

Frequency Mixer

ADE-18W+

Level 7 (LO Power +7 dBm) 1750 to 3500 MHz



Generic photo used for illustration purposes only
CASE STYLE: CD542

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500, 1000

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	4
RF	6
IF	3
GROUND	1,2,5


Features

- low conversion loss, 5.4 dB typ.
- good isolation, 33 dB typ.
- low profile package
- aqueous washable
- protected by U.S. Patent 6,133,525


Applications

- PCS
- MMDS
- ISM

Outline Drawing




PCB Land Pattern



Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L	wt		
.030	.026	.065	.300	grams		
0.76	0.66	1.65	7.62	0.20		

Demo Board MCL P/N: TB-02 Suggested PCB Layout (PL-051)

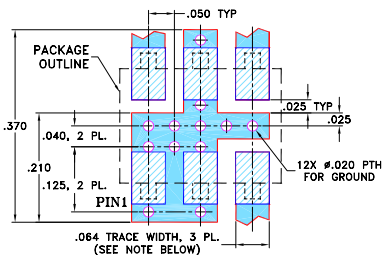

- NOTES:**
1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - ▨ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Electrical Specifications


FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF	IF	\bar{X}	σ	Total Range Max.	Typ.	Min.	Typ.	Min.	Typ.
1750-3500	DC-700	5.4	0.30	8.9	33	20	12	7	11







1 dB COMP.: +1 dBm typ.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
1750.00	1780.00	5.42	31.90	20.60	2.84	3.01
1784.78	1814.78	5.43	32.30	20.10	2.58	2.88
1932.61	1962.61	4.79	33.10	16.00	1.77	2.92
2080.44	2110.44	4.68	33.50	14.30	1.75	3.01
2228.26	2258.26	4.92	33.80	13.80	2.16	3.06
2376.09	2406.09	5.19	34.60	14.20	2.46	2.96
2523.91	2553.91	5.23	32.90	14.10	2.49	2.76
2671.74	2701.74	4.79	30.80	13.70	2.52	2.55
2819.57	2849.57	4.97	28.40	15.20	2.49	2.96
2967.39	2997.39	5.53	27.50	16.20	2.40	3.50
3000.00	3030.00	5.69	27.70	16.30	2.40	3.06
3115.21	3145.22	6.58	27.50	17.30	2.84	3.06
3263.04	3293.04	7.28	25.70	17.20	4.03	3.32
3410.87	3440.87	7.07	24.90	17.20	5.49	3.79
3470.00	3500.00	7.01	25.10	17.30	6.26	3.95
3500.00	3530.00	6.96	25.00	16.80	6.26	4.42
3558.70	3588.70	6.93	25.00	16.60	5.85	4.42
3706.52	3736.52	7.74	26.40	15.70	7.00	5.33

Electrical Schematic

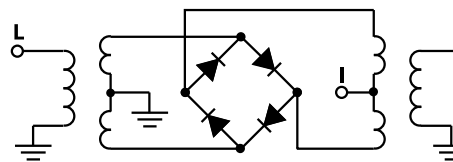

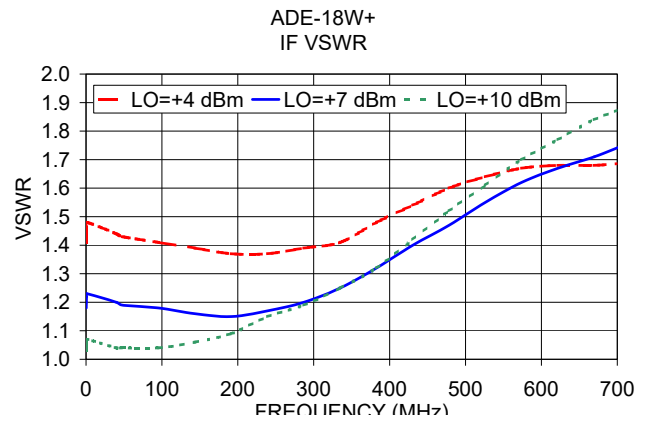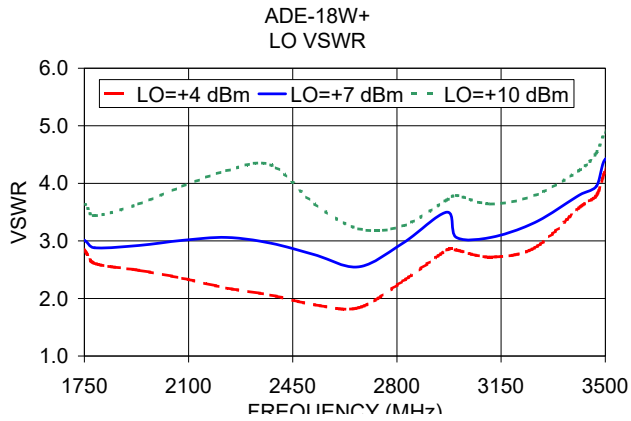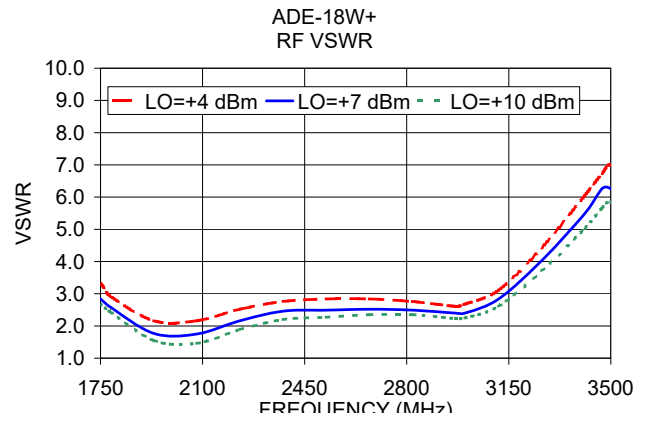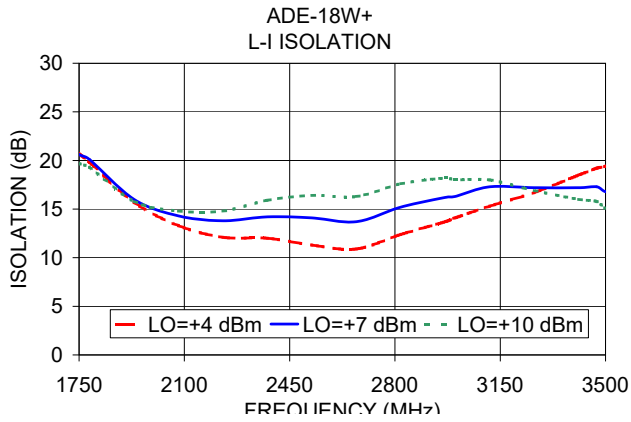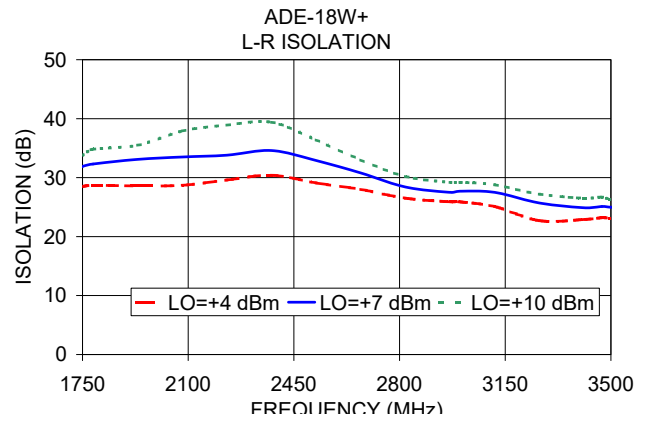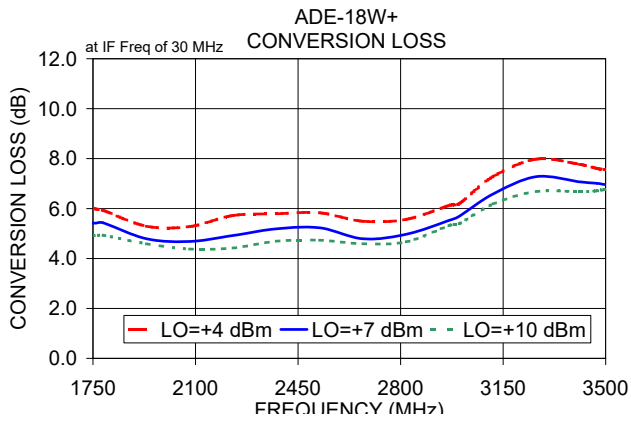

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

ADE-18W+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
		+4	+7	+10			+4	+7	+10			+4	+7	+10
1200.1	1230.1	15.12	9.84	8.41	1200.1	1230.1	2.81	13.86	15.97	1200.1	1230.1	-2.39	-0.08	0.03
1280.4	1310.4	12.99	9.23	7.97	1280.4	1310.4	4.53	11.61	13.99	1280.4	1310.4	-1.53	-0.16	0.01
1360.6	1390.6	11.08	8.47	7.54	1360.6	1390.6	6.69	10.87	11.06	1360.6	1390.6	-0.59	0.04	0.07
1440.9	1470.9	9.54	7.52	6.81	1440.9	1470.9	9.48	10.79	12.97	1440.9	1470.9	0.09	0.41	0.31
1521.2	1551.2	8.58	7.07	6.46	1521.2	1551.2	11.72	12.21	13.10	1521.2	1551.2	0.45	0.54	0.38
1601.4	1631.4	7.84	6.73	6.17	1601.4	1631.4	12.45	11.14	13.03	1601.4	1631.4	0.68	0.62	0.48
1681.7	1711.7	7.34	6.41	5.90	1681.7	1711.7	13.29	10.96	11.52	1681.7	1711.7	0.88	0.70	0.58
1762.0	1792.0	6.94	6.26	5.81	1762.0	1792.0	13.06	9.59	9.82	1762.0	1792.0	1.18	0.84	0.70
1842.2	1872.2	6.66	6.06	5.69	1842.2	1872.2	12.01	10.10	9.45	1842.2	1872.2	1.48	1.08	0.84
1922.5	1952.5	6.40	5.85	5.56	1922.5	1952.5	10.54	9.43	9.34	1922.5	1952.5	1.65	1.14	0.95
2002.8	2032.8	6.29	5.71	5.40	2002.8	2032.8	9.67	8.75	8.74	2002.8	2032.8	1.60	1.12	0.94
2083.1	2113.1	6.33	5.60	5.27	2083.1	2113.1	8.42	9.19	10.06	2083.1	2113.1	1.39	1.01	0.83
2163.3	2193.3	6.52	5.68	5.20	2163.3	2193.3	9.84	9.30	9.20	2163.3	2193.3	1.05	0.71	0.59
2243.6	2273.6	6.62	5.72	5.21	2243.6	2273.6	9.21	9.50	9.54	2243.6	2273.6	0.92	0.57	0.52
2323.9	2353.9	6.58	5.75	5.25	2323.9	2353.9	8.76	8.85	9.03	2323.9	2353.9	0.85	0.51	0.46
2404.1	2434.1	6.48	5.62	5.11	2404.1	2434.1	8.87	8.73	8.71	2404.1	2434.1	0.83	0.57	0.47
2484.4	2514.4	6.32	5.33	4.84	2484.4	2514.4	9.63	12.20	14.14	2484.4	2514.4	1.00	0.74	0.56
2564.7	2594.7	6.18	5.34	4.88	2564.7	2594.7	8.06	10.00	12.53	2564.7	2594.7	0.98	0.55	0.40
2644.9	2674.9	6.15	5.39	4.97	2644.9	2674.9	8.11	9.47	11.86	2644.9	2674.9	0.92	0.48	0.35
2725.2	2755.2	6.30	5.55	5.10	2725.2	2755.2	8.69	9.06	10.86	2725.2	2755.2	0.81	0.41	0.29
2805.5	2835.5	6.38	5.71	5.28	2805.5	2835.5	9.44	9.08	10.82	2805.5	2835.5	0.72	0.34	0.26
2885.7	2915.7	6.40	5.83	5.45	2885.7	2915.7	12.62	10.21	10.46	2885.7	2915.7	0.75	0.34	0.23
2966.0	2996.0	6.50	5.93	5.59	2966.0	2996.0	12.24	13.23	11.62	2966.0	2996.0	0.76	0.36	0.23
3046.3	3076.3	6.62	6.06	5.76	3046.3	3076.3	12.17	14.69	14.48	3046.3	3076.3	0.69	0.37	0.24
3126.5	3156.5	6.87	6.31	6.00	3126.5	3156.5	12.89	13.53	17.92	3126.5	3156.5	0.68	0.34	0.23
3206.8	3236.8	7.15	6.58	6.25	3206.8	3236.8	15.00	17.26	19.69	3206.8	3236.8	0.60	0.27	0.17
3287.1	3317.1	7.44	6.86	6.52	3287.1	3317.1	16.16	17.88	21.36	3287.1	3317.1	0.52	0.22	0.12
3347.3	3377.3	7.62	7.05	6.70	3347.3	3377.3	15.03	15.33	17.48	3347.3	3377.3	0.51	0.22	0.12
3427.5	3457.5	7.67	7.15	6.86	3427.5	3457.5	13.57	15.86	17.66	3427.5	3457.5	0.57	0.24	0.13
3487.8	3517.8	7.57	7.08	6.86	3487.8	3517.8	12.20	15.63	19.06	3487.8	3517.8	0.65	0.26	0.14
3568.0	3598.0	7.91	7.12	6.76	3568.0	3598.0	15.12	15.71	15.27	3568.0	3598.0	0.50	0.28	0.20
3628.2	3658.2	8.54	7.53	6.98	3628.2	3658.2	15.04	22.98	17.81	3628.2	3658.2	0.38	0.20	0.18
3708.5	3738.5	8.90	7.96	7.40	3708.5	3738.5	12.68	16.63	17.68	3708.5	3738.5	0.49	0.20	0.13
3768.7	3798.7	9.07	8.12	7.55	3768.7	3798.7	12.37	16.70	17.79	3768.7	3798.7	0.52	0.21	0.14
3849.0	3879.0	9.46	8.35	7.77	3849.0	3879.0	10.26	13.56	17.34	3849.0	3879.0	0.67	0.23	0.16
3909.2	3939.2	9.89	8.56	7.91	3909.2	3939.2	9.19	13.14	16.23	3909.2	3939.2	0.92	0.32	0.16
3989.4	4019.4	10.39	8.61	8.00	3989.4	4019.4	8.03	12.18	16.65	3989.4	4019.4	0.96	0.36	0.16
4049.6	4079.6	11.08	8.70	8.08	4049.6	4079.6	8.67	11.92	16.04	4049.6	4079.6	0.71	0.45	0.13
4129.9	4159.9	13.43	9.09	8.17	4129.9	4159.9	11.14	12.32	17.29	4129.9	4159.9	-0.52	0.52	0.16
4190.1	4220.1	16.28	9.85	8.29	4190.1	4220.1	2.94	13.29	17.46	4190.1	4220.1	-2.45	0.41	0.20



Frequency Mixer

ADE-18W+

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2625.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1750.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=3500.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
700.0	1925.1	5.45	10.0	1760.1	6.14	700.0	2800.1	7.97
659.4	1965.7	5.53	27.7	1777.8	6.26	682.3	2817.8	7.99
618.8	2006.3	5.63	45.4	1795.5	6.31	664.6	2835.5	8.00
578.2	2046.9	5.81	63.1	1813.2	6.36	646.9	2853.2	8.03
537.6	2087.5	5.86	80.8	1830.9	6.37	629.2	2870.9	8.02
497.1	2128.0	5.85	98.5	1848.6	6.43	611.5	2888.6	8.03
456.5	2168.6	5.88	116.2	1866.3	6.49	593.8	2906.3	8.03
415.9	2209.2	5.80	133.8	1883.9	6.55	576.2	2923.9	8.05
375.3	2249.8	5.75	151.5	1901.6	6.59	558.5	2941.6	8.09
334.7	2290.4	5.70	169.2	1919.3	6.65	540.8	2959.3	8.11
294.1	2331.0	5.66	186.9	1937.0	6.68	523.1	2977.0	8.11
253.5	2371.6	5.73	204.6	1954.7	6.70	505.4	2994.7	8.13
212.9	2412.2	5.67	222.3	1972.4	6.73	487.7	3012.4	8.14
172.4	2452.7	5.66	240.0	1990.1	6.74	470.0	3030.1	8.17
131.8	2493.3	5.56	257.7	2007.8	6.76	452.3	3047.8	8.18
91.2	2533.9	5.49	275.4	2025.5	6.75	434.6	3065.5	8.17
50.6	2574.5	5.41	293.1	2043.2	6.73	416.9	3083.2	8.13
10.0	2615.1	5.32	310.8	2060.9	6.73	399.2	3100.9	8.10
30.3	2655.4	5.38	328.5	2078.6	6.73	381.5	3118.6	8.09
70.9	2696.0	5.35	346.2	2096.3	6.70	363.8	3136.3	8.09
111.5	2736.6	5.39	363.8	2113.9	6.68	346.2	3153.9	8.04
152.1	2777.2	5.46	381.5	2131.6	6.66	328.5	3171.6	8.01
192.6	2817.7	5.49	399.2	2149.3	6.68	310.8	3189.3	7.96
212.9	2838.0	5.53	416.9	2167.0	6.69	293.1	3207.0	7.92
253.5	2878.6	5.58	434.6	2184.7	6.69	275.4	3224.7	7.91
273.8	2898.9	5.56	452.3	2202.4	6.68	257.7	3242.4	7.90
314.4	2939.5	5.52	470.0	2220.1	6.66	240.0	3260.1	7.85
334.7	2959.8	5.50	487.7	2237.8	6.65	222.3	3277.8	7.78
375.3	3000.4	5.40	505.4	2255.5	6.70	204.6	3295.5	7.73
395.6	3020.7	5.35	523.1	2273.2	6.74	186.9	3313.2	7.69
436.2	3061.3	5.31	540.8	2290.9	6.76	169.2	3330.9	7.67
456.5	3081.6	5.28	558.5	2308.6	6.76	151.5	3348.6	7.62
497.1	3122.2	5.26	576.2	2326.3	6.79	133.8	3366.3	7.56
517.4	3142.5	5.26	593.8	2343.9	6.82	116.2	3383.9	7.48
557.9	3183.0	5.28	611.5	2361.6	6.83	98.5	3401.6	7.43
578.2	3203.3	5.31	629.2	2379.3	6.84	80.8	3419.3	7.39
618.8	3243.9	5.38	646.9	2397.0	6.78	63.1	3437.0	7.36
639.1	3264.2	5.43	664.6	2414.7	6.76	45.4	3454.7	7.32
679.7	3304.8	5.47	682.3	2432.4	6.76	27.7	3472.4	7.30
700.0	3325.1	5.44	700.0	2450.1	6.76	10.0	3490.1	7.23

Frequency Mixer

ADE-18W+

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
1200.1	25.88	24.69	24.31	18.63	21.80	24.79
1280.4	25.72	24.89	24.55	20.42	24.17	27.49
1360.6	25.76	25.28	24.91	23.22	27.83	33.25
1440.9	26.26	25.90	25.58	26.73	32.63	39.58
1521.2	26.98	26.85	26.54	28.24	29.51	29.98
1601.4	28.02	28.31	27.89	24.83	24.82	24.57
1681.7	29.32	30.15	29.77	20.52	20.96	21.03
1762.0	31.15	32.67	32.39	17.42	17.98	18.46
1842.2	33.91	36.84	35.75	15.04	15.77	16.32
1922.5	37.48	43.16	36.37	13.08	14.09	14.66
2002.8	38.18	52.52	36.75	11.62	12.89	13.75
2083.1	34.74	41.16	36.33	10.30	11.82	12.84
2163.3	31.71	35.18	33.65	9.23	10.85	12.18
2243.6	29.77	32.75	32.77	8.61	10.34	11.73
2323.9	28.23	31.24	32.58	8.07	9.97	11.57
2404.1	27.25	30.50	32.66	7.72	9.70	11.53
2484.4	26.90	30.49	33.15	7.47	9.57	11.58
2564.7	26.16	29.32	31.97	7.29	9.39	11.54
2644.9	25.99	28.84	31.44	7.39	9.52	11.74
2725.2	26.58	29.37	31.89	7.67	9.90	12.25
2805.5	27.05	29.61	31.92	7.98	10.29	12.71
2885.7	27.87	30.08	32.12	8.31	10.67	13.13
2966.0	29.32	31.17	32.73	8.73	11.15	13.64
3046.3	30.76	32.14	33.16	9.24	11.65	14.15
3126.5	32.17	32.78	33.07	9.92	12.31	14.72
3206.8	33.11	33.46	33.19	10.76	13.10	15.23
3287.1	33.04	33.39	33.16	11.58	13.78	15.60
3347.3	32.62	33.05	33.12	12.15	14.14	15.66
3427.5	32.26	32.77	32.92	13.22	14.83	15.72
3487.8	31.71	32.23	32.42	14.12	15.34	15.78
3568.0	30.60	31.33	31.88	15.27	15.87	15.84
3628.2	30.92	31.71	32.26	16.28	16.27	15.72
3708.5	31.12	32.05	32.67	17.74	16.83	15.85
3768.7	31.00	32.08	32.76	19.17	17.34	15.95
3849.0	30.49	31.83	32.62	20.98	18.06	16.09
3909.2	30.30	31.67	32.54	22.41	18.33	16.14
3989.4	29.89	31.29	32.23	23.41	18.68	16.25
4049.6	29.53	30.90	31.89	23.56	19.00	16.39
4129.9	29.07	30.14	31.16	21.93	19.07	16.54
4190.1	28.82	29.59	30.54	20.47	18.83	16.52

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
1200.1	1230.1	14.20	13.45	13.19
1280.4	1310.4	14.42	14.09	13.92
1360.6	1390.6	14.81	14.78	14.75
1440.9	1470.9	15.43	15.49	15.34
1521.2	1551.2	16.22	16.36	16.31
1601.4	1631.4	16.94	17.37	17.40
1681.7	1711.7	17.65	18.25	18.47
1762.0	1792.0	18.22	18.71	19.13
1842.2	1872.2	18.33	18.41	18.25
1922.5	1952.5	17.63	17.01	16.39
2002.8	2032.8	17.15	16.20	15.27
2083.1	2113.1	16.59	15.46	14.66
2163.3	2193.3	16.08	15.25	14.60
2243.6	2273.6	15.19	14.63	14.22
2323.9	2353.9	14.51	14.27	14.04
2404.1	2434.1	14.01	13.95	13.85
2484.4	2514.4	13.73	13.95	14.11
2564.7	2594.7	13.79	13.92	14.17
2644.9	2674.9	14.24	14.34	14.52
2725.2	2755.2	14.72	14.88	15.08
2805.5	2835.5	15.27	15.43	15.64
2885.7	2915.7	15.90	16.14	16.38
2966.0	2996.0	16.50	16.84	17.09
3046.3	3076.3	17.02	17.40	17.70
3126.5	3156.5	17.56	18.00	18.35
3206.8	3236.8	18.17	18.54	18.91
3287.1	3317.1	18.87	19.21	19.51
3347.3	3377.3	19.37	19.77	20.08
3427.5	3457.5	20.18	20.52	20.79
3487.8	3517.8	20.80	21.10	21.38
3568.0	3598.0	21.29	21.50	21.78
3628.2	3658.2	21.65	21.94	22.23
3708.5	3738.5	22.43	22.62	22.91
3768.7	3798.7	23.05	23.23	23.54
3849.0	3879.0	23.68	23.91	24.19
3909.2	3939.2	24.21	24.44	24.69
3989.4	4019.4	24.96	25.33	25.58
4049.6	4079.6	25.51	25.92	26.21
4129.9	4159.9	26.21	26.28	26.71
4190.1	4220.1	26.96	26.69	26.79



Frequency Mixer

ADE-18W+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)		
		@LO (dBm)		
		+4	+7	+10
1200.1	1230.1	9.74	7.22	6.32
1280.4	1310.4	8.77	6.97	6.30
1360.6	1390.6	7.80	6.49	5.95
1440.9	1470.9	6.76	5.68	5.16
1521.2	1551.2	5.79	5.04	4.68
1601.4	1631.4	5.22	4.57	4.26
1681.7	1711.7	4.78	4.22	3.90
1762.0	1792.0	4.25	3.76	3.52
1842.2	1872.2	3.69	3.20	2.93
1922.5	1952.5	3.18	2.67	2.39
2002.8	2032.8	2.91	2.41	2.08
2083.1	2113.1	2.79	2.24	1.89
2163.3	2193.3	2.75	2.23	1.86
2243.6	2273.6	2.54	2.15	1.83
2323.9	2353.9	2.30	2.02	1.77
2404.1	2434.1	2.12	1.85	1.63
2484.4	2514.4	1.93	1.67	1.44
2564.7	2594.7	1.78	1.61	1.47
2644.9	2674.9	1.80	1.66	1.57
2725.2	2755.2	2.00	1.88	1.79
2805.5	2835.5	2.19	2.07	2.00
2885.7	2915.7	2.33	2.23	2.17
2966.0	2996.0	2.53	2.40	2.35
3046.3	3076.3	2.80	2.62	2.52
3126.5	3156.5	3.13	2.89	2.73
3206.8	3236.8	3.52	3.20	2.97
3287.1	3317.1	3.97	3.64	3.42
3347.3	3377.3	4.30	3.95	3.73
3427.5	3457.5	4.66	4.29	4.06
3487.8	3517.8	4.82	4.45	4.18
3568.0	3598.0	5.66	5.06	4.63
3628.2	3658.2	6.26	5.51	4.98
3708.5	3738.5	6.24	5.61	5.10
3768.7	3798.7	6.24	5.65	5.20
3849.0	3879.0	6.49	5.85	5.38
3909.2	3939.2	6.83	6.03	5.51
3989.4	4019.4	7.22	6.07	5.47
4049.6	4079.6	7.66	6.09	5.42
4129.9	4159.9	8.95	6.44	5.51
4190.1	4220.1	10.69	7.11	5.83

LO (MHz)	LO VSWR (:1)		
	@LO (dBm)		
	+4	+7	+10
1200.1	11.38	6.39	5.07
1280.4	9.08	5.28	4.73
1360.6	6.89	4.60	4.56
1440.9	5.31	4.23	4.53
1521.2	4.30	3.84	4.39
1601.4	3.65	3.60	4.29
1681.7	3.25	3.50	4.29
1762.0	3.00	3.46	4.33
1842.2	2.86	3.45	4.36
1922.5	2.77	3.44	4.35
2002.8	2.67	3.38	4.27
2083.1	2.55	3.27	4.11
2163.3	2.43	3.13	3.91
2243.6	2.32	3.00	3.76
2323.9	2.25	2.92	3.70
2404.1	2.13	2.80	3.54
2484.4	2.02	2.62	3.40
2564.7	1.89	2.54	3.26
2644.9	1.92	2.53	3.29
2725.2	1.94	2.56	3.30
2805.5	2.00	2.59	3.30
2885.7	2.07	2.65	3.35
2966.0	2.12	2.67	3.33
3046.3	2.14	2.67	3.30
3126.5	2.25	2.73	3.34
3206.8	2.33	2.75	3.33
3287.1	2.38	2.76	3.29
3347.3	2.48	2.78	3.23
3427.5	2.52	2.78	3.22
3487.8	2.60	2.85	3.29
3568.0	2.81	2.96	3.40
3628.2	2.96	3.07	3.45
3708.5	3.32	3.35	3.72
3768.7	3.67	3.60	3.92
3849.0	4.34	4.01	4.24
3909.2	4.96	4.42	4.55
3989.4	5.81	4.89	4.86
4049.6	6.61	5.28	5.06
4129.9	7.50	5.79	5.30
4190.1	7.90	6.15	5.51

IF (OUT) (MHz)	IF VSWR @LO=3500.1MHz (:1)		
	@LO (dBm)		
	+4	+7	+10
10.0	1.42	1.22	1.14
27.7	1.40	1.21	1.06
45.4	1.35	1.16	1.05
63.1	1.32	1.15	1.05
80.8	1.33	1.14	1.05
98.5	1.35	1.15	1.06
116.2	1.37	1.17	1.09
133.8	1.38	1.19	1.11
151.5	1.38	1.18	1.12
169.2	1.38	1.18	1.13
186.9	1.39	1.20	1.15
204.6	1.41	1.21	1.16
222.3	1.42	1.23	1.19
240.0	1.43	1.25	1.21
257.7	1.44	1.26	1.23
275.4	1.45	1.27	1.24
293.1	1.46	1.29	1.27
310.8	1.47	1.31	1.30
328.5	1.47	1.32	1.32
346.2	1.47	1.33	1.34
363.8	1.46	1.34	1.36
381.5	1.46	1.35	1.38
399.2	1.47	1.37	1.40
416.9	1.47	1.38	1.42
434.6	1.46	1.39	1.45
452.3	1.44	1.39	1.47
470.0	1.43	1.39	1.47
487.7	1.42	1.40	1.49
505.4	1.42	1.41	1.52
523.1	1.42	1.42	1.54
540.8	1.41	1.43	1.55
558.5	1.39	1.42	1.56
576.2	1.39	1.43	1.57
593.8	1.40	1.45	1.59
611.5	1.40	1.46	1.61
629.2	1.39	1.47	1.64
646.9	1.38	1.48	1.65
664.6	1.38	1.48	1.65
682.3	1.38	1.49	1.66
700.0	1.39	1.51	1.69

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+17	28	1	24	19	37	29	46	42	---
1	-	9	+0	26	35	31	34	38	44	42	71	49
2	>100	59	33	43	34	66	40	50	50	56	52	74
3	>100	62	70	53	54	55	72	57	65	61	73	60
4	100	74	77	>81	71	74	71	>81	73	69	78	77
5	98	>81	>81	>81	>81	77	>81	78	>81	>81	>81	>81
6	>100	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
7	96	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
8	98	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
9	94	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
10	---	---	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 2600.1 MHz; -14.00 dBm.
 LO IN: 2630.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -19.41 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+7	39	13	38	37	53	37	64	54	---
1	-	9	+0	29	34	36	41	53	57	59	>90	64
2	86	49	25	38	27	69	35	53	50	64	56	72
3	>100	56	53	43	38	48	61	50	51	56	62	61
4	>100	58	55	70	46	55	46	80	51	59	61	70
5	>100	70	67	67	72	56	53	57	70	59	67	64
6	>100	85	86	77	72	87	63	74	63	82	65	69
7	>100	85	87	81	82	76	83	65	67	66	82	70
8	>100	>90	88	>90	>90	87	83	90	77	84	78	89
9	>100	>90	>90	>90	>90	90	87	85	>90	75	78	77
10	---	---	>90	>90	>90	>90	>90	>90	>90	>90	>90	88
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 2600.1 MHz; -4.00 dBm.
 LO IN: 2630.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -9.55 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
 ADE-18W+
 100817
 Page 5 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Typical Performance Curves


Conversion Loss @ IF=30MHz

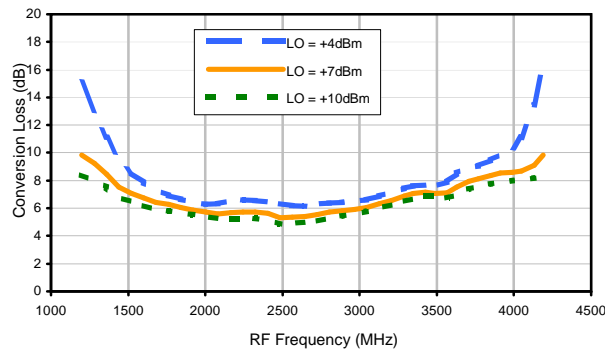


Conversion Loss vs. LO @ RF=2625.1MHz

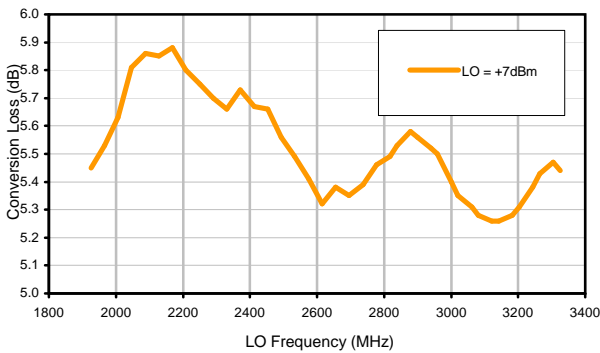


Conversion Loss vs. IF @ RF=2625.1MHz

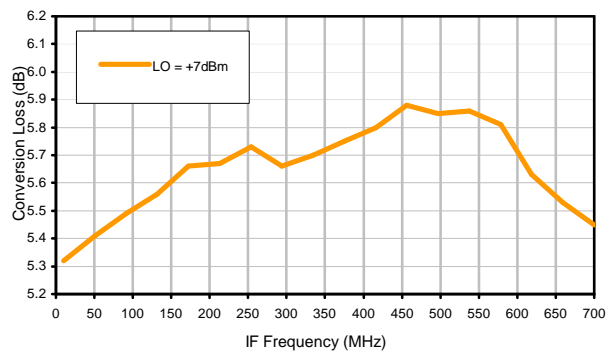


Conversion Loss vs. IF @ RF=1750.1MHz

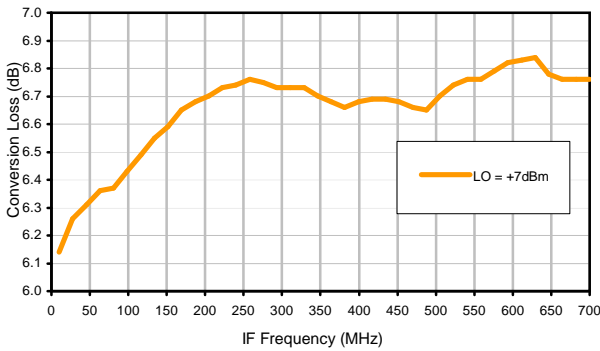


Conversion Loss vs. IF @ RF=3500.1MHz

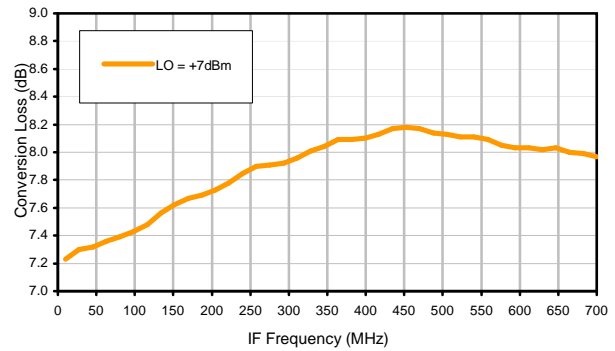

IP3 Input

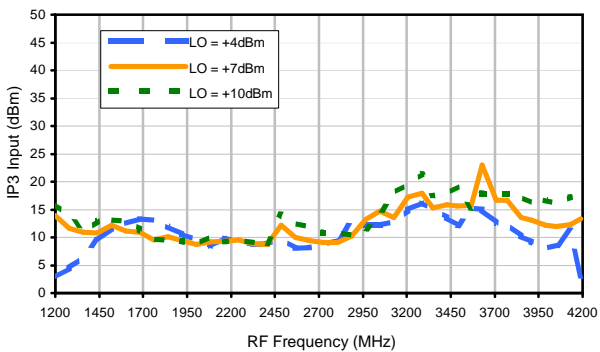


Compression @ RF IN=+1dBm

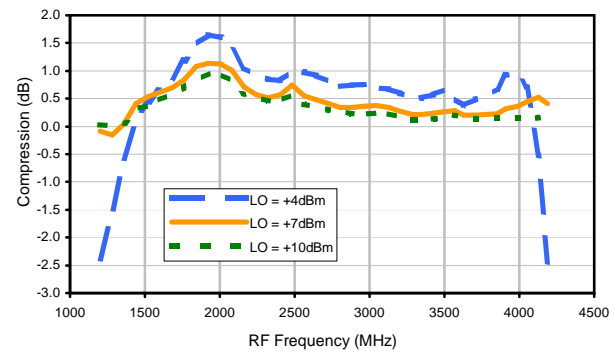


Typical Performance Curves


LO-RF Isolation

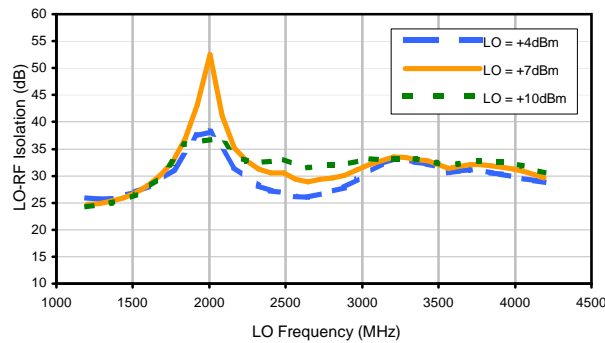


LO-IF Isolation

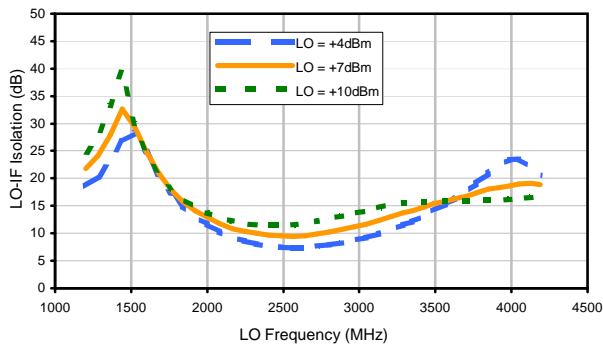


RF-IF Isolation

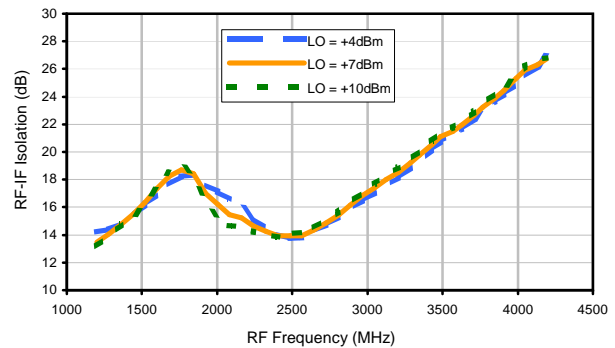


RF VSWR

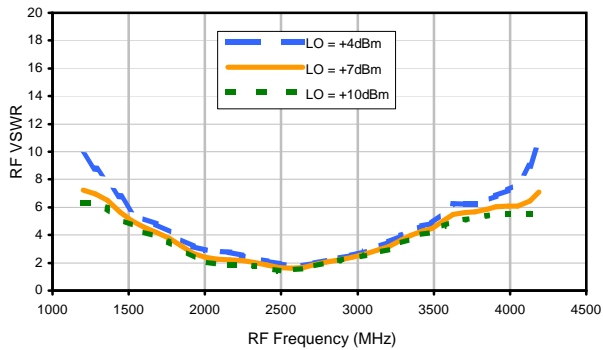

LO VSWR

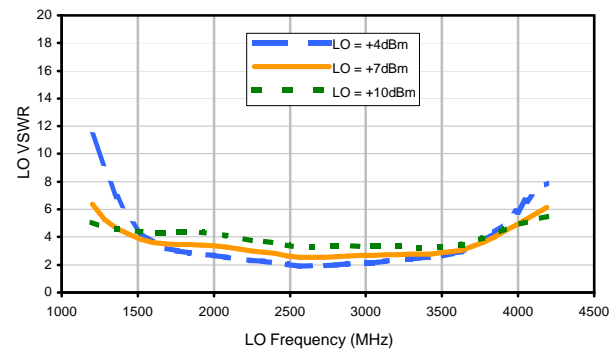

IF VSWR

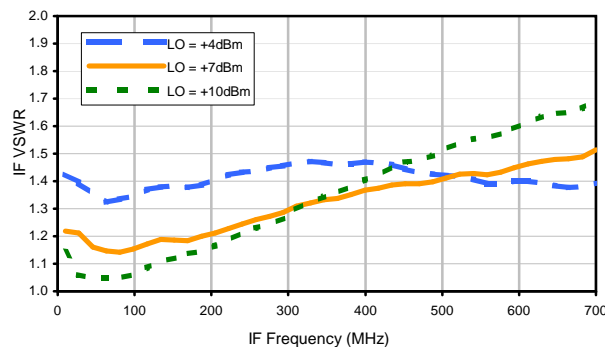

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+17	28	1	24	19	37	29	46	42	---
1	-	9	+0	26	35	31	34	38	44	42	71	49
2	>100	59	33	43	34	66	40	50	50	56	52	74
3	>100	62	70	53	54	55	72	57	65	61	73	60
4	100	74	77	>81	71	74	71	>81	73	69	78	77
5	98	>81	>81	>81	>81	77	>81	78	>81	>81	>81	>81
6	>100	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
7	96	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
8	98	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
9	94	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
10	---	---	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 2600.1 MHz; -14.00 dBm.
 LO IN: 2630.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -19.41 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+7	39	13	38	37	53	37	64	54	---
1	-	9	+0	29	34	36	41	53	57	59	>90	64
2	86	49	25	38	27	69	35	53	50	64	56	72
3	>100	56	53	43	38	48	61	50	51	56	62	61
4	>100	58	55	70	46	55	46	80	51	59	61	70
5	>100	70	67	67	72	56	53	57	70	59	67	64
6	>100	85	86	77	72	87	63	74	63	82	65	69
7	>100	85	87	81	82	76	83	65	67	66	82	70
8	>100	>90	88	>90	>90	87	83	90	77	84	78	89
9	>100	>90	>90	>90	>90	90	87	85	>90	75	78	77
10	---	---	>90	>90	>90	>90	>90	>90	>90	>90	>90	88
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 2600.1 MHz; -4.00 dBm.
 LO IN: 2630.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -9.55 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
 ADE-18W+
 100817
 Page 3 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Case Style

CD

CD541
CD542
CD636
CD637

Outline Dimensions



PCB Land Pattern



Suggested Layout,
Tolerance to be within $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAM
CD541					.082 (2.08)							.15
CD542	.272 (6.91)	.310 (7.87)	.220 (5.58)	.100 (2.54)	.112 (2.84)	.055 (1.40)	.100 (2.54)	.030 (0.76)	.026 (0.66)	.065 (1.65)	.300 (7.62)	.20
CD636					.162 (4.11)							.25
CD637					.206 (5.23)							.40

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
 - For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
 - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

Mini-Circuits®

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F34



Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M82272	NEW RELEASE	08/05/02	MMG	DJ
A	M102713	ADDED NOTE 2 & "...WITH SMOBC"	01/17/06	MMG	IL

**SUGGESTED MOUNTING CONFIGURATION
FOR CD541/542/636/637 CASE STYLES,
"jv", "ju", "jw" PIN CONNECTIONS**



- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES
TOLERANCES ON:
2 PL DECIMALS ±
3 PL DECIMALS ± .005
ANGLES ±
FRACTIONS ±

	INITIALS	DATE
DRAWN	MMG	07/17/02
CHECKED	WL	08/02/02
APPROVED	DJ	08/05/02



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, jv/ju/jw, CD541/542/636/637, ADE, TB-02


Mini-Circuits®
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-051	REV: A
FILE: 98PL051	SCALE: 8:1	SHEET: 1 OF 1	

ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit


For Pin Connections refer to Data Sheet of the DUT

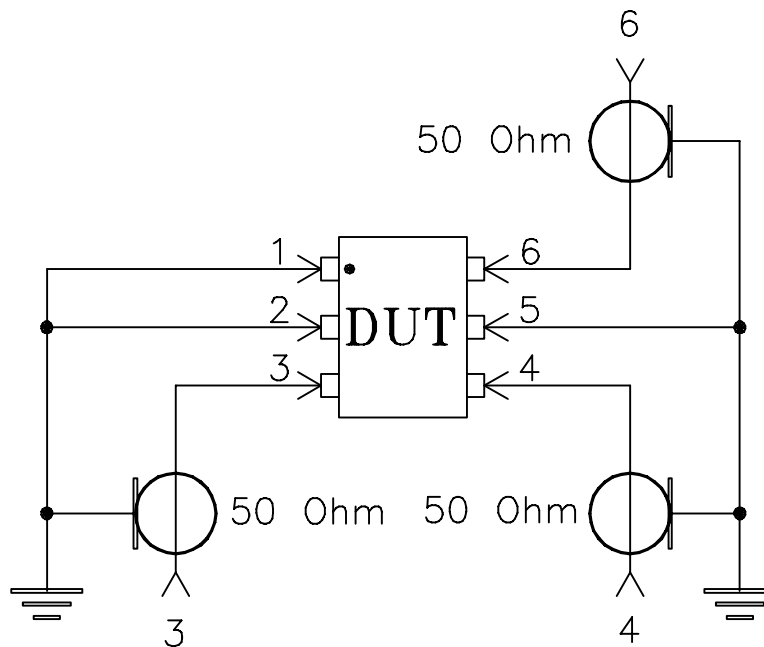

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215