

Frequency Mixer

ADE-2ASK

Level 7 (LO Power +7 dBm) 1 to 1000 MHz



Generic photo used for illustration purposes only

CASE STYLE: CD542

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

LO	6
RF	3
IF	2
GROUND	1,4,5

Outline Drawing

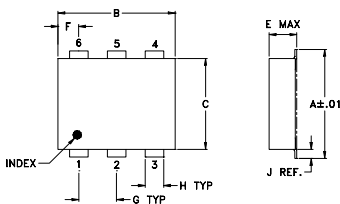

PCB Land Pattern




Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54

H	J	K	L	wt
.030	.026	.065	.300	grams
0.76	0.66	1.65	7.62	0.20

Demo Board MCL P/N: TB-03 Suggested PCB Layout (PL-052)

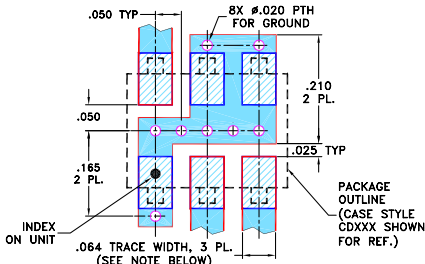

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low conversion loss, 5.4 dB typ.
- excellent L-R isolation, 45 dB typ.
- low profile package
- aqueous washable
- protected by U.S. Patent 6,133,525

Applications

- VSAT systems
- instrumentation
- cellular

Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			IP3 at center band (dBm)									
		L	M	U	L	M	U										
1-1000	DC-1000	5.4	0.10	6.8	9.5	55	45	45	30	36	20	50	40	32	22	22	12


1 dB COMP.: +1 dBm typ.
Phase detection, positive polarity







L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]
m = mid band [$2f_L$ to $f_U/2$]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
1.00	31.00	6.13	67.70	64.10	1.38	2.58
2.00	32.00	5.68	67.90	64.20	1.22	2.55
2.18	32.18	5.68	67.90	64.00	1.21	2.52
4.73	34.73	5.45	66.90	64.10	1.12	2.55
10.29	40.29	5.40	66.00	63.10	1.09	2.52
22.37	52.37	5.49	63.30	61.10	1.07	2.52
48.66	78.66	5.44	59.70	57.50	1.04	2.52
105.82	135.82	5.42	54.50	52.40	1.00	2.52
230.13	260.13	5.49	48.90	47.20	1.05	2.61
500.50	530.50	5.96	46.80	38.20	1.25	2.88
556.00	586.00	6.18	47.40	36.40	1.20	2.92
600.00	630.00	6.29	45.90	35.20	1.21	2.96
611.50	641.50	6.31	45.10	35.00	1.21	2.88
667.00	697.00	6.43	42.60	31.90	1.26	3.21
722.50	752.50	6.81	41.00	30.90	1.38	3.01
778.00	808.00	6.93	38.60	29.20	1.58	3.21
833.50	863.50	7.22	36.80	28.10	1.78	3.38
889.00	919.00	7.46	35.20	28.60	1.99	3.16
944.50	974.50	7.58	33.10	26.60	2.25	3.64
1000.00	1030.00	7.83	30.70	24.00	2.49	3.64

Electrical Schematic

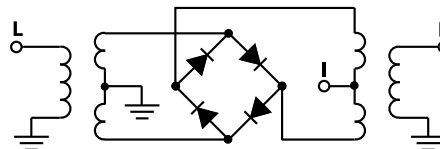

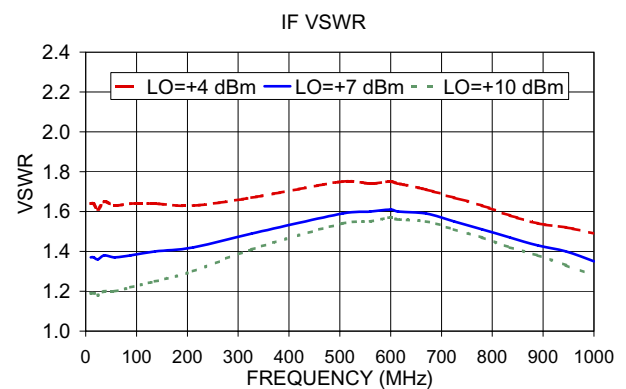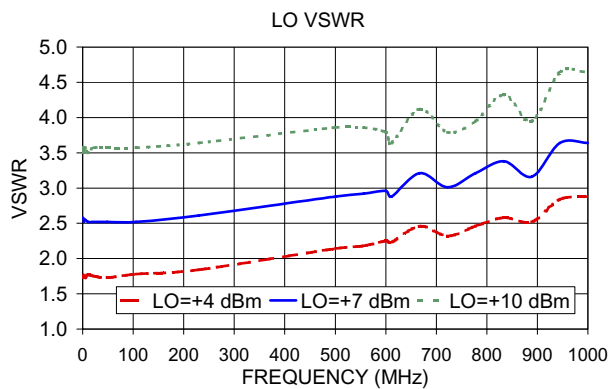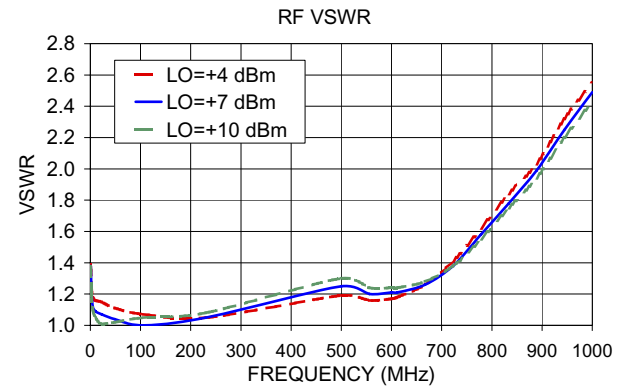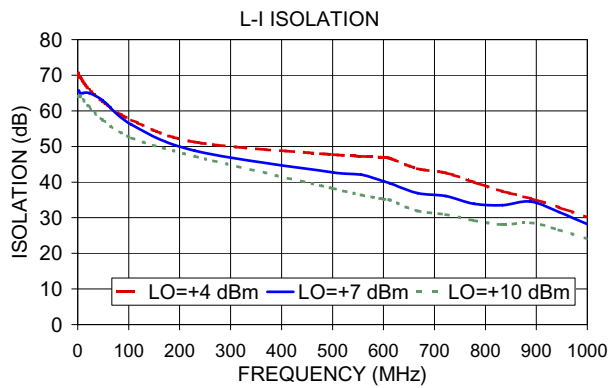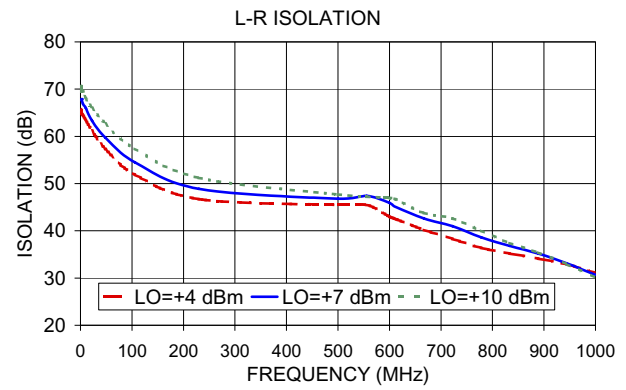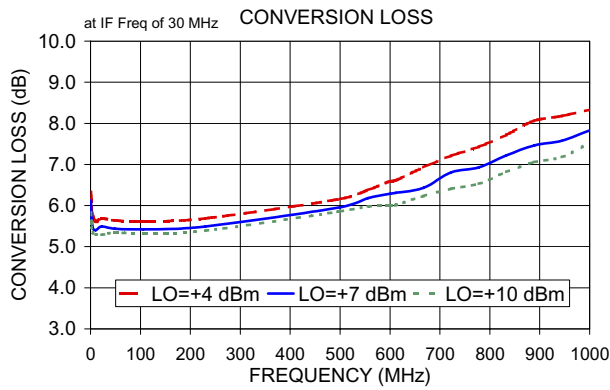

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

ADE-2ASK

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
		+4	+7	+10			+4	+7	+10			+4	+7	+10
1.0	31.0	6.33	6.13	5.83	10.1	40.1	20.63	23.58	22.71	10.1	40.1	1.31	1.20	0.88
2.0	32.0	5.98	5.68	5.58	50.4	80.4	23.45	19.76	23.68	50.4	80.4	1.41	1.10	0.96
2.2	32.2	5.88	5.68	5.48	90.8	120.8	20.06	20.85	22.02	90.8	120.8	1.46	1.16	0.98
4.7	34.7	5.75	5.45	5.35	110.9	140.9	19.20	19.79	20.11	110.9	140.9	1.49	1.23	0.99
10.3	40.3	5.60	5.40	5.30	151.3	181.3	18.73	24.20	19.96	151.3	181.3	1.46	1.06	0.95
50.4	80.4	5.62	5.34	5.20	171.5	201.5	18.48	23.33	21.14	171.5	201.5	1.40	1.08	0.86
90.8	120.8	5.64	5.39	5.25	211.8	241.8	22.35	18.50	20.44	211.8	241.8	1.32	1.00	0.85
110.9	140.9	5.63	5.38	5.25	232.0	262.0	19.40	21.64	20.99	232.0	262.0	1.37	1.14	0.88
171.5	201.5	5.65	5.43	5.30	272.3	302.3	19.97	16.95	23.32	272.3	302.3	1.31	1.00	0.91
211.8	241.8	5.68	5.46	5.32	292.5	322.5	15.84	13.51	14.13	292.5	322.5	1.26	1.04	0.87
232.0	262.0	5.69	5.48	5.33	332.8	362.8	16.12	14.50	15.45	332.8	362.8	1.33	1.09	0.90
272.3	302.3	5.74	5.52	5.37	353.0	383.0	18.85	20.31	20.72	353.0	383.0	1.34	1.17	0.90
292.5	322.5	5.73	5.51	5.37	393.3	423.3	14.51	15.27	21.80	393.3	423.3	1.28	1.01	0.93
332.8	362.8	5.76	5.52	5.36	413.5	443.5	13.55	13.99	15.06	413.5	443.5	1.35	1.13	0.94
353.0	383.0	5.82	5.55	5.37	453.8	483.8	14.56	13.02	14.20	453.8	483.8	1.44	1.11	0.94
393.3	423.3	5.91	5.65	5.45	474.0	504.0	14.90	13.22	13.67	474.0	504.0	1.52	1.29	1.02
453.8	483.8	5.99	5.75	5.58	514.3	544.3	16.29	15.05	18.07	514.3	544.3	1.66	1.24	0.99
474.0	504.0	5.98	5.73	5.56	534.5	564.5	14.60	15.28	20.73	534.5	564.5	1.74	1.30	1.06
514.3	544.3	5.98	5.70	5.54	574.8	604.8	9.70	15.13	16.99	574.8	604.8	1.92	1.54	1.30
534.5	564.5	6.05	5.73	5.58	595.0	625.0	7.27	12.16	16.38	595.0	625.0	1.92	1.61	1.42
574.8	604.8	6.29	5.86	5.65	635.4	665.4	4.82	6.84	11.93	635.4	665.4	2.03	1.89	1.71
595.0	625.0	6.47	6.01	5.73	655.5	685.5	4.33	5.91	9.59	655.5	685.5	2.02	1.82	1.69
635.4	665.4	6.78	6.32	5.91	695.9	725.9	4.31	5.21	6.96	695.9	725.9	2.00	1.82	1.68
695.9	725.9	7.12	6.68	6.26	716.0	746.0	4.42	5.26	6.64	716.0	746.0	2.10	1.78	1.73
716.0	746.0	7.22	6.78	6.38	756.4	786.4	4.89	5.85	7.41	756.4	786.4	1.96	1.84	1.67
756.4	786.4	7.42	6.95	6.52	776.5	806.5	5.47	6.54	8.25	776.5	806.5	2.01	1.86	1.75
776.5	806.5	7.54	7.02	6.57	816.9	846.9	7.42	8.71	10.77	816.9	846.9	2.23	2.09	1.90
816.9	846.9	7.56	6.96	6.51	837.0	867.0	8.91	9.93	14.36	837.0	867.0	2.08	1.85	1.73
837.0	867.0	7.55	6.92	6.48	877.4	907.4	12.31	15.89	17.50	877.4	907.4	2.23	1.83	1.70
877.4	907.4	7.49	6.86	6.46	897.6	927.6	16.12	19.42	15.50	897.6	927.6	2.20	1.93	1.70
897.6	927.6	7.43	6.84	6.47	937.9	967.9	15.21	15.68	14.49	937.9	967.9	2.29	1.92	1.67
958.1	988.1	7.56	7.04	6.76	958.1	988.1	14.33	14.11	14.23	958.1	988.1	2.12	1.84	1.56
998.4	1028.4	7.71	7.28	7.04	998.4	1028.4	12.27	13.56	14.66	998.4	1028.4	2.17	1.67	1.42
1018.6	1048.6	7.86	7.42	7.20	1018.6	1048.6	11.30	13.39	14.24	1018.6	1048.6	2.15	1.68	1.53
1058.9	1088.9	8.22	7.82	7.60	1058.9	1088.9	10.85	11.89	11.33	1058.9	1088.9	1.97	1.59	1.32
1079.1	1109.1	8.42	8.04	7.86	1079.1	1109.1	10.91	11.13	10.80	1079.1	1109.1	1.92	1.50	1.28
1119.4	1149.4	8.86	8.50	8.35	1119.4	1149.4	9.50	9.94	9.46	1119.4	1149.4	1.92	1.35	1.15
1139.6	1169.6	9.17	8.79	8.64	1139.6	1169.6	9.43	10.13	9.68	1139.6	1169.6	1.93	1.32	1.02
1179.9	1209.9	9.68	9.29	9.17	1179.9	1209.9	8.84	10.59	10.73	1179.9	1209.9	1.88	1.29	1.00
1200.1	1230.1	9.90	9.53	9.40	1200.1	1230.1	9.14	10.96	11.92	1200.1	1230.1	1.88	1.23	0.85



Frequency Mixer

ADE-2ASK

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=500.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1000.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
490.0	10.1	5.82	10.0	20.1	5.10	990.0	10.1	8.14
477.7	22.4	5.80	30.0	40.1	4.68	970.0	30.1	8.16
465.4	34.7	5.77	50.0	60.1	4.83	950.0	50.1	8.15
453.1	47.0	5.75	70.0	80.1	4.80	930.0	70.1	8.16
440.8	59.3	5.77	90.0	100.1	4.74	910.0	90.1	8.18
428.5	71.6	5.76	110.0	120.1	4.75	890.0	110.1	8.15
416.2	83.9	5.72	130.0	140.1	4.80	870.0	130.1	8.09
403.8	96.3	5.65	150.0	160.1	4.79	850.0	150.1	8.12
391.5	108.6	5.65	170.0	180.1	4.80	830.0	170.1	8.14
379.2	120.9	5.65	190.0	200.1	4.82	810.0	190.1	8.09
366.9	133.2	5.65	210.0	220.1	4.85	790.0	210.1	8.08
354.6	145.5	5.65	230.0	240.1	4.87	770.0	230.1	8.01
342.3	157.8	5.65	250.0	260.1	4.91	750.0	250.1	7.96
330.0	170.1	5.65	270.0	280.1	4.95	730.0	270.1	7.96
317.7	182.4	5.66	290.0	300.1	4.99	710.0	290.1	7.93
305.4	194.7	5.67	310.0	320.1	4.99	690.0	310.1	7.90
293.1	207.0	5.66	330.0	340.1	4.94	670.0	330.1	7.85
280.8	219.3	5.65	350.0	360.1	4.92	650.0	350.1	7.79
268.5	231.6	5.65	370.0	380.1	4.96	630.0	370.1	7.71
256.2	243.9	5.68	390.0	400.1	5.00	610.0	390.1	7.71
243.8	256.3	5.65	430.0	440.1	5.55	570.0	430.1	7.78
231.5	268.6	5.60	450.0	460.1	5.20	550.0	450.1	7.84
219.2	280.9	5.60	490.0	500.1	5.23	510.0	490.1	7.75
206.9	293.2	5.67	510.0	520.1	5.17	490.0	510.1	7.62
194.6	305.5	5.69	550.0	560.1	5.19	450.0	550.1	7.35
182.3	317.8	5.70	570.0	580.1	5.19	430.0	570.1	7.42
170.0	330.1	5.71	610.0	620.1	5.26	390.0	610.1	7.38
157.7	342.4	5.70	630.0	640.1	5.22	370.0	630.1	7.56
145.4	354.7	5.73	670.0	680.1	5.34	330.0	670.1	7.96
133.1	367.0	5.71	690.0	700.1	5.33	310.0	690.1	8.05
120.8	379.3	5.71	730.0	740.1	5.38	270.0	730.1	8.16
108.5	391.6	5.73	750.0	760.1	5.35	250.0	750.1	8.25
96.2	403.9	5.73	790.0	800.1	5.36	210.0	790.1	8.27
83.8	416.3	5.72	810.0	820.1	5.31	190.0	810.1	8.25
71.5	428.6	5.79	850.0	860.1	5.27	150.0	850.1	8.11
59.2	440.9	5.79	870.0	880.1	5.24	130.0	870.1	7.95
46.9	453.2	5.76	910.0	920.1	5.24	90.0	910.1	7.65
34.6	465.5	5.79	930.0	940.1	5.25	70.0	930.1	7.55
22.3	477.8	5.84	970.0	980.1	5.34	30.0	970.1	7.38
10.0	490.1	5.83	990.0	1000.1	5.39	10.0	990.1	7.51

Frequency Mixer

ADE-2ASK

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
1.0	65.7	67.7	70.6	65.5	64.1	62.9
2.0	65.4	67.9	70.3	65.4	64.2	62.6
2.2	64.8	67.9	69.5	65.7	64.0	62.5
4.7	64.5	66.9	69.6	65.0	64.1	62.5
10.3	63.4	66.0	68.1	65.0	63.1	60.8
50.4	72.24	89.61	78.67	53.31	51.24	50.16
90.8	62.11	70.02	81.00	49.15	46.64	45.76
110.9	60.21	66.69	76.09	47.36	45.12	44.04
171.5	54.45	59.29	63.81	44.02	42.13	40.84
211.8	51.60	55.40	58.59	42.78	40.80	39.42
232.0	50.52	53.86	56.32	41.85	39.91	38.49
272.3	48.72	51.44	53.26	40.56	38.52	37.09
292.5	47.40	50.16	51.90	40.35	38.24	36.71
332.8	45.22	47.53	49.18	38.99	36.94	35.45
353.0	44.20	46.22	47.75	38.24	36.27	34.78
393.3	43.01	44.51	45.53	36.79	35.19	33.83
453.8	41.81	42.83	43.16	34.05	32.74	31.69
474.0	41.30	42.21	42.53	33.51	32.19	31.15
514.3	40.60	41.20	41.02	32.27	30.91	29.70
534.5	40.15	40.64	40.34	31.68	30.21	28.92
574.8	39.12	39.51	39.17	30.56	29.12	27.85
595.0	38.67	38.90	38.46	29.85	28.41	27.19
635.4	37.90	38.16	37.75	28.57	27.28	25.99
695.9	36.42	37.15	36.94	26.97	26.24	25.12
716.0	35.58	36.40	36.31	26.38	25.75	24.78
756.4	34.71	35.59	35.53	25.50	25.06	24.29
776.5	34.16	35.02	34.90	25.04	24.58	23.77
816.9	33.15	33.90	33.57	24.16	23.83	22.91
837.0	32.70	33.33	32.92	23.74	23.43	22.38
877.4	31.86	32.18	31.60	23.21	22.91	21.61
897.6	31.32	31.53	30.92	22.66	22.42	21.11
958.1	30.21	29.99	29.43	21.24	20.83	19.68
998.4	29.08	28.68	28.09	19.98	19.75	18.83
1018.6	28.55	28.03	27.41	19.25	19.11	18.28
1058.9	27.37	26.67	25.97	18.23	18.41	17.75
1079.1	26.84	26.03	25.24	17.51	17.97	17.48
1119.4	25.75	24.75	23.87	16.52	17.22	16.97
1139.6	25.29	24.16	23.24	16.14	16.92	16.73
1179.9	24.58	23.26	22.22	15.25	16.25	16.36
1200.1	24.03	22.67	21.63	14.89	15.93	16.09

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	34.31	34.06	35.99
50.4	80.4	33.92	34.31	35.56
90.8	120.8	30.41	30.78	30.39
110.9	140.9	29.26	29.40	29.34
151.3	181.3	27.42	27.61	27.58
171.5	201.5	26.58	26.81	26.94
211.8	241.8	25.80	25.97	26.25
232.0	262.0	25.61	25.84	26.07
272.3	302.3	25.36	25.86	26.30
292.5	322.5	25.36	25.89	26.22
332.8	362.8	25.62	26.11	26.51
353.0	383.0	25.92	26.46	26.93
393.3	423.3	26.71	27.30	27.85
413.5	443.5	26.95	27.52	28.08
453.8	483.8	26.36	27.04	27.52
474.0	504.0	25.52	25.95	26.33
514.3	544.3	23.26	23.53	23.67
534.5	564.5	22.13	22.12	22.15
574.8	604.8	20.41	20.15	19.92
595.0	625.0	19.81	19.50	19.21
635.4	665.4	18.94	18.72	18.46
655.5	685.5	18.65	18.46	18.33
695.9	725.9	18.47	18.25	18.23
716.0	746.0	18.54	18.31	18.26
756.4	786.4	18.90	18.72	18.68
776.5	806.5	19.00	18.84	18.81
816.9	846.9	18.92	18.64	18.45
837.0	867.0	18.60	18.22	17.90
877.4	907.4	17.76	17.26	16.99
897.6	927.6	17.28	16.93	16.71
937.9	967.9	16.44	16.28	16.15
958.1	988.1	15.94	15.83	15.68
998.4	1028.4	14.80	14.67	14.47
1018.6	1048.6	14.15	14.01	13.79
1058.9	1088.9	12.81	12.63	12.37
1079.1	1109.1	12.09	11.86	11.59
1119.4	1149.4	10.79	10.43	10.10
1139.6	1169.6	10.25	9.80	9.43
1179.9	1209.9	9.24	8.65	8.20
1200.1	1230.1	8.78	8.16	7.69



Frequency Mixer

ADE-2ASK

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)		
		@LO (dBm)		
		+4	+7	+10
1.0	31.0	1.39	1.38	1.38
2.0	32.0	1.25	1.22	1.22
2.2	32.2	1.24	1.21	1.20
4.7	34.7	1.18	1.12	1.10
10.3	40.3	1.16	1.09	1.05
50.4	80.4	1.06	1.03	1.07
90.8	120.8	1.17	1.10	1.08
110.9	140.9	1.11	1.04	1.03
171.5	201.5	1.13	1.08	1.07
211.8	241.8	1.09	1.09	1.12
232.0	262.0	1.13	1.13	1.14
272.3	302.3	1.14	1.12	1.14
292.5	322.5	1.12	1.12	1.14
332.8	362.8	1.16	1.16	1.18
353.0	383.0	1.16	1.15	1.18
393.3	423.3	1.20	1.20	1.23
453.8	483.8	1.21	1.23	1.25
474.0	504.0	1.23	1.25	1.29
514.3	544.3	1.21	1.25	1.29
534.5	564.5	1.22	1.26	1.30
574.8	604.8	1.23	1.24	1.27
595.0	625.0	1.23	1.21	1.24
635.4	665.4	1.30	1.26	1.26
695.9	725.9	1.45	1.39	1.36
716.0	746.0	1.53	1.48	1.44
756.4	786.4	1.76	1.69	1.64
776.5	806.5	1.82	1.75	1.70
816.9	846.9	2.07	1.98	1.92
837.0	867.0	2.18	2.09	2.02
877.4	907.4	2.30	2.20	2.14
897.6	927.6	2.44	2.35	2.28
958.1	988.1	2.63	2.54	2.47
998.4	1028.4	2.88	2.79	2.72
1018.6	1048.6	2.93	2.83	2.75
1058.9	1088.9	2.97	2.88	2.82
1079.1	1109.1	3.07	2.98	2.90
1119.4	1149.4	2.99	2.89	2.82
1139.6	1169.6	3.01	2.91	2.84
1179.9	1209.9	3.07	2.93	2.84
1200.1	1230.1	2.96	2.82	2.73

LO (MHz)	LO VSWR (:1)		
	@LO (dBm)		
	+4	+7	+10
1.0	1.77	2.58	3.57
2.0	1.73	2.55	3.57
2.2	1.75	2.52	3.50
4.7	1.73	2.55	3.57
10.3	1.77	2.52	3.50
50.4	1.80	2.62	3.70
90.8	1.79	2.59	3.61
110.9	1.74	2.51	3.47
171.5	1.82	2.61	3.60
211.8	1.82	2.58	3.53
232.0	1.87	2.66	3.64
272.3	1.91	2.69	3.65
292.5	1.90	2.65	3.56
332.8	1.96	2.73	3.67
353.0	2.01	2.79	3.73
393.3	2.02	2.75	3.63
453.8	2.17	2.93	3.88
474.0	2.16	2.89	3.79
514.3	2.20	2.91	3.79
534.5	2.23	2.92	3.79
574.8	2.32	2.98	3.80
595.0	2.42	3.11	3.95
635.4	2.53	3.27	4.10
695.9	2.60	3.34	4.18
716.0	2.60	3.33	4.16
756.4	2.65	3.34	4.15
776.5	2.69	3.38	4.20
816.9	2.75	3.43	4.22
837.0	2.77	3.42	4.19
877.4	2.77	3.37	4.09
897.6	2.77	3.34	4.06
958.1	2.89	3.45	4.16
998.4	2.99	3.54	4.23
1018.6	3.11	3.64	4.31
1058.9	3.27	3.74	4.36
1079.1	3.33	3.74	4.33
1119.4	3.62	3.97	4.52
1139.6	3.76	4.09	4.61
1179.9	3.90	4.15	4.60
1200.1	4.01	4.26	4.69

IF (OUT) (MHz)	IF VSWR @LO=1200.1MHz (:1)		
	@LO (dBm)		
	+4	+7	+10
10.0	1.64	1.37	1.19
29.9	1.34	1.11	1.03
49.7	1.24	1.03	1.14
69.5	1.20	1.11	1.17
89.3	1.29	1.15	1.17
109.1	1.31	1.16	1.17
128.9	1.29	1.14	1.17
148.7	1.27	1.16	1.21
168.5	1.28	1.18	1.22
188.3	1.31	1.21	1.24
208.1	1.30	1.20	1.23
227.9	1.28	1.20	1.24
247.7	1.28	1.21	1.29
267.5	1.30	1.26	1.32
287.3	1.33	1.28	1.33
307.1	1.33	1.29	1.34
326.9	1.31	1.27	1.34
346.7	1.30	1.28	1.36
386.3	1.34	1.33	1.41
406.1	1.34	1.34	1.42
445.7	1.34	1.36	1.45
465.5	1.35	1.38	1.49
505.1	1.35	1.38	1.48
524.9	1.36	1.39	1.50
564.5	1.37	1.41	1.53
584.3	1.36	1.39	1.49
623.9	1.37	1.41	1.52
643.7	1.38	1.42	1.53
683.3	1.40	1.40	1.51
703.1	1.39	1.39	1.50
742.7	1.40	1.38	1.48
762.5	1.42	1.37	1.46
802.1	1.40	1.32	1.41
821.9	1.40	1.31	1.39
861.5	1.44	1.30	1.36
881.3	1.45	1.27	1.31
920.9	1.44	1.23	1.25
940.7	1.46	1.23	1.24
980.3	1.50	1.21	1.15
1000.1	1.49	1.19	1.10

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	4	16	11	30	14	28	36	45	45	51
1	-	18	0	37	11	32	34	51	50	43	65	55
2	109	59	45	57	44	57	47	64	52	66	70	73
3	113	67	67	68	65	69	63	83	89	81	89	79
4	120	95	92	90	95	90	98	92	92	92	93	96
5	119	99	120	107	108	111	95	109	102	117	96	111
6	128	125	108	102	124	94	101	85	104	100	108	105
7	112	107	108	99	106	131	97	97	87	101	102	98
8	116	107	99	104	105	106	102	100	97	85	96	111
9	111	109	122	100	99	107	109	106	100	98	96	99
10	120	106	106	105	104	105	119	118	122	99	92	90
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500.1 MHz; -14.00 dBm.
 LO IN: 530.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -19.53 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	13	28	23	42	27	39	49	54	54	63
1	-	19	0	34	12	33	35	52	52	49	65	61
2	94	47	38	59	38	49	39	61	44	58	61	73
3	110	44	43	51	42	52	40	54	65	68	70	63
4	109	76	61	59	53	57	53	57	57	67	62	70
5	142	71	70	84	58	61	58	62	61	74	77	76
6	112	84	92	90	78	82	73	84	91	73	77	81
7	113	87	95	91	83	75	72	73	74	73	74	86
8	112	93	89	95	101	92	81	77	76	76	77	80
9	109	115	100	96	100	98	98	87	81	86	85	85
10	113	117	113	104	102	110	112	109	94	89	94	94
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500.1 MHz; -4.00 dBm.
 LO IN: 530.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -9.52 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
 ADE-2ASK
 100817
 Page 5 of 5




IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see [minicircuits.com](http://www.minicircuits.com)

Typical Performance Curves


Conversion Loss @ IF=30 MHz

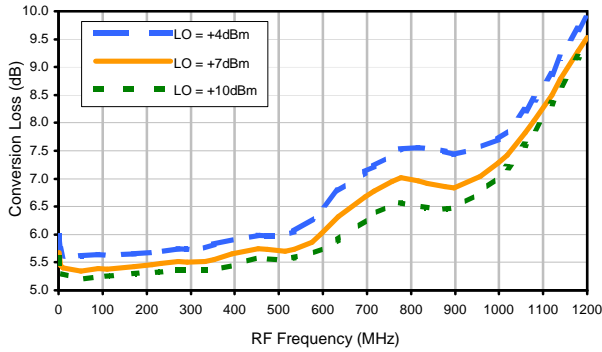


Conversion Loss vs. IF @ RF=500.1 MHz

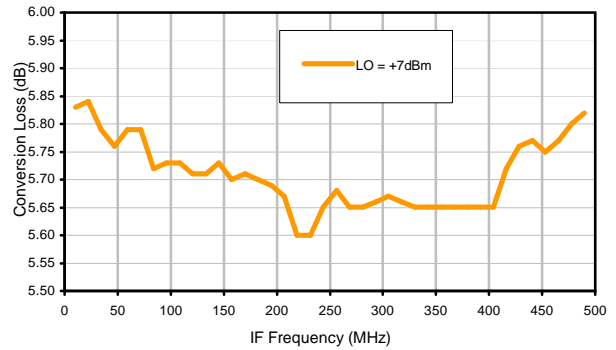


Conversion Loss vs. IF @ RF=10.1 MHz

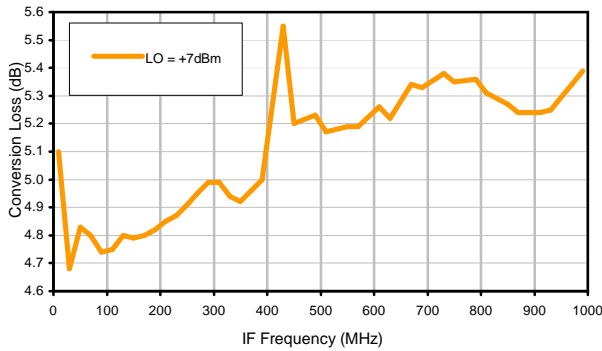


Conversion Loss vs. IF @ RF=1000.1 MHz

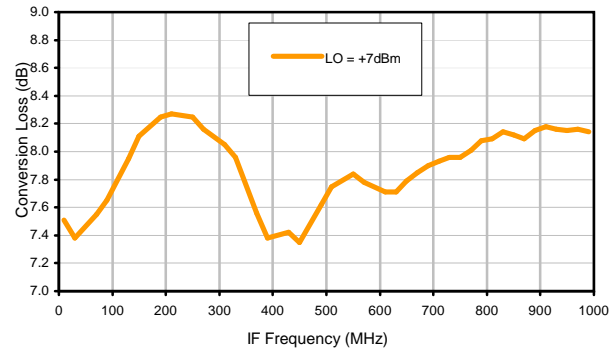

IP3 Input

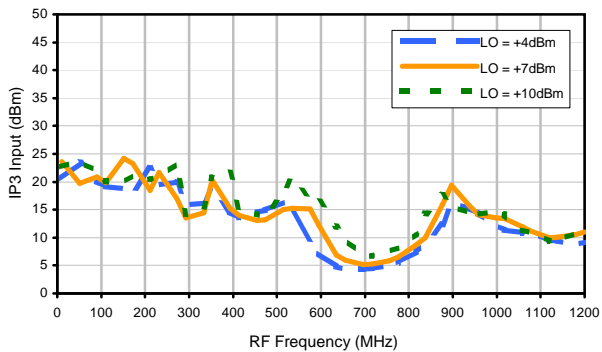


Compression @ RF IN = +1 dBm

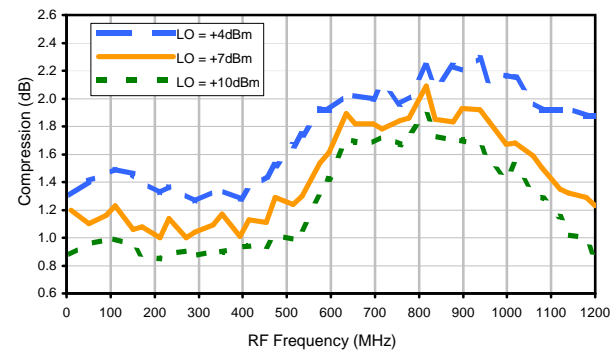


Typical Performance Curves


LO-RF Isolation

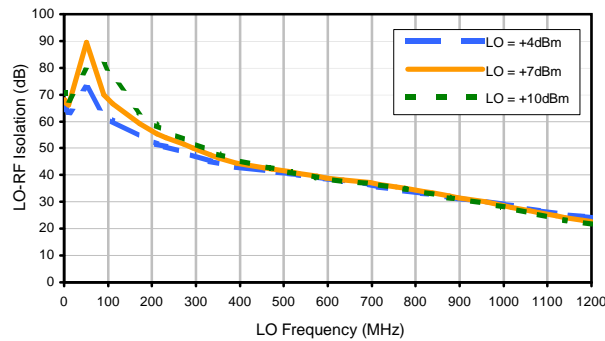


LO-IF Isolation

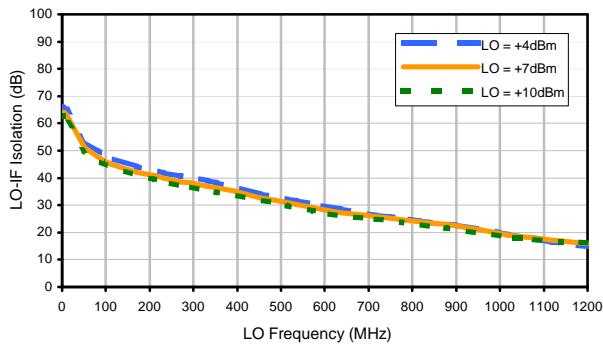


RF-IF Isolation

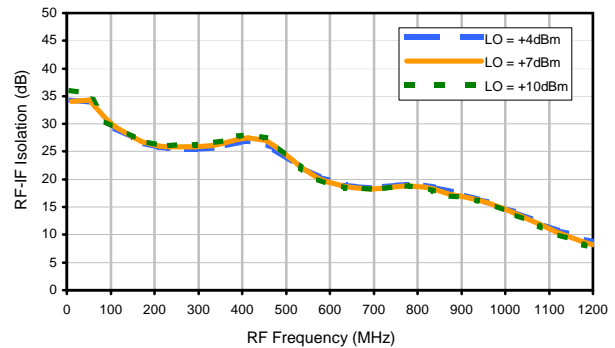


RF VSWR

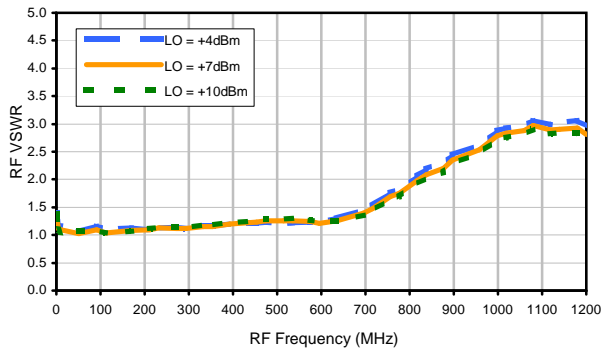

LO VSWR

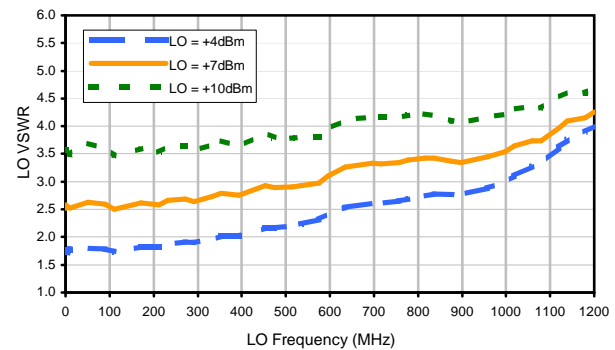

IF VSWR

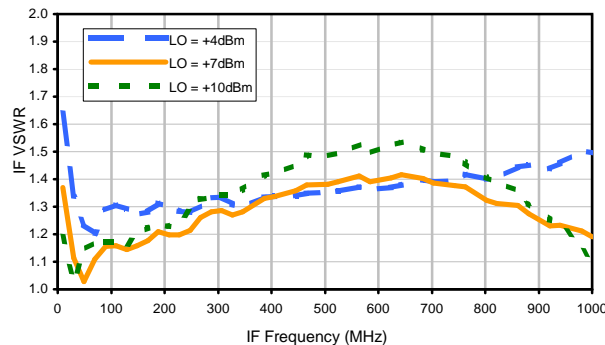

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	4	16	11	30	14	28	36	45	45	51
1	-	18	0	37	11	32	34	51	50	43	65	55
2	109	59	45	57	44	57	47	64	52	66	70	73
3	113	67	67	68	65	69	63	83	89	81	89	79
4	120	95	92	90	95	90	98	92	92	92	93	96
5	119	99	120	107	108	111	95	109	102	117	96	111
6	128	125	108	102	124	94	101	85	104	100	108	105
7	112	107	108	99	106	131	97	97	87	101	102	98
8	116	107	99	104	105	106	102	100	97	85	96	111
9	111	109	122	100	99	107	109	106	100	98	96	99
10	120	106	106	105	104	105	119	118	122	99	92	90
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500.1 MHz; -14.00 dBm.
 LO IN: 530.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -19.53 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	13	28	23	42	27	39	49	54	54	63
1	-	19	0	34	12	33	35	52	52	49	65	61
2	94	47	38	59	38	49	39	61	44	58	61	73
3	110	44	43	51	42	52	40	54	65	68	70	63
4	109	76	61	59	53	57	53	57	57	67	62	70
5	142	71	70	84	58	61	58	62	61	74	77	76
6	112	84	92	90	78	82	73	84	91	73	77	81
7	113	87	95	91	83	75	72	73	74	73	74	86
8	112	93	89	95	101	92	81	77	76	76	77	80
9	109	115	100	96	100	98	98	87	81	86	85	85
10	113	117	113	104	102	110	112	109	94	89	94	94
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500.1 MHz; -4.00 dBm.
 LO IN: 530.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -9.52 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
 ADE-2ASK
 100817
 Page 3 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see [minicircuits.com](http://www.minicircuits.com)

Case Style

CD

CD541
CD542
CD636
CD637

Outline Dimensions



PCB Land Pattern



Suggested Layout,
Tolerance to be within $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAM
CD541					.082 (2.08)							.15
CD542	.272 (6.91)	.310 (7.87)	.220 (5.58)	.100 (2.54)	.112 (2.84)	.055 (1.40)	.100 (2.54)	.030 (0.76)	.026 (0.66)	.065 (1.65)	.300 (7.62)	.20
CD636					.162 (4.11)							.25
CD637					.206 (5.23)							.40

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

Mini-Circuits[®]

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F34



Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M101143	ADDED "gk" PIN CONNECTION, TT100 CASE STYLE & NOTE 2	10/10/05	MMG	DJ
B	M102713	ADDED "...WITH SMOBC"	01/17/06	MMG	IL
C	M108637	REMOVED "PIN 1", ADDED INDEX ON UNIT	12/01/06	MYG	FL

SUGGESTED MOUNTING CONFIGURATION
FOR BH292, CD541/542/636/637, TT100/240 CASE
STYLES, "gk", "ht", "hu", "nd", "w" PIN CONNECTIONS



- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES	MMG	07/17/02
TOLERANCES ON:	WL	08/02/02
2 PL DECIMALS ±	DJ	08/05/02
3 PL DECIMALS ± .005		
ANGLES ±		
FRACTIONS ±		

Mini-Circuits® 13 Neptune Avenue
 Brooklyn NY 11235

PL, gk/ht/hu/nd/w, BH292,
 CD541/542/636/637, TT100/240, TB-03

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-052	C
FILE:	98PL052	SCALE: 8:1	SHEET: 1 OF 1


Mini-Circuits®
 THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

Evaluation Board and Circuit

For Pin Connections and DUT Orientation Refer to
Data Sheet of the DUT



TB-03

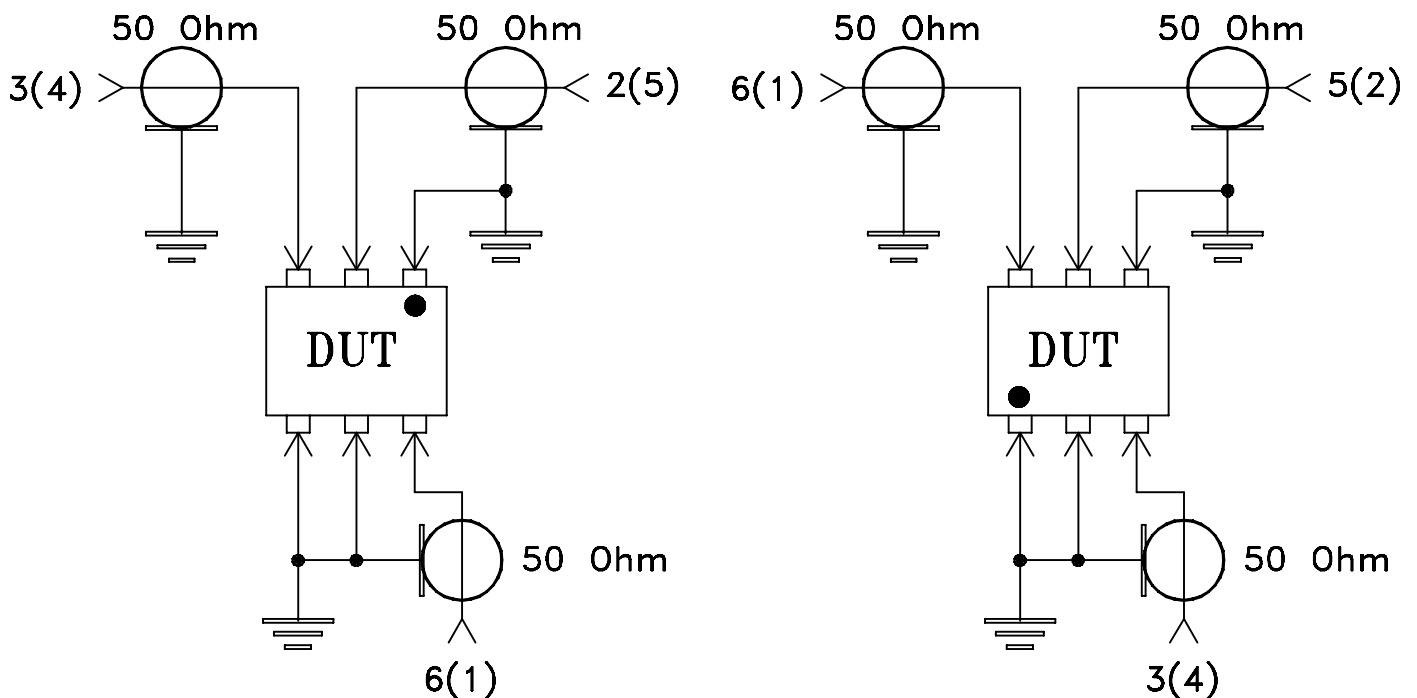

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215