

Surface Mount Frequency Mixer

Level 7 (LO Power +7 dBm) 800 to 1000 MHz

ADE-901+



Generic photo used for illustration purposes only
CASE STYLE: CD542

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500, 1000

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

LO	6
RF	4
IF	3
GROUND	1,2,5

Outline Drawing

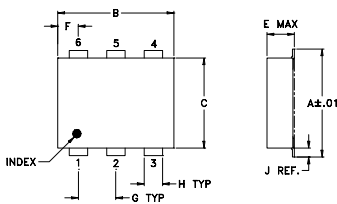


PCB Land Pattern



Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L	wt		
.030	.026	.065	.300	grams		
0.76	0.66	1.65	7.62	0.20		

Demo Board MCL P/N: TB-02 Suggested PCB Layout (PL-051)

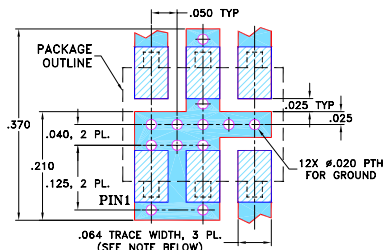

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low conversion loss, 5.9 dB typ.
- good isolation, 32 dB typ.
- low profile package
- aqueous washable
- protected by U.S. Patent 6,133,525

Applications

- cellular
- ISM/GSM

Electrical Specifications


FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF	IF	\bar{X}	σ	Max.	Typ.	Min.	Typ.	Min.	Typ.
800-1000	DC-200	5.9	0.10	7.3	32	22	26	18	13







1 dB COMP.: +1 dBm typ.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
800.00	830.00	5.99	33.00	25.00	1.21	2.68
810.53	840.53	5.85	33.16	25.16	1.20	2.76
821.05	851.05	5.89	33.17	25.17	1.20	2.84
831.58	861.58	5.80	33.17	25.00	1.19	2.92
842.11	872.11	5.85	33.17	25.34	1.19	2.96
852.63	882.63	5.88	33.33	25.17	1.19	2.96
863.16	893.16	5.89	33.33	25.33	1.18	2.92
873.68	903.68	5.86	33.50	25.33	1.17	2.88
884.21	914.21	5.86	33.67	25.50	1.16	2.88
894.74	924.74	5.89	33.50	25.50	1.15	3.01
905.26	935.26	5.91	33.50	25.34	1.13	3.11
915.79	945.79	5.84	33.50	25.33	1.12	3.16
926.32	956.32	5.92	33.33	25.33	1.10	3.21
936.84	966.84	5.86	33.50	25.00	1.08	3.21
947.37	977.37	5.92	33.34	24.84	1.06	3.21
957.90	987.90	5.91	33.33	24.67	1.04	3.16
968.42	998.42	5.87	33.50	24.50	1.02	3.21
978.95	1008.95	5.80	33.50	24.50	1.01	3.32
989.47	1019.47	5.86	33.50	24.34	1.01	3.38
1000.00	1030.00	5.82	33.50	24.34	1.03	3.44

Electrical Schematic

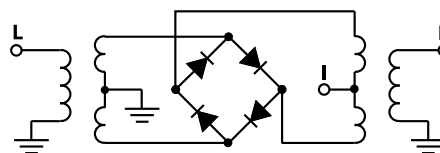

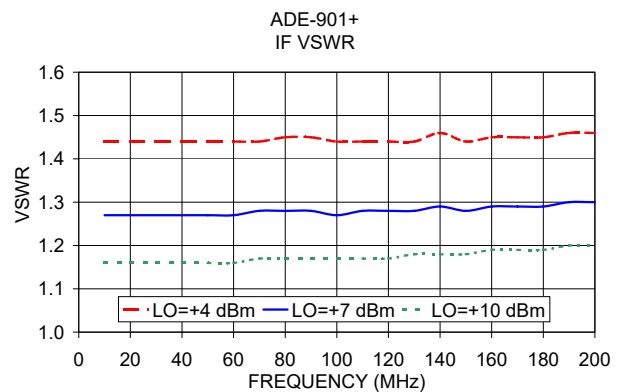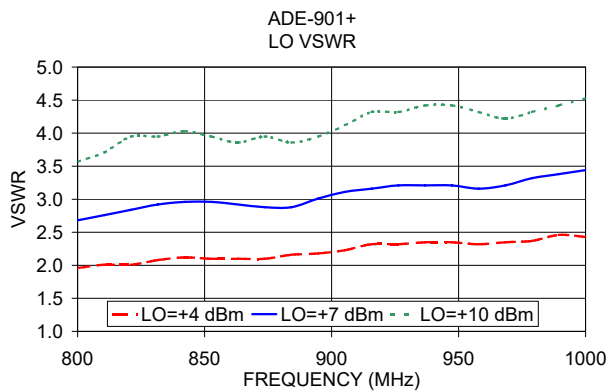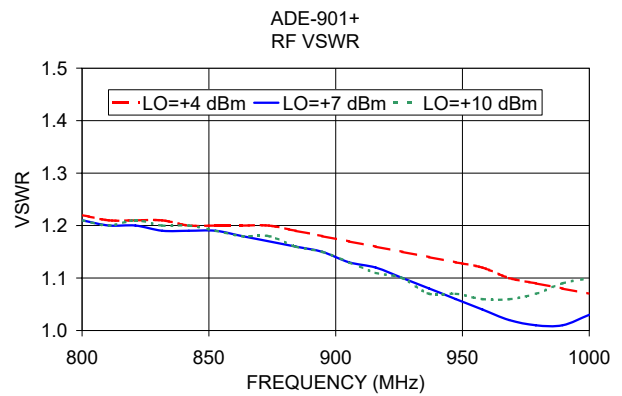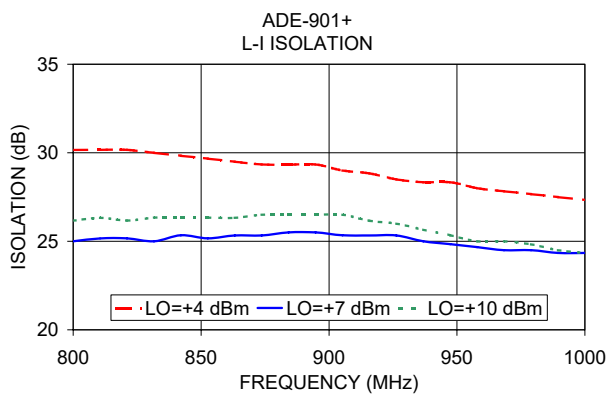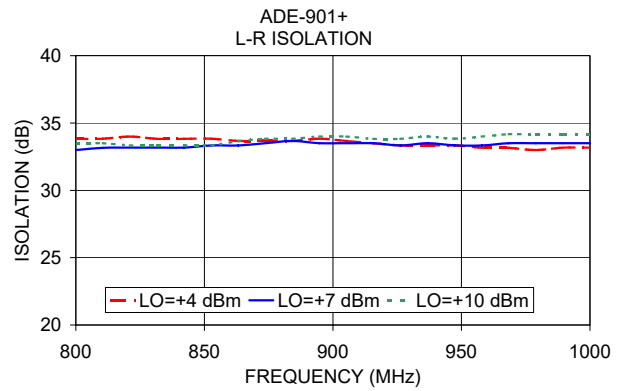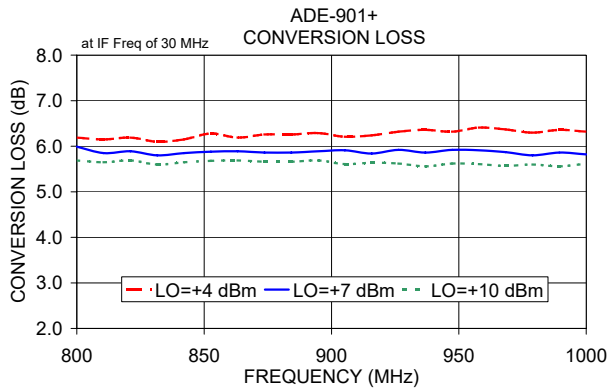

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

ADE-901+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
		+4	+7	+10			+4	+7	+10			+4	+7	+10
80.1	110.1	11.54	10.22	9.70	80.1	110.1	13.63	16.53	19.41	80.1	110.1	-0.11	0.15	0.01
120.1	150.1	9.16	8.44	8.07	120.1	150.1	16.26	16.78	18.80	120.1	150.1	0.22	0.09	0.17
160.1	190.1	8.18	7.65	7.41	160.1	190.1	15.36	16.90	17.40	160.1	190.1	0.33	0.17	0.17
200.1	230.1	7.51	7.09	6.91	200.1	230.1	14.80	15.13	16.12	200.1	230.1	0.54	0.27	0.25
240.1	270.1	7.18	6.86	6.67	240.1	270.1	16.12	15.86	18.01	240.1	270.1	0.73	0.38	0.29
280.1	310.1	6.99	6.61	6.48	280.1	310.1	16.04	14.78	17.23	280.1	310.1	0.74	0.44	0.31
320.1	350.1	6.82	6.54	6.52	320.1	350.1	15.76	15.55	16.18	320.1	350.1	0.73	0.63	0.55
360.1	390.1	6.69	6.36	6.22	360.1	390.1	15.97	14.45	15.23	360.1	390.1	0.91	0.60	0.45
400.1	430.1	6.56	6.28	6.17	400.1	430.1	14.65	15.79	16.47	400.1	430.1	1.02	0.61	0.47
440.1	470.1	6.41	6.12	6.00	440.1	470.1	15.52	15.52	17.17	440.1	470.1	0.90	0.69	0.49
480.1	510.1	6.48	6.17	6.01	480.1	510.1	19.98	16.89	15.89	480.1	510.1	1.00	0.76	0.53
520.1	550.1	6.43	6.13	6.00	520.1	550.1	16.20	16.75	16.16	520.1	550.1	0.97	0.69	0.51
560.1	590.1	6.39	6.10	5.95	560.1	590.1	14.43	15.08	16.15	560.1	590.1	0.95	0.76	0.56
600.1	630.1	6.39	6.08	5.88	600.1	630.1	13.98	14.28	15.15	600.1	630.1	1.01	0.79	0.59
640.1	670.1	6.39	6.06	5.87	640.1	670.1	14.73	14.50	14.24	640.1	670.1	1.19	1.05	0.87
700.1	730.1	6.40	6.10	5.90	700.1	730.1	15.53	14.24	14.29	700.1	730.1	1.10	0.93	0.77
740.1	770.1	6.41	6.09	5.88	740.1	770.1	15.93	15.50	15.32	740.1	770.1	1.31	1.03	0.84
800.1	830.1	6.37	6.09	5.87	800.1	830.1	14.52	15.12	14.79	800.1	830.1	1.25	1.09	0.87
840.1	870.1	6.39	6.10	5.88	840.1	870.1	15.32	15.15	13.70	840.1	870.1	1.47	1.17	1.06
900.1	930.1	6.39	6.08	5.88	900.1	930.1	14.65	14.62	14.45	900.1	930.1	1.51	1.14	0.98
940.1	970.1	6.46	6.13	5.92	940.1	970.1	15.13	14.64	15.22	940.1	970.1	1.76	1.32	1.20
1000.1	1030.1	6.57	6.21	5.96	1000.1	1030.1	20.26	14.10	14.57	1000.1	1030.1	1.81	1.48	1.22
1040.1	1070.1	6.68	6.27	6.01	1040.1	1070.1	18.16	14.86	13.94	1040.1	1070.1	1.64	1.35	1.14
1100.1	1130.1	6.89	6.39	6.09	1100.1	1130.1	12.14	17.87	13.59	1100.1	1130.1	1.73	1.47	1.24
1140.1	1170.1	7.06	6.54	6.20	1140.1	1170.1	11.15	18.47	14.63	1140.1	1170.1	1.64	1.44	1.20
1200.1	1230.1	7.28	6.72	6.32	1200.1	1230.1	10.15	14.03	14.94	1200.1	1230.1	1.73	1.45	1.19
1240.1	1270.1	7.50	6.91	6.50	1240.1	1270.1	10.38	13.53	15.62	1240.1	1270.1	1.63	1.48	1.30
1300.1	1330.1	7.69	7.12	6.69	1300.1	1330.1	10.26	12.07	13.80	1300.1	1330.1	1.66	1.42	1.18
1340.1	1370.1	7.86	7.33	6.86	1340.1	1370.1	9.38	10.28	11.78	1340.1	1370.1	1.54	1.28	1.21
1400.1	1430.1	8.01	7.45	6.99	1400.1	1430.1	9.02	9.87	10.87	1400.1	1430.1	1.28	1.21	1.05
1440.1	1470.1	8.05	7.54	7.13	1440.1	1470.1	9.27	10.44	10.97	1440.1	1470.1	1.25	1.15	1.04
1500.1	1530.1	8.26	7.81	7.52	1500.1	1530.1	10.97	11.02	11.40	1500.1	1530.1	1.16	0.90	0.80
1540.1	1570.1	8.36	7.94	7.69	1540.1	1570.1	11.15	12.39	12.14	1540.1	1570.1	0.99	0.74	0.74
1600.1	1630.1	8.66	8.27	8.02	1600.1	1630.1	13.49	13.17	13.04	1600.1	1630.1	0.71	0.66	0.49
1640.1	1670.1	8.78	8.42	8.20	1640.1	1670.1	12.76	14.35	13.73	1640.1	1670.1	0.78	0.51	0.36
1700.1	1730.1	9.03	8.69	8.50	1700.1	1730.1	14.02	15.05	14.43	1700.1	1730.1	0.54	0.42	0.37
1740.1	1770.1	9.29	8.93	8.78	1740.1	1770.1	13.66	15.54	16.14	1740.1	1770.1	0.61	0.29	0.26
1800.1	1830.1	9.55	9.22	9.02	1800.1	1830.1	16.78	16.21	17.47	1800.1	1830.1	0.46	0.23	0.19
1840.1	1870.1	9.82	9.52	9.30	1840.1	1870.1	16.89	19.25	18.08	1840.1	1870.1	0.47	0.17	0.16
1900.1	1930.1	10.18	9.85	9.68	1900.1	1930.1	17.67	20.44	18.78	1900.1	1930.1	0.20	0.12	0.14

Frequency Mixer

ADE-901+

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=900.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=800.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1000.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
100.0	800.1	5.86	10.0	810.1	6.11	200.0	800.1	6.17
95.3	804.8	5.89	14.9	815.0	6.12	195.1	805.0	6.17
90.5	809.6	5.89	19.7	819.8	6.12	190.3	809.8	6.17
85.8	814.3	5.89	24.6	824.7	6.10	185.4	814.7	6.16
81.1	819.0	5.89	29.5	829.6	6.07	180.5	819.6	6.16
76.3	823.8	5.89	34.4	834.5	6.03	175.6	824.5	6.16
71.6	828.5	5.88	39.2	839.3	6.06	170.8	829.3	6.15
66.8	833.3	5.86	44.1	844.2	6.04	165.9	834.2	6.17
62.1	838.0	5.84	49.0	849.1	6.06	161.0	839.1	6.19
57.4	842.7	5.85	53.8	853.9	6.05	156.2	843.9	6.18
52.6	847.5	5.83	58.7	858.8	6.06	151.3	848.8	6.19
47.9	852.2	5.84	63.6	863.7	6.07	146.4	853.7	6.20
43.2	856.9	5.84	68.5	868.6	6.07	141.5	858.6	6.17
38.4	861.7	5.84	73.3	873.4	6.07	136.7	863.4	6.16
33.7	866.4	5.86	78.2	878.3	6.03	131.8	868.3	6.15
28.9	871.2	5.84	83.1	883.2	6.04	126.9	873.2	6.14
24.2	875.9	5.83	87.9	888.0	6.04	122.1	878.0	6.13
19.5	880.6	5.83	92.8	892.9	6.03	117.2	882.9	6.14
14.7	885.4	5.81	97.7	897.8	6.02	112.3	887.8	6.13
10.0	890.1	5.86	102.6	902.7	6.01	107.4	892.7	6.15
10.0	910.1	5.91	107.4	907.5	6.00	102.6	897.5	6.15
14.7	914.8	5.77	112.3	912.4	6.00	97.7	902.4	6.15
19.5	919.6	5.82	117.2	917.3	5.99	92.8	907.3	6.16
24.2	924.3	5.79	122.1	922.2	5.98	87.9	912.2	6.15
28.9	929.0	5.79	126.9	927.0	5.98	83.1	917.0	6.14
33.7	933.8	5.78	131.8	931.9	5.99	78.2	921.9	6.13
38.4	938.5	5.77	136.7	936.8	6.00	73.3	926.8	6.16
43.2	943.3	5.79	141.5	941.6	6.01	68.5	931.6	6.17
47.9	948.0	5.81	146.4	946.5	6.03	63.6	936.5	6.16
52.6	952.7	5.82	151.3	951.4	6.02	58.7	941.4	6.16
57.4	957.5	5.84	156.2	956.3	6.01	53.8	946.3	6.14
62.1	962.2	5.84	161.0	961.1	6.00	49.0	951.1	6.19
66.8	966.9	5.83	165.9	966.0	6.01	44.1	956.0	6.16
71.6	971.7	5.82	170.8	970.9	6.00	39.2	960.9	6.19
76.3	976.4	5.81	175.6	975.7	6.01	34.4	965.7	6.16
81.1	981.2	5.81	180.5	980.6	6.01	29.5	970.6	6.16
85.8	985.9	5.82	185.4	985.5	6.02	24.6	975.5	6.20
90.5	990.6	5.83	190.3	990.4	6.02	19.7	980.4	6.23
95.3	995.4	5.85	195.1	995.2	6.02	14.9	985.2	6.23
100.0	1000.1	5.86	200.0	1000.1	6.02	10.0	990.1	6.34

REV. X2
 ADE-901+
 100817
 Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
80.1	54.13	53.66	53.31	59.70	52.96	49.73
120.1	50.56	49.83	49.40	52.26	48.46	46.63
160.1	47.25	46.84	46.72	48.52	46.42	44.98
200.1	44.97	45.03	45.06	46.90	44.92	43.63
240.1	43.21	43.45	43.62	45.67	43.86	42.49
280.1	41.67	42.00	42.23	44.78	42.93	41.54
320.1	40.46	40.88	41.14	43.78	41.92	40.54
360.1	39.61	40.09	40.40	42.69	40.99	39.65
400.1	38.76	39.30	39.67	41.78	40.35	39.12
440.1	38.02	38.53	38.88	40.45	39.13	38.06
480.1	37.39	37.94	38.25	39.50	38.45	37.46
520.1	36.83	37.41	37.76	38.03	37.38	36.71
560.1	36.23	36.75	37.10	36.74	36.19	35.69
600.1	35.73	36.19	36.48	35.88	35.35	34.83
640.1	35.32	35.82	36.07	34.78	34.41	33.94
700.1	34.70	35.18	35.45	33.57	33.49	33.28
740.1	34.42	34.84	35.09	32.66	32.60	32.51
800.1	33.94	34.22	34.43	31.77	31.67	31.52
840.1	33.89	34.02	34.09	31.12	30.99	30.75
900.1	33.93	33.90	33.80	30.53	30.46	30.16
940.1	33.89	33.82	33.67	30.15	30.24	29.97
1000.1	33.83	33.78	33.60	29.42	29.94	29.88
1040.1	33.84	33.84	33.65	28.73	29.52	29.71
1100.1	33.74	33.80	33.61	28.04	28.98	29.49
1140.1	33.62	33.73	33.61	27.58	28.50	29.19
1200.1	33.71	33.89	33.87	27.20	28.00	28.70
1240.1	33.72	33.90	33.92	26.97	27.75	28.40
1300.1	33.85	33.99	34.05	26.78	27.57	28.17
1340.1	33.97	34.04	34.08	26.50	27.33	27.91
1400.1	34.20	34.15	34.11	26.33	27.26	27.83
1440.1	34.61	34.49	34.37	26.30	27.23	27.77
1500.1	35.64	35.43	35.21	26.14	27.11	27.68
1540.1	36.52	36.39	36.12	26.26	27.32	27.97
1600.1	38.07	38.22	37.91	26.37	27.71	28.57
1640.1	38.69	39.46	39.39	26.16	27.74	28.84
1700.1	39.14	41.03	41.47	26.18	28.08	29.56
1740.1	38.89	41.42	42.50	26.07	28.16	29.87
1800.1	38.30	41.46	43.52	26.15	28.41	30.44
1840.1	38.08	41.49	44.00	26.18	28.54	30.76
1900.1	37.14	40.49	43.32	26.52	28.88	31.22

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
80.1	110.1	41.08	41.09	43.67
120.1	150.1	38.09	39.12	40.16
160.1	190.1	36.22	37.73	37.58
200.1	230.1	34.10	35.27	35.31
240.1	270.1	32.78	33.69	34.33
280.1	310.1	31.92	32.56	33.00
320.1	350.1	31.21	31.96	32.62
360.1	390.1	30.68	31.35	32.17
400.1	430.1	30.48	31.37	32.02
440.1	470.1	30.40	31.61	32.42
480.1	510.1	30.19	31.58	32.71
520.1	550.1	30.42	31.82	33.04
560.1	590.1	31.02	32.49	33.75
600.1	630.1	32.26	34.15	35.91
640.1	670.1	33.68	36.02	38.60
700.1	730.1	39.92	46.07	56.81
740.1	770.1	44.69	45.46	41.52
800.1	830.1	34.82	33.30	32.14
840.1	870.1	30.52	29.36	28.53
900.1	930.1	26.59	25.57	24.96
940.1	970.1	25.15	24.17	23.54
1000.1	1030.1	23.53	22.56	21.94
1040.1	1070.1	22.82	21.85	21.20
1100.1	1130.1	22.08	21.18	20.49
1140.1	1170.1	21.72	20.96	20.28
1200.1	1230.1	21.43	20.81	20.20
1240.1	1270.1	21.35	20.82	20.27
1300.1	1330.1	21.20	20.78	20.29
1340.1	1370.1	21.03	20.65	20.20
1400.1	1430.1	20.34	19.86	19.39
1440.1	1470.1	19.66	19.13	18.63
1500.1	1530.1	18.60	18.06	17.58
1540.1	1570.1	17.77	17.21	16.77
1600.1	1630.1	16.55	15.97	15.54
1640.1	1670.1	15.66	15.06	14.63
1700.1	1730.1	14.41	13.78	13.35
1740.1	1770.1	13.61	12.98	12.56
1800.1	1830.1	12.50	11.86	11.43
1840.1	1870.1	11.89	11.23	10.82
1900.1	1930.1	10.95	10.31	9.89

Frequency Mixer

ADE-901+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)		
		@LO (dBm)		
		+4	+7	+10
80.1	110.1	5.91	5.56	5.34
120.1	150.1	4.14	3.90	3.87
160.1	190.1	2.81	2.73	2.69
200.1	230.1	2.55	2.49	2.46
240.1	270.1	2.14	2.14	2.13
280.1	310.1	1.98	1.96	1.96
320.1	350.1	1.82	1.83	1.85
360.1	390.1	1.68	1.69	1.70
400.1	430.1	1.57	1.59	1.61
440.1	470.1	1.47	1.49	1.51
480.1	510.1	1.42	1.45	1.48
520.1	550.1	1.36	1.39	1.41
560.1	590.1	1.32	1.36	1.40
600.1	630.1	1.28	1.33	1.36
640.1	670.1	1.27	1.34	1.39
700.1	730.1	1.22	1.29	1.36
740.1	770.1	1.23	1.30	1.37
800.1	830.1	1.23	1.30	1.37
840.1	870.1	1.25	1.32	1.38
900.1	930.1	1.30	1.38	1.44
940.1	970.1	1.27	1.33	1.38
1000.1	1030.1	1.37	1.44	1.51
1040.1	1070.1	1.36	1.41	1.46
1100.1	1130.1	1.58	1.62	1.67
1140.1	1170.1	1.60	1.63	1.68
1200.1	1230.1	1.92	1.91	1.93
1240.1	1270.1	2.03	2.01	2.01
1300.1	1330.1	2.28	2.23	2.20
1340.1	1370.1	2.50	2.44	2.40
1400.1	1430.1	2.63	2.58	2.53
1440.1	1470.1	2.99	2.92	2.85
1500.1	1530.1	3.37	3.31	3.25
1540.1	1570.1	3.65	3.58	3.52
1600.1	1630.1	4.36	4.28	4.20
1640.1	1670.1	4.05	4.00	3.93
1700.1	1730.1	4.62	4.52	4.44
1740.1	1770.1	4.09	4.04	3.98
1800.1	1830.1	4.39	4.32	4.24
1840.1	1870.1	4.67	4.59	4.52
1900.1	1930.1	4.63	4.54	4.45

LO (MHz)	LO VSWR (:1)		
	@LO (dBm)		
	+4	+7	+10
80.1	7.70	5.93	5.70
120.1	3.99	3.82	4.33
160.1	3.18	3.43	4.18
200.1	2.62	3.06	3.88
240.1	2.44	3.02	3.95
280.1	2.27	2.93	3.89
320.1	2.18	2.88	3.84
360.1	2.17	2.93	3.95
400.1	2.05	2.78	3.74
440.1	2.07	2.85	3.85
480.1	2.04	2.83	3.82
520.1	2.04	2.84	3.83
560.1	2.09	2.94	3.98
600.1	2.07	2.90	3.91
640.1	2.15	3.00	4.04
700.1	2.14	2.97	3.97
740.1	2.23	3.10	4.15
800.1	2.20	3.01	3.99
840.1	2.30	3.15	4.17
900.1	2.25	3.03	3.97
940.1	2.39	3.20	4.19
1000.1	2.41	3.19	4.13
1040.1	2.53	3.33	4.30
1100.1	2.56	3.34	4.28
1140.1	2.66	3.47	4.43
1200.1	2.69	3.48	4.40
1240.1	2.80	3.62	4.60
1300.1	2.74	3.50	4.42
1340.1	2.84	3.64	4.60
1400.1	2.72	3.45	4.33
1440.1	2.80	3.54	4.45
1500.1	2.73	3.44	4.33
1540.1	2.83	3.54	4.44
1600.1	2.90	3.57	4.44
1640.1	3.02	3.68	4.55
1700.1	3.13	3.76	4.60
1740.1	3.29	3.90	4.74
1800.1	3.36	3.90	4.68
1840.1	3.58	4.10	4.89
1900.1	3.64	4.05	4.75

IF (OUT) (MHz)	IF VSWR @LO=1000.1MHz (:1)		
	@LO (dBm)		
	+4	+7	+10
10.1	2.09	2.06	1.86
14.9	2.20	1.97	1.90
19.6	2.25	2.03	1.73
24.4	2.09	1.84	1.69
29.1	2.12	1.73	1.57
33.9	1.91	1.67	1.50
38.6	1.88	1.61	1.47
43.4	1.77	1.52	1.46
48.1	1.66	1.53	1.36
52.9	1.62	1.45	1.34
57.6	1.64	1.44	1.31
62.4	1.62	1.44	1.31
67.1	1.59	1.43	1.30
71.9	1.63	1.44	1.32
76.6	1.64	1.46	1.31
81.4	1.66	1.47	1.38
86.1	1.68	1.49	1.39
90.9	1.74	1.52	1.42
95.6	1.76	1.58	1.44
100.4	1.78	1.56	1.43
105.1	1.80	1.58	1.47
109.9	1.83	1.60	1.48
114.6	1.85	1.60	1.49
119.4	1.86	1.62	1.49
124.1	1.83	1.64	1.47
128.9	1.81	1.60	1.47
133.6	1.79	1.57	1.46
138.4	1.80	1.58	1.43
143.1	1.77	1.55	1.42
147.9	1.74	1.55	1.39
152.6	1.71	1.51	1.39
157.4	1.73	1.52	1.40
162.1	1.71	1.50	1.38
166.9	1.71	1.53	1.40
171.6	1.73	1.53	1.42
176.4	1.75	1.55	1.41
181.1	1.75	1.56	1.44
185.9	1.78	1.57	1.46
195.4	1.80	1.59	1.49
200.1	1.81	1.60	1.47

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	12	29	40	41	24	44	47	63	64	75
1	-	20	+0	26	11	35	34	40	48	53	69	60
2	90	50	37	55	36	54	45	61	44	65	61	85
3	129	43	59	51	48	45	41	54	62	51	75	64
4	112	89	86	69	58	69	57	67	58	73	63	73
5	113	65	70	69	63	64	58	62	58	67	69	71
6	115	86	88	96	83	85	73	71	74	74	75	85
7	109	91	86	88	87	77	77	79	78	83	76	82
8	95	93	100	101	97	102	94	102	88	88	86	82
9	122	122	114	112	107	96	99	94	93	88	88	88
10	109	110	119	111	105	105	108	110	105	97	105	92
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 900.1 MHz; -4.00 dBm.
 LO IN: 930.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -10.08 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	3	18	28	31	12	33	33	53	50	54
1	-	20	+0	25	10	32	34	34	46	47	71	53
2	110	60	45	66	44	67	50	78	51	65	67	75
3	119	64	79	66	79	63	68	74	74	70	90	81
4	112	98	89	88	87	92	94	95	89	97	95	101
5	115	124	111	115	100	106	88	106	92	96	99	105
6	117	111	100	111	97	110	96	96	103	115	103	109
7	133	99	102	105	109	102	104	101	94	102	105	107
8	103	96	95	98	99	102	102	112	105	84	103	110
9	121	114	101	109	113	111	101	103	97	96	92	105
10	107	103	109	118	106	112	105	101	109	96	104	97
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 900.1 MHz; -14.00 dBm.
 LO IN: 930.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -19.92 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
 ADE-901+
 100817
 Page 5 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Typical Performance Curves


Conversion Loss @ IF=30MHz

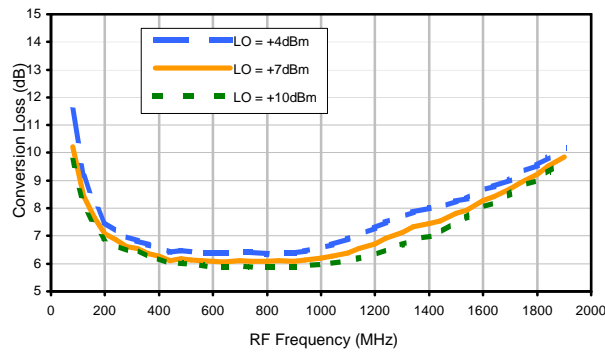


Conversion Loss vs. LO @ RF=900.1MHz

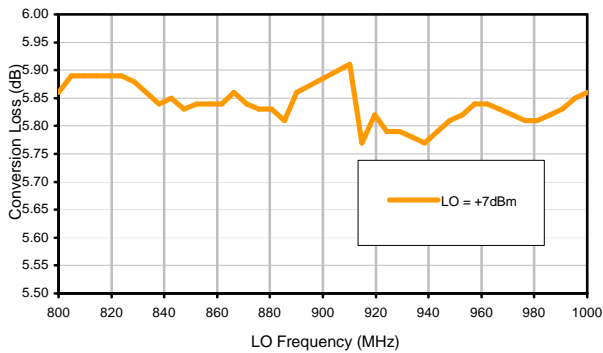


Conversion Loss vs. IF @ RF=900.1MHz

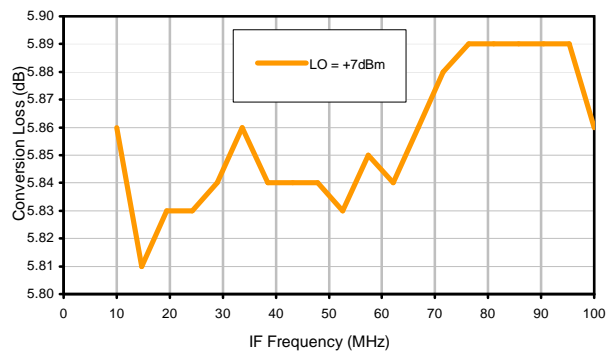


Conversion Loss vs. IF @ RF=800.1MHz

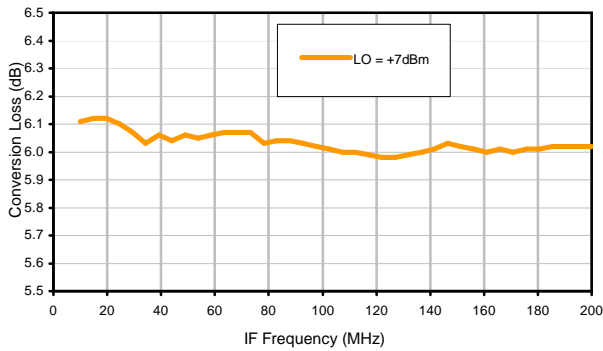


Conversion Loss vs. IF @ RF=1000.1MHz

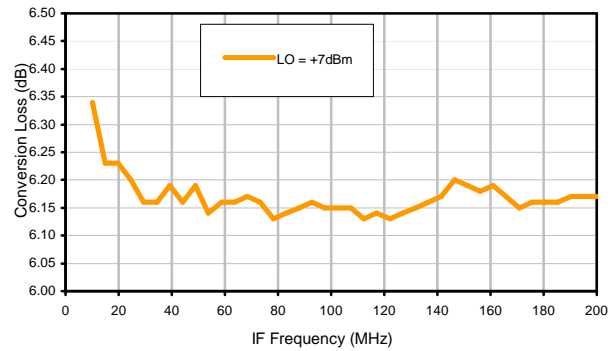

IP3 Input

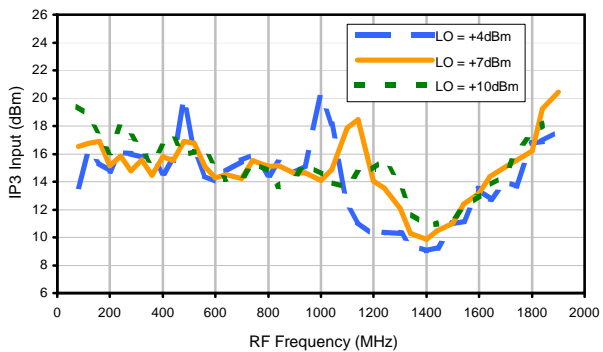


Compression @ RF IN=+1dBm

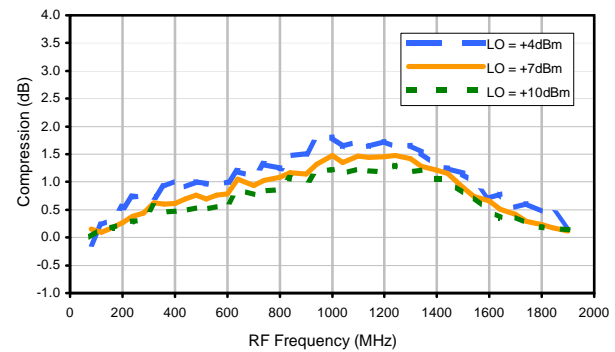


Typical Performance Curves


LO-RF Isolation

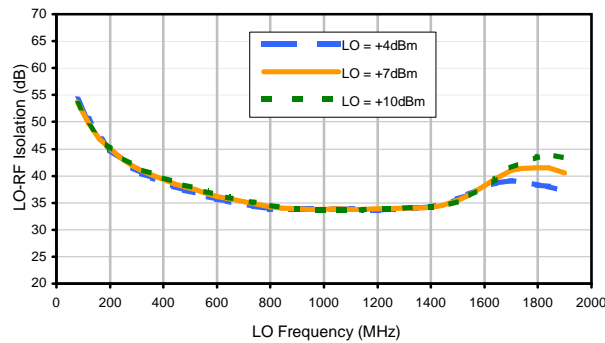


LO-IF Isolation

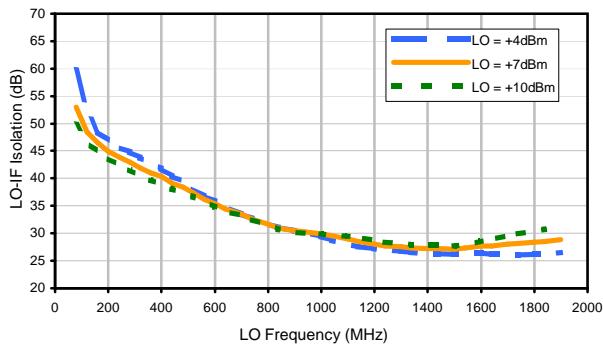


RF-IF Isolation

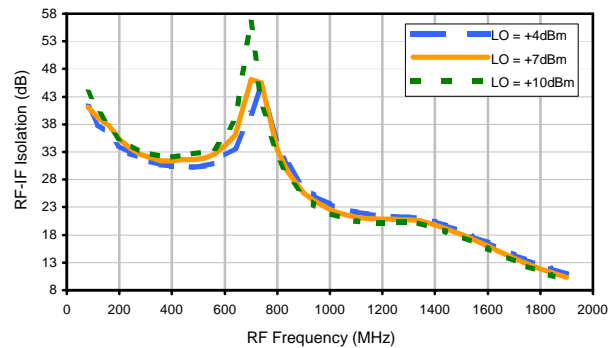


RF VSWR

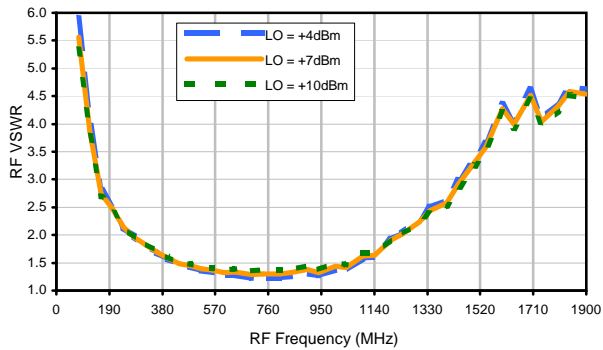

LO VSWR

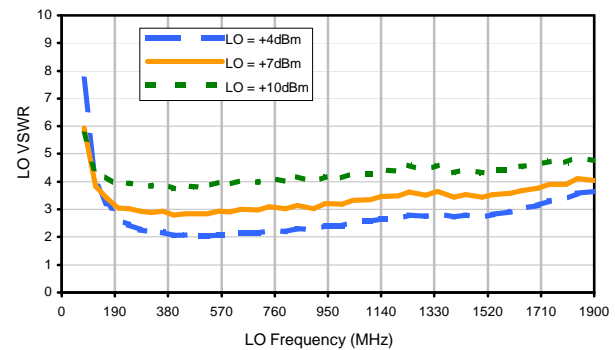

IF VSWR

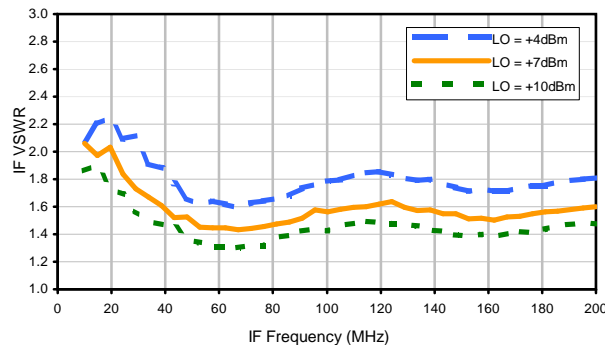

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	12	29	40	41	24	44	47	63	64	75
1	-	20	+0	26	11	35	34	40	48	53	69	60
2	90	50	37	55	36	54	45	61	44	65	61	85
3	129	43	59	51	48	45	41	54	62	51	75	64
4	112	89	86	69	58	69	57	67	58	73	63	73
5	113	65	70	69	63	64	58	62	58	67	69	71
6	115	86	88	96	83	85	73	71	74	74	75	85
7	109	91	86	88	87	77	77	79	78	83	76	82
8	95	93	100	101	97	102	94	102	88	88	86	82
9	122	122	114	112	107	96	99	94	93	88	88	88
10	109	110	119	111	105	105	108	110	105	97	105	92
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 900.1 MHz; -4.00 dBm.
 LO IN: 930.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -10.08 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	3	18	28	31	12	33	33	53	50	54
1	-	20	+0	25	10	32	34	34	46	47	71	53
2	110	60	45	66	44	67	50	78	51	65	67	75
3	119	64	79	66	79	63	68	74	74	70	90	81
4	112	98	89	88	87	92	94	95	89	97	95	101
5	115	124	111	115	100	106	88	106	92	96	99	105
6	117	111	100	111	97	110	96	96	103	115	103	109
7	133	99	102	105	109	102	104	101	94	102	105	107
8	103	96	95	98	99	102	102	112	105	84	103	110
9	121	114	101	109	113	111	101	103	97	96	92	105
10	107	103	109	118	106	112	105	101	109	96	104	97
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 900.1 MHz; -14.00 dBm.
 LO IN: 930.01 MHz; +7.00 dBm
 IF OUT: 29.91 MHz; -19.92 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
 ADE-901+
 100817
 Page 3 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Case Style

CD

CD541
CD542
CD636
CD637

Outline Dimensions



PCB Land Pattern



Suggested Layout,
Tolerance to be within $\pm.002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAM
CD541					.082 (2.08)							.15
CD542	.272 (6.91)	.310 (7.87)	.220 (5.58)	.100 (2.54)	.112 (2.84)	.055 (1.40)	.100 (2.54)	.030 (0.76)	.026 (0.66)	.065 (1.65)	.300 (7.62)	.20
CD636					.162 (4.11)							.25
CD637					.206 (5.23)							.40

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
 - For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
 - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

Mini-Circuits

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F34



Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
			100	
			200	
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M82272	NEW RELEASE	08/05/02	MMG	DJ
A	M102713	ADDED NOTE 2 & "...WITH SMOBC"	01/17/06	MMG	IL

SUGGESTED MOUNTING CONFIGURATION
FOR CD541/542/636/637 CASE STYLES,
"jv", "ju", "jw" PIN CONNECTIONS



- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

MMG

07/17/02

TOLERANCES ON:

CHECKED

WL

08/02/02

2 PL DECIMALS ±

APPROVED


DJ

08/05/02

3 PL DECIMALS ± .005

ANGLES ±

FRACTIONS ±



THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

13 Neptune Avenue
 Brooklyn NY 11235

PL, jv/ju/jw, CD541/542/636/637, ADE, TB-02

SIZE
 A

CODE IDENT
 15542

DRAWING NO:
 98-PL-051

REV:
 A


FILE: 98PL051

SCALE: 8:1

SHEET: 1 OF 1

Evaluation Board and Circuit


For Pin Connections refer to Data Sheet of the DUT

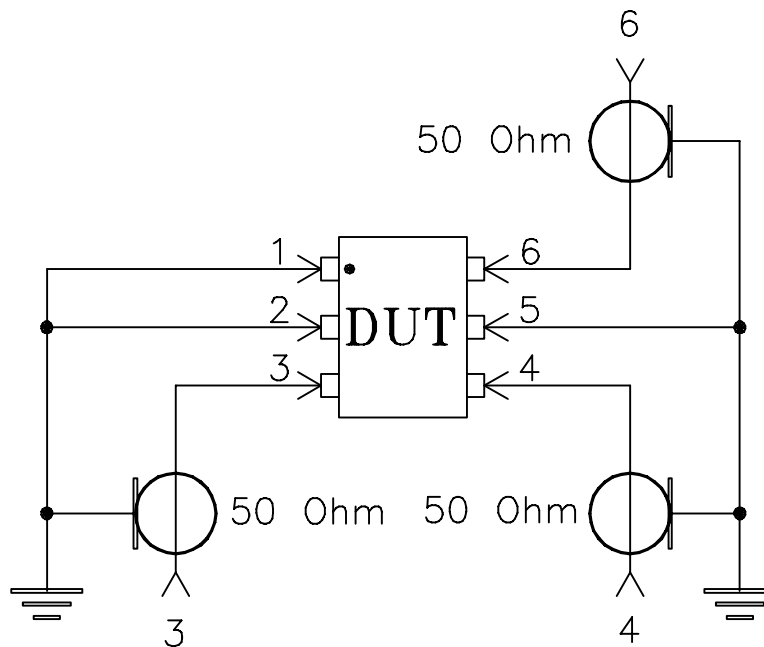

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215