

Frequency Mixer

ADE-ED12872/7

Level 7 (LO Power + 7 dBm)

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : CD637

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (f _L to f _U)	10		325	MHz
	RF (f _L to f _U)	10		325	MHz
	IF	10		200	MHz
Conversion Loss	mid band		4.9		dB
	Total Range		5.3		dB
LO-RF Isolation	Low Range		62		dB
	Mid Range		40		dB
	Upper Range		40		dB
LO-IF Isolation	Low Range		58		dB
	Mid Range		45		dB
	Upper Range		40		dB
Input IP3			+10.53		dBm
1 dB Compression			+1		dBm

Note: Low Range = [f_L to 10f_L]
mid band = [2f_L to f_U/2]


Mid Range = [10f_L to f_U/2]

Upper Range = [f_U/2 to f_U]

MAXIMUM RATINGS	
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

PIN CONNECTIONS	
LO	6
RF	3
IF	2
GROUND	1,4,5

Electrical Schematic

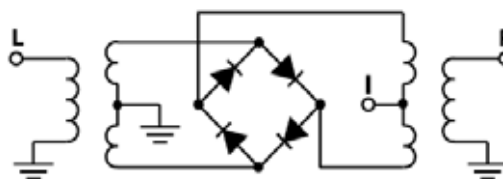

Frequency Mixer

ADE-ED12872/7

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	4.69	4.62	4.51
20.1	50.1	4.94	4.67	4.70
30.1	60.1	5.00	4.83	4.70
40.1	70.1	5.04	4.85	4.67
50.1	80.1	4.96	4.81	4.69
60.1	90.1	5.04	4.79	4.73
70.1	100.1	5.01	4.82	4.78
80.1	110.1	4.97	4.81	4.75
90.1	120.1	5.09	4.88	4.76
100.1	130.1	5.20	4.96	4.84
110.1	140.1	5.28	5.08	4.94
120.1	150.1	5.31	5.11	4.95
130.1	160.1	5.27	5.09	4.95
140.1	170.1	5.29	5.06	4.94
150.1	180.1	5.37	5.14	5.07
160.1	190.1	5.43	5.24	5.19
170.1	200.1	5.59	5.34	5.21
180.1	210.1	5.68	5.46	5.28
190.1	220.1	5.74	5.56	5.42
200.1	230.1	5.88	5.67	5.53
210.1	240.1	5.97	5.74	5.56
220.1	250.1	6.00	5.72	5.45
230.1	260.1	6.20	5.84	5.53
240.1	270.1	6.16	5.76	5.42
250.1	280.1	6.36	5.92	5.61
260.1	290.1	6.50	6.07	5.74
270.1	300.1	6.60	6.24	5.99
280.1	310.1	6.81	6.40	6.15
290.1	320.1	6.72	6.38	6.19
300.1	330.1	7.07	6.72	6.51
310.1	340.1	6.93	6.65	6.55
320.1	350.1	7.39	7.14	6.93
330.1	360.1	7.39	7.19	7.17
340.1	370.1	8.08	7.88	7.89
350.1	380.1	8.19	8.05	8.02
360.1	390.1	8.78	8.62	8.68
370.1	400.1	9.02	8.80	8.79
380.1	410.1	9.79	9.46	9.43
390.1	420.1	10.15	9.81	9.72
400.1	430.1	10.91	10.58	10.49

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	14.80	15.75	17.44
20.1	50.1	16.87	18.96	21.65
30.1	60.1	14.04	15.71	21.62
40.1	70.1	15.84	18.92	19.74
50.1	80.1	17.48	20.75	15.06
60.1	90.1	15.18	18.70	17.03
70.1	100.1	15.33	15.77	13.30
80.1	110.1	15.34	13.40	12.03
90.1	120.1	19.46	13.41	12.03
100.1	130.1	17.38	12.67	12.41
110.1	140.1	18.61	13.62	12.11
120.1	150.1	18.59	14.31	12.82
130.1	160.1	15.07	12.00	11.02
140.1	170.1	15.38	11.15	11.32
150.1	180.1	13.33	10.97	11.88
160.1	190.1	10.81	10.64	11.44
170.1	200.1	7.57	9.16	10.23
180.1	210.1	4.89	5.75	7.42
190.1	220.1	3.49	3.72	5.29
200.1	230.1	3.26	3.36	4.19
210.1	240.1	2.70	3.37	4.43
220.1	250.1	2.74	3.46	4.36
230.1	260.1	3.41	4.13	5.40
240.1	270.1	3.18	4.51	6.04
250.1	280.1	4.34	5.20	7.37
260.1	290.1	4.04	5.48	8.12
270.1	300.1	6.14	7.61	10.39
280.1	310.1	6.32	8.59	11.91
290.1	320.1	6.86	9.83	14.42
300.1	330.1	7.76	10.06	14.04
310.1	340.1	7.63	10.32	14.39
320.1	350.1	7.86	10.43	14.04
330.1	360.1	7.90	10.63	13.01
340.1	370.1	7.96	10.51	13.03
350.1	380.1	8.03	10.32	11.98
360.1	390.1	9.09	11.85	12.55
370.1	400.1	9.46	11.81	11.92
380.1	410.1	10.06	12.31	12.29
390.1	420.1	9.07	11.29	11.63
400.1	430.1	9.32	12.36	12.23

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	2.08	1.52	1.26
20.1	50.1	1.66	1.32	0.98
30.1	60.1	1.45	1.17	1.05
40.1	70.1	1.55	1.22	1.03
50.1	80.1	1.43	1.18	1.08
60.1	90.1	1.54	1.13	1.11
70.1	100.1	1.52	1.32	1.11
80.1	110.1	1.64	1.25	1.01
90.1	120.1	1.39	1.17	0.96
100.1	130.1	1.31	1.06	0.88
110.1	140.1	1.21	1.02	0.82
120.1	150.1	1.21	1.03	0.84
130.1	160.1	1.37	1.12	0.92
140.1	170.1	1.52	1.18	0.98
150.1	180.1	1.64	1.25	0.95
160.1	190.1	1.88	1.36	0.96
170.1	200.1	1.99	1.51	1.15
180.1	210.1	2.15	1.79	1.43
190.1	220.1	2.35	1.98	1.58
200.1	230.1	2.39	2.03	1.67
210.1	240.1	2.54	2.19	1.87
220.1	250.1	2.60	2.29	2.05
230.1	260.1	2.51	2.24	1.95
240.1	270.1	2.58	2.29	2.02
250.1	280.1	2.39	2.02	1.75
260.1	290.1	2.33	1.95	1.67
270.1	300.1	2.05	1.69	1.40
280.1	310.1	1.98	1.64	1.40
290.1	320.1	1.92	1.57	1.34
300.1	330.1	1.89	1.56	1.36
310.1	340.1	1.94	1.50	1.31
320.1	350.1	1.90	1.55	1.17
330.1	360.1	1.86	1.45	1.19
340.1	370.1	1.68	1.24	1.00
350.1	380.1	1.69	1.23	0.97
360.1	390.1	1.44	1.07	0.92
370.1	400.1	1.55	1.19	1.06
380.1	410.1	1.31	0.93	1.23
390.1	420.1	1.48	1.17	1.12
400.1	430.1	1.28	0.93	0.91

REV. X3

ADE-ED12872/7

101108

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Frequency Mixer

ADE-ED12872/7

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=135.1MHz (dB)
		@LO (dBm)
		+7
125.1	10.0	5.39
122.5	12.6	5.38
120.0	15.1	5.39
117.4	17.7	5.36
114.9	20.2	5.34
112.3	22.8	5.30
109.8	25.3	5.25
107.2	27.9	5.25
104.7	30.4	5.28
102.1	33.0	5.25
99.5	35.6	5.23
97.0	38.1	5.21
94.4	40.7	5.15
91.9	43.2	5.20
89.3	45.8	5.21
86.8	48.3	5.18
84.2	50.9	5.14
81.7	53.4	5.11
79.1	56.0	5.13
76.5	58.6	5.18
74.0	61.1	5.17
71.4	63.7	5.14
68.9	66.2	5.16
66.3	68.8	5.16
63.8	71.3	5.17
61.2	73.9	5.19
58.7	76.4	5.14
56.1	79.0	5.08
51.0	84.1	5.08
48.4	86.7	5.09
43.3	91.8	5.02
40.8	94.3	5.01
35.7	99.4	5.02
33.1	102.0	5.01
28.0	107.1	4.98
25.4	109.7	4.96
20.3	114.8	5.05
17.8	117.3	5.03
12.7	122.4	5.02
10.1	125.0	5.10

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10MHz (dB)
		@LO (dBm)
		+7
10.1	20.1	4.68
20.1	30.1	4.47
30.1	40.1	4.42
40.1	50.1	4.76
50.1	60.1	4.60
60.1	70.1	4.69
70.1	80.1	4.76
80.1	90.1	4.81
90.1	100.1	4.44
100.1	110.1	5.05
110.1	120.1	4.99
120.1	130.1	4.97
130.1	140.1	5.15
140.1	150.1	5.50
150.1	160.1	5.21
160.1	170.1	5.24
170.1	180.1	5.12
180.1	190.1	4.85
190.1	200.1	5.29
200.1	210.1	5.43
210.1	220.1	5.34
220.1	230.1	5.40
230.1	240.1	5.43
240.1	250.1	5.47
250.1	260.1	5.46
260.1	270.1	5.32
270.1	280.1	5.50
280.1	290.1	5.19
290.1	300.1	5.43
300.1	310.1	5.51
310.1	320.1	5.70
320.1	330.1	5.78
330.1	340.1	6.45
340.1	350.1	6.61
350.1	360.1	6.76
360.1	370.1	6.93
370.1	380.1	7.49
380.1	390.1	7.45
400.1	410.1	8.65
410.1	420.1	9.71

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=260.1MHz (dB)
		@LO (dBm)
		+7
250.1	10.0	7.58
245.1	15.0	7.53
240.1	20.0	7.41
235.1	25.0	7.37
230.1	30.0	7.28
225.1	35.0	7.24
220.1	40.0	7.27
215.1	45.0	7.20
210.1	50.0	7.14
205.1	55.0	7.13
200.1	60.0	7.02
195.1	65.0	7.11
190.1	70.0	7.04
185.1	75.0	7.07
180.1	80.0	7.10
175.1	85.0	7.06
170.1	90.0	7.00
165.1	95.0	7.05
160.1	100.0	6.93
155.1	105.0	6.93
150.1	110.0	6.94
145.1	115.0	6.81
135.1	125.0	6.82
130.1	130.0	6.89
120.1	140.0	6.57
115.1	145.0	6.54
105.1	155.0	6.39
100.1	160.0	6.45
90.1	170.0	6.25
85.1	175.0	6.24
75.1	185.0	6.12
70.1	190.0	6.21
60.1	200.0	6.29
55.1	205.0	6.37
45.1	215.0	6.53
40.1	220.0	6.66
30.1	230.0	6.62
25.1	235.0	6.55
15.1	245.0	6.51
10.1	250.0	6.55

REV. X3

ADE-ED12872/7

101108

Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
40.1	60.25	59.92	59.79	54.48	52.41	50.62
50.1	57.77	57.84	57.51	55.82	54.15	51.87
60.1	56.37	55.97	56.28	53.29	54.39	52.74
70.1	54.46	54.30	53.80	48.91	51.16	52.35
80.1	54.30	54.50	54.78	46.04	47.52	48.64
90.1	51.10	51.44	51.64	43.97	46.48	49.08
100.1	49.81	49.06	49.19	40.94	43.42	46.26
110.1	51.48	49.69	49.19	38.81	40.84	43.11
120.1	53.39	51.72	50.78	37.56	39.46	41.94
130.1	52.95	53.52	52.81	37.01	38.85	41.05
140.1	49.14	50.92	51.81	36.84	39.02	41.52
150.1	46.05	47.82	48.44	36.25	38.53	40.96
160.1	43.09	44.39	45.10	35.32	38.10	41.32
170.1	40.34	41.37	42.23	34.09	37.03	40.40
180.1	39.05	40.02	40.96	32.60	35.31	38.02
190.1	38.47	39.51	40.73	30.91	33.13	35.13
200.1	38.36	39.68	41.19	29.83	32.11	33.73
210.1	37.98	39.27	40.60	28.97	31.20	32.83
220.1	37.82	38.89	39.79	28.29	30.29	32.08
230.1	37.35	38.49	39.70	27.66	29.39	31.11
240.1	36.93	38.12	39.28	27.07	28.60	30.05
250.1	36.36	37.08	37.38	26.54	27.80	28.88
260.1	35.44	35.93	36.13	25.98	26.95	27.37
270.1	34.89	35.27	35.33	25.70	26.09	25.67
280.1	34.87	34.70	34.25	25.50	25.13	24.10
290.1	33.95	33.57	33.33	25.17	23.90	22.77
300.1	33.57	33.13	32.82	24.38	22.77	21.72
310.1	33.05	32.04	31.46	23.62	21.70	20.65
320.1	32.04	30.70	29.87	23.08	21.07	19.92
330.1	31.98	30.25	29.21	23.13	20.79	19.42
340.1	32.11	29.73	28.07	23.24	20.54	19.02
350.1	32.51	29.01	26.88	23.54	20.51	18.66
360.1	32.44	28.13	25.65	23.58	20.28	18.18
370.1	32.87	27.28	24.54	23.23	19.83	17.56
380.1	31.79	26.05	23.20	22.79	19.40	16.98
390.1	29.74	24.85	21.98	22.01	18.88	16.60
400.1	27.40	23.52	20.95	20.84	18.17	15.94
410.1	25.31	22.51	20.10	19.91	17.67	15.65
420.1	23.46	21.55	19.29	19.14	17.32	15.33
430.1	21.74	20.38	18.46	18.09	16.64	14.84

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	31.28	30.58	30.94
20.1	50.1	26.85	26.80	26.89
30.1	60.1	24.75	24.59	24.54
40.1	70.1	22.68	23.01	23.02
50.1	80.1	22.63	20.10	21.33
60.1	90.1	20.58	21.08	20.76
70.1	100.1	20.81	20.34	20.42
80.1	110.1	18.86	19.10	20.77
90.1	120.1	19.15	19.79	20.38
100.1	130.1	19.07	19.51	19.85
110.1	140.1	19.75	20.09	19.80
120.1	150.1	20.48	20.96	20.98
130.1	160.1	21.95	22.51	23.23
140.1	170.1	23.18	24.98	26.26
150.1	180.1	22.45	24.55	26.30
160.1	190.1	19.62	21.50	22.71
170.1	200.1	18.06	18.86	19.12
180.1	210.1	16.74	17.05	17.52
190.1	220.1	15.33	15.50	16.10
200.1	230.1	14.35	14.69	14.94
210.1	240.1	14.20	14.06	14.42
220.1	250.1	13.90	14.00	14.43
230.1	260.1	14.08	14.34	14.54
240.1	270.1	13.73	14.05	14.51
250.1	280.1	14.19	14.22	14.68
260.1	290.1	14.12	14.34	14.49
270.1	300.1	13.70	13.62	13.93
280.1	310.1	13.53	13.66	13.41
290.1	320.1	12.78	12.87	12.58
300.1	330.1	12.42	12.22	11.97
310.1	340.1	11.55	11.40	11.29
320.1	350.1	10.95	10.83	10.42
330.1	360.1	10.26	10.08	9.70
340.1	370.1	9.45	9.28	9.03
350.1	380.1	9.07	8.64	8.22
360.1	390.1	8.51	8.15	7.81
370.1	400.1	7.85	7.64	7.28
380.1	410.1	7.22	6.91	6.87
390.1	420.1	6.72	6.49	6.30
400.1	430.1	6.31	6.15	5.96

Frequency Mixer

ADE-ED12872/7

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=250.1MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+4	+7	+10		+4	+7	+10		+4	+7	+10
10.1	40.1	1.30	1.35	1.09	40.1	1.78	2.64	3.70	10.0	1.99	1.81	1.61
20.1	50.1	1.36	1.24	1.13	50.1	1.75	2.54	3.52	15.0	2.03	1.84	1.64
30.1	60.1	1.34	1.23	1.17	60.1	1.71	2.44	3.34	20.0	1.98	1.80	1.61
40.1	70.1	1.34	1.24	1.17	70.1	1.67	2.36	3.21	25.0	1.93	1.75	1.56
50.1	80.1	1.34	1.23	1.17	80.1	1.66	2.34	3.17	30.0	1.90	1.73	1.55
60.1	90.1	1.31	1.22	1.15	90.1	1.68	2.36	3.19	35.0	1.96	1.78	1.60
70.1	100.1	1.30	1.20	1.14	100.1	1.73	2.42	3.28	40.0	2.00	1.84	1.65
80.1	110.1	1.27	1.16	1.11	110.1	1.78	2.50	3.38	45.0	2.01	1.84	1.67
90.1	120.1	1.24	1.13	1.07	120.1	1.83	2.57	3.46	50.0	1.98	1.81	1.64
100.1	130.1	1.25	1.15	1.08	130.1	1.86	2.60	3.50	55.0	1.95	1.78	1.60
110.1	140.1	1.21	1.14	1.09	140.1	1.86	2.57	3.45	60.0	1.96	1.80	1.62
120.1	150.1	1.17	1.11	1.09	150.1	1.86	2.52	3.36	65.0	2.04	1.87	1.70
130.1	160.1	1.15	1.10	1.12	160.1	1.86	2.48	3.29	70.0	2.10	1.94	1.77
140.1	170.1	1.12	1.11	1.16	170.1	1.89	2.48	3.27	75.0	2.09	1.94	1.78
150.1	180.1	1.09	1.10	1.16	180.1	1.95	2.54	3.32	80.0	2.04	1.90	1.75
160.1	190.1	1.08	1.10	1.16	190.1	2.02	2.64	3.42	85.0	2.02	1.88	1.73
170.1	200.1	1.10	1.04	1.12	200.1	2.09	2.75	3.56	90.0	2.05	1.90	1.75
180.1	210.1	1.14	1.03	1.07	210.1	2.14	2.84	3.68	95.0	2.11	1.97	1.82
190.1	220.1	1.20	1.11	1.05	220.1	2.17	2.88	3.73	100.0	2.15	2.02	1.87
200.1	230.1	1.24	1.16	1.09	230.1	2.17	2.86	3.71	105.0	2.12	2.00	1.87
210.1	240.1	1.31	1.24	1.18	240.1	2.15	2.83	3.66	110.0	2.06	1.95	1.83
220.1	250.1	1.35	1.27	1.20	250.1	2.14	2.79	3.60	115.0	2.01	1.90	1.80
230.1	260.1	1.45	1.35	1.27	260.1	2.13	2.77	3.57	120.0	2.04	1.92	1.82
240.1	270.1	1.49	1.38	1.31	270.1	2.15	2.78	3.57	125.0	2.10	1.99	1.88
250.1	280.1	1.57	1.46	1.39	280.1	2.17	2.80	3.60	130.0	2.13	2.03	1.92
260.1	290.1	1.66	1.55	1.48	290.1	2.21	2.83	3.63	135.0	2.11	2.00	1.90
270.1	300.1	1.69	1.60	1.54	300.1	2.24	2.85	3.65	145.0	2.02	1.93	1.85
280.1	310.1	1.79	1.70	1.65	310.1	2.27	2.86	3.65	150.0	2.07	1.97	1.89
290.1	320.1	1.78	1.70	1.66	320.1	2.30	2.87	3.63	160.0	2.12	2.03	1.95
300.1	330.1	1.98	1.89	1.83	330.1	2.35	2.88	3.61	165.0	2.09	2.00	1.93
310.1	340.1	1.92	1.83	1.78	340.1	2.41	2.90	3.60	175.0	2.09	1.99	1.91
320.1	350.1	2.07	1.97	1.90	350.1	2.49	2.95	3.61	180.0	2.12	2.03	1.96
330.1	360.1	2.05	1.94	1.88	360.1	2.59	3.00	3.63	190.0	2.04	1.97	1.93
340.1	370.1	2.20	2.08	2.00	370.1	2.71	3.08	3.67	195.0	1.97	1.90	1.84
350.1	380.1	2.17	2.03	1.96	380.1	2.84	3.16	3.71	205.0	2.05	1.94	1.85
360.1	390.1	2.20	2.07	2.00	390.1	3.00	3.25	3.76	210.0	2.11	2.01	1.91
370.1	400.1	2.18	2.05	1.96	400.1	3.13	3.32	3.76	220.0	2.01	1.92	1.85
380.1	410.1	2.21	2.07	2.00	410.1	3.24	3.37	3.76	225.0	1.95	1.84	1.77
390.1	420.1	2.21	2.07	1.99	420.1	3.33	3.41	3.74	235.0	2.08	1.95	1.82
400.1	430.1	2.22	2.07	2.00	430.1	3.34	3.41	3.70	240.0	2.17	2.03	1.90

REV. X3

ADE-ED12872/7

101108

Page 4 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	13	18	11	36	25	37	29	43	32	40
1	-	18	+0	25	11	35	35	46	39	47	32	49
2	>90	52	42	54	43	52	50	66	59	>71	59	69
3	>90	>71	60	66	61	>71	65	64	63	69	65	69
4	>90	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71
5	>90	>71	>71	>71	>71	62	>71	>71	>71	>71	>71	>71
6	>90	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71
7	>90	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71
8	>90	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71
9	>90	>71	>71	>71	>71	>71	>71	>71	69	>71	>71	>71
10	>90	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 125 MHz; -14.00 dBm.
LO IN: 155 MHz; +7.00 dBm
IF OUT: 30 MHz; -19.37 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	24	29	21	45	37	53	42	57	44	70
1	-	18	+0	25	12	35	35	58	48	60	40	67
2	73	46	38	46	38	45	51	60	59	63	55	58
3	>90	53	37	54	39	54	41	56	60	63	56	57
4	>90	69	58	60	54	60	53	63	67	>81	67	77
5	>90	70	60	60	57	63	58	62	75	66	67	66
6	>90	>81	77	>81	>81	67	67	73	67	72	78	78
7	>90	>81	>81	>81	75	71	68	69	68	71	74	74
8	>90	>81	>81	>81	>81	>81	>81	80	>81	>81	>81	>81
9	>90	>81	>81	>81	>81	>81	>81	>81	71	77	77	>81
10	>90	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 125 MHz; -4.00 dBm.
LO IN: 155 MHz; +7.00 dBm
IF OUT: 30 MHz; -9.34 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X3
ADE-ED12872/7
101108
Page 5 of 5




Typical Performance Curves


Conversion Loss @ IF=30MHz

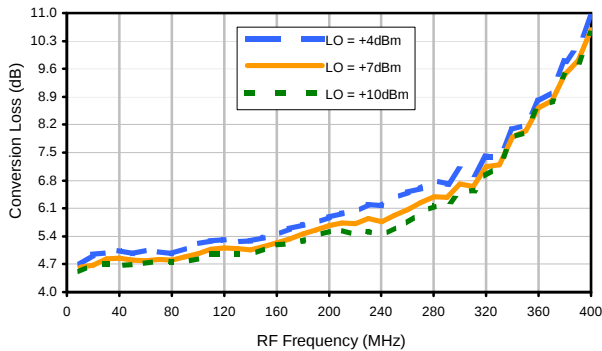


Conversion Loss vs. IF @ RF=135.1MHz

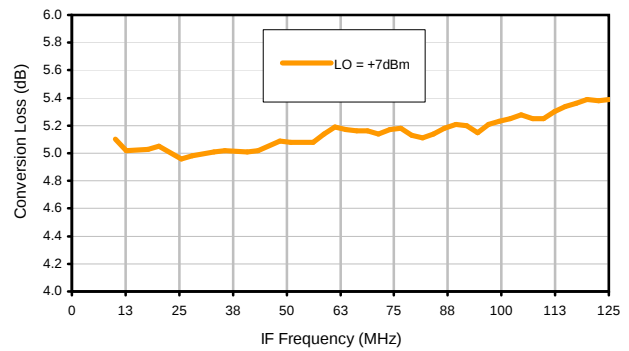


Conversion Loss vs. IF @ RF=10MHz

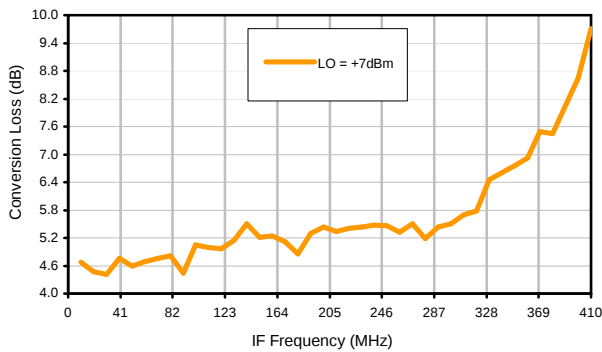


Conversion Loss vs. IF @ RF=260.1MHz

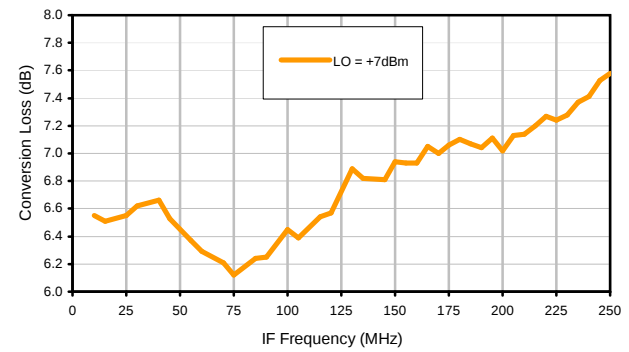

IP3 Input

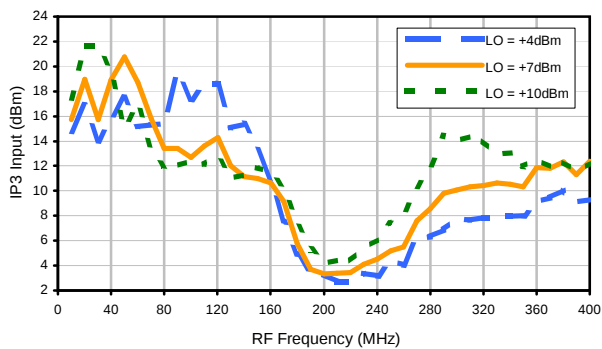


Compression @ RF IN=+1dBm

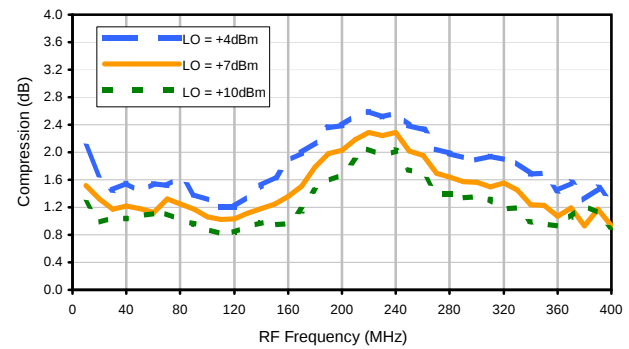


Typical Performance Curves


LO-RF Isolation

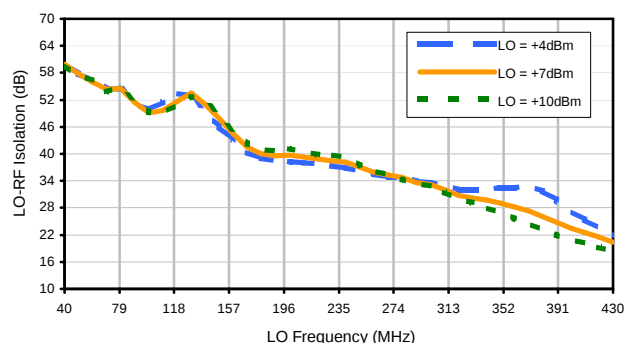


LO-IF Isolation

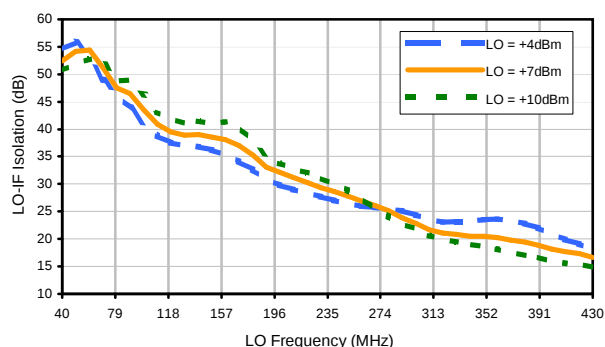


RF-IF Isolation

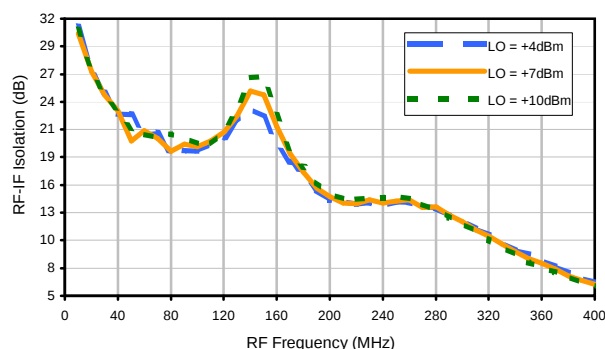


RF VSWR

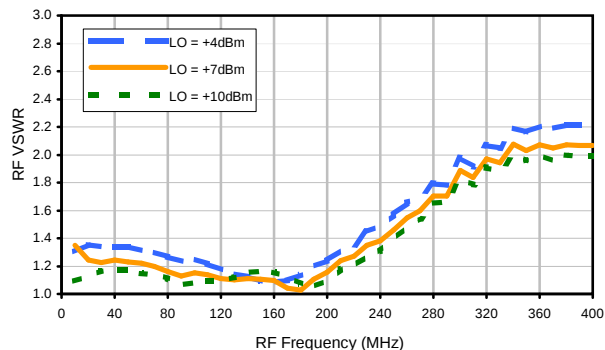

LO VSWR

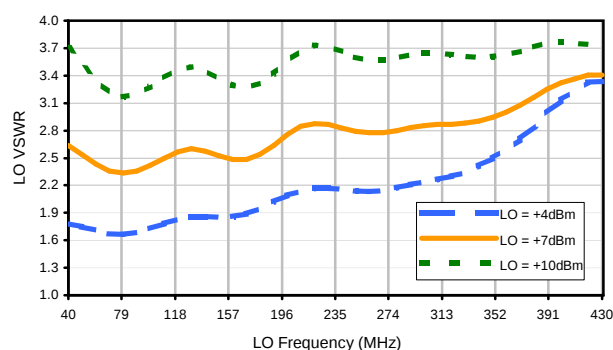

IF VSWR

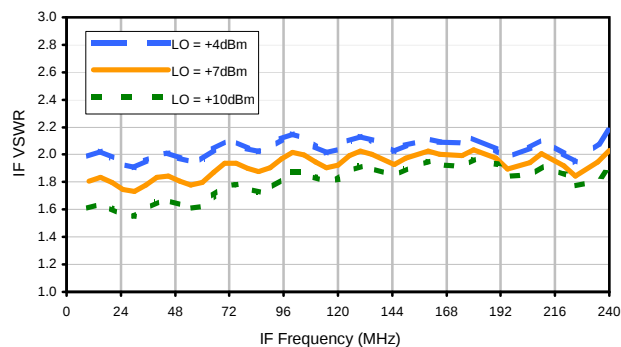

REV. X3

ADE-ED12872/7

101108

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	13	18	11	36	25	37	29	43	32	40
1	-	18	+0	25	11	35	35	46	39	47	32	49
2	>90	52	42	54	43	52	50	66	59	>71	59	69
3	>90	>71	60	66	61	>71	65	64	63	69	65	69
4	>90	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71
5	>90	>71	>71	>71	>71	62	>71	>71	>71	>71	>71	>71
6	>90	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71
7	>90	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71
8	>90	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71
9	>90	>71	>71	>71	>71	>71	>71	>71	69	>71	>71	>71
10	>90	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71	>71
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 125 MHz; -14.00 dBm.
LO IN: 155 MHz; +7.00 dBm
IF OUT: 30 MHz; -19.37 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	24	29	21	45	37	53	42	57	44	70
1	-	18	+0	25	12	35	35	58	48	60	40	67
2	73	46	38	46	38	45	51	60	59	63	55	58
3	>90	53	37	54	39	54	41	56	60	63	56	57
4	>90	69	58	60	54	60	53	63	67	>81	67	77
5	>90	70	60	60	57	63	58	62	75	66	67	66
6	>90	>81	77	>81	>81	67	67	73	67	72	78	78
7	>90	>81	>81	>81	75	71	68	69	68	71	74	74
8	>90	>81	>81	>81	>81	>81	>81	80	>81	>81	>81	>81
9	>90	>81	>81	>81	>81	>81	>81	>81	71	77	77	>81
10	>90	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 125 MHz; -4.00 dBm.
LO IN: 155 MHz; +7.00 dBm
IF OUT: 30 MHz; -9.34 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661





The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see

REV. X3
ADE-ED12872/7
101108
Page 3 of 3




CD541
CD542
CD636
CD637

Outline Dimensions

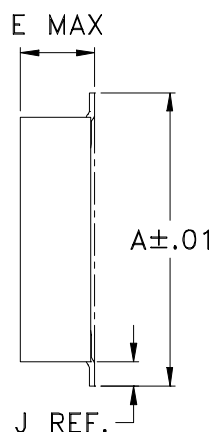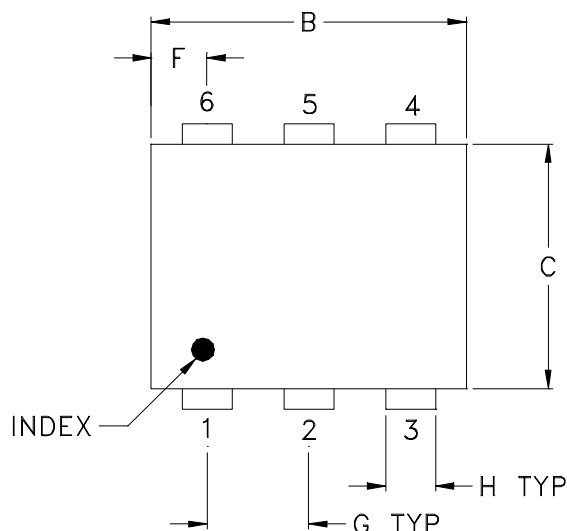

PCB Land Pattern

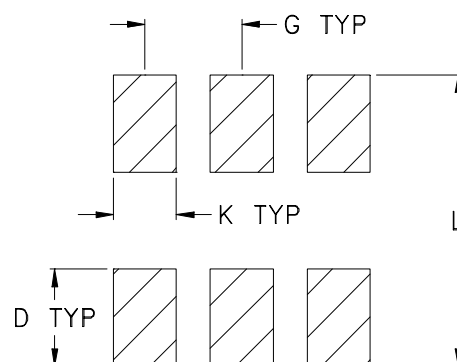

Suggested Layout,
Tolerance to be within $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAM
CD541					.082 (2.08)							.15
CD542	.272 (6.91)	.310 (7.87)	.220 (5.58)	.100 (2.54)	.112 (2.84)	.055 (1.40)	.100 (2.54)	.030 (0.76)	.026 (0.66)	.065 (1.65)	.300 (7.62)	.20
CD636					.162 (4.11)							.25
CD637					.206 (5.23)							.40

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F46

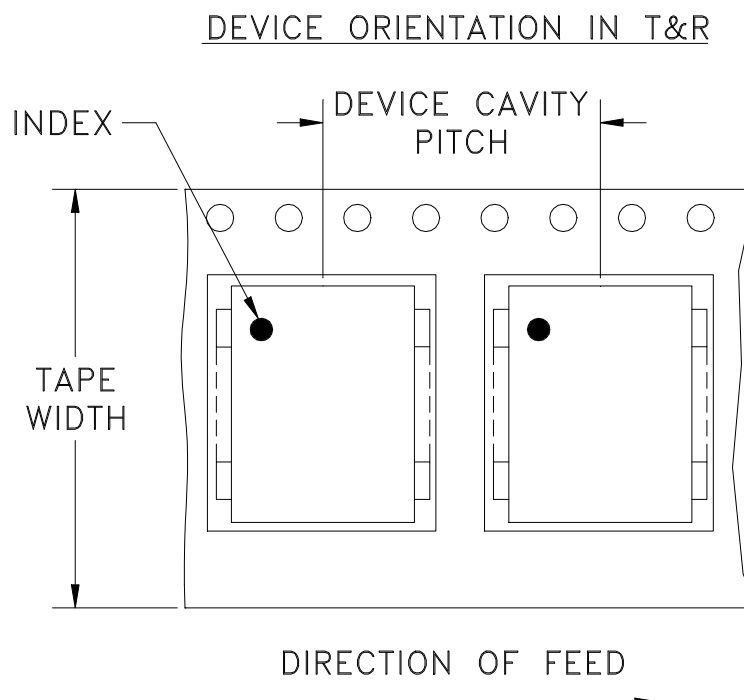

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
16	12	13	900

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M101143	ADDED "gk" PIN CONNECTION, TT100 CASE STYLE & NOTE 2	10/10/05	MMG	DJ
B	M102713	ADDED "...WITH SMOBC"	01/17/06	MMG	IL
C	M108637	REMOVED "PIN 1", ADDED INDEX ON UNIT	12/01/06	MYG	FL

SUGGESTED MOUNTING CONFIGURATION
FOR BH292, CD541/542/636/637, TT100/240 CASE
STYLES, "gk", "ht", "hu", "nd", "w" PIN CONNECTIONS

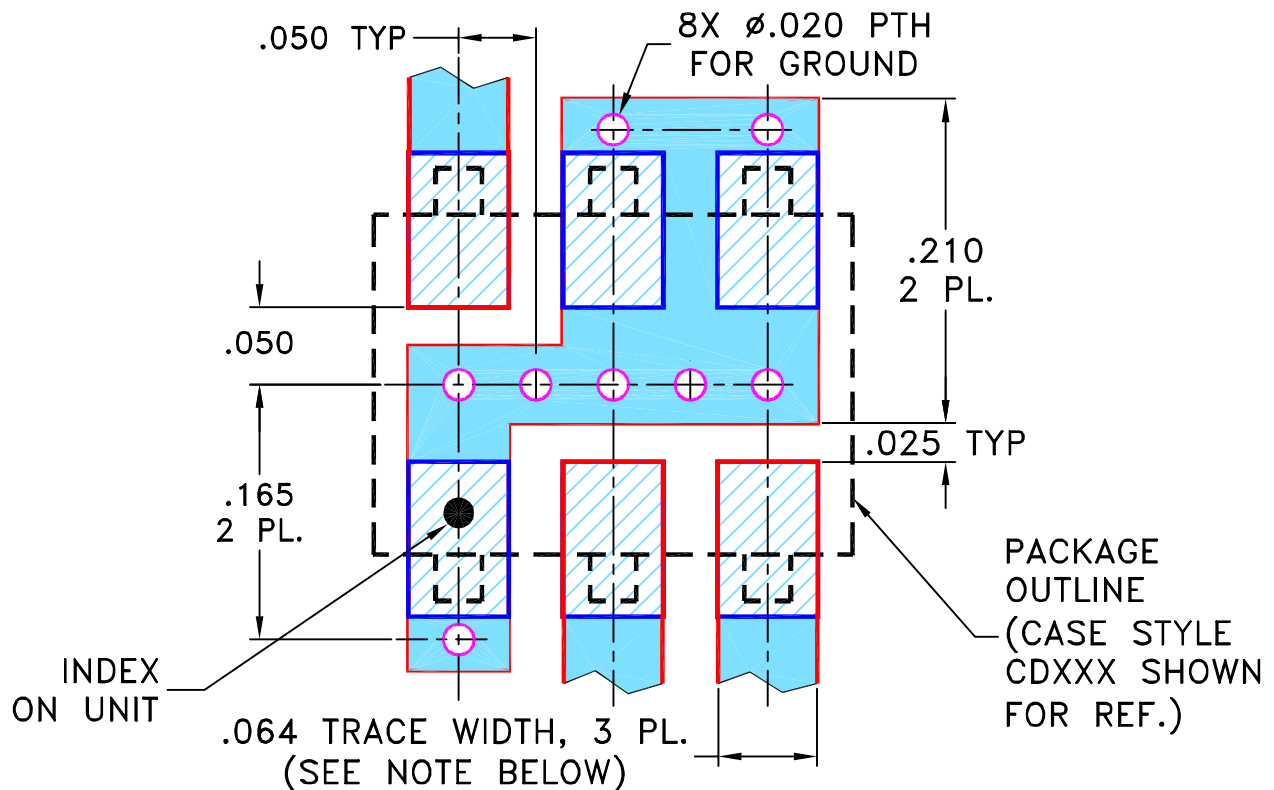

- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS $.030" \pm .002"$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS $\pm$ 3 PL DECIMALS $\pm .005$ ANGLES $\pm$ FRACTIONS $\pm$

DRAWN

MMG

07/17/02

CHECKED

WL

08/02/02

APPROVED

DJ

08/05/02



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, gk/ht/hu/nd/w, BH292,
CD541/542/636/637, TT100/240, TB-03

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-052

REV:

C

FILE:

98PL052

SCALE:

8:1

SHEET:


1 OF 1

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.


ASHEETA1.DWG REV:A DATE:01/12/95

THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
E	M119737	UPDATED PCB	10.08	MF	AD
F	M127659	UPDATED CARR	06.10	SW	SG
G	M127846	UPDATED SCHEMATIC DIAGRAM	06.10	SW	SG
H	M131840	UPDATED DWG	05.11	MF	AD

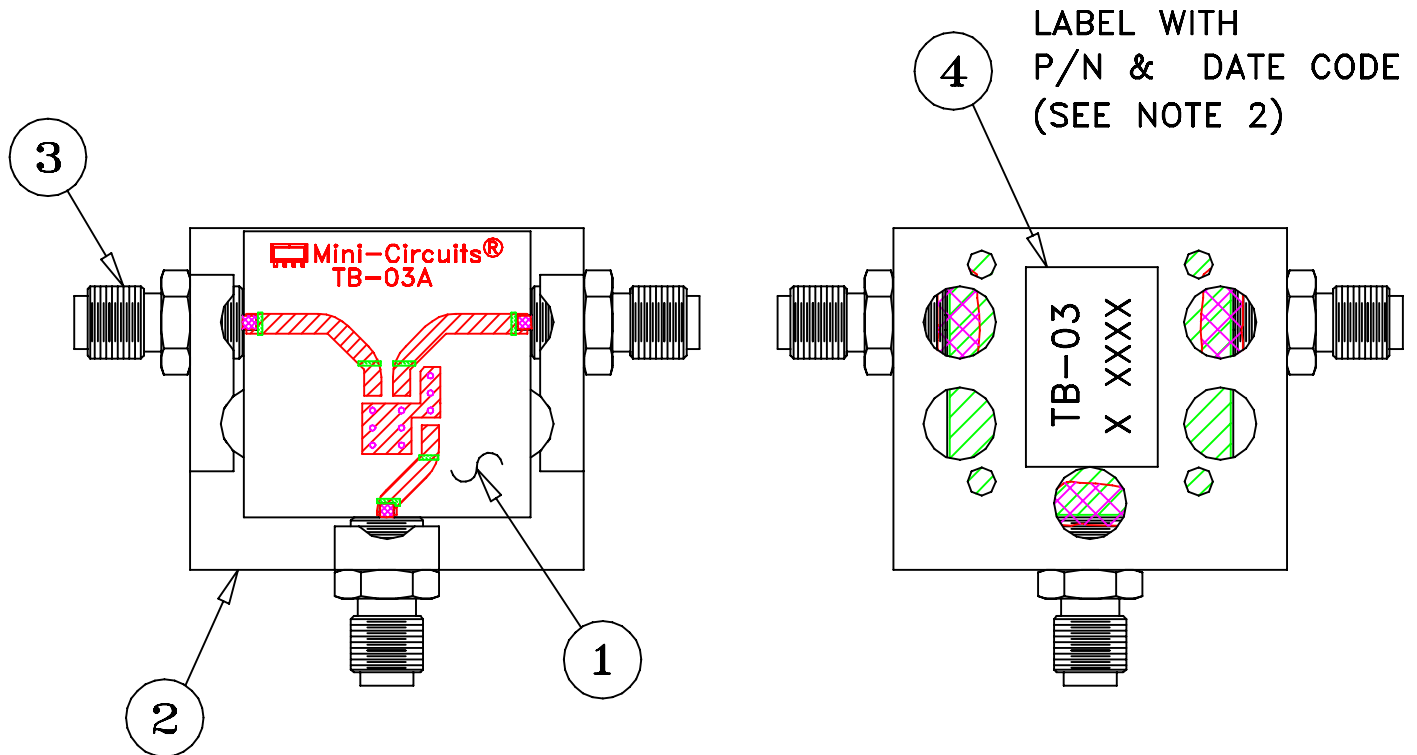**NOTES:**

1. REFER TO -09 PAGE FOR ITEM DESCRIPTIONS.
DESIGNATION NUMBERS ON -20 PAGE CORRESPOND TO THE NUMBERS ON -09 PAGE.
2. FOR TEXT HEIGHT & STYLE ON THE LABEL REFER TO: D3-G209.

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:
2 PL DECIMALS ±
3 PL DECIMALS ±
ANGLES ±
FRACTIONS ±

DRAWN

S.WOLYNSKI

06.29.99

CHECKED


SG

07.06.99

APPROVED

MG

07.10.99



THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

TB,ADE,CD542/636,06MX01,50

SIZE
A

CODE IDENT
15542

DRAWING NO:
TB-03-20

REV:
H

FILE: WTB-03

SCALE: 1.5:1


SHEET: 1 OF 2

Evaluation Board and Circuit

For Pin Connections and DUT Orientation Refer to
Data Sheet of the DUT



TB-03

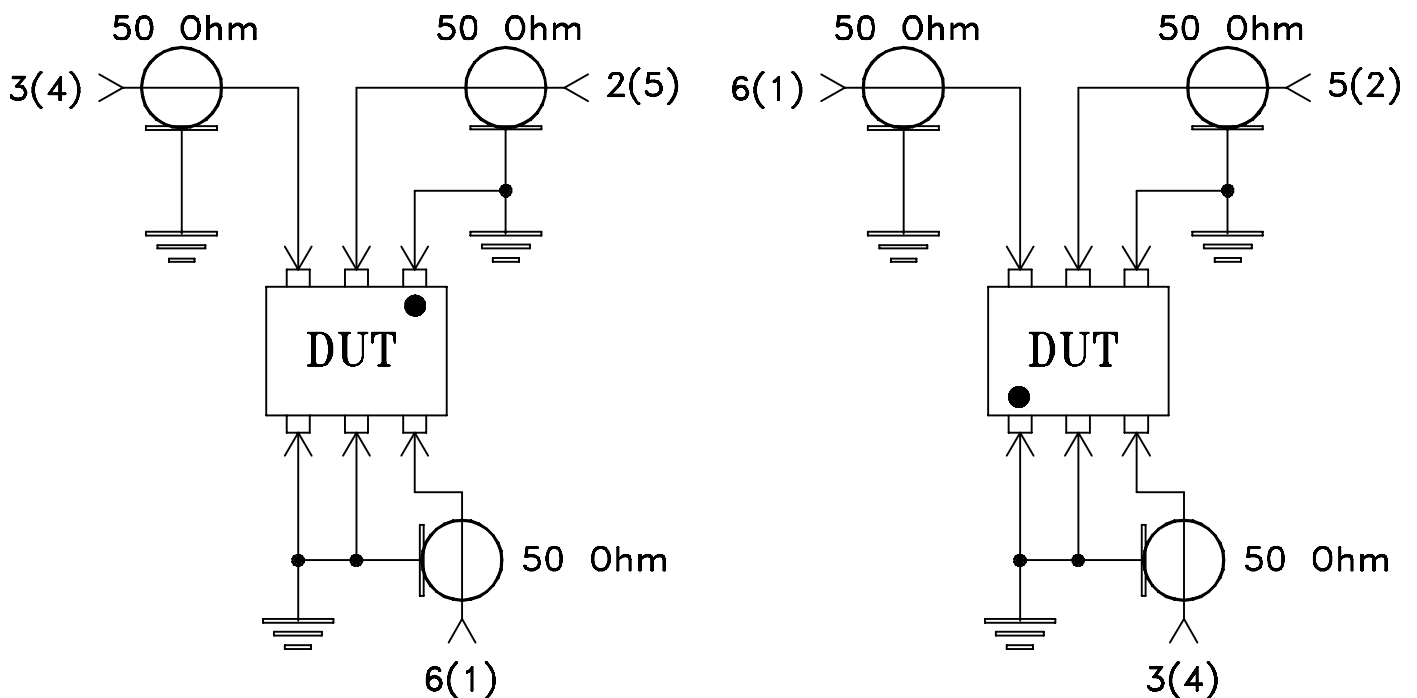

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215