Engineering Development Model

Frequency Mixer ADE-ED13328/1

Level 13 (LO Power + 13 dBm)

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability.
At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.

Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : CD542

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		**Min.**	**Typ.**	**Max.**	**Units**
Frequency	**LO** (f_L to f_U)	130		1320	MHz
	RF (f_L to f_U)	130		1320	MHz
	IF	10		500	MHz
Conversion Loss	**Total Range**		7.2		dB
LO-RF Isolation			42		dB
LO-IF Isolation			36		dB
Input IP3			+22		dBm
1dB Compression			+8		dBm

MAXIMUM RATINGS	
Operating Temperature	-20°C to +85°C
Storage Temperature	-55°C to +100°C

PIN CONNECTIONS	
LO	6
RF	3
IF	2
GROUND	1,4,5

Electrical Schematics

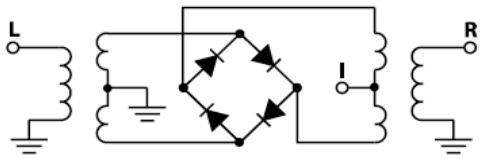

Frequency Mixer ADE-ED13328/1

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=110.6MHz (dB)		
		@LO (dBm)		
		+10	+13	+16
130.0	240.6	7.97	7.14	6.93
170.0	280.6	7.63	7.16	7.01
210.0	320.6	7.39	7.06	6.93
250.0	360.6	7.35	7.06	6.92
290.0	400.6	7.39	7.12	6.98
330.0	440.6	7.25	7.00	6.86
380.0	490.6	7.28	7.04	6.90
420.0	530.6	7.21	6.95	6.80
470.0	580.6	7.25	6.97	6.81
510.0	620.6	7.27	6.94	6.75
560.0	670.6	7.37	7.06	6.83
600.0	710.6	7.28	7.00	6.79
650.0	760.6	7.25	6.97	6.78
690.0	800.6	7.13	6.87	6.71
740.0	850.6	7.10	6.85	6.70
780.0	890.6	7.11	6.81	6.68
830.0	940.6	7.24	6.85	6.68
870.0	980.6	7.39	6.93	6.71
920.0	1030.6	7.58	7.09	6.80
960.0	1070.6	7.66	7.15	6.83
1010.0	1120.6	7.88	7.37	6.97
1050.0	1160.6	7.89	7.35	6.95
1100.0	1210.6	8.04	7.48	7.01
1140.0	1250.6	8.06	7.46	7.00
1190.0	1300.6	8.07	7.45	7.02
1230.0	1340.6	8.14	7.52	7.11
1280.0	1390.6	8.17	7.64	7.28
1320.0	1430.6	8.42	7.95	7.61
1370.0	1480.6	8.51	8.18	7.94
1410.0	1520.6	8.83	8.54	8.37
1460.0	1570.6	8.85	8.58	8.45
1500.0	1610.6	9.20	8.90	8.76
1550.0	1660.6	9.28	9.03	8.84
1590.0	1700.6	9.63	9.42	9.25
1640.0	1750.6	9.74	9.53	9.37
1680.0	1790.6	10.21	9.98	9.83
1730.0	1840.6	10.40	10.15	10.01

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+10	+13	+16
130.0	240.6	16.26	20.63	24.29
170.0	280.6	18.78	22.30	26.29
210.0	320.6	19.61	23.49	26.64
250.0	360.6	20.34	23.40	27.41
290.0	400.6	20.68	24.18	27.91
330.0	440.6	20.98	25.20	27.94
380.0	490.6	21.60	24.04	27.77
420.0	530.6	24.35	27.30	29.08
470.0	580.6	22.82	26.09	24.98
510.0	620.6	21.45	26.26	25.52
560.0	670.6	21.44	23.70	26.96
600.0	710.6	23.02	24.90	26.30
650.0	760.6	22.43	23.71	24.39
690.0	800.6	24.04	24.46	24.15
740.0	850.6	26.38	23.07	22.80
780.0	890.6	25.14	24.28	22.42
830.0	940.6	20.44	26.97	24.06
870.0	980.6	17.75	28.40	24.67
920.0	1030.6	16.26	20.61	25.57
960.0	1070.6	16.02	20.08	24.66
1010.0	1120.6	15.53	18.37	23.20
1050.0	1160.6	17.24	20.22	22.86
1100.0	1210.6	17.00	18.85	20.81
1140.0	1250.6	16.39	17.90	19.23
1190.0	1300.6	16.13	17.50	18.17
1230.0	1340.6	15.84	16.95	17.64
1280.0	1390.6	16.42	17.02	17.67
1320.0	1430.6	16.52	17.04	17.78
1370.0	1480.6	17.95	18.64	19.14
1410.0	1520.6	18.91	19.69	20.21
1460.0	1570.6	19.70	20.72	21.55
1500.0	1610.6	20.44	21.48	21.98
1550.0	1660.6	21.30	22.18	22.77
1590.0	1700.6	21.75	23.03	23.36
1640.0	1750.6	22.28	23.57	23.67
1680.0	1790.6	22.58	24.14	24.30
1730.0	1840.6	24.35	24.83	25.17

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+8dBm (dB)		
		@LO (dBm)		
		+10	+13	+16
130.0	240.6	0.04	0.12	0.07
170.0	280.6	0.24	0.12	0.05
210.0	320.6	0.24	0.13	0.08
250.0	360.6	0.24	0.12	0.07
290.0	400.6	0.19	0.10	0.08
330.0	440.6	0.21	0.12	0.10
380.0	490.6	0.23	0.15	0.13
420.0	530.6	0.24	0.16	0.14
470.0	580.6	0.25	0.18	0.15
510.0	620.6	0.23	0.20	0.17
560.0	670.6	0.22	0.18	0.17
600.0	710.6	0.31	0.23	0.21
650.0	760.6	0.42	0.31	0.26
690.0	800.6	0.55	0.40	0.32
740.0	850.6	0.68	0.45	0.33
780.0	890.6	0.76	0.53	0.40
830.0	940.6	0.77	0.60	0.46
870.0	980.6	0.79	0.65	0.51
920.0	1030.6	0.80	0.68	0.56
960.0	1070.6	0.85	0.77	0.64
1010.0	1120.6	0.91	0.81	0.71
1050.0	1160.6	0.99	0.89	0.78
1100.0	1210.6	1.04	0.93	0.87
1140.0	1250.6	1.10	1.01	0.94
1190.0	1300.6	1.23	1.18	1.06
1230.0	1340.6	1.25	1.19	1.10
1280.0	1390.6	1.29	1.21	1.16
1320.0	1430.6	1.13	1.06	1.04
1370.0	1480.6	1.03	0.91	0.86
1410.0	1520.6	0.82	0.68	0.60
1460.0	1570.6	0.76	0.60	0.49
1500.0	1610.6	0.60	0.48	0.39
1550.0	1660.6	0.57	0.41	0.37
1590.0	1700.6	0.50	0.33	0.28
1640.0	1750.6	0.49	0.33	0.28
1680.0	1790.6	0.44	0.29	0.24
1730.0	1840.6	0.38	0.26	0.21

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=711MHz (dB) @LO (dBm) +13
600.9	110.1	11.00
570.2	140.8	7.51
539.5	171.5	7.11
508.8	202.2	6.64
478.1	232.9	6.58
447.4	263.6	6.58
416.7	294.3	6.61
386.0	325.0	6.60
355.3	355.7	6.11
324.6	386.4	6.58
293.9	417.1	6.59
263.2	447.8	6.66
232.5	478.5	6.61
201.9	509.1	6.70
171.2	539.8	6.64
140.5	570.5	6.70
109.8	601.2	6.75
79.1	631.9	6.77
48.4	662.6	6.81
17.7	693.3	6.99
75.2	786.2	6.88
205.5	916.5	6.85
335.9	1046.9	7.03
466.2	1177.2	7.08
596.5	1307.5	6.96
726.9	1437.9	6.67
857.2	1568.2	6.52
987.6	1698.6	6.49
1117.9	1828.9	6.70
1248.3	1959.3	6.87
1378.6	2089.6	6.97
1508.9	2219.9	7.19
1639.3	2350.3	7.51
1769.6	2480.6	8.24
1900.0	2611.0	8.73
2030.3	2741.3	8.87
2160.7	2871.7	8.83
2291.0	3002.0	9.10
2421.3	3132.3	9.98
2519.1	3230.1	10.82

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=470MHz (dB) @LO (dBm) +13
10.1	480.1	7.34
70.1	540.1	6.95
130.1	600.1	7.01
190.1	660.1	7.16
250.1	720.1	7.28
310.1	780.1	7.23
370.1	840.1	7.22
430.1	900.1	7.23
490.1	960.1	7.23
550.1	1020.1	7.15
610.1	1080.1	7.15
670.1	1140.1	7.22
730.1	1200.1	7.34
790.1	1260.1	7.24
850.1	1320.1	7.05
910.1	1380.1	6.96
970.1	1440.1	6.95
1030.1	1500.1	6.86
1090.1	1560.1	6.84
1150.1	1620.1	6.86
1210.1	1680.1	6.89
1270.1	1740.1	6.88
1330.1	1800.1	6.95
1390.1	1860.1	6.96
1470.1	1940.1	7.08
1530.1	2000.1	7.29
1610.1	2080.1	7.58
1670.1	2140.1	7.80
1750.1	2220.1	8.14
1810.1	2280.1	8.47
1890.1	2360.1	8.96
1950.1	2420.1	9.18
2030.1	2500.1	9.50
2090.1	2560.1	9.59
2170.1	2640.1	9.45
2230.1	2700.1	9.53
2310.1	2780.1	9.82
2370.1	2840.1	9.97
2450.1	2920.1	10.42
2510.1	2980.1	10.78

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=952MHz (dB) @LO (dBm) +13
850.0	102.0	13.14
830.0	122.0	8.60
810.0	142.0	7.69
790.0	162.0	7.55
770.0	182.0	7.21
750.0	202.0	6.89
730.0	222.0	6.86
710.0	242.0	6.86
690.0	262.0	6.82
670.0	282.0	6.80
650.0	302.0	6.78
630.0	322.0	6.79
610.0	342.0	6.80
590.0	362.0	6.81
570.0	382.0	6.81
550.0	402.0	6.79
530.0	422.0	6.80
510.0	442.0	6.80
490.0	462.0	6.83
470.0	482.0	6.74
450.0	502.0	6.74
430.0	522.0	6.80
410.0	542.0	6.75
390.0	562.0	6.75
370.0	582.0	6.76
350.0	602.0	6.77
330.0	622.0	6.82
310.0	642.0	6.77
290.0	662.0	6.79
260.0	692.0	6.79
240.0	712.0	6.83
210.0	742.0	6.80
190.0	762.0	6.79
160.0	792.0	6.77
140.0	812.0	6.78
110.0	842.0	6.74
90.0	862.0	6.80
60.0	892.0	6.82
40.0	912.0	6.84
10.0	942.0	7.26

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB) @LO (dBm)			LO-IF ISOLATION (dB) @LO (dBm)		
	+10	+13	+16	+10	+13	+16
240.6	49.57	52.30	55.48	50.45	49.49	46.58
280.6	48.02	51.01	54.21	52.15	52.59	46.99
320.6	47.53	50.69	54.27	58.90	52.41	45.81
360.6	46.17	49.42	52.92	55.99	52.94	45.55
400.6	45.77	48.71	52.04	52.44	50.01	44.65
440.6	44.63	48.14	51.75	47.08	47.94	43.50
490.6	43.75	46.83	50.57	42.61	43.74	42.60
530.6	42.95	45.92	49.39	40.84	41.27	40.24
580.6	42.62	46.30	50.21	38.82	40.23	39.22
620.6	41.67	45.74	50.54	37.28	39.26	39.10
670.6	41.02	44.06	47.69	35.74	37.51	38.54
710.6	40.59	43.73	47.32	34.61	35.76	36.50
760.6	40.17	43.33	47.02	34.01	34.81	34.60
800.6	40.57	44.24	47.90	33.53	34.55	34.23
850.6	41.20	45.63	48.75	32.52	34.13	34.02
890.6	39.21	43.64	47.12	31.49	33.79	34.15
940.6	37.05	40.47	43.96	30.20	32.86	34.32
980.6	36.12	39.06	42.27	29.05	31.73	33.73
1030.6	34.94	37.52	40.22	28.15	30.72	33.21
1070.6	34.24	36.80	39.42	27.37	29.60	31.96
1120.6	33.10	35.46	37.87	26.83	28.69	30.90
1160.6	32.72	35.26	37.85	26.34	27.93	29.68
1210.6	32.05	34.65	37.16	26.39	27.95	29.36
1250.6	31.98	34.93	37.68	26.19	27.77	29.04
1300.6	31.92	35.09	37.76	26.21	27.80	29.00
1340.6	32.25	35.43	37.75	26.14	27.77	29.02
1390.6	32.34	34.89	36.64	26.02	27.74	29.12
1430.6	32.20	34.37	35.79	26.08	28.07	29.66
1480.6	31.72	33.50	34.73	25.87	28.12	30.00
1520.6	31.03	32.89	34.07	25.90	28.51	30.82
1570.6	30.20	32.34	33.81	25.43	28.37	31.31
1610.6	29.48	31.73	33.32	25.20	28.30	31.55
1660.6	29.00	31.29	33.04	24.99	28.18	31.71
1700.6	28.40	30.71	32.46	24.66	27.91	31.47
1750.6	28.54	30.78	32.47	25.30	28.62	32.24
1790.6	28.15	30.39	32.07	25.23	28.59	32.26
1840.6	28.55	30.68	32.26	26.43	29.90	33.67

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB) @LO (dBm)		
		+10	+13	+16
130.0	240.6	33.10	33.16	33.19
170.0	280.6	31.02	31.16	31.21
210.0	320.6	29.50	29.54	29.66
250.0	360.6	28.35	28.44	28.40
290.0	400.6	27.42	27.45	27.54
330.0	440.6	26.63	26.82	26.88
380.0	490.6	25.83	25.99	26.18
420.0	530.6	25.45	25.49	25.58
470.0	580.6	25.21	25.38	25.46
510.0	620.6	24.91	25.12	25.26
560.0	670.6	24.77	24.95	25.24
600.0	710.6	24.63	24.85	25.11
650.0	760.6	23.95	24.24	24.39
690.0	800.6	23.34	23.59	23.71
740.0	850.6	22.18	22.32	22.46
780.0	890.6	21.69	21.80	21.88
830.0	940.6	21.13	21.42	21.59
870.0	980.6	20.63	20.99	21.27
920.0	1030.6	20.15	20.37	20.81
960.0	1070.6	19.95	20.07	20.42
1010.0	1120.6	19.95	19.88	19.99
1050.0	1160.6	20.39	20.36	20.34
1100.0	1210.6	20.82	20.92	20.85
1140.0	1250.6	21.24	21.38	21.37
1190.0	1300.6	21.59	21.77	21.77
1230.0	1340.6	21.67	21.99	22.10
1280.0	1390.6	21.51	21.98	22.21
1320.0	1430.6	21.03	21.51	21.75
1370.0	1480.6	20.15	20.46	20.61
1410.0	1520.6	19.11	19.28	19.33
1460.0	1570.6	17.75	17.79	17.72
1500.0	1610.6	16.75	16.64	16.54
1550.0	1660.6	15.49	15.28	15.12
1590.0	1700.6	14.58	14.29	14.08
1640.0	1750.6	13.51	13.14	12.90
1680.0	1790.6	12.82	12.38	12.11
1730.0	1840.6	11.95	11.43	11.15

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1) @LO (dBm)		
		+10	+13	+16
130.0	240.6	1.12	1.27	1.35
170.0	280.6	1.19	1.30	1.36
210.0	320.6	1.22	1.31	1.37
250.0	360.6	1.23	1.31	1.37
290.0	400.6	1.24	1.31	1.36
330.0	440.6	1.25	1.32	1.38
380.0	490.6	1.26	1.32	1.37
420.0	530.6	1.28	1.34	1.40
470.0	580.6	1.29	1.36	1.42
510.0	620.6	1.30	1.37	1.42
560.0	670.6	1.33	1.38	1.44
600.0	710.6	1.36	1.41	1.46
650.0	760.6	1.41	1.47	1.52
690.0	800.6	1.45	1.51	1.56
740.0	850.6	1.48	1.56	1.62
780.0	890.6	1.49	1.56	1.62
830.0	940.6	1.53	1.59	1.65
870.0	980.6	1.57	1.62	1.67
920.0	1030.6	1.62	1.65	1.70
960.0	1070.6	1.69	1.71	1.75
1010.0	1120.6	1.79	1.79	1.81
1050.0	1160.6	1.90	1.90	1.91
1100.0	1210.6	2.09	2.07	2.06
1140.0	1250.6	2.27	2.25	2.23
1190.0	1300.6	2.55	2.50	2.46
1230.0	1340.6	2.78	2.72	2.67
1280.0	1390.6	3.07	3.00	2.93
1320.0	1430.6	3.31	3.24	3.17
1370.0	1480.6	3.65	3.59	3.53
1410.0	1520.6	3.88	3.82	3.78
1460.0	1570.6	4.16	4.10	4.06
1500.0	1610.6	4.31	4.23	4.18
1550.0	1660.6	4.43	4.37	4.30
1590.0	1700.6	4.60	4.52	4.44
1640.0	1750.6	4.69	4.61	4.54
1680.0	1790.6	4.80	4.68	4.59
1730.0	1840.6	4.86	4.72	4.63

LO (MHz)	LO VSWR (:1) @LO (dBm)		
	+10	+13	+16
240.6	6.42	4.36	4.68
280.6	4.39	3.54	4.10
320.6	3.22	3.23	4.10
360.6	2.62	2.89	3.82
400.6	2.34	2.82	3.80
440.6	2.10	2.73	3.79
490.6	1.92	2.63	3.69
530.6	1.87	2.66	3.77
580.6	1.79	2.60	3.69
620.6	1.79	2.66	3.78
670.6	1.77	2.62	3.69
710.6	1.81	2.69	3.81
760.6	1.80	2.66	3.75
800.6	1.84	2.72	3.85
850.6	1.88	2.73	3.83
890.6	1.96	2.81	3.91
940.6	2.02	2.86	3.95
980.6	2.10	2.95	4.02
1030.6	2.14	2.99	4.08
1070.6	2.20	3.03	4.10
1120.6	2.24	3.06	4.13
1160.6	2.24	3.05	4.12
1210.6	2.26	3.04	4.09
1250.6	2.27	3.04	4.11
1300.6	2.24	2.96	3.98
1340.6	2.26	3.00	4.04
1390.6	2.32	3.00	3.99
1430.6	2.40	3.08	4.10
1480.6	2.55	3.14	4.09
1520.6	2.69	3.25	4.20
1570.6	2.83	3.29	4.15
1610.6	3.01	3.40	4.24
1660.6	3.20	3.52	4.31
1700.6	3.42	3.61	4.38
1750.6	3.66	3.77	4.47
1790.6	3.88	3.81	4.43
1840.6	4.12	3.99	4.57

IF (OUT) (MHz)	IF VSWR @LO=1062.6MHz (:1) @LO (dBm)		
	+10	+13	+16
100.0	2.09	1.73	1.48
130.0	2.15	1.78	1.53
160.0	2.05	1.70	1.45
190.0	2.10	1.75	1.51
220.0	2.15	1.80	1.56
250.0	2.05	1.72	1.49
280.0	2.08	1.75	1.53
310.0	2.12	1.80	1.58
340.0	2.07	1.75	1.54
370.0	2.04	1.74	1.54
400.0	2.10	1.80	1.61
420.0	2.03	1.73	1.55
450.0	2.03	1.75	1.59
470.0	2.06	1.77	1.59
500.0	2.01	1.74	1.59
520.0	2.07	1.79	1.63
550.0	1.99	1.73	1.58
570.0	2.08	1.81	1.66
600.0	2.03	1.77	1.63
620.0	2.03	1.78	1.66
650.0	2.04	1.78	1.64
670.0	2.02	1.78	1.66
700.0	2.03	1.79	1.67
720.0	1.97	1.73	1.62
750.0	2.02	1.79	1.68
770.0	1.99	1.75	1.64
800.0	1.98	1.75	1.66
820.0	1.99	1.75	1.63
850.0	1.96	1.73	1.63
870.0	2.01	1.78	1.67
900.0	1.96	1.73	1.62
920.0	2.00	1.77	1.67
950.0	1.96	1.74	1.62
970.0	1.99	1.77	1.66
1000.0	1.99	1.77	1.65
1020.0	1.94	1.73	1.63
1050.0	2.03	1.82	1.71

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Harmonics Tables

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	9	19	13	23	18	31	32	43	42	52
1	-	17	+0	41	11	33	34	37	42	51	51	73
2	74	74	53	63	50	65	57	80	64	65	71	75
3	>100	>86	70	78	83	73	72	>86	76	77	80	>86
4	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
5	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
6	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
7	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
8	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
9	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
10	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: **RF IN: 711 MHz; -7.00 dBm.**
LO IN: 821.6 MHz; +13.00 dBm
IF OUT: 110.6 MHz; -13.95 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	18	29	24	33	30	43	45	58	64	74
1	-	17	+0	43	11	33	35	40	46	56	57	80
2	54	59	43	57	40	58	49	75	54	59	62	69
3	87	61	49	60	61	53	47	62	56	56	61	69
4	>100	76	74	69	73	73	71	76	70	82	76	79
5	>100	73	73	72	71	74	67	69	64	74	77	87
6	>100	>96	95	91	89	>96	83	92	77	85	86	>96
7	>100	95	>96	>96	92	>96	87	91	84	91	89	94
8	>100	>96	>96	>96	>96	>96	>96	>96	>96	>96	>96	>96
9	>100	>96	>96	>96	>96	>96	>96	>96	>96	>96	>96	>96
10	>100	>96	>96	>96	>96	>96	>96	>96	>96	>96	>96	>96
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: **RF IN: 711 MHz; 3.00 dBm.**
LO IN: 821.6 MHz; +13.00 dBm
IF OUT: 110.6 MHz; -3.95 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Curves

Conversion Loss @ IF=110.6MHz

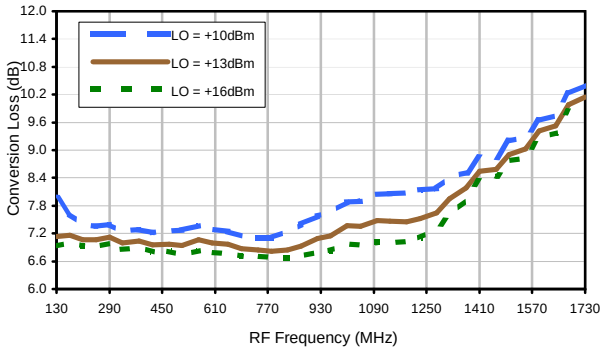

Conversion Loss vs. LO @ RF=711MHz

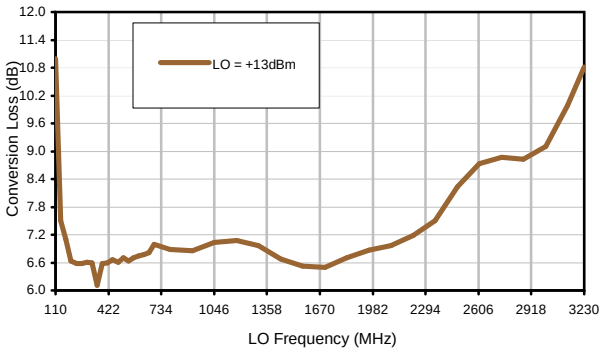

Conversion Loss vs. IF @ RF=711MHz

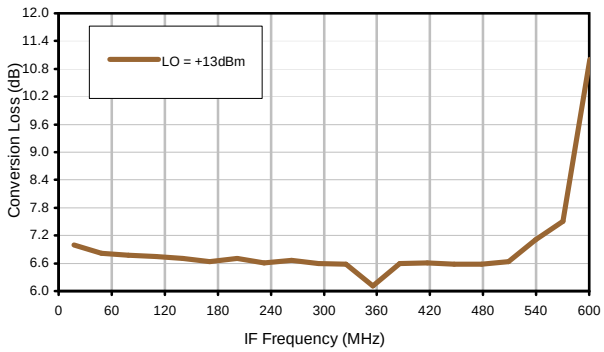

Conversion Loss vs. IF @ RF=470MHz

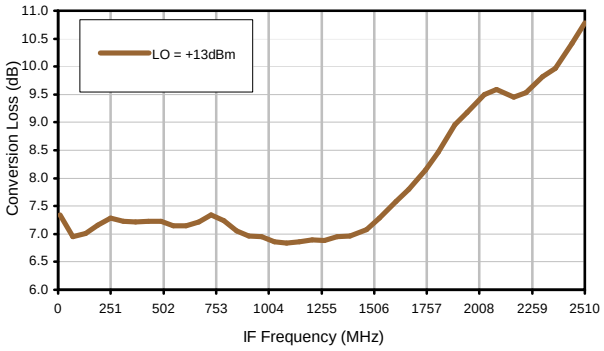

Conversion Loss vs. IF @ RF=952MHz

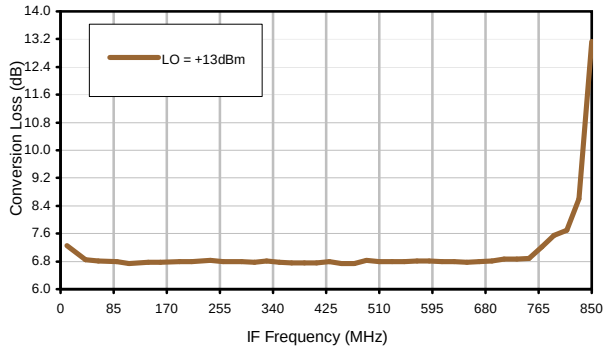

IP3 Input

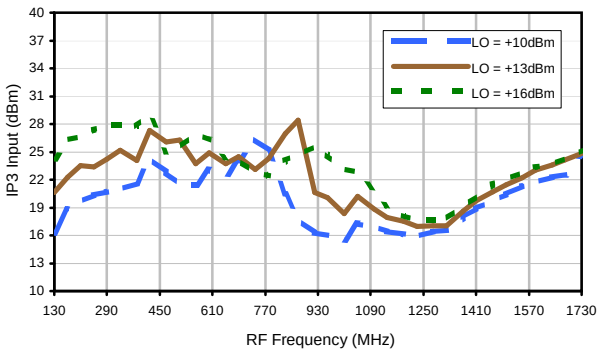

Compression @ RF IN=+8dBm

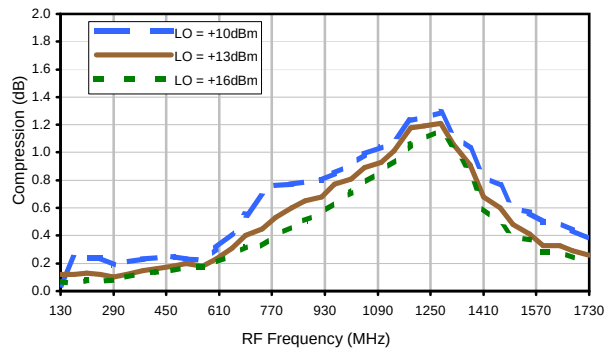

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Curves

LO-RF Isolation

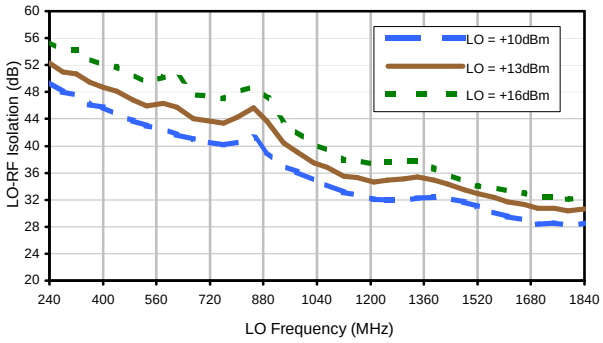

LO-IF Isolation

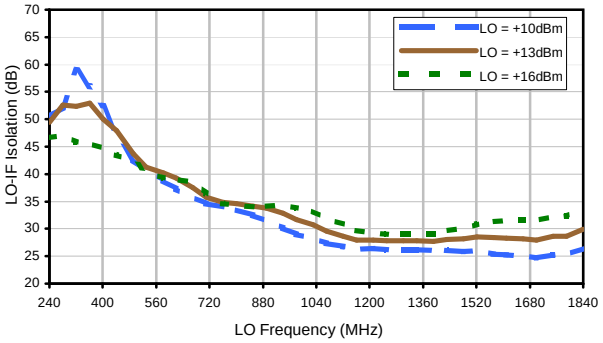

RF-IF Isolation

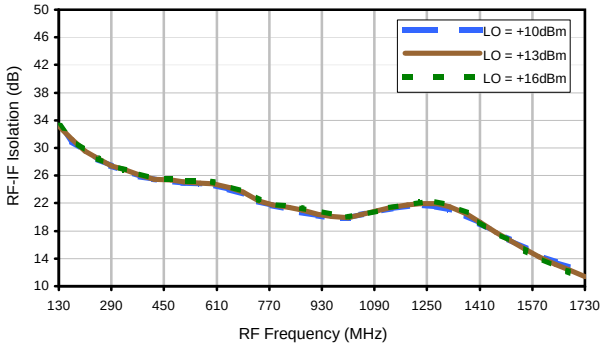

RF VSWR

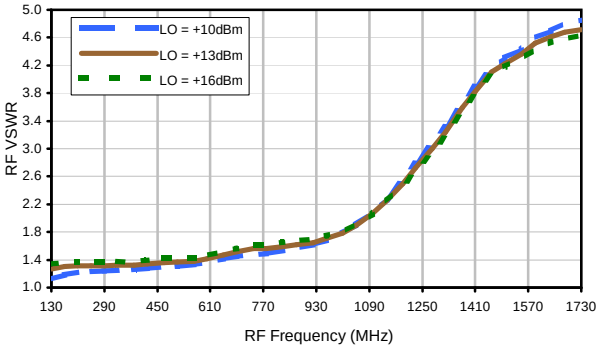

LO VSWR

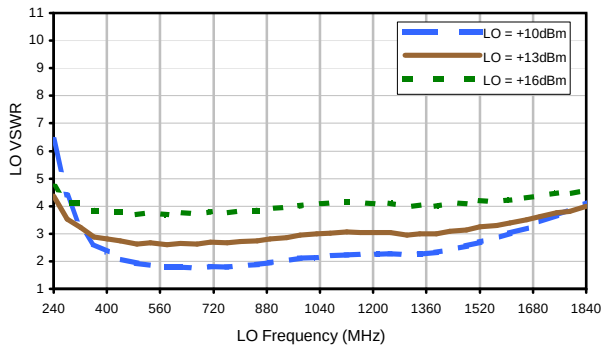

IF VSWR

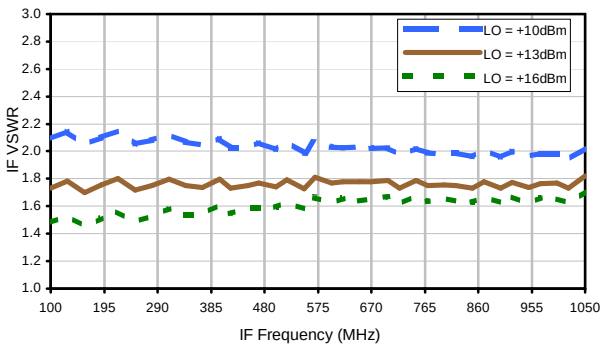

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Harmonics Tables

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	9	19	13	23	18	31	32	43	42	52
1	-	17	+0	41	11	33	34	37	42	51	51	73
2	74	74	53	63	50	65	57	80	64	65	71	75
3	>100	>86	70	78	83	73	72	>86	76	77	80	>86
4	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
5	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
6	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
7	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
8	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
9	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
10	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: **RF IN: 711 MHz; -7.00 dBm.**
LO IN: 821.6 MHz; +13.00 dBm
IF OUT: 110.6 MHz; -13.95 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	18	29	24	33	30	43	45	58	64	74
1	-	17	+0	43	11	33	35	40	46	56	57	80
2	54	59	43	57	40	58	49	75	54	59	62	69
3	87	61	49	60	61	53	47	62	56	56	61	69
4	>100	76	74	69	73	73	71	76	70	82	76	79
5	>100	73	73	72	71	74	67	69	64	74	77	87
6	>100	>96	95	91	89	>96	83	92	77	85	86	>96
7	>100	95	>96	>96	92	>96	87	91	84	91	89	94
8	>100	>96	>96	>96	>96	>96	>96	>96	>96	>96	>96	>96
9	>100	>96	>96	>96	>96	>96	>96	>96	>96	>96	>96	>96
10	>100	>96	>96	>96	>96	>96	>96	>96	>96	>96	>96	>96
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: **RF IN: 711 MHz; 3.00 dBm.**
LO IN: 821.6 MHz; +13.00 dBm
IF OUT: 110.6 MHz; -3.95 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Case Style CD

CD541
CD542
CD636
CD637

Outline Dimensions

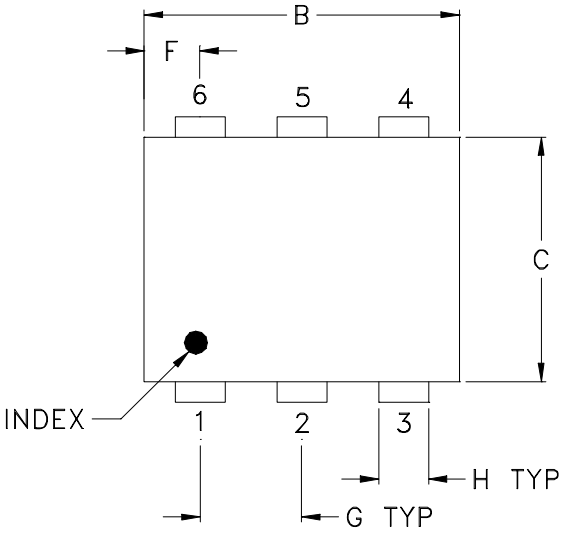

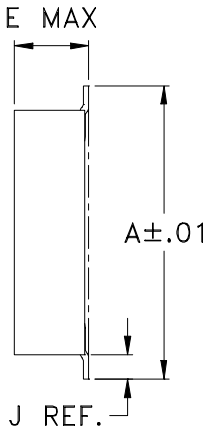

PCB Land Pattern

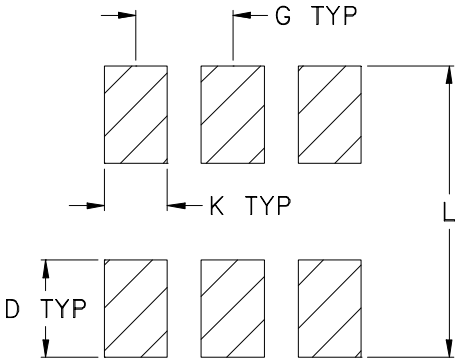

Suggested Layout,
Tolerance to be within ±.002

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAM
CD541	.272 (6.91)	.310 (7.87)	.220 (5.58)	.100 (2.54)	.082 (2.08)	.055 (1.40)	.100 (2.54)	.030 (0.76)	.026 (0.66)	.065 (1.65)	.300 (7.62)	.15
CD542					.112 (2.84)							.20
CD636					.162 (4.11)							.25
CD637					.206 (5.23)							.40

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .01; 3 Pl. ± .005

Notes:

1. Case material: Plastic.
2. Termination finish:
   For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
   For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits

Tape & Reel Packaging TR-F34

DEVICE ORIENTATION IN T&R

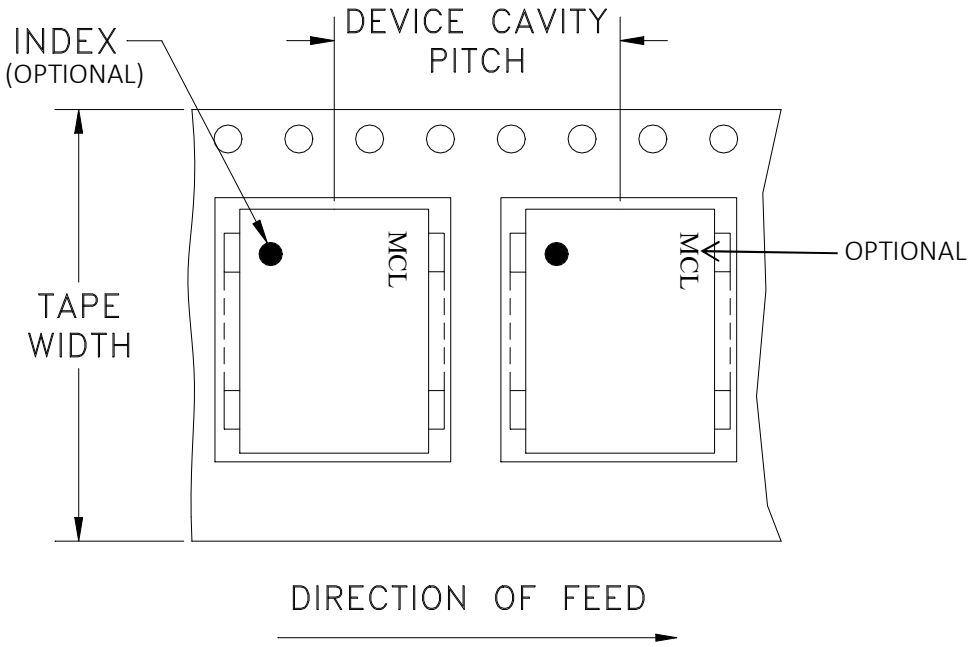

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits.

THIRD ANGLE PROJECTION



REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M101143	ADDED "gk" PIN CONNECTION, TT100 CASE STYLE & NOTE 2	10/10/05	MMG	DJ
B	M102713	ADDED "...WITH SMOBC"	01/17/06	MMG	IL
C	M108637	REMOVED "PIN 1" , ADDED INDEX ON UNIT	12/01/06	MYG	FL

SUGGESTED MOUNTING CONFIGURATION FOR BH292, CD541/542/636/637, TT100/240 CASE STYLES, "gk", "ht", "hu", "nd", "w" PIN CONNECTIONS

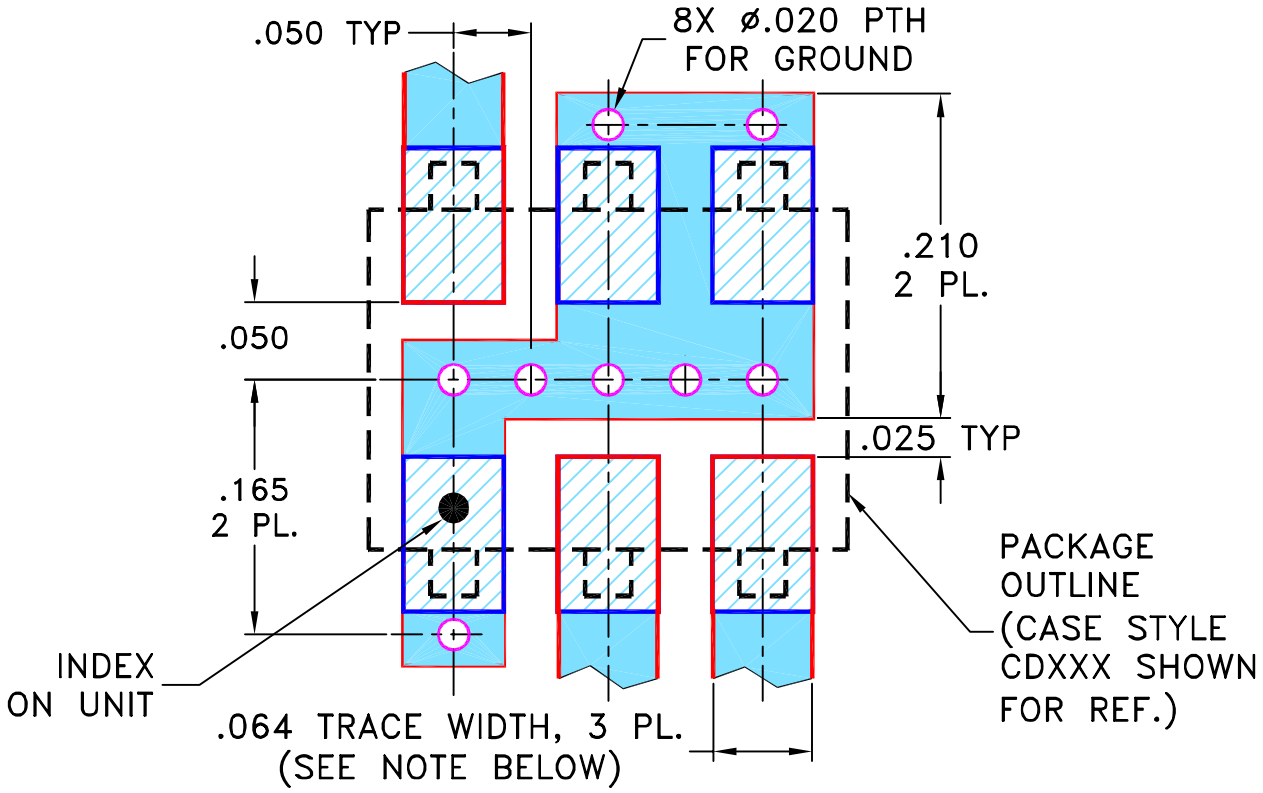

NOTES:
1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	MMG	07/17/02
TOLERANCES ON:	CHECKED	WL	08/02/02
2 PL DECIMALS ±	APPROVED	DJ	08/05/02
3 PL DECIMALS ± .005			
ANGLES ±			
FRACTIONS ±			

Mini-Circuits®
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235

PL, gk/ht/hu/nd/w, BH292, CD541/542/636/637, TT100/240, TB-03

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-052	C

FILE:	SCALE:	SHEET:
98PL052	8:1	1 OF 1

THIRD ANGLE PROJECTION



REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
E	**M119737**	**UPDATED PCB**	**10.08**	**MF**	**AD**
F	M127659	UPDATED CARR	06.10	SW	SG
G	M127846	UPDATED SCHEMATIC DIAGRAM	06.10	SW	SG
H	M131840	UPDATED DWG	05.11	MF	AD

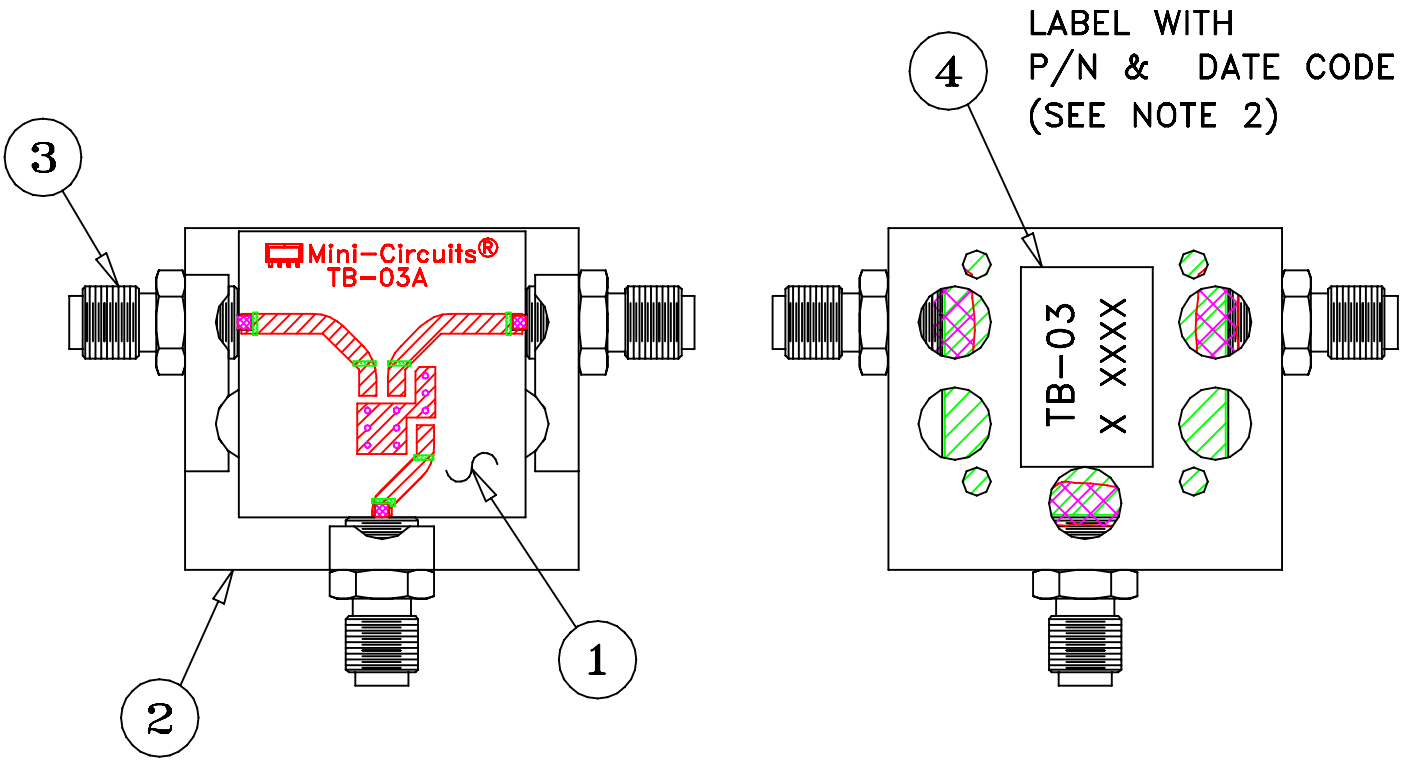

NOTES:

1. REFER TO -09 PAGE FOR ITEM DESCRIPTIONS. DESIGNATION NUMBERS ON -20 PAGE CORRESPOND TO THE NUMBERS ON -09 PAGE.
2. FOR TEXT HEIGHT & STYLE ON THE LABEL REFER TO: D3-G209.

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	S.WOLYNSKI	06.29.99
TOLERANCES ON:	CHECKED	SG	07.06.99
2 PL DECIMALS ±	APPROVED	MG	07.10.99
3 PL DECIMALS ±			
ANGLES ±			
FRACTIONS ±			

Mini-Circuits®
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235

TB,ADE,CD542/636,06MX01,50

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	TB-03-20	H

FILE:	SCALE:	SHEET:
WTB-03	1.5:1	1 OF 2

Evaluation Board and Circuit

For Pin Connections and DUT Orientation Refer to Data Sheet of the DUT

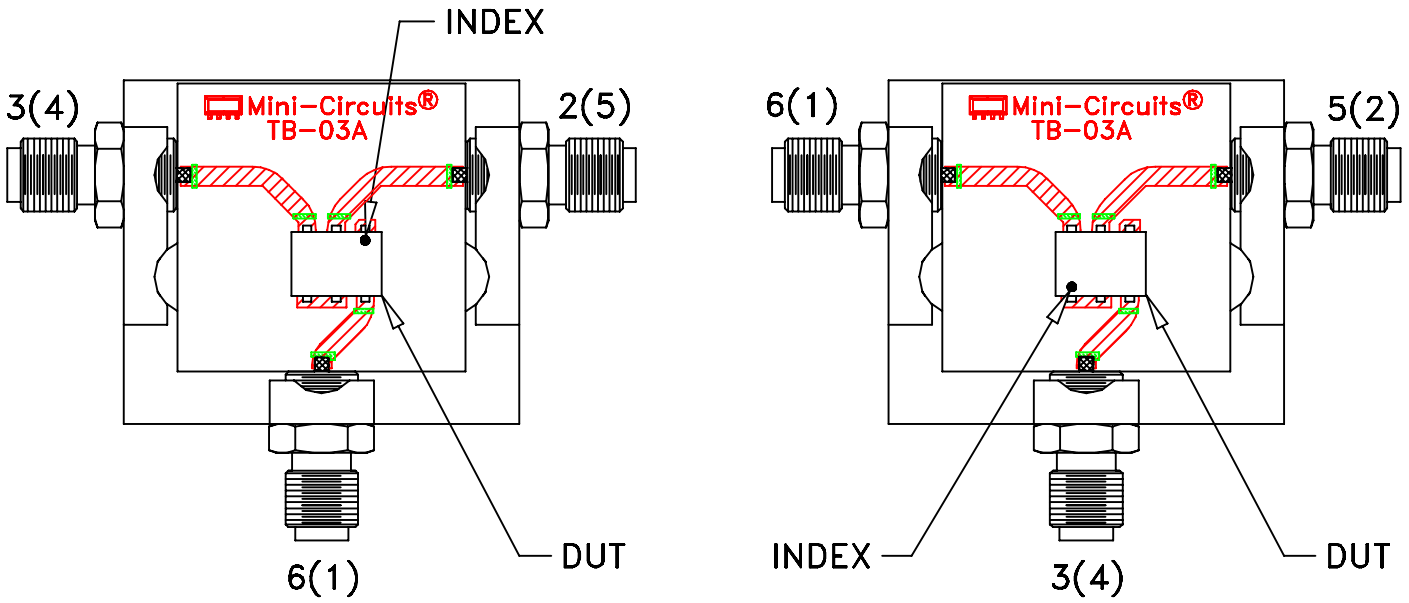

TB-03

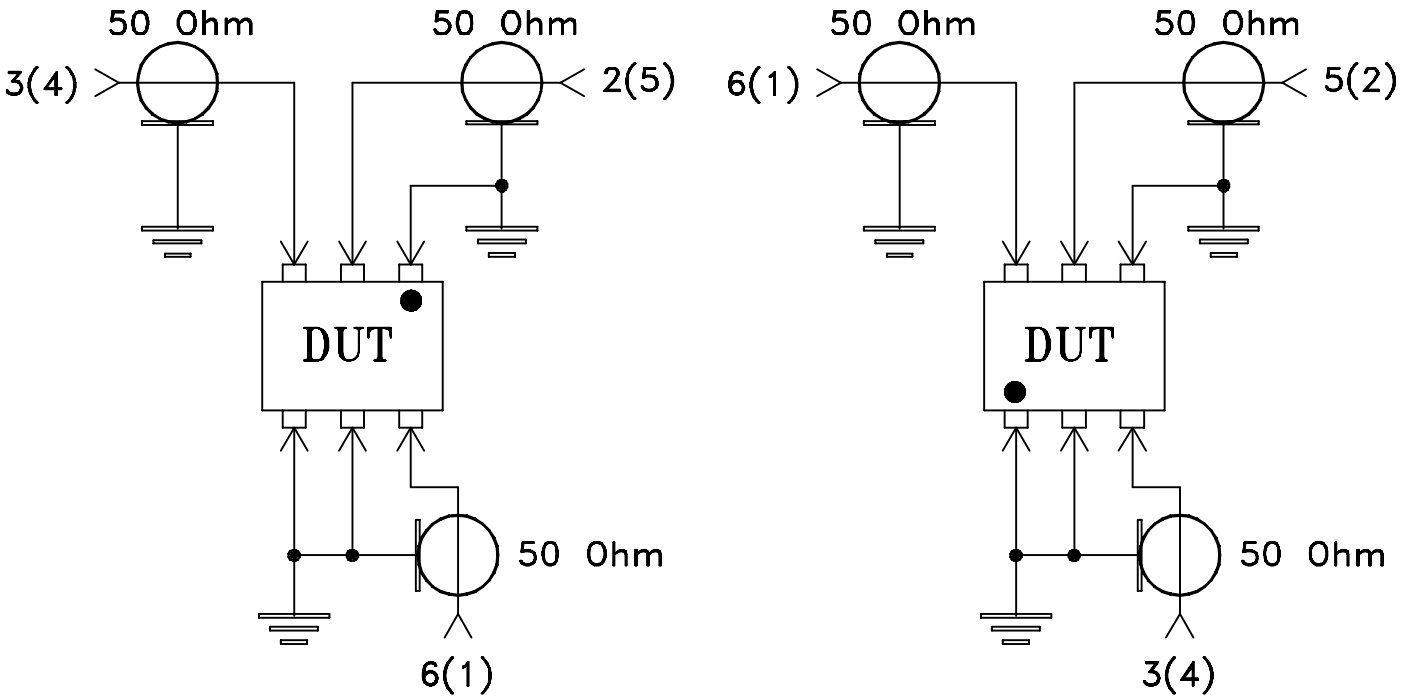

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: Rogers RO4350 or equivalent, Dielectric Constant=3.5, Thickness=.030 inch.

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.

Mini-Circuits

Environmental Specifications ENV02

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-20° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215

This document and its contents are the property of Mini-Circuits.