

# Coaxial Termination

## ANNEF-50V+

50Ω 2.4 mm DC to 50 GHz

### The Big Deal

- Ultra-wideband, DC to 50 GHz
- Excellent return loss, 20 dB typ. up to 50 GHz
- Input power handling up to 1W
- Mates with 1.85mm, 3.5mm, 2.92mm and SMA connectors



CASE STYLE: LL2592-1

### Product Overview

Mini-Circuits' ANNEF-50V+ is an ultra-wideband 50Ω termination capable of absorbing signals up to 1W from DC to 50 GHz. It provides excellent return loss across its entire operating frequency range, effectively dissipating signal power with minimal reflections. This model has a 2.4 mm-female connector, mechanically compatible with 1.85mm, 3.5mm, 2.92mm and SMA connectors. The unit features rugged construction for a long life of use and comes in a passivated stainless steel case measuring only 0.61" (l) x 0.31" (dia.).

### Key Features

Feature	Advantages
Ultra-wideband, DC to 50 GHz	Extremely wide frequency range provides application flexibility and makes this model ideal for broadband and multi-band use.
Good return loss, 20 dB up to 50 GHz	Good return loss minimizes signal reflections across multiple-decade frequency range.
2.4 mm connector mates with 1.85mm, 3.5mm, 2.92mm and SMA connectors	Provides flexible connection options, avoiding the need for extra adapters.
Power handling up to 1W	ANNEF-50V+ meets a wide range of system power requirements in a small device size.
Wide operating temperature range, -55 to +100°C	Withstands tough operating conditions and is suitable for use near high power components where heat rise is common.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Coaxial Termination

## 2.4 mm-Female

## ANNEF-50V+

50Ω DC to 50 GHz

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

### Features

- wideband coverage, DC to 50 GHz
- return loss, 20 dB typ. up to 50 GHz
- rugged construction
- mechanically compatible with SMA & 2.92 mm connectors



CASE STYLE: LL2592-1

Connector	Model
2.4mm-Female	ANNEF-50V+


### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Applications

- test and measurement equipment
- test labs
- defense and aerospace
- 5G applications
- Q and V band communication links

### Outline Drawing

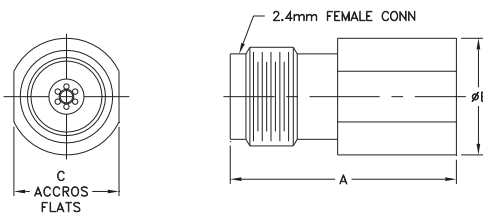

### Electrical Specifications at 25°C

Parameter	Condition (GHz)	Min.	Typ.	Max.	Unit
Frequency Range		DC	—	50	GHz
Impedance			50		Ohms
Return Loss	DC - 18	23	41	—	dB
	18 - 35	17	30	—	
	35 - 50	14.8	23	—	
Input Power <sup>1</sup>	DC - 50	—	—	1	W


1. At 25°C, derate linearly to 325 mW at 125°C.

### Typical Performance Data

Frequency (MHz)	Return Loss (dB)
10	43.3
100	42.3
1000	41.5
5000	41.0
10000	43.5
15000	30.9
20000	27.2
30000	26.7
35000	21.1
40000	20.2
45000	26.4
50000	22.9

### Outline Dimensions (inch/mm)

A	B	C	D	E	wt
.605	.312	.281	—	—	grams
15.4	7.9	7.1	—	—	4.5

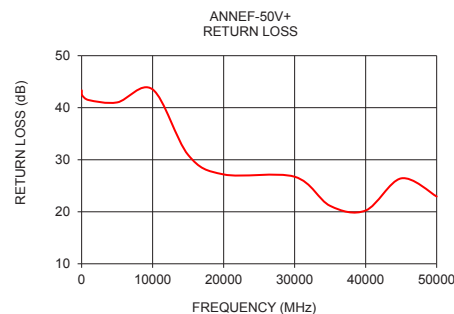

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



Typical Performance Data

FREQUENCY (MHz)	RETURN LOSS (dB)
10	43.34
50	42.51
100	42.34
200	42.25
300	42.08
400	42.00
500	41.88
600	41.67
700	41.46
800	41.38
900	41.39
1000	41.47
2000	41.26
3000	40.68
4000	40.17
5000	41.02
6000	42.48
7000	45.20
8000	49.81
9000	48.48
10000	43.51
11000	39.34
12000	36.24
13000	34.31
14000	32.48
15000	30.92
16000	29.88
17000	28.88
18000	27.96
19000	27.41
20000	27.17
21000	27.13
22000	27.03
23000	27.31
24000	27.75
25000	28.17
26000	28.60
27000	29.10
28000	29.03
29000	28.16
30000	26.73
31000	25.32
32000	24.02
33000	22.81
34000	21.87
35000	21.13
36000	20.60
37000	20.21
38000	19.96
39000	19.95
40000	20.24
41000	20.86
42000	21.71
43000	22.99
44000	24.66
45000	26.42
46000	28.03
47000	28.19
48000	27.09
49000	24.74
50000	22.93

## Typical Performance Curves




# Case Style

# LL

## Outline Dimensions

## LL2592-1

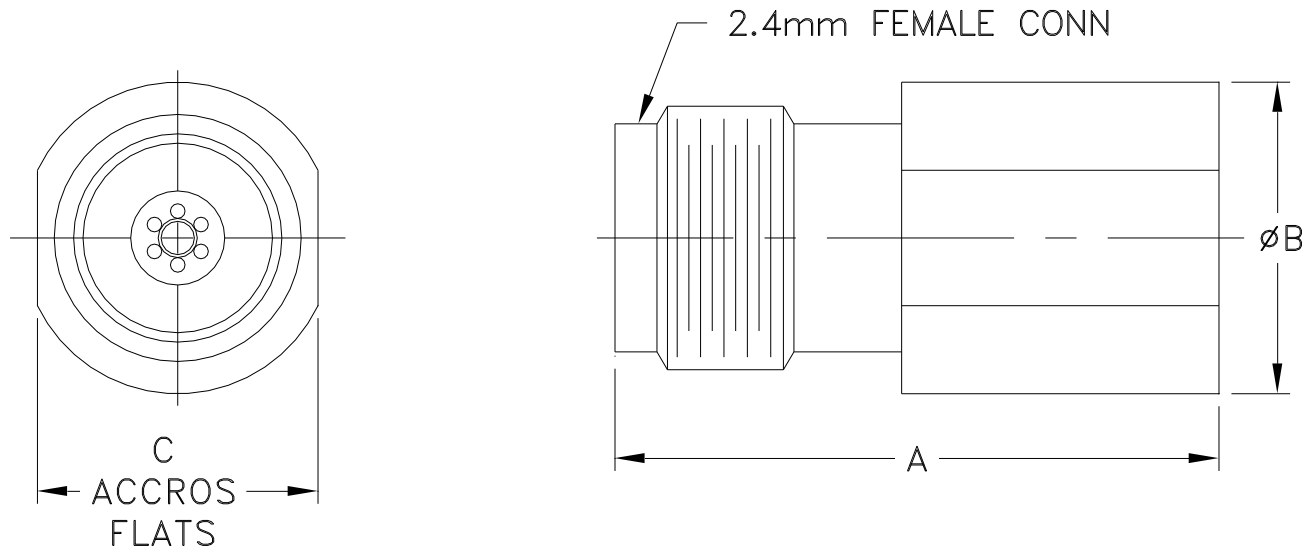

CASE #	A	B	C	D	E	WT. GRAM
LL2592-1	.605 (15.4)	.312 (7.9)	.281 (7.1)	-- --	-- --	4.5

**Dimensions are in inches (mm). Tolerances: 2Pl. ± .030; 3Pl. ± .015**

### Notes:

1. Case material: Stainless Steel.
2. Case Finish: Passivated.

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

<b>Specification</b>	<b>Test/Inspection Condition</b>	<b>Reference/Spec</b>
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I