Ceramic **Bandpass Filter**

75Ω 950 to 1970 MHz


Features

- Wideband, 950-1970 MHz
- · Low loss, 1.9 dB typ.
- Small size, 1206 (3.2mm x 1.6mm)
- Temperature stable
- LTCC construction

Applications

- CATV/MOCA
- Harmonic Rejection
- Transmitters / receivers


Specification Definition





Functional Schematic RF IN RF OUT

Operating Temperature	-55°C to +100°C
Storage Temperature*	-55°C to +100°C
RF Power Input**	1W at 25°C
* 12 months may	

Permanent damage may occur if any of these limits are exceeded.

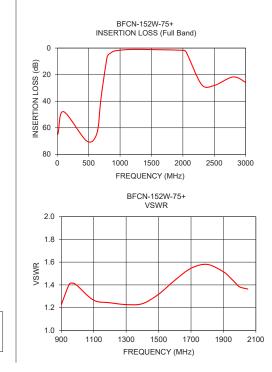





REV. A M151107 ED-16419/32 BFCN-152W-75+ MY/CP/AM

190726

Page 1 of 2

Mini-Circuits

BFCN-152W-75+



Generic photo used for illustration purposes only

CASE STYLE: FV1206-7

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost							
Reel Size	Devices/Reel						
7"	20, 50, 100, 200, 500, 1000, 3000						

Electrical Specifications^{1,2} at 25°C

Parameter		F#	Frequency (MHz)	Min.	Тур.	Max.	Unit
	Center Frequency	_			1460		MHz
Pass Band	Insertion Loss	F1 - F2	950 - 1970	_	1.9	2.5	dB
	VSWR	F1 - F2	950 - 1970	-	1.6	_	:1
			DC - 470	38	44	—	
Stop Band, Lower	Insertion Loss	DC - F3	470 - 630	50	60	_	dB
			630 - 730	_	22	_	
Stop Bond Uppor	Incortion Loop		2300 - 2500	18	22	—	dB
Stop Band, Upper Insertion Loss		F4 - F5	2500 - 3000	l	20	_	UB

1. Measured on Mini-Circuits Characterization Test Board TB-812+.

2. This filter is not intended for use as a DC Blocking circuit element. In Application where DC voltage is present at either input or output ports, blocking capacitors are required at the corresponding RF port.

Maximum Ratings

· · · · · · · · · · · · · · · · · · ·	
RF Power Input**	1W at 25°C
Storage Temperature*	-55°C to +100°C
Operating Temperature	-55°C to +100°C

**Passband rating, derate linearly to 0.5W at 100°C ambient

Bandpass Filter


BFCN-152W-75+

Ful	Full Band Performance			s Band Performa	nce
Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
10	64.84	162.19	900	2.39	1.23
100	47.86	361.27	950	1.91	1.41
470	70.01	76.30	980	1.72	1.41
630	64.47	27.45	1100	1.22	1.27
690	40.38	16.60	1200	1.01	1.24
730	26.32	10.08	1300	0.88	1.23
790	7.63	2.27	1400	0.82	1.23
810	5.17	1.80	1500	0.82	1.32
1200	1.01	1.24	1600	0.88	1.44
1970	1.64	1.42	1700	0.99	1.55
2050	2.83	1.36	1800	1.12	1.58
2300	27.57	9.19	1900	1.32	1.52
2500	28.16	19.37	1970	1.64	1.42
2800	21.71	31.77	2000	1.91	1.38
3000	25.87	34.97	2050	2.83	1.36

Pad Connections

Input	1
Output	3
Ground	2

Outline Drawing

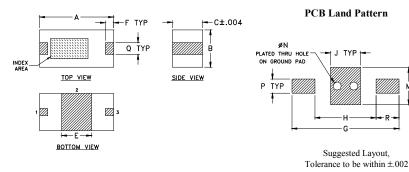

COPLANAR WAVEGUIDE: .022 TRACE WIDTH & .014 GAP, 2 PL. PIN 1 (SEE NOTE BELOW) 14X Ø.013 PTH FOR GROUND PACKAGE

Demo Board MCL P/N: TB-812+ Suggested PCB Layout (PL-439)

NOTES:

COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .010" ± .001", COPPER: 1/2 02. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Outline Dimensions (^{inch})

A .126 3.20	B .063 1.60	-	.051	F .014 0.36	.183	.104
.051	.063	N .014 0.36	.024	.020	.039	

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Ceramic Bandpass Filter Typical Performance Data

		Γ
FREQUENCY	INSERTION LOSS	VSWR
(MHz)	(dB)	(:1)
10.0	64.84	162.19
55.0	52.36	301.74 361.27
100.0 150.0	47.86 45.79	404.03
200.0	45.17	327.48
250.0	45.75	318.39
300.0	47.47	206.14
350.0	50.50	156.54
400.0	55.72	113.05
470.0	70.01	76.30
530.0	59.64	53.17
570.0	58.08	41.36
630.0	64.47	27.45
670.0	48.08	20.04
730.0	26.32	10.08
770.0	12.70	3.91
830.0	4.10	1.56
870.0	2.91	1.13
900.0	2.39	1.23
930.0	2.07	1.36
950.0	1.91 1.72	1.41 1.41
980.0 1000.0	1.61	1.39
1050.0	1.38	1.39
1100.0	1.30	1.27
1150.0	1.10	1.25
1200.0	1.01	1.24
1250.0	0.94	1.24
1300.0	0.88	1.23
1350.0	0.84	1.22
1400.0	0.82	1.23
1450.0	0.81	1.27
1500.0	0.82	1.32
1550.0	0.84	1.38
1600.0	0.88	1.44
1650.0	0.93	1.50
1700.0	0.99	1.55
1750.0	1.05	1.57
1800.0 1850.0	1.12	1.58
1900.0	1.20 1.32	1.56 1.52
1900.0	1.64	1.42
2000.0	1.91	1.38
2050.0	2.83	1.36
2100.0	5.37	1.64
2150.0	11.53	2.73
2200.0	22.00	4.76
2250.0	27.28	6.98
2300.0	27.57	9.19
2350.0	31.52	11.59
2400.0	39.32	14.16
2450.0	33.30	16.74
2500.0	28.16	19.37
2550.0	25.35	21.82
2600.0	23.67	24.24
2650.0	22.63	26.34
2700.0	22.01	28.52
2750.0	21.72	30.26
2800.0	21.71	31.77
2850.0 2900.0	22.02 22.68	33.10 34.25
2950.0	23.86	34.23
3000.0	25.87	34.82
0000.0	20.01	0-1.01






REV. OR P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site BFCN-152W-75+ The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com 11/3/2014

Ceramic Bandpass Filter

Typical Performance Curves

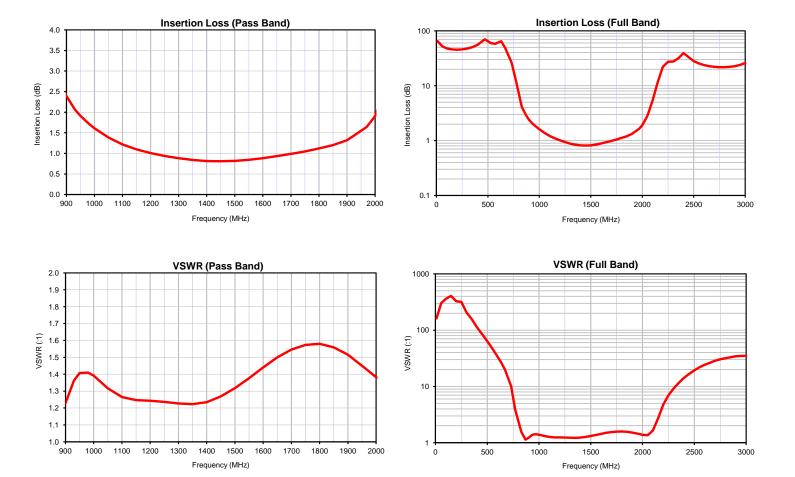



minicircuits.com


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site BFCN-152W-75+ The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com 11/3/2014 **IF/RF MICROWAVE COMPONENTS**

REV. OR Page 1 of 1

Case Style

FV1206-7

Outline Dimensions

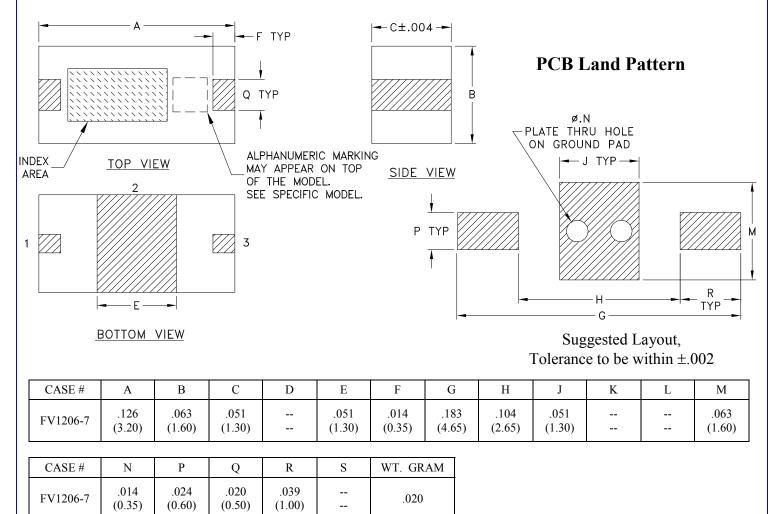

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .01; 3 Pl. ± .005

Notes:

- 1. Open style, ceramic base.
- Termination finish: as shown below or indicated on Data Sheet. For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix. For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.
- 3. Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.





P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

98-FV Rev.: V (12/1118) M171394 File: 98-FV.docx This document and its contents are the property of Mini-Circuits.

Tape & Reel Packaging

<u>TR-F75</u>

DEVICE ORIENTATION IN T&R								
DI	EVICE		Applicable	Case Styles				
- C/		ILLUSTRATION 1	FV1206-1 FV1206-3					
DIRECTIC	ON OF FEED							
	EVICE AVITY ITCH INDEX TERMINATION AREA	ILLUSTRATION 2	Applicable FV1206-4 FV1206-5 FV1206-6 FV1206-7 FV1206-9	Case Styles				
	DEVICE		Applicable Case Styles					
-	PITCH		FV1206-11					
			FV1206-12					
			GE0805C-18					
			NL1008C-6 NL1008C-7					
			NL1008C-9					
DIRECTI	ON OF FEED		NL1008C-1					
		ILLUSTRATION 3						
Tape Width, mm	Device Cavity	Reel Size,	Devices p	ber Reel				
• ′	Pitch, mm	inches						
			Small	20				
			quantity	50				
			standards	100				
8	4	7	(see note)	200				
				500				
			~	1000				
			Standard	3000				

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf

Т


 InterNet
 InterNet
 http://www.minicircuits.com

 Mini-Circuits®
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

 Distribution Centers NORTH AMERICA 800-654-7949
 417-335-5935
 Fax 417-335-5945
 EUROPE 44-1252-832600
 Fax 44-1252-837010

 Mini-Circuits ISO 9001 & ISO 14001 Certified
 Mini-Circuits ISO 9001 & ISO 14001 Certified

98-TR-F75 Rev.: Q (08/26/25) ECO-026726 File: 98-TR-F75.doc This document and its contents are the property of Mini-Circuits.

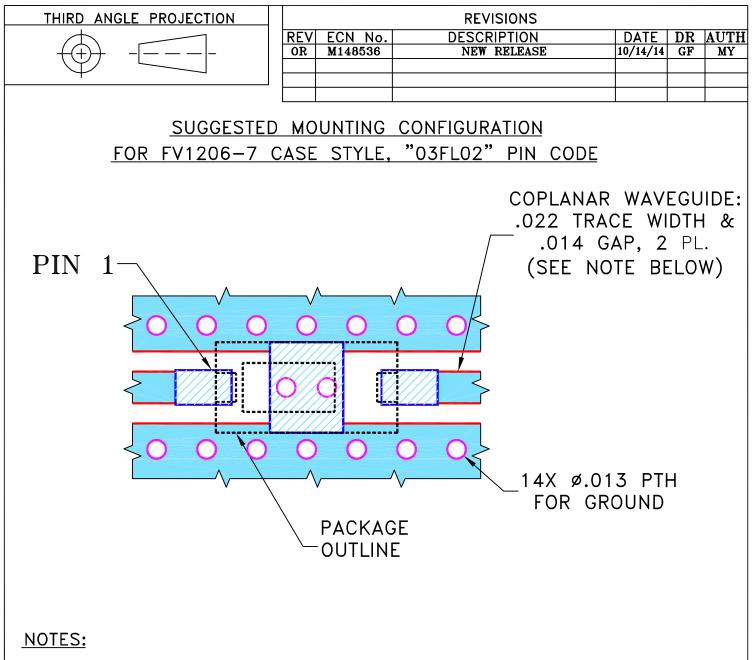


- COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 - DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER

BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE			∃ ъ σ • • •		N •	• R			
DIMENSIONS ARE IN INCHES	DRAWN	GF	10/07/14			Mini	l — (Circu	its .	13 Neptur	ne Ave	nue
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	AV	10/14/14							Бгоокіуп	NI II	ຂວບ
3 PL DECIMALS ± .005	APPROVED	MY	10/14/14									
] P	L.	03FLC)2.	FV1206	5 - 7.	TB-	81	2+
Mini-Circuits ®				,		,		- ,			_	
THIS DOCUMENT AND ITS CONTENTS A EXCEPT FOR USE EXPRESSLY GRANTED				SIZE		CODE IDENT	DRAWING	NO.			REV:	
AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITEN PERMISSION OF MINI-CIRCUITS.		A		15542	DRAWING		-PL-4	439	REV:	OR		
PARIT, IN WHOLE OR IN PART, WITHO				FILE:	9	8PL439	SCALE:	15:1	SHEET:	1	OF	1
	ASHEETA1.D	WG REV:A DA	TE:01/12/95		<u> </u>	01 1100		10.1		1	01	*

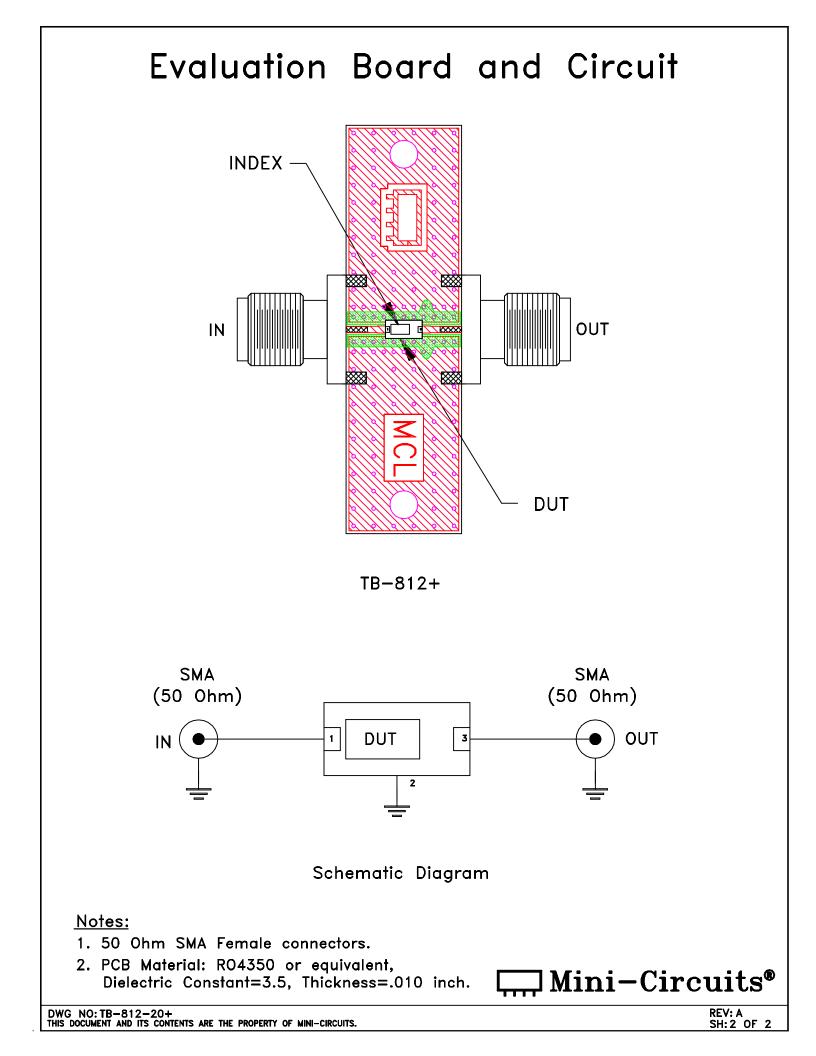

Mini-Circuits

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A

ENV06 Rev: A 02/25/11 M130240 File: ENV06.pdf

This document and its contents are the property of Mini-Circuits.