## **LTCC Bandpass Filter**

1530 to 1620 MHz **50**Ω

## **The Big Deal**

- Small size 3.2mm x 1.6mm
- Pass band (1530-1620 MHz)
- Low Insertion Loss (2.0 dB typical)
- · Sharp rejection peaks close to stop band

## **Product Overview**

The BFCN-1575+ LTCC Band Pass Filter is constructed with 12 layers in order to achieve a miniature size and high repeatability of performance. Wrap-around terminations minimize variations in performance due to parasitics. Covering 1575 MHz ±45 MHz, these units offer low insertion loss and good rejection.

## **Key Features**

Feature	Advantages
Small Size (3.20mm x1.6 mm)	Allows for high layout density of circuit boards, while minimizing affects of parasitics.
Rejection peaks at harmonic frequencies	Provides good rejection of signals at harmonic frequencies, for improved system performance.
Wrap around termination	Provides excellent solderability and easy visual inspection capability.
LTCC construction	Provides a rugged package that is well suited for tough environments including high humidity and high temperature extremes.



**BFCN-1575+** 

### Notes A Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



## Ceramic **Bandpass Filter**

#### 1530 to 1620 MHz 50Ω

#### **Maximum Ratings**


Operating Temperature	-55°C to 100°C			
Storage Temperature	-55°C to 100°C			
RF Power Input*	1.5W max. at 25°C			
*Passband rating, derate linearly to 0.25W at 100°C ambient				
Permanent damage may occur if any of these limits are exceeded				

#### **Pin Connections**

RF IN	1
RF OUT	3
GROUND	2,4

#### Product Marking: 34


#### **Outline Drawing**

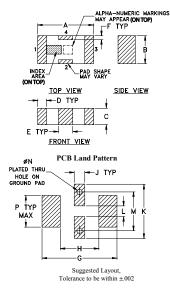

#### Outline Dimensions (inch)

A	B	C	D	E	F	G	
.126	.063	.037	.020	.032	.009	.169	
3.20	1.60	0.94	0.51	0.81	0.23	4.29	
H	J	K	L	M	N	P	wt
.087	.024	.122	.024	.087	.012	.071	grams
2.21	0.61	3.10	0.61	2.21	0.30	1.80	.020

#### Demo Board MCL P/N: TB-270 Suggested PCB Layout (PL-137



#### Notes

Small size

• Temperature stable

**Features** 

- · Hermetically sealed
- LTCC construction

#### **Applications**

ATTENUATION (dB)

DC

#### • Harmonic Rejection

• Transmitters / Receivers





#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



#### Electrical Specifications<sup>1,2</sup> at 25°C


Parameter		F#	Frequency (MHz)	Min.	Тур.	Max.	Unit
	Center Frequency	—	—	_	1575	—	MHz
Pass Band	Insertion Loss	F1-F2	1530-1620	-	_	3.0	dB
	VSWR	F1-F2	1530-1620	-	-	2.5	:1
Sten Band Lawer	Insertion Loss	DC-F3	DC-1200	_	20	_	dB
Stop Band, Lower	VSWR	DC-F3	DC-1200	-	25	_	:1
Stop Bond Upper	Insertion Loss	F4-F5	2800-5200	_	25	_	dB
Stop Band, Upper	VSWR	F4-F5	2800-5200	_	20	—	:1


1. Measured on Mini-Circuits Characterization Test Board TB-270.

2. This filter is not intended for use as a DC Blocking circuit element. In Application where DC voltage is present at either input or output ports, blocking capacitors are required at the corresponding RF port.



#### **Functional Schematic**







#### Typical Performance Data at 25°C

Frequency (MHz)	Insertion L (dB)	oss		SWR :1)
0.30	66.27		2309	9.62
300.00	36.19		116	6.96
900.00	36.42		7	1.69
1050.00	38.82		59	9.41
1150.00	46.97		48	3.27
1280.00	22.49		26	6.70
1405.00	7.30		4	4.82
1480.00	2.76			1.65
1530.00	2.47			1.88
2220.00	20.01		54	4.29
2400.00	23.53		65	5.60
2800.00	30.79		75	5.11
3100.00	37.82		72	2.94
3500.00	49.66		65	5.41
5200.00	29.49		26	6.75
	BFCN-1575+ INSERTION LOSS			
60				







Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp А. В. С.

REV. D M151107 BFCN-1575+ ED-13635/5 AD/CP/AM 190725 Page 2 of 2

### **,,,,)**Mini-Circuits

# Ceramic Bandpass Filter Typical Performance Data

FREQUENCY	INSERTION LOSS	RETURN LOSS
(MHz)	(dB)	(dB)
0.3	66.27	0.01
1.0	55.30	0.00
10.0	35.48	0.00
70.0	24.94	0.07
100.0	25.79	0.09
300.0	36.19	0.15
500.0	58.35	0.18
700.0	40.00	0.20
900.0	36.42	0.24
1000.0	37.08	0.27
1050.0	38.82	0.29
1100.0	43.39	0.32
1150.0	46.97	0.36
1200.0	34.30	0.42
1250.0	26.47	0.53
1280.0	22.49	0.64
1305.0	19.34	0.79
1355.0	13.18	1.44
1380.0	10.15	2.19
1430.0	4.96	6.30
1455.0	3.45	10.52
1480.0	2.76	12.69
1530.0	2.47	9.69
1540.0	2.45	9.53
1550.0	2.41	9.54
1560.0	2.37	9.74
1570.0	2.32	10.11
1580.0	2.26	10.68
1590.0	2.20	11.49
1600.0	2.15	12.57
1620.0	2.07	15.85
1800.0	7.15	2.20
1920.0	12.00	0.84
2100.0	17.28	0.40
2220.0	20.01	0.32
2400.0	23.53	0.26
2500.0	25.34	0.24
2600.0	27.13	0.23
2800.0	30.79	0.23
2900.0	32.82	0.23
3000.0	35.10	0.23
3100.0	37.82	0.23
3200.0	41.69	0.24
3400.0	70.25	0.25
3600.0	43.20	0.27
3800.0	37.65	0.29
3900.0	35.80	0.29
4000.0	34.49	0.30
4200.0	32.47	0.32
4400.0	31.12	0.34
4600.0	30.32	0.36
4800.0	30.06	0.39
5000.0	30.83	0.44
5200.0	29.49	0.65
5400.0	19.12	1.06
5500.0	19.21	0.73






REV. X2 BFCN-1575+ 2/10/2010 Page 1 of 1

**IF/RF MICROWAVE COMPONENTS** 

## Ceramic Bandpass Filter

## Typical Performance Curves

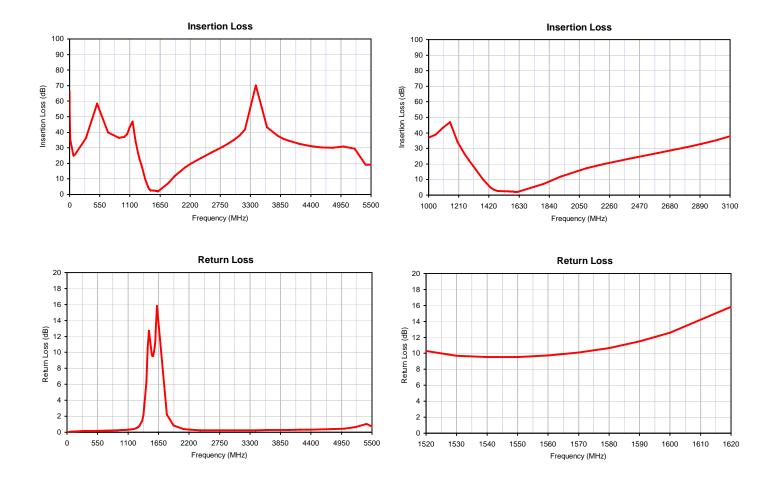




minicircuits.com

REV. X2

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com BFCN-1575+ 2/10/2010 Page 1 of 1

# Case Style

## **Outline Dimensions**

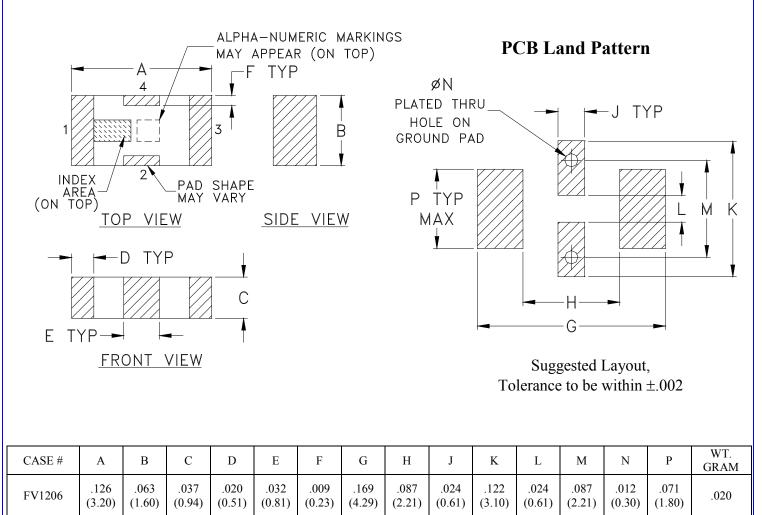

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .01; 3 Pl. ± .005

#### Notes:

- 1. Open style, ceramic base.
- Termination finish: as shown below or indicated on Data Sheet. For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix. For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.






FV1206

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

98-FV Rev.: V (12/1118) M171394 File: 98-FV.docx This document and its contents are the property of Mini-Circuits.

# Tape & Reel Packaging TR-F71

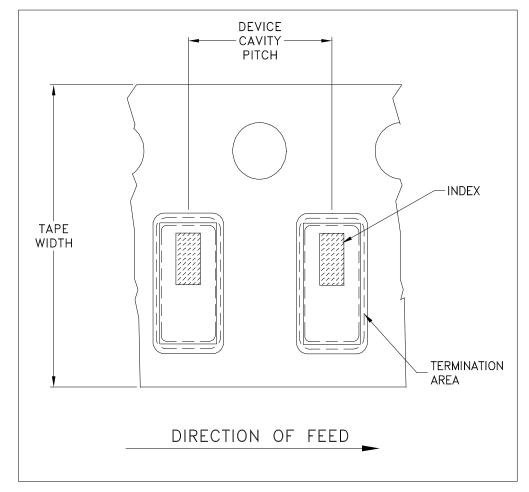

### ILLUSTRATION 1

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices p	er Reel
				20
			Small	50
			quantity	100
8	4	7	standards	200
			(see note)	500
				1000
			Standard	3000

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf







P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

98-TR-F71 Rev.: D (01/24/19) M172100 File: 98-TR-F71.docx This document and its contents are the property of Mini-Circuits.

Sheet 1 of 1

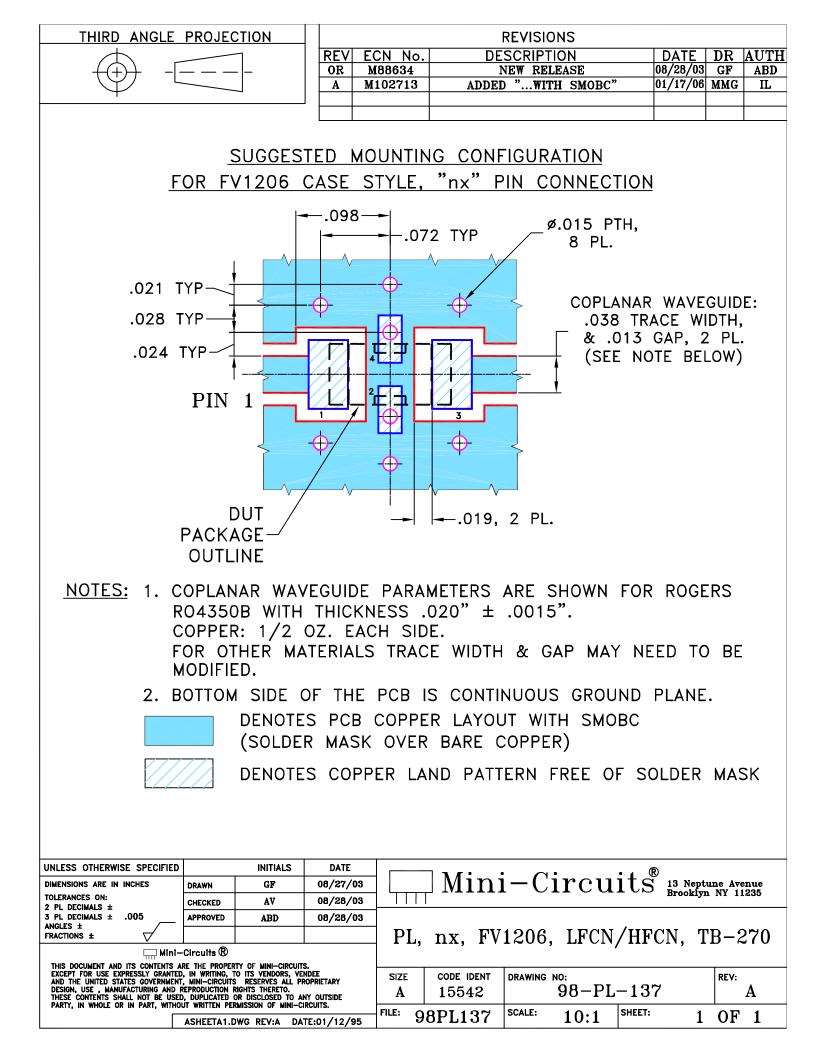

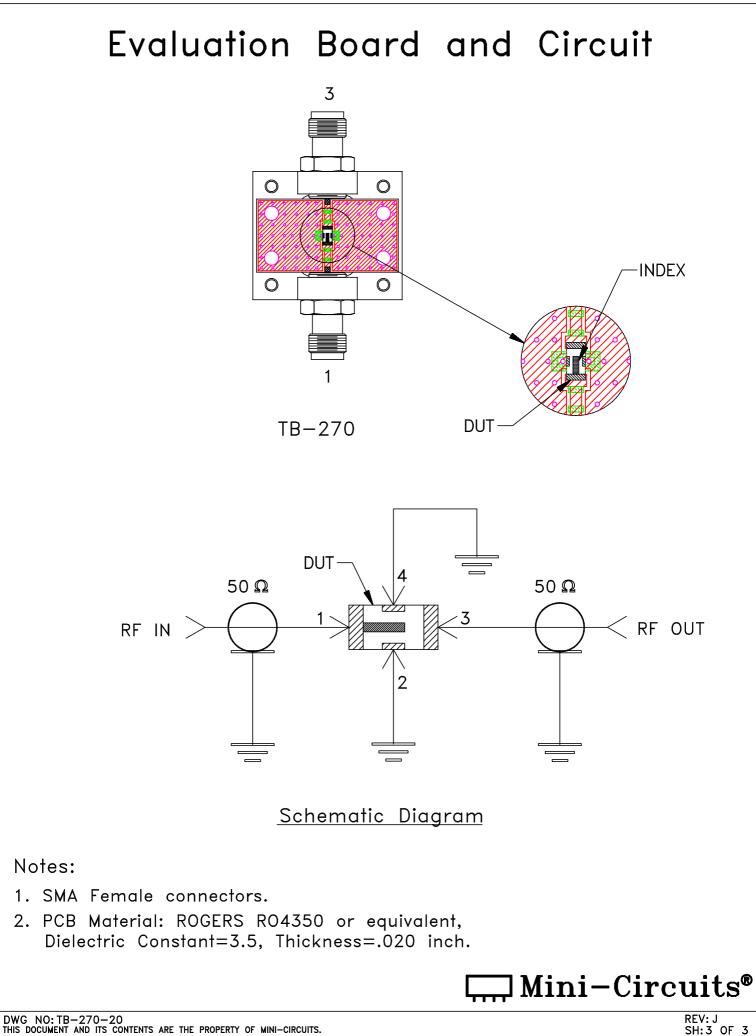

## **Mini-Circuits** Environmental Specifications ENV28

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I

ENV28 Rev: B 09/26/13 M143494 File: ENV28.pdf

This document and its contents are the property of Mini-Circuits.