LTCC Bandpass Filter

BFCN-1945+

50Ω 1850 to 2040 MHz

The Big Deal

- Small size 3.2mm x 1.6mm
- Pass band (1850-2040 MHz)
- Low Insertion Loss (2.0 dB typical)
- Sharp rejection peaks close to stop band



CASE STYLE: FV1206

Product Overview

The BFCN-1945+ LTCC Band Pass Filter is constructed with 12 layers in order to achieve a miniature size and high repeatability of performance. Wrap-around terminations minimize variations in performance due to parasitics. Covering 1945 MHz ±95 MHz, these units offer low insertion loss and good rejection.

Key Features

Feature	Advantages
Small Size (3.20mm x1.6 mm)	Allows for high layout density of circuit boards, while minimizing affects of parasitics.
Rejection peaks at harmonic frequencies	Provides good rejection of signals at harmonic frequencies, for improved system performance.
Wrap around termination	Provides excellent solderability and easy visual inspection capability.
LTCC construction	Provides a rugged package that is well suited for tough environments including high humidity and high temperature extremes.

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.ninicircuits.com/MCLStore/terms.jsp

Bandpass Filter

1850 to 2040 MHz 50Ω

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	1.5W max. at 25°C


^{*}Passband rating, derate linearly to 0.25W at 100°C ambient Permanent damage may occur if any of these limits are exceeded.


Pin Connections

RF IN	11_
RF OUT	3
GROUND	2,4

Product Marking: 32

Outline Drawing






Outline Dimensions (inch)

A .126 3.20	B .063 1.60	C .037 0.94	.020 0.51	.032 0.81	F .009 0.23	G .169 4.29	
H .087 2.21	J .024 0.61	K .122 3.10	.024 0.61	M .087 2.21	N .012 0.30	P .071 1.80	wt grams .020

Demo Board MCL P/N: TB-270 Suggested PCB Layout (PL-137



NOTES: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH THICKNESS .020" ± .0015".

COPPER: 1/2 OZ. EACH SIDE.

FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- Small size
- Temperature stable
- · Hermetically sealed
- LTCC construction

Applications

- Harmonic Rejection
- Transmitters / Receivers

BFCN-1945+



Generic photo used for illustration purposes only

CASE STYLE: FV1206

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications




Electrical Specifications^{1,2} at 25°C


Parai	neter	F#	Frequency (MHz)	Min.	Тур.	Max.	Unit
	Center Frequency	_	_	_	1945	_	MHz
Pass Band	Insertion Loss	F1-F2	1850-2040	_	_	3.0	dB
	VSWR	F1-F2	1850-2040	_	_	2.5	:1
Oten Bend Lewes	Insertion Loss	DC-F3	DC-1500	_	20	_	dB
Stop Band, Lower	VSWR	DC-F3	DC-1500	_	25	_	:1
Ston Bond Unner	Insertion Loss	F4-F5	3600-5700	_	25	_	dB
Stop Band, Upper	VSWR	F4-F5	3600-5700	_	20	_	:1

^{1.} Measured on Mini-Circuits Characterization Test Board TB-270.

Typical Frequency Response




Functional Schematic




Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
0.30	67.55	3349.77
300.00	29.47	107.34
1000.00	35.80	69.99
1400.00	52.82	46.90
1550.00	23.37	28.71
1800.00	2.50	1.58
1850.00	2.02	1.58
1900.00	1.88	1.69
2040.00	1.76	1.29
2200.00	5.25	5.68
2500.00	13.24	27.99
2900.00	20.02	53.43
4500.00	46.92	47.55
4900.00	37.86	44.11
5700.00	32.47	27.83



BFCN-1945+ INSERTION LOSS 100 (gB) 80 2.0 **INSERTION LOSS** 60 40 20 1000 6000 0 3000 4000 5000 FREQUENCY (MHz)



- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.


 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

^{2.} This filter is not intended for use as a DC Blocking circuit element. In Application where DC voltage is present at either input or output ports, blocking capacitors are required at the corresponding RF port.

(MHz) (dB) (dB) 0.3 67.55 0.01 1.0 57.63 0.00 3.0 47.89 0.00 10.0 37.53 0.00 30.0 28.64 0.01 70.0 23.94 0.06 100.0 23.40 0.08 300.0 29.47 0.16 500.0 38.57 0.19 700.0 48.02 0.21	
1.0 57.63 0.00 3.0 47.89 0.00 10.0 37.53 0.00 30.0 28.64 0.01 70.0 23.94 0.06 100.0 23.40 0.08 300.0 29.47 0.16 500.0 38.57 0.19	
3.0 47.89 0.00 10.0 37.53 0.00 30.0 28.64 0.01 70.0 23.94 0.06 100.0 23.40 0.08 300.0 29.47 0.16 500.0 38.57 0.19	
10.0 37.53 0.00 30.0 28.64 0.01 70.0 23.94 0.06 100.0 23.40 0.08 300.0 29.47 0.16 500.0 38.57 0.19	
30.0 28.64 0.01 70.0 23.94 0.06 100.0 23.40 0.08 300.0 29.47 0.16 500.0 38.57 0.19	
70.0 23.94 0.06 100.0 23.40 0.08 300.0 29.47 0.16 500.0 38.57 0.19	
100.0 23.40 0.08 300.0 29.47 0.16 500.0 38.57 0.19	
300.0 29.47 0.16 500.0 38.57 0.19	
500.0 38.57 0.19	
700.0 48.02 0.21	
1000.0 35.80 0.25	ļ
1200.0 34.76 0.28	
1300.0 37.00 0.31	
1400.0 52.82 0.37	
1450.0 38.04 0.42 1500.0 29.50 0.49	
1600.0 18.05 0.84	
1650.0 13.00 1.35	
1700.0 8.24 2.66	
1750.0 4.41 6.20	
1800.0 2.50 12.96	
1850.0 2.02 12.92	
1875.0 1.95 11.99	
1900.0 1.88 11.83	
1950.0 1.72 14.07	
1975.0 1.65 17.21	
2000.0 1.62 23.39	
2020.0 1.65 24.59	
2040.0 1.76 17.88	
2060.0 1.94 13.43	
2080.0 2.21 10.43	
2200.0 5.25 3.09	
2400.0 10.96 0.90	
2600.0 15.21 0.48	
2800.0 18.55 0.36 2900.0 20.02 0.33	
2900.0 20.02 0.33 3000.0 21.38 0.30	
3200.0 23.94 0.29	
3400.0 25.54 0.29	
3600.0 29.39 0.30	
3800.0 32.78 0.32	
4000.0 37.23 0.33	
4200.0 44.12 0.34	
4400.0 52.63 0.36	
4600.0 42.92 0.38	
4800.0 39.04 0.39	
5000.0 37.06 0.40	
5200.0 36.51 0.42	
5400.0 38.52 0.45	
5500.0 40.81 0.49	
5600.0 39.89 0.53	
5700.0 32.47 0.62	
5800.0 24.79 0.89	
5900.0 17.91 1.63	
6000.0 14.54 2.01	

Page 1 of 1

Typical Performance Curves

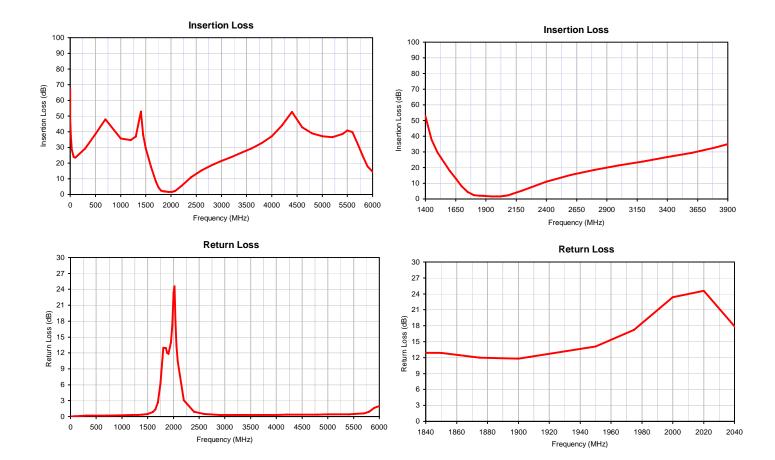




Case Style



FV1206

Outline Dimensions

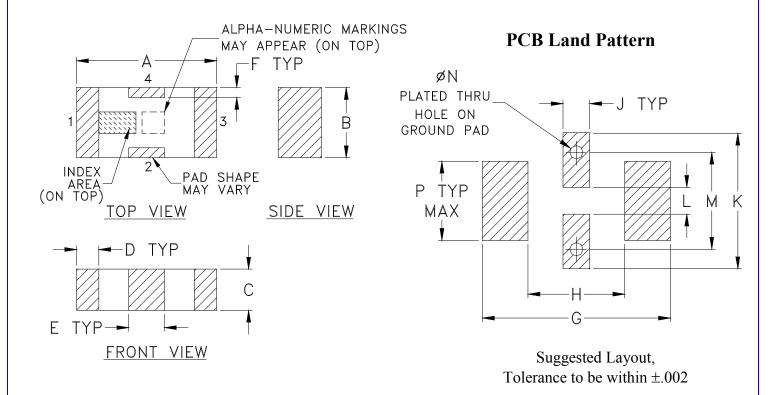

CASE #	A	В	С	D	Е	F	G	Н	J	K	L	M	N	P	WT. GRAM
FV1206	.126 (3.20)	.063 (1.60)	.037 (0.94)	.020 (0.51)	.032 (0.81)	.009 (0.23)	.169 (4.29)	.087 (2.21)	.024 (0.61)	.122 (3.10)	.024 (0.61)	.087 (2.21)	.012 (0.30)	.071 (1.80)	.020

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .01; 3 Pl. ± .005

Notes:

- 1. Open style, ceramic base.
- 2. Termination finish: as shown below or indicated on Data Sheet.

For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.

For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.





P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

98-FV Rev.: V (12/1118) M171394 File: 98-FV.docx This document and its contents are the property of Mini-Circuits.

Tape & Reel Packaging TR-F71

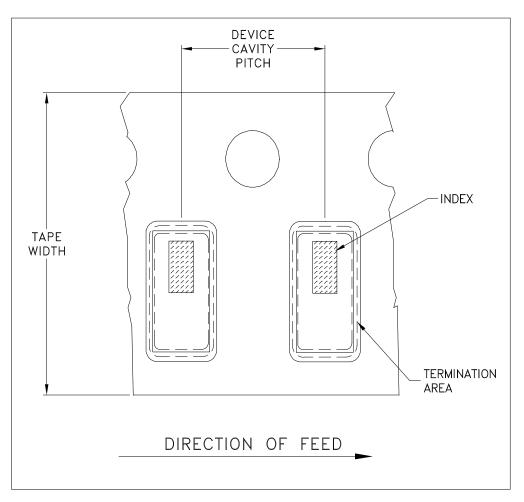


ILLUSTRATION 1

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel 20 Small 50 quantity 100		
				20	
			Small	50	
			quantity	100	
8	4	7	standards	200	
			(see note)	500	
				1000	
			Standard	3000	

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf





P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site


The Design Engineers Search Engine Provides ACTUAL Data Instantly From MiNi-CIRCUITS At: www.minicircuits.com

THIRD ANGLE PROJECTION

PLE PROJECTION
-[

		REVISIONS			
REV	ECN No.	DATE	DR	AUTH	
OR	M88634	NEW RELEASE	08/28/03	GF	ABD
A	M102713	ADDED "WITH SMOBC"	01/17/06	MMG	IL

SUGGESTED MOUNTING CONFIGURATION FOR FV1206 CASE STYLE, "nx" PIN CONNECTION

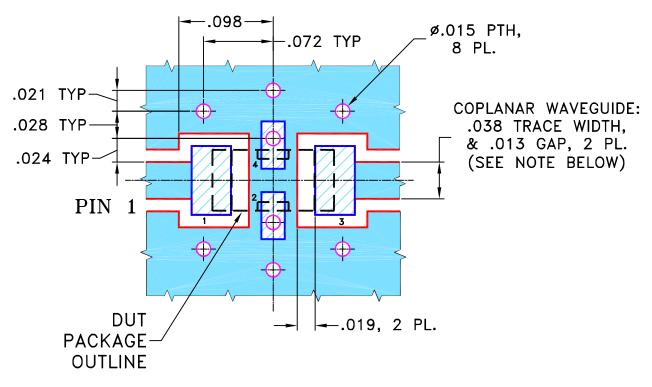

NOTES: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH THICKNESS .020" ± .0015".

COPPER: 1/2 OZ. EACH SIDE.

FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.




DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)




DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE		¬		~	•	. (R)			
DIMENSIONS ARE IN INCHES	DRAWN	GF	08/27/03]	\perp M1	nı	\mathbf{C}	ircu	its :	3 Neptu	ne Aver	nue
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	AV	08/28/03	Mini-Circuits® 13 Neptune Brooklyn N					NI IIA	NY 11235		
3 PL DECIMALS ± .005	APPROVED	ABD	08/28/03									
ANGLES ± FRACTIONS ±				\square PL, nx, FV1206, LFCN/HFCN, TB						B-2	3-270	
∏ Mini-	☐ Mini-Circuits ®							, ,	,	.,		-
THIS DOCUMENT AND ITS CONTENTS A EXCEPT FOR USE EXPRESSLY GRANTE					T						1	
AND THE UNITED STATES GOVERNMEN				SIZE	CODE IDE	.NT	DRAWING				REV:	
DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE			A	1554	3		98-PL	-137		,	A	
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.				FILE: C	8PL13	~	SCALE:	10.1	SHEET:	1	ΛE	1
ASHEETA1.DWG REV:A DATE:01/12/95					OPLIS	· (10:1		1	OF'	1

Evaluation Board and Circuit

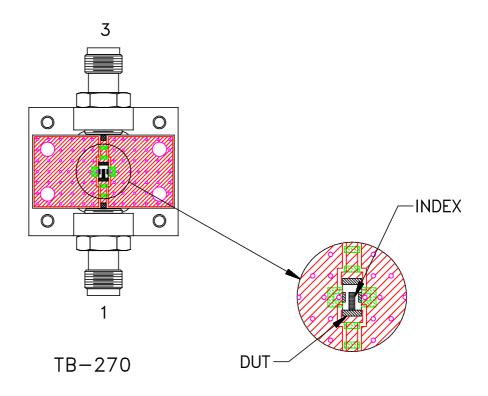


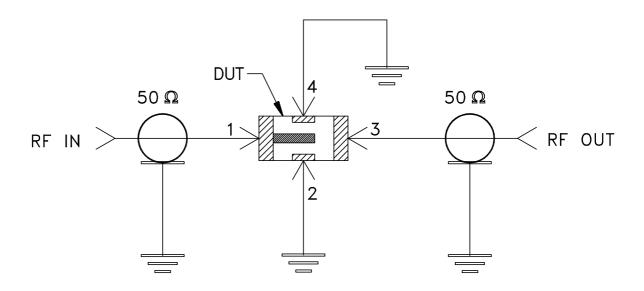

Schematic Diagram

Notes:

- 1. SMA Female connectors.
- 2. PCB Material: ROGERS RO4350 or equivalent, Dielectric Constant=3.5, Thickness=.020 inch.





ENV28



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I

ENV28 Rev: B

09/26/13

3 M143494 File: ENV28.pdf

This document and its contents are the property of Mini-Circuits.