**BFCN-2491+** 

50Ω 1950 to 3190 MHz

# **The Big Deal**

- Small size 3.2mm x 1.6mm
- Pass band (1950 to 3190 MHz)
- High rejection in upper stopband



CASE STYLE: FV1206-7

### **Product Overview**

The BFCN-2491+ LTCC Band Pass Filter achieves a miniature size and high repeatability of performance. Wrap-around terminations minimize variations in performance due to parasitics. Covering 1950 to 3190 MHz, these units offer excellent rejection over a deep stopband.

# **Key Features**

Feature	Advantages
Small Size (3.20mm x1.6 mm)	Allows for high layout density of circuit boards, while minimizing effects of parasitics.
Rejection peaks close to pass band	Provides good rejection of signals close to the pass band, for improved system performance.
Wide stopband	No regrowth out to 3 <sup>rd</sup> harmonic permits filter to be used in presence of wideband interfering signals.
LTCC construction	Provides a rugged package that is well suited for tough environments including high humidity and high temperature extremes.

# Ceramic

# **Bandpass Filter**

1950 to 3190 MHz  $50\Omega$ 

#### **Features**

- Small size
- Temperature stable
- Hermetically sealed
- LTCC construction

#### **Applications**

- Harmonic Rejection
- Transmitters / Receivers

# BFCN-2491+



Generic photo used for illustration purposes only

CASE STYLE: FV1206-7

+ROHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications




#### **Maximum Ratings**

Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
RF Power Input	1W max.

Permanent damage may occur if any of these limits are exceeded.


# Top View



#### **Pad Connections**

Input	1
Output	3
Ground	2

#### **Functional Schematic**



#### Electrical Specifications<sup>1,2</sup> at 25°C


Para	meter	F#	Frequency (MHz)	Min.	Тур.	Max.	Unit
	Center Frequency	_			2491		MHz
Pass Band	Insertion Loss	F1-F2	1950-3190	_	1.2	3.0	dB
	Return Loss	F1-F2	1950-3190	_	15	_	dB
Stop Band, Lower	Insertion Loss	DC-F3	DC-1440	20	22	_	dB
Stop Band, Upper	Insertion Loss	F4-F5	4500-10000	20	29	_	dB

- 1. Measured on Mini-Circuits Characterization Test Board TB-812+.
- 2. This filter is not intended for use as a DC Blocking circuit element. In Application where DC voltage is present at either input or output ports, blocking capacitors are required at the corresponding RF port.


### Typical Performance Data at 25°C


Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
500	-46.14	-0.06
1000	-25.95	-0.26
1400	-21.64	-0.56
1700	-9.28	-2.41
1800	-2.67	-9.20
2200	-0.78	-20.19
2600	-0.70	-23.38
3200	-0.92	-25.70
3400	-1.55	-11.95
3600	-4.30	-4.19
4200	-22.20	-0.49
4600	-36.37	-0.34
7000	-31.12	-0.29
8600	-33.77	-0.29
10000	-29.70	-0.21

### **Specification Definition**










#### **Outline Drawing**

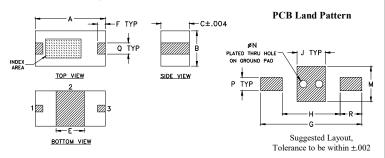

Product Marking: N/A


#### **Pad Connections**

Input	1
Output	3
Ground	2

#### Outline Dimensions (inch )

Н	G	F	Е	С	В	Α
.104	.183	.014	.051	.051	.063	.126
2.64	4.65	0.36	1.30	1.30	1.60	3.20
wt	R	O	Р	N	М	J
			.024			.051

#### Demo Board MCL P/N: TB- 812+ Suggested PCB Layout (PL-439)



#### NOTES:

- 1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



## **Additional Notes**


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp





FREQUENCY	INSERTION LOSS	RETURN LOSS
(MHz)	(dB)	(dB)
10	76.41	0.00
55	66.83	0.00
100	62.35	0.00
200 300	59.49 66.91	0.01 0.03
400	56.80	0.04
500	46.14	0.06
600 700	39.80 35.15	0.09 0.13
800	31.46	0.17
900	28.46	0.21
1000	25.95	0.26
1100 1200	23.89 22.32	0.32 0.38
1300	21.38	0.46
1400	21.64	0.56
1500	25.51	0.69
1600 1700	24.02 9.28	0.99 2.41
1800	2.67	9.20
1900	1.21	27.52
2000	0.99	18.31
2073	0.90	17.64
2100 2150	0.87 0.83	17.87 18.80
2200	0.78	20.19
2250	0.75	21.75
2300	0.72	23.19
2350 2400	0.70 0.69	24.32 24.78
2450	0.69	24.53
2500	0.69	24.09
2550	0.69	23.68
2600 2650	0.70 0.70	23.38 23.30
2700	0.70	23.44
2750	0.71	23.69
2800	0.72	24.05
2850 2900	0.74 0.75	24.50 24.91
2950	0.75	25.50
3000	0.79	26.13
3050	0.80	26.65
3100 3200	0.83 0.92	27.26 25.70
3400	1.55	11.95
3600	4.30	4.19
3800	9.74	1.48
4000 4146	15.98 20.52	0.74 0.54
4200	22.20	0.54 0.49
4400	28.64	0.39
4600	36.37	0.34
4800 5000	51.28 45.37	0.29 0.27
5200	39.56	0.27
5400	37.02	0.24
5600	35.48	0.23
5800 6000	34.42 33.62	0.23 0.23
6200	32.93	0.23
6400	32.40	0.25
6600	31.92	0.26
6800 7000	31.46 31.12	0.28 0.29
7000 7200	31.12	0.29
7400	30.58	0.33
7600	30.50	0.35
7800	30.68	0.36
8000 8600	31.18 33.77	0.35 0.29
8800	30.27	0.29
9000	30.95	0.23
9600	30.31	0.20
10000	29.70	0.21






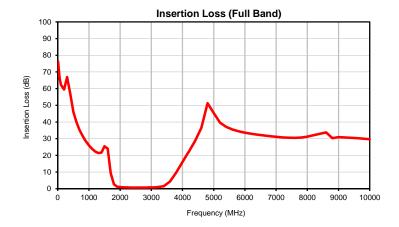

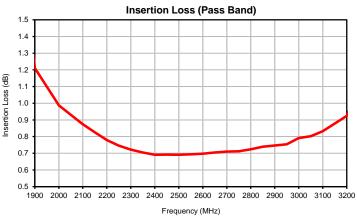

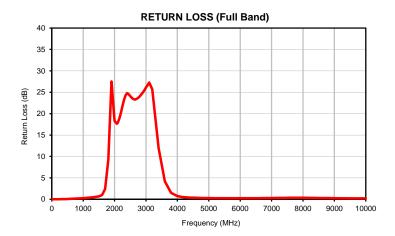

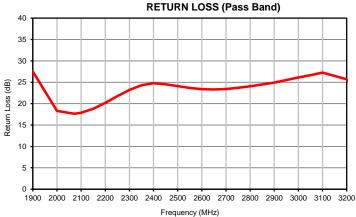




# Case Style



FV1206-7

# **Outline Dimensions**

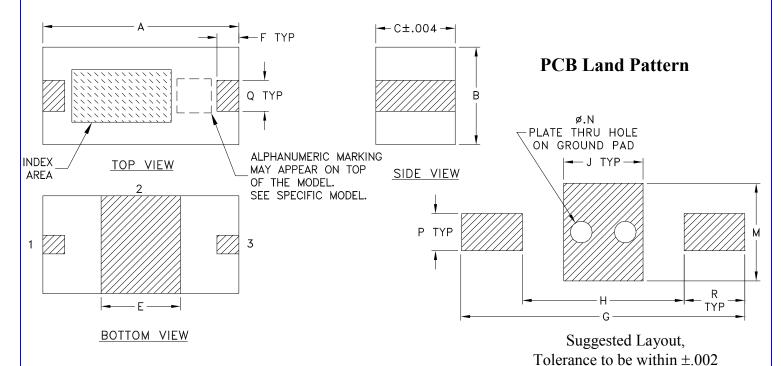

CASE #	A	В	С	D	Е	F	G	Н	J	K	L	M
FV1206-7	.126 (3.20)	.063 (1.60)	.051 (1.30)		.051 (1.30)	.014 (0.35)	.183 (4.65)	.104 (2.65)	.051 (1.30)	1 1		.063 (1.60)

CASE#	N	P	Q	R	S	WT. GRAM
FV1206-7	.014 (0.35)	.024 (0.60)	.020 (0.50)	.039 (1.00)		.020

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .01; 3 Pl. ± .005

### **Notes:**

- 1. Open style, ceramic base.
- 2. Termination finish: as shown below or indicated on Data Sheet.

For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.

For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

3. Line width should be designed to match  $50\Omega$  characteristic impedance, depending on PCB material and thickness.





P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site


The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com


RF/IF MICROWAVE COMPONENTS

# Tape & Reel Packaging


# TR-F75

### **DEVICE ORIENTATION IN T&R**






FV1206-1 FV1206-3



Applicable Case Styles
FV1206-4
FV1206-5
FV1206-6
FV1206-7
FV1206-9



Applicabl	e Case Styles
FV1206-1	12
GE0805C	C-18
NL1008C	2-6
NL1008C	2-7
NL1008C	:-9
NL1008C	C-10

#### **ILLUSTRATION 3**

ILLUSTRATION 1

ILLUSTRATION 2

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices p	oer Reel
			Small	20
			quantity	50
			standards	100
8	4	7	(see note)	200
				500
				1000
			Standard	3000

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf

Mini-Circuits ISO 9001 & ISO 14001 Certified



INTERNET http://www.minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

# THIRD ANGLE PROJECTION

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M148536	NEW RELEASE	10/14/14	GF	MY

# SUGGESTED MOUNTING CONFIGURATION FOR FV1206-7 CASE STYLE, "03FL02" PIN CODE

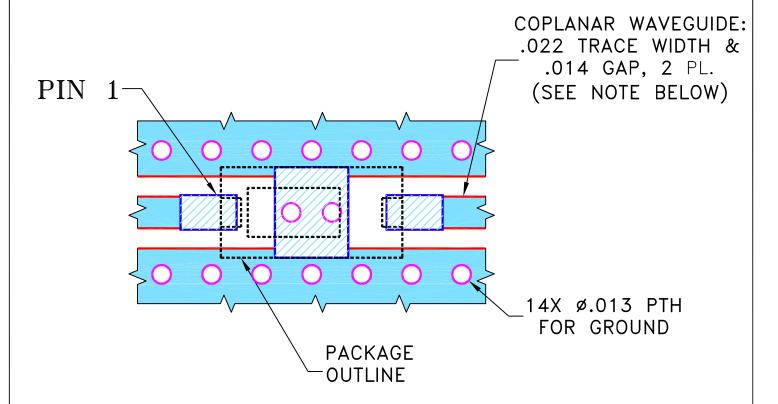

# NOTES:

- 1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010"  $\pm$  .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.




DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).




DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE			. ~		• 4 R			
DIMENSIONS ARE IN INCHES	DRAWN	GF	10/07/14		$\square$ Mini	<b>1 — C</b> i	ırcu	1ts	13 Neptur Brooklyn	ne Avenu	ue
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	AV	10/14/14	1111					Brooklyn	NI IIZO	ວ <sub>ັ</sub> ວ
3 PL DECIMALS ± .005 ANGLES ±	APPROVED	MY	10/14/14								
FRACTIONS ±				PL, 03FL02, FV1206-7, TB-812+				+			
⊞ Mini−Circuits ®											
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.  EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE  AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY  DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO.  THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE			SIZE A	code ident 15542	DRAWING		-PL-4	139	REV:	DR	
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.  ASHEETA1.DWG REV:A DATE:01/12/95		FILE: Q	8PL439	SCALE:	15:1	SHEET:	1	OF .	1		

# Evaluation Board and Circuit

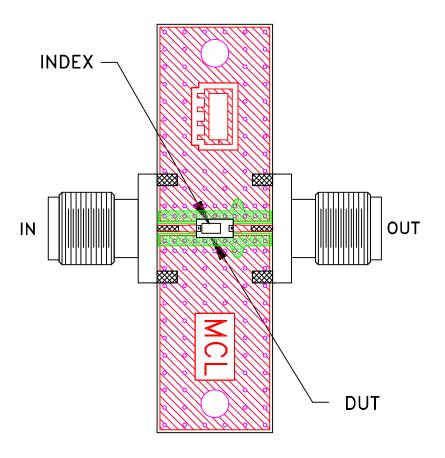


TB-812+

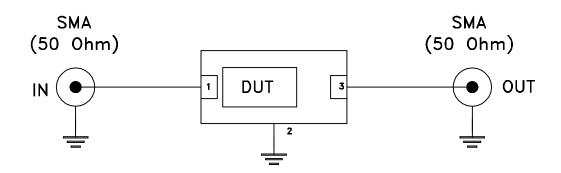

Schematic Diagram

## Notes:

- 1. 50 Ohm SMA Female connectors.
- 2. PCB Material: R04350 or equivalent, Dielectric Constant=3.5, Thickness=.010 inch.





### **Environmental Specifications**

ENV06

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec		
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet		
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet		
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours		
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1		
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage		
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D		
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A		

ENV06 Rev: A

02/25/11

M130240 File: ENV06.pdf