

Ceramic

Bandpass Filter

BFCN-2500AT+

50Ω 2100 to 2900 MHz

The Big Deal

- LTCC construction
- Temperature stable from -40 to +105°C
- Small size (0.126 x .063 X .037")
- AEC-Q200 qualified component family



CASE STYLE: FV1206-4

Product Overview

Key Features

Feature	Advantages
LTCC Construction	Provides a rugged package well suited for tough environments such as high humidity and temperature extremes.
Tiny size (0.126 x .063 x .037")	Saves space in dense circuit boards and minimizes the effects of parasitics.
Wrap-around terminations	Provides excellent solderability and easy visual inspection
Wide operating temperature range, -40 to +105°C	Enables reliable performance in extreme environments



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Ceramic Bandpass Filter

50Ω 2100 to 2900 MHz

BFCN-2500AT+



Generic photo used for illustration purposes only

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel
at no extra cost
Reel Size Devices/Reel
7" 20, 50, 100, 200, 500, 1000, 3000


Features

- Good VSWR, 1.8:1 typ. @ passband
- Small size(0.126 x .063 x .037)
- Temperature stable
- LTCC construction
- AEC-Q200 qualified component family

Applications

- Automotive

Specification Definition

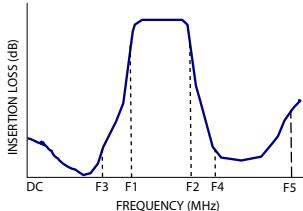


Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	—	—	2500	—	MHz
	Insertion Loss	F1 - F2	2100 - 2900	—	2	3.7	dB
	VSWR	F1 - F2	2100 - 2900	—	1.8	2.6	:1
Stop Band, Lower	Insertion Loss	DC - F3	1600	—	20	—	dB
	VSWR	DC - F3	1600	—	20	—	:1
Stop Band, Upper	Insertion Loss	F4 - F5	3700 - 5200	—	20	—	dB
	VSWR	F4 - F5	3700 - 5200	—	15	—	:1


1. Measured on Mini-Circuits Characterization Test Board TB-824+ using BFCN-2500+.

2. This filter is not intended for use as a DC Blocking circuit element. In Application where DC voltage is present at either input or output ports, blocking capacitors are required at the corresponding RF port.

Functional Schematic

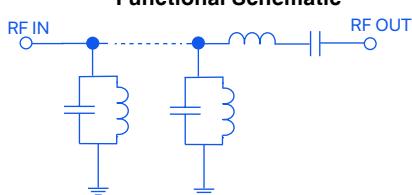

Top View

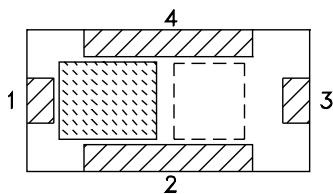

Pad Connections

Input	1
Output	3
Ground	2,4

Electrical Specifications^{1,2} at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	—	2500	—	MHz
	Insertion Loss	F1 - F2	2100 - 2900	2	3.7	dB
	VSWR	F1 - F2	2100 - 2900	1.8	2.6	:1
Stop Band, Lower	Insertion Loss	DC - F3	1600	—	—	dB
	VSWR	DC - F3	1600	20	—	:1
Stop Band, Upper	Insertion Loss	F4 - F5	3700 - 5200	—	20	dB
	VSWR	F4 - F5	3700 - 5200	15	—	:1


Maximum Ratings

Operating Temperature	-40°C to +105°C
Storage Temperature	-40°C to +105°C
RF Power Input*	2.5 W at +25°C


*Passband rating, derate linearly to 0.7 W at +105°C ambient

Permanent damage may occur if any of these limits are exceeded.


INSERTION LOSS (Full Band)

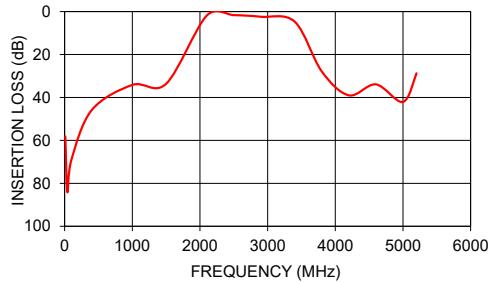


INSERTION LOSS (Pass Band)

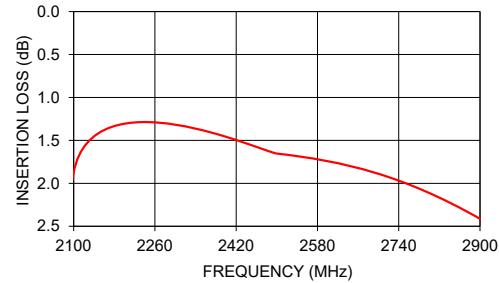

VSWR

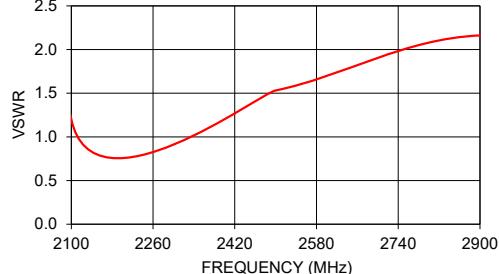

GROUP DELAY

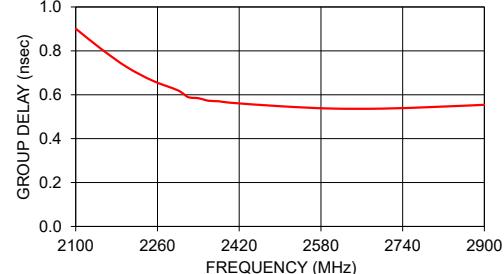

 **Mini-Circuits®**

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
NPO-005288
BFCN-2500AT+
ED-17087
250602

Page 2 of 3

Bandpass Filter

BFCN-2500AT+

Full Band Performance

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Insertion Loss (dB)	Group Delay (nsec)
10	58.18	79.99	2100	1.88	0.90
40	84.01	78.80	2150	1.70	0.81
100	69.04	74.42	2200	1.63	0.73
400	45.88	61.11	2250	1.60	0.66
1000	34.16	43.74	2300	1.60	0.62
1500	33.62	29.10	2320	1.60	0.59
2100	1.88	1.20	2340	1.60	0.58
2500	1.65	1.53	2360	1.61	0.57
2900	2.41	2.16	2380	1.61	0.57
3400	4.69	1.76	2400	1.62	0.56
3800	27.88	14.98	2500	1.65	0.55
4200	39.01	20.59	2600	1.74	0.54
4600	33.90	20.73	2700	1.89	0.54
5000	42.09	11.56	2800	2.11	0.54
5200	28.75	6.04	2900	2.41	0.55


Pass Band Performance

Pad Connections

Input	1
Output	3
Ground	2,4

Product Marking:


Outline Drawing

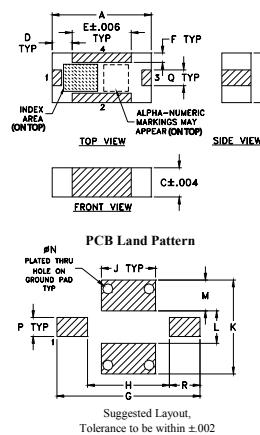

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J
.126	.063	.037	.026	.075	.012	.182	.104	.069
3.20	1.60	0.94	0.66	1.91	0.30	4.62	2.64	1.75
K	L	M	N	P	Q	R	wt	
.119	.041	.039	.013	.024	.020	.039	grams	
3.02	1.04	0.99	0.33	0.61	0.51	0.99		.020

Demo Board MCL P/N: TB-824+ Suggested PCB Layout (PL-454)

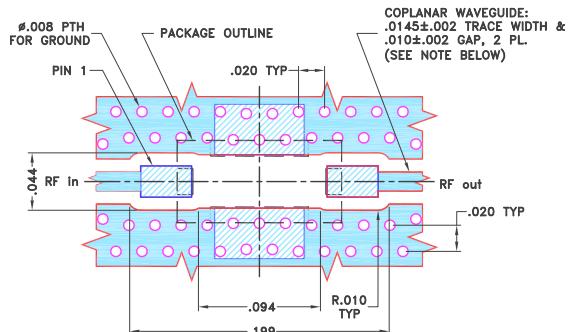

NOTES:

1. TRACE WIDTH PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .0066"±.0007". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMBC (SOLDER MASK OVER BARE COPPER).
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

NOTES



- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/terms/viewterm.html

Case Style


FV

FV1206-4

Outline Dimensions

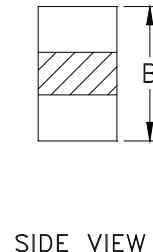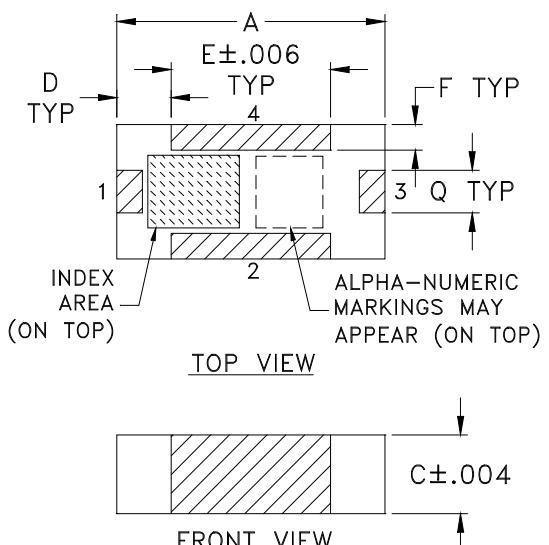

PCB Land Pattern

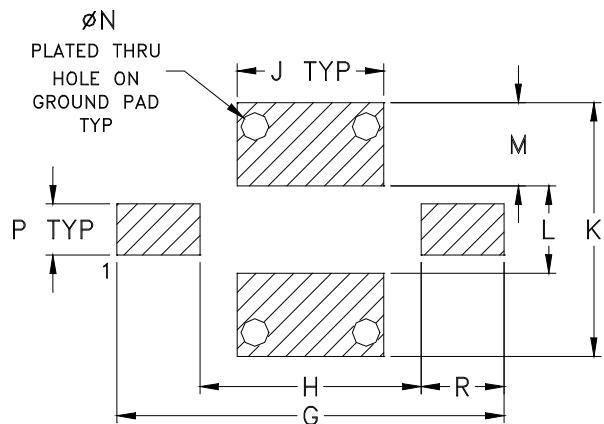

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L	M
FV1206-4	.126 (3.20)	.063 (1.60)	.037 (0.94)	.026 (0.66)	.075 (1.91)	.012 (0.30)	.182 (4.62)	.104 (2.64)	.069 (1.75)	.119 (3.02)	.041 (1.04)	.039 (0.99)

CASE #	N	P	Q	R	WT. GRAM
FV1206-4	.013 (0.33)	.024 (0.61)	.020 (0.51)	.039 (0.99)	.020

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

1. Open style, ceramic base.
2. Termination finish: as shown below or indicated on Data Sheet.
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

 **Mini-Circuits®**
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

98-FV Rev.: V (12/1118) M171394 File: 98-FV.docx

This document and its contents are the property of Mini-Circuits.

Sheet 4 of 8

Tape & Reel Packaging

TR-F75

DEVICE ORIENTATION IN T&R

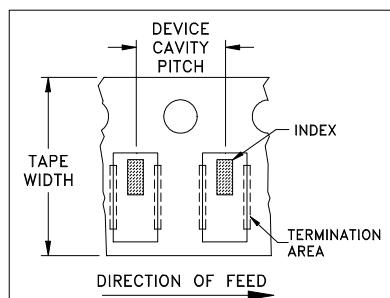


ILLUSTRATION 1

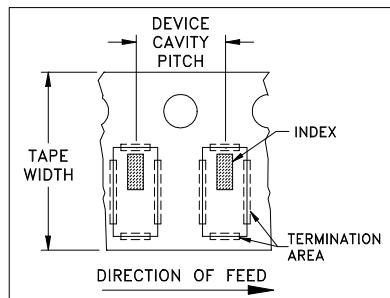


ILLUSTRATION 2

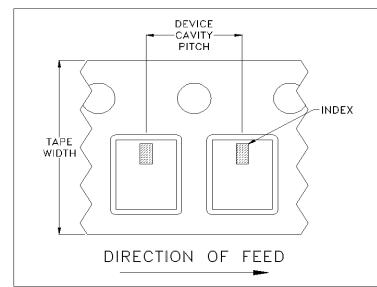


ILLUSTRATION 3

Applicable Case Styles

FV1206-1
FV1206-3

Applicable Case Styles

FV1206-4
FV1206-5
FV1206-6
FV1206-7
FV1206-9

Applicable Case Styles

FV1206-11
FV1206-12
GE0805C-18
NL1008C-6
NL1008C-7
NL1008C-9
NL1008C-10
NL1008C-12

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
8	4	7	Small quantity standards (see note)
			20
			50
			100
			200
			500
			1000
		Standard	3000

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISI

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M152168	NEW RELEASE	07/31/15	ITG	AVB

SUGGESTED MOUNTING CONFIGURATION
FOR FV1206-4 CASE STYLE, "04FL01" PIN CODE

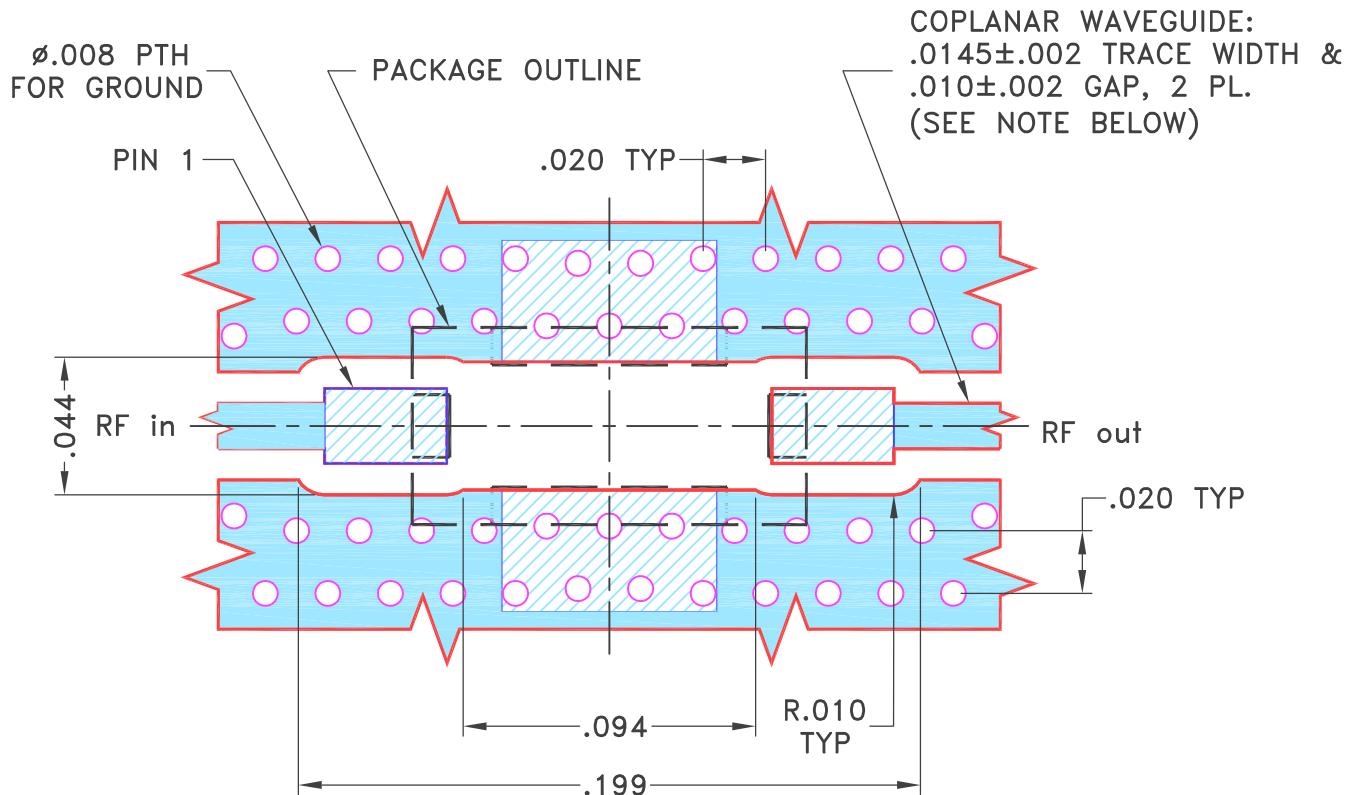NOTES:

1. TRACE WIDTH PARAMETERS ARE SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS $.0066\pm.0007$ ". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS \pm 3 PL DECIMALS $\pm .005$ ANGLES \pm FRACTIONS \pm

INITIALS

DRAWN

CHECKED

APPROVED

DATE

ITG

GF

AVB



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, 04FL01, FV1206-4, TB-824+

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-454	OR
FILE:	98PL454	SCALE: 16:1	SHEET: 1 OF 1

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.
 EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE
 AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY
 DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO.
 THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE
 PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.