



CERAMIC

# Bandpass Filter

## BFCV-2792+

Mini-Circuits

50Ω 27.5 to 28.35 GHz

### THE BIG DEAL

- 5G n261 bandpass filter
- Low Insertion Loss – Mid band 3 dB typical
- Pick and place standard case style
- Small size 3.2mm x 2.5mm
- Reduced footprint area by employing LGA (Land grid array)
- Suited for very high-volume production
- High quality distributed filter topology



Generic photo used for illustration purposes only

CASE STYLE: JV1210C-10

#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### APPLICATIONS

- 5G Telecommunications

### PRODUCT OVERVIEW

The BFCV-2792+ LTCC Bandpass Filter covers the 5G n261 band. This corresponds to a passband of 27.5 to 28.35 GHz, with as low as 2.3 dB passband loss, and up to 35dB stopband rejection. This model handles up to 1W RF input power and provides a wide operating temperature range from -55 to +125°C. Utilizing a proprietary LTCC material system and a distributed filter topology, this filter is able to achieve repeatable performance on a lot-to-lot basis, up to mmWave frequencies.

### KEY FEATURES

Feature	Advantages
5G n261 band compatible	Designed for 5G Telecommunications, n261 band, 27.5 - 28.35 GHz
Proprietary mmWave compatible LTCC material system	Low loss and repeatable performance on a lot-to-lot basis up to mmWave frequencies.
Cost effective	LTCC is scalable technology that allows for cost reduction at volume.
Small size (3.2mm x 2.5mm)	Allows for high layout density of circuit boards, while minimizing effects of parasitics.
Surface Mountable	Suitable for very high volume automated assembly process





CERAMIC

# Bandpass Filter

## BFCV-2792+

### ELECTRICAL SPECIFICATIONS<sup>1</sup> AT 25°C

Parameter	F#	Frequency (GHz)	Min.	Typ.	Max.	Units
Center Frequency	—	—	—	28.3	—	GHz
Passband	Insertion Loss	F1-F2	27.5 - 28.35	—	3.0	dB
	Return Loss	F1-F2	27.5 - 28.35	—	11	dB
Stop Band, Lower	Insertion Loss	DC-F3	0.1 - 21	35	42	—
			21 - 25.5	20	26	—
Stop Band, Upper	Insertion Loss	F4-F5	31 - 35	16	22	—
			35 - 45	—	12	—


1. Measured on Mini-Circuits Test Board TB-BFCV-2792C+ with feedline losses removed by normalization of S12 and S21 traces to measurement of the thru-line.

### MAXIMUM RATINGS


Parameter	Ratings
Operating temperature	-55°C to +125°C
Storage temperature	-55°C to +125°C
RF Power Input	1W max.

Permanent damage may occur if any of these limits are exceeded.

### TYPICAL FREQUENCY RESPONSE

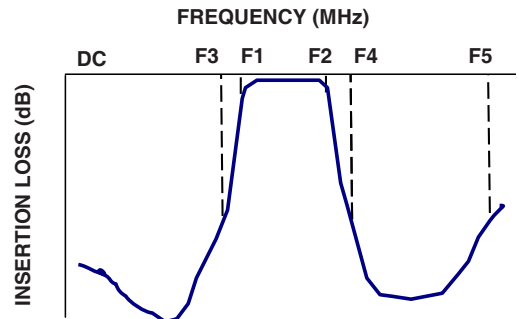

### FUNCTIONAL SCHEMATIC

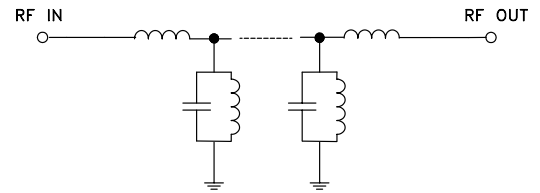



CERAMIC

# Bandpass Filter


## BFCV-2792+

### PAD CONNECTIONS



INPUT	1
OUTPUT	2
GROUND	3

PRODUCT MARKING: N/A


DEMO BOARD MCL P/N: TB-BFCV-2792C+  
 SUGGESTED PCB LAYOUT: PL-712

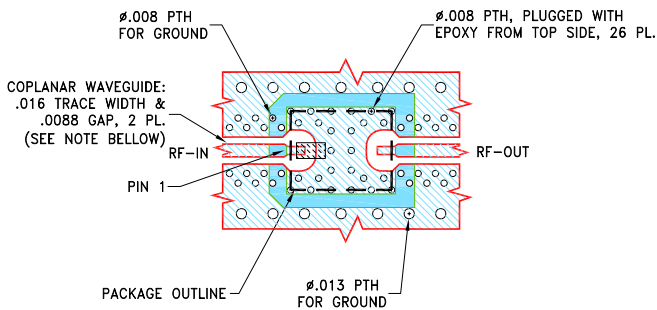

**NOTES:**

1. TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR MEGTRON-7 R5785(N); DIELECTRIC THICKNESS: .0079±.001; COPPER: HVLP/HVLP. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).  
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

### OUTLINE DRAWING

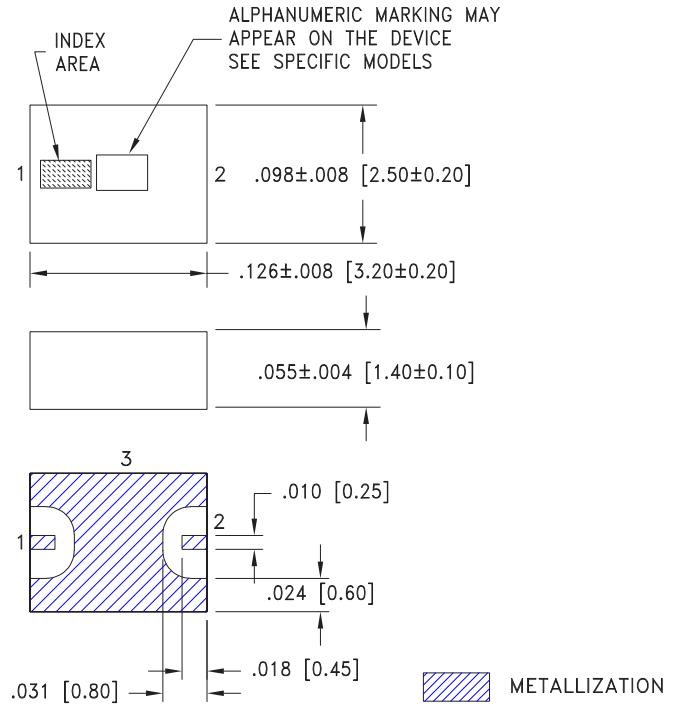

Weight: .045 grams

Dimensions are in inches (mm). Tolerances: 3 Pl. ±.005






CERAMIC

# Bandpass Filter

## BFCV-2792+

### TYPICAL PERFORMANCE DATA AT 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
100	88.09	0.01
5000	68.52	0.54
10000	52.51	0.65
12500	48.81	0.77
15000	48.32	0.88
17500	54.91	0.98
20000	59.70	0.98
22500	41.35	1.38
25000	31.80	1.39
27500	2.17	13.76
28300	1.58	25.19
28400	1.61	30.54
30000	32.58	1.99
32500	25.47	2.37
35000	26.66	2.55
37500	17.32	4.79
40000	15.22	4.12
42500	12.37	6.58
45000	17.23	2.36
50000	17.34	5.01

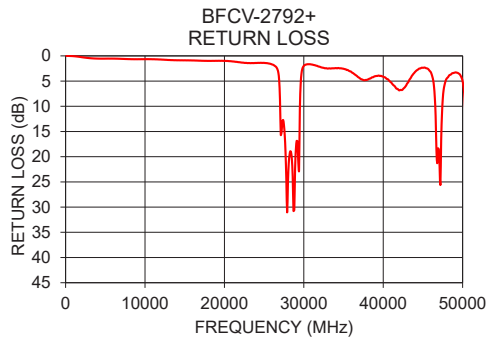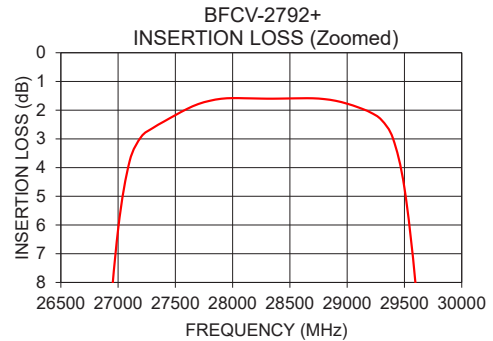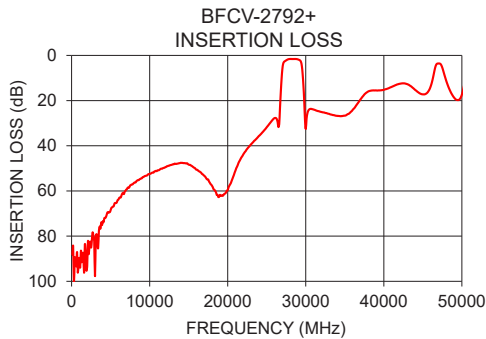

#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT RETURN LOSS (dB)	OUTPUT RETURN LOSS (dB)
100	88.09	0.01	0.01
2600	81.72	0.38	0.32
5100	67.51	0.54	0.50
7700	57.13	0.63	0.56
10200	52.19	0.65	0.60
12800	48.44	0.80	0.74
15300	48.76	0.89	0.79
17900	57.26	0.99	0.93
20400	56.53	1.01	0.95
23000	39.31	1.43	1.24
23100	38.97	1.42	1.25
26500	31.73	2.17	2.07
26600	30.43	2.40	2.26
26700	23.22	2.76	2.63
26800	16.38	3.41	3.27
26900	10.57	4.93	4.77
27000	6.15	8.72	8.55
27100	3.78	15.66	15.56
27200	2.94	15.15	15.13
27300	2.63	12.96	12.75
27400	2.40	12.72	12.46
27500	2.17	13.76	13.59
27600	1.96	15.81	15.73
27700	1.79	19.25	19.28
27800	1.67	24.61	26.03
27900	1.60	31.04	35.84
28000	1.58	25.19	25.10
28100	1.59	21.39	20.62
28200	1.59	19.67	18.52
28300	1.60	18.91	17.73
28400	1.60	19.20	17.74
28500	1.59	20.65	18.28
28600	1.59	23.89	19.87
28700	1.59	30.76	21.42
28800	1.61	30.54	21.53
28900	1.67	22.53	19.90
29000	1.78	18.56	17.47
29100	1.91	16.86	15.86
29200	2.07	16.97	15.54
29300	2.34	20.87	16.12
29400	2.99	22.68	14.29
29500	4.72	10.70	8.64
29600	8.20	5.74	4.81
29700	13.31	3.59	3.06
29800	19.82	2.66	2.32
29900	28.43	2.22	1.95
30000	32.58	1.99	1.75
30100	28.14	1.84	1.65
32500	25.47	2.37	2.24
35000	26.66	2.55	2.09
35100	26.61	2.60	2.10
36300	23.00	3.54	2.86
37500	17.32	4.79	3.95
38700	15.48	4.25	3.59
40000	15.22	4.12	3.47
40100	15.12	4.22	3.51
43000	12.72	5.51	4.65
46000	13.74	3.25	3.11
49000	18.66	3.33	2.91
52000	31.21	2.86	2.51
55000	24.23	2.31	2.96
58000	36.05	2.60	2.48
61000	20.17	2.63	3.10









P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site  
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)



IF/RF MICROWAVE COMPONENTS


## Typical Performance Curves

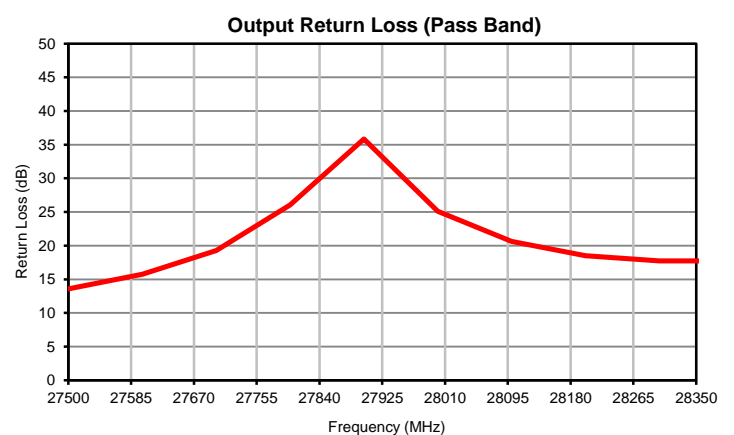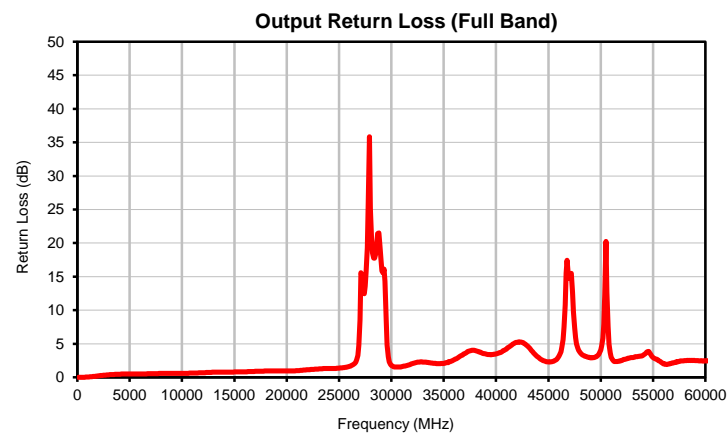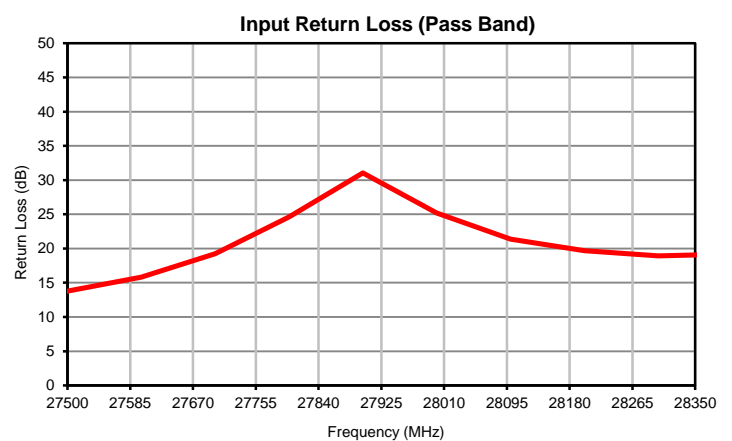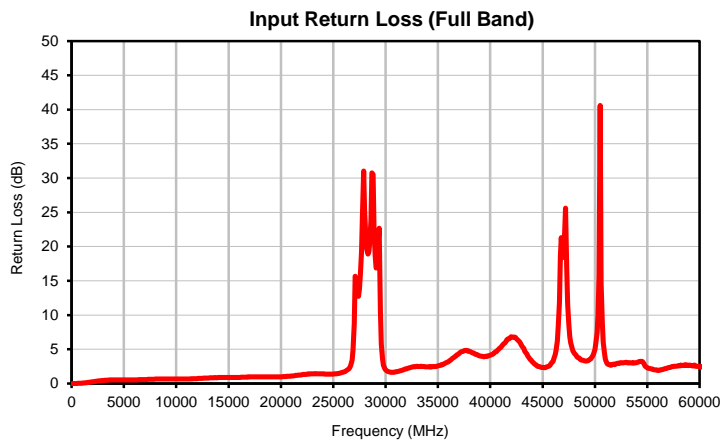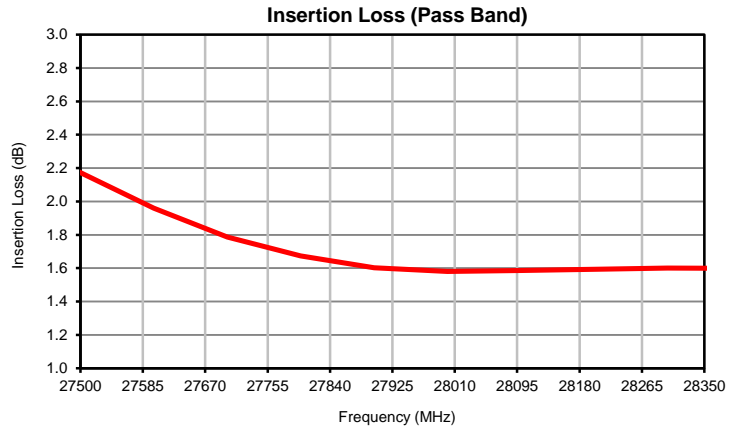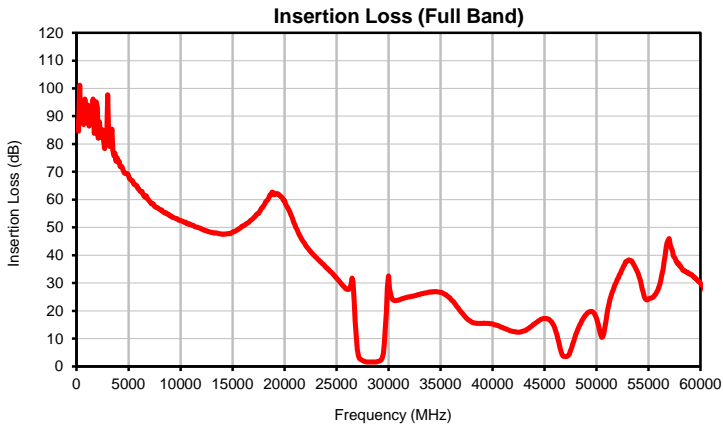


## Outline Dimensions

JV1210C-10


ALPHANUMERIC MARKING MAY APPEAR ON THE DEVICE SEE SPECIFIC MODELS

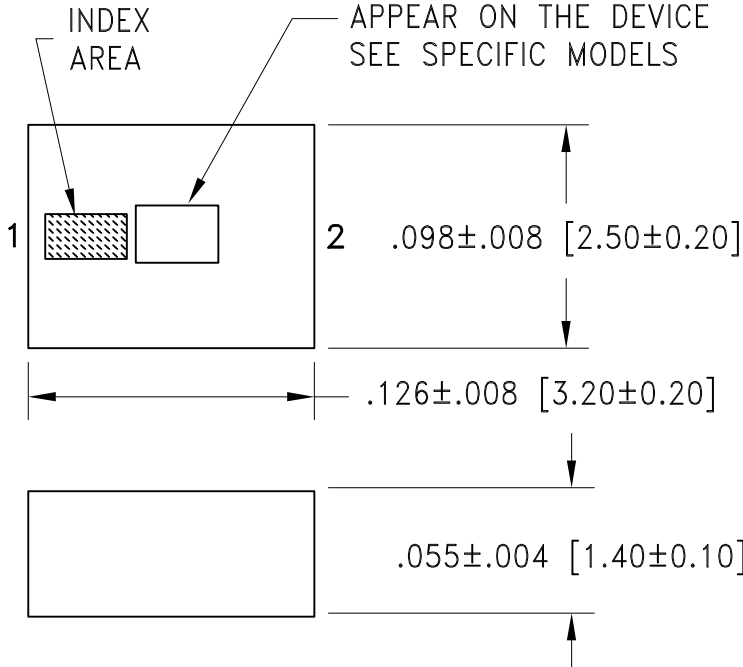

### PCB Land Pattern

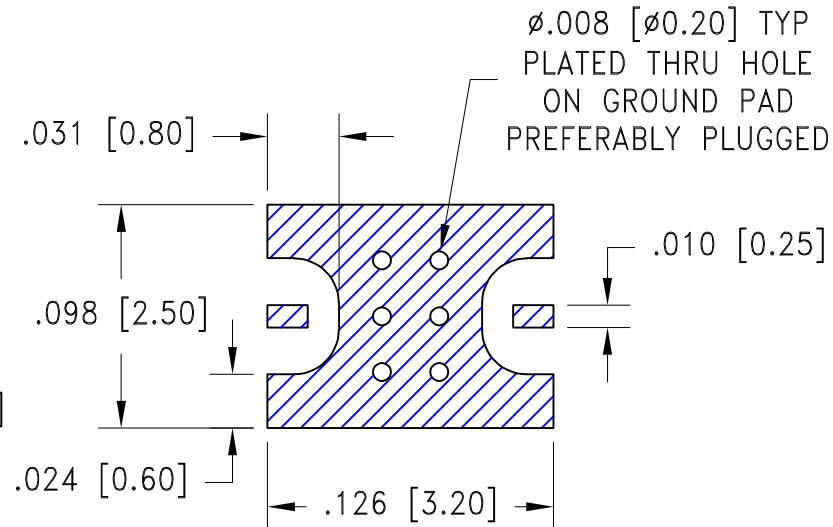

**Suggested Layout Tolerances to be within ±.002**

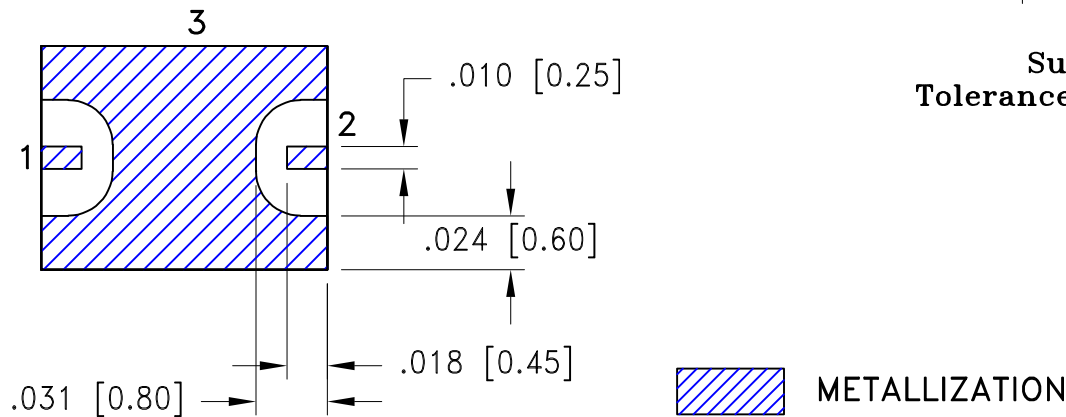

Weight: .045 grams

Dimensions are in inches (mm). Tolerances: 3 Pl. ±.005

### Notes:

1. Open style, ceramic base.
2. Termination finish: **as shown below or indicated on Data Sheet.**  
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.  
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.
3. Pad tolerance is non-cumulative. Minimum spacing between each pad is .004.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

# Tape & Reel Packaging TR-F74


## **DEVICE ORIENTATION IN T&R**

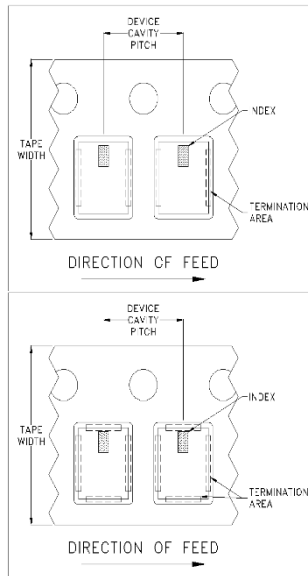

**ILLUSTRATION 1**

### Applicable Case Styles

GE0805C-1  
 GE0805C-1AP  
 JV1210C-1  
 GU2939



**ILLUSTRATION 2**

### Applicable Case Styles

JV1210C  
 JV1210C-2  
 JV1210C-3  
 JV1210C-4  
 JV1210C-5  
 JV1210C-6  
 JV1210C-11

**ILLUSTRATION 3**

### Applicable Case Styles

JC0603C-8  
 JC0603C-9  
 JV1210C-7  
 JV1210C-8  
 JV1210C-9  
 JV1210C-10  
 JV1210C-13  
 GE0805C-13  
 GE0805C-19  
 GE0805C-20

Tape Width, mm	Device Cavity Pitch, mm	Real Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
				1000
			Standard	2000
				4000

Note: Small reel availability varies by model. Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)




**Distribution Centers** NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

THIRD ANGLE PROJECTION




REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	ECO-008442	NEW RELEASE	06/24/21	ITG	IL

SUGGESTED MOUNTING CONFIGURATION

JV1210C-10 CASE STYLE

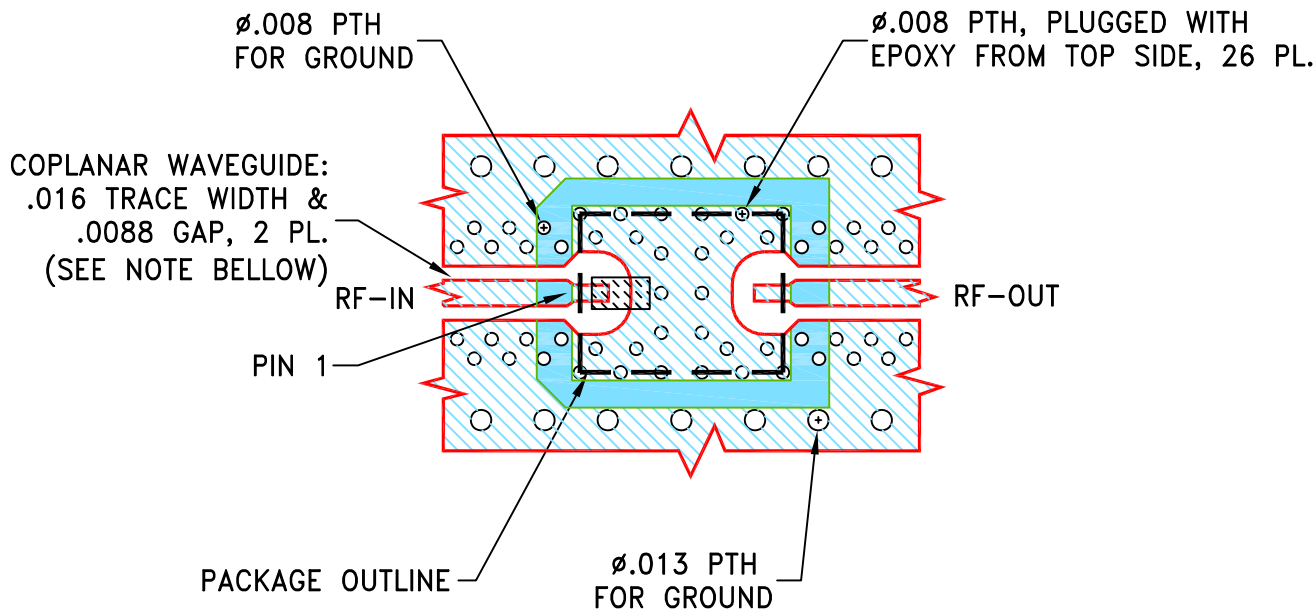


**NOTES:**

1. TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR MEGTRON-7 R5785(N); DIELECTRIC THICKNESS:  $.0079 \pm .001$ ; COPPER: HVLP/HVLP. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE
DIMENSIONS ARE IN INCHES	DRAWN	ITG	06/24/21
TOLERANCES ON:	CHECKED	GF	06/24/21
2 PL DECIMALS $\pm$	APPROVED	IL	06/24/21
3 PL DECIMALS $\pm$ .005			
ANGLES $\pm$			
FRACTIONS $\pm$			



**Mini-Circuits®**


13 Neptune Avenue  
Brooklyn NY 11235

PL, JV1210C-10, TB-BFCV-2852C+


Mini-Circuits®  
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-712	OR
FILE:	98PL712	SCALE: 8:1	SHEET: 1 OF 1

# Evaluation Board and Circuit

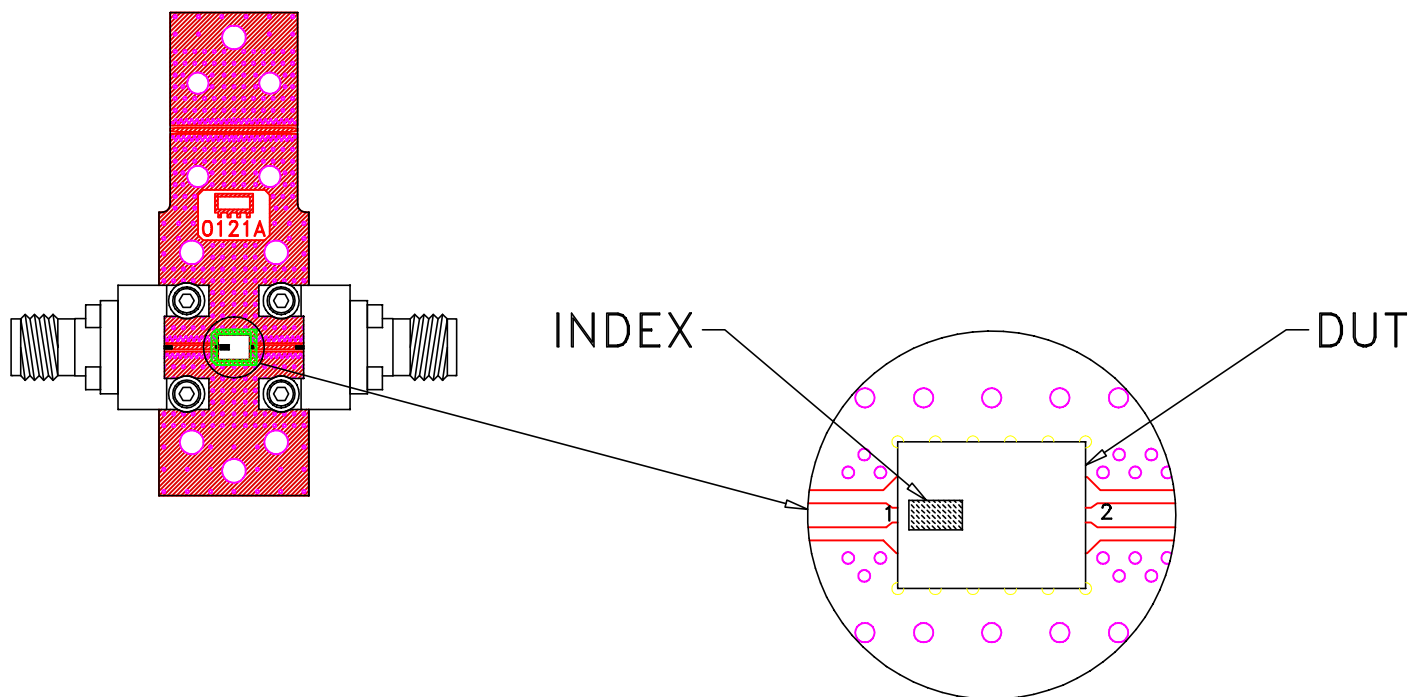


TB-BFCV-2792C+

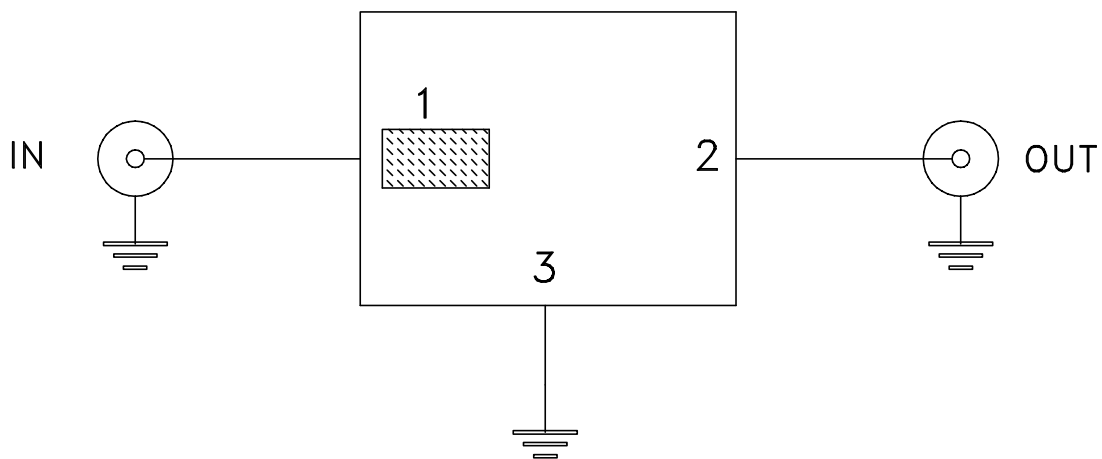

Schematic Diagram

1. 50 Ohm SMA Female connectors.
2. PCB Material: Megtron 7 or equivalent,  
Dielectric Constant=3.6, Thickness=.0079 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 125° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 125° C Ambient Environment	Individual Model Data Sheet
Thermal Cycling	-55 to 125°C, 100 cycles, Dwell Time 15 minutes.	MIL-STD-202, Method 107, Condition A-3
Mechanical Shock	50g, 11ms half-sine, 18 shocks applied each to 3 axes	MIL-STD-202 Method 213, Condition A
Vibration	10-2000Hz sine, 20g, 12 cycles applied each to 3 axes	MIL-STD-202, Method 204, Condition D
Constant Acceleration	30Kg, Y1 Direction	MIL-STD-883, Method 2001, Condition E
Humidity	85°C, 90-95% Relative Humidity, 250hours	
Solderability	10X / 30X Magnification	J-STD-002C Test S, J-STD-002C Test S1
High Temp Storage	125°C, 250 hours	