

LTCC SURFACE MOUNT

Bandpass Filter

50Ω 9.2 to 11.3 GHz

BFHKI-1072+

THE BIG DEAL

- · LTCC Band Pass Filter with Integrated Interposer Board
- Wide Stopband Rejection, Typ. 45 dB Up to 30 GHz
- Small Size, 4.95x3.65 mm
- Shielded Construction
- Protected by US Patents 11,638,370 and 11,744,057



Generic photo used for illustration purposes only

FUNCTIONAL DIAGRAM

RF1 PF 2

APPLICATIONS

Test & Measurement Equipment

PRODUCT OVERVIEW

BFHKI-1072+ is a miniature low temperature co-fired ceramic (LTCC) ultra-high stopband rejection band pass filter with a 9.2 to 11.3 GHz passband supporting a variety of applications. This model achieves 45 dB typical stopband rejection up to 30 GHz, when mounted on coplanar waveguide layouts. Housed in a small 4.95 mm by 3.65 mm ceramic form factor, the filter is ideal for dense signal chain PCB layouts where it complements MMIC size and performance. The BFHKI family with integrated interposer board enables installation onto PCB layouts with automated manufacturing equipment. This model provides 3.2 dB typical insertion loss over a wide band due to its rugged monolithic construction. The LTCC fabrication process assures minimal RF performance variation while delivering a product that is well suited for environmental extremes of high humidity and temperature.

KEY FEATURES

| Features | Advantages |
|---|---|
| Surface Mountable Due to Integrated Interposer Board | Enables installation with automated manufacturing equipment making this suitable for high-volume processes. |
| Wide Rejection | Provides high stopband rejection of 45 dB typical up to 30 GHz. |
| Small Size (4.95x3.65 mm) | Allows for high layout density of circuit boards, while minimizing effects of parasitics. |
| Wide Operating and Storage Temperature, -55 to +125°C | Enables use in high reliability and extreme environment condition such as aerospace & defense applications. |
| Cost Effective | LTCC is a scalable technology that is cost effective due to ease of production in high volume. |

REV. OR ECO-018272 BFHKI-1072+ MCL NY 250626



Bandpass Filter

BFHKI-1072+

50Ω 9.2 to 11.3 GHz

ELECTRICAL SPECIFICATIONS^{1,2,3} AT +25°C

| Parameter | | F# | Frequency (GHz) | Min. | Тур. | Max. | Units |
|---------------------|-------------------------------|--------------------|-----------------|------|-------|------|-------|
| | Center Frequency ⁴ | | | | 10.25 | | GHz |
| Passband | Insertion Loss | F2-F3 | 9.2-11.3 | | 3.2 | 4.5 | dB |
| | Return Loss | F2-F3 | 9.2-11.3 | | 12 | | dB |
| Stopband, Lower | Rejection | DC-F1 | 0.1-6 | 55 | 65 | | dB |
| Charles and I lanes | Daiastian | F4-F5 | 15.1-17.7 | 40 | 50 | | dB |
| Stopband, Upper | Rejection | F 4- F5 | 17.7-30 | 25 | 45 | | ив |


- 1. Tested on Evaluation Board P/N TB-BFHKI-1072C+. Measured with the connector and feedline effects de-embedded using the 2XThru IEEE P370 method.
- 2. Bi-directional RF1 and RF2 ports can be interchanged.
- 3. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.
- 4. Typical variation ± 5%.

ABSOLUTE MAXIMUM RATINGS⁵

| Parameter | Ratings |
|--------------------------|-------------------|
| Operating Temperature | -55 °C to +125 °C |
| Storage Temperature | -55 °C to +125 °C |
| Input Power ⁶ | 1 W |

- 5. Permanent damage may occur if any of these limits are exceeded.
- Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 0.5 W at +125°C.

TYPICAL FREQUENCY RESPONSE




LTCC SURFACE MOUNT


Bandpass Filter


BFHKI-1072+

50Ω 9.2 to 11.3 GHz

TYPICAL PERFORMANCE GRAPHS

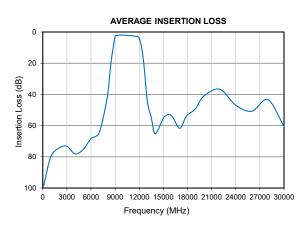

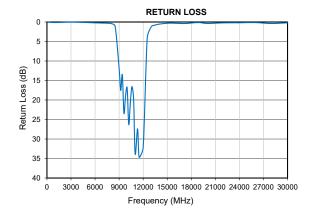

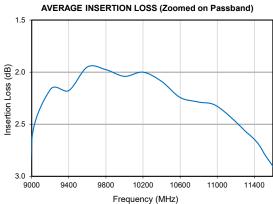

LTCC SURFACE MOUNT

Bandpass Filter

BFHKI-1072+

50Ω 9.2 to 11.3 GHz

FUNCTIONAL DIAGRAM


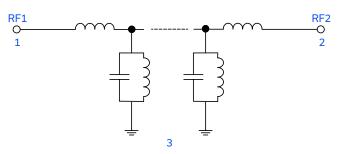


Figure 1. BFHKI-1072+ Functional Diagram

PAD DESCRIPTION

| Function | Pad Number | Description |
|-------------------------|------------|--|
| RF1 ^(Note 2) | 1 | Connects to RF Input Port |
| RF2 ^(Note 2) | 2 | Connects to RF Output Port |
| GROUND | 3 | Connects to Ground on PCB, (See drawing PL-753) |

SUGGESTED PCB LAYOUT (PL-753)

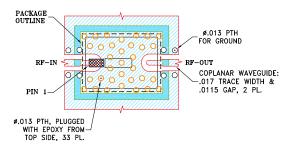


NOTES:

- 1. TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR ROGERS RO4350B
 WITH DIELECTRIC THICKNESS .010"; COPPER: 1/2 OZ.
 FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB ARE CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER) DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Figure 2. Suggested PCB Layout BFHKI-1072+

CASE STYLE DRAWING

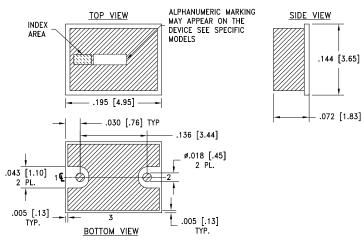

METALLIZATION

Weight: .135 grams.

Dimensions are in inches [mm]. Tolerances: 2 Pl.±.01; 3 Pl. ±.005

PRODUCT MARKING*: F442

*Marking may contain other features or characters for internal lot control.



Bandpass Filter

BFHKI-1072+

50Ω 9.2 to 11.3 GHz

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASHBOARD.

CLICK HERE

| | Data |
|--|---|
| Performance Data & Graphs | Graphs |
| | S-Parameter (S2P Files) Data Set (.zip file) De-embedded to device pads |
| Case Style NM3237 Finish: Gold over Nickel Plating | |
| RoHS Status | Compliant |
| Tape and Reel | TR-F77 |
| Suggested Layout for PCB Design | PL-753 |
| E. J. C. Barri | TB-BFHKI-1072C+ |
| Evaluation Board | Gerber File |
| Environmental Rating | ENV06T12 |

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



LTCC Bandpass Filter BFHKI-1072+ Typical Performance Data FREQUENCY INSERTION LOSS **RETURN LOSS** (MHz) (dB) (dB) 100 98.69 0.04 1000 79.92 0.15 2000 74.40 0.08 3000 73.19 0.04 0.08 4000 78.07 5000 0.14 75.42 6000 68.31 0.21 7000 0.28 64.62 8000 42.36 0.40 8500 18.86 1.09 9000 11.85 2.68 9200 2.17 17.54 9400 2.18 13.52 9600 1.95 23.40 9800 1.98 18.97 10000 2.04 16.91 10200 2.00 26.29 10400 2.09 20.62 10600 2.24 16.55 10800 2.29 19.37 11000 2.33 33.81 11300 2.56 27.38 11500 2.77 34.69 12000 32.13 3.86 12500 17.36 4.19 13000 44.24 1.26 13500 55.09 0.78 14000 65.17 0.54 15100 0.31 54.53 16000 53.55 0.33 17000 61.73 0.39 17700 55.41 0.33 18000 53.13 0.25 19000 49.13 0.15 20000 41.22 0.37 22000 36.67 0.22 24000 46.95 0.20

50.76

43.36

60.46

26000

28000


30000





0.15

0.39

Typical Performance Data

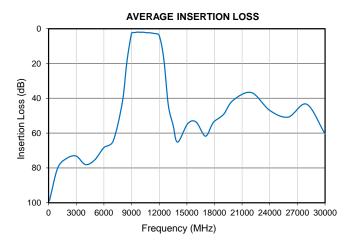

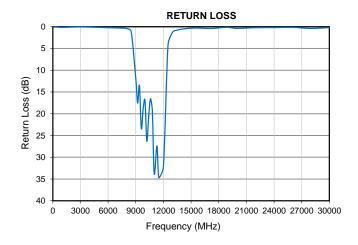


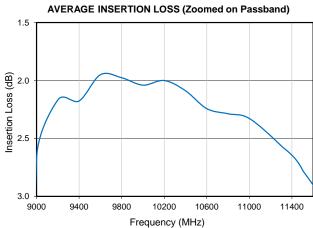


NM

Outline Dimensions

NM3237

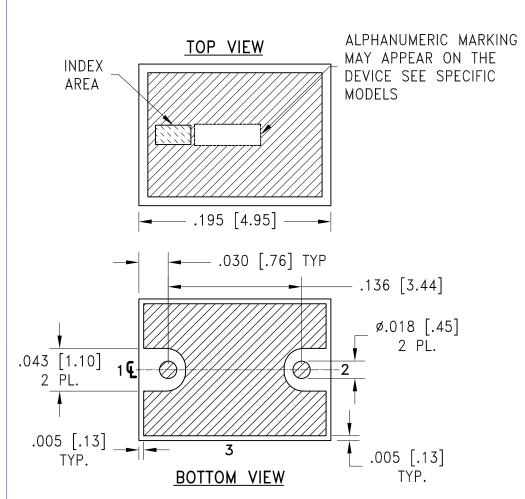

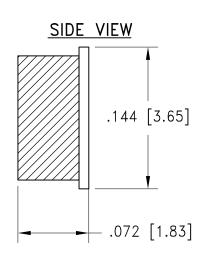



Weight: .135 grams.

Dimensions are in inches (mm). Tolerances: 2 Pl.±.01; 3 Pl. ±.005

Notes:

1. Case material: LTCC on printed circut board base.

2. Termination Finish: as shown below or indicated on Data Sheet.
For RoHS Case Styles: Gold Plate over Nickel plate. All models, (+) suffix.



INTERNET http://www.minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION

| | REVISIONS | | | | | |
|-----|------------|--------------------------------------|----------|-----|------|--|
| REV | ECN No. | DESCRIPTION | DATE | DR | AUTH | |
| OR | ECO-017025 | NEW RELEASE | 03/30/23 | ITG | IL | |
| OR1 | ECO-018201 | CORRECTED TYPO IN NOTE 2 | 06/16/23 | ITG | IL | |
| A | ECO-020890 | ADDED DETAIL "A" (SH.2) & DIMENSIONS | 02/16/24 | ITG | IL | |
| | | | | | | |

SUGGESTED MOUNTING CONFIGURATION FOR NM3237 CASE STYLE

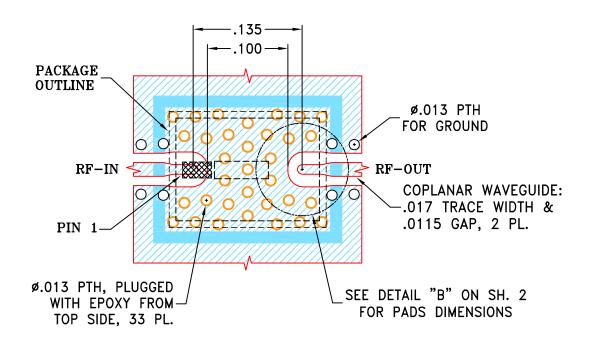


NOTES:

- 1. TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010"; COPPER: 1/2 OZ. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB ARE CONTINUOUS GROUND PLANE.

ASHEETA1.DWG REV:A DATE:01/12/95

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)


| DE | NOTES (| COPPER LA | AND PATTE | RN FRE | E OF SOLDE | R MASK | | | | | |
|---|--|-----------|-----------|------------|---------------|---------------|------------------|------------------|-------|-------------------|-----|
| UNLESS OTHERWISE SPECIFIED | | INITIALS | DATE | | | . ~: | | • 4 R | | | |
| DIMENSIONS ARE IN INCHES | DRAWN | ITG | 03/30/23 | | \sqcup Mini | i-Cir | 'cu | 1ts 13.1 | Neptu | ne Aver NY 112 | nue |
| TOLERANCES ON: 2 PL DECIMALS ± | CHECKED | GF | 03/30/23 | | Τ | | | - Broo | окіуп | NI 114 | ೭35 |
| 3 PL DECIMALS ± .005 ANGLES ± | APPROVED | IL | 03/30/23 | | | | | | | | |
| FRACTIONS ± | | | | | PL. | NM323 | 37. ^r | $\Gamma B - 120$ | 00 | | |
| Mini-Circuits ® | | | | | , | 1 1112 0 10 0 | | | • | | |
| THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. | | | | | T | T | | | | T | |
| EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI—CIRCUITS RESERVES ALL PROPRIETARY | | | SIZE | CODE IDENT | DRAWING NO: | | | _ | REV: | | |
| DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE | | A | 15542 | | 98- | -PL-75 | 3 | | A | | |
| PARIT, IN WHOLE OR IN PARI, WITHO | PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS. | | | FILE: C | 8PL753 | SCALE: | 3:1 | SHEET: | 1 | OF | 2 |
| | ASHEETA1.DWG REV:A DATE:01/12/95 | | | 5 | OLLIOO | 1 | J. I | | 1 | OI. | ~ |

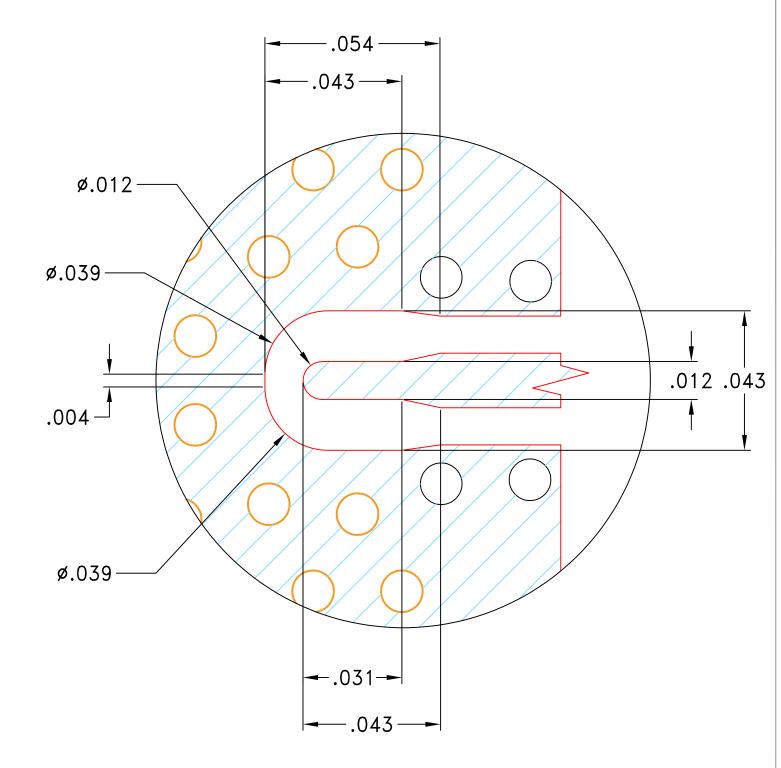

DETAIL "A". SOLDER MASK IS NOT SHOWN FOR CLARITY

(SCALE 4:1)

Evaluation Board and Circuit

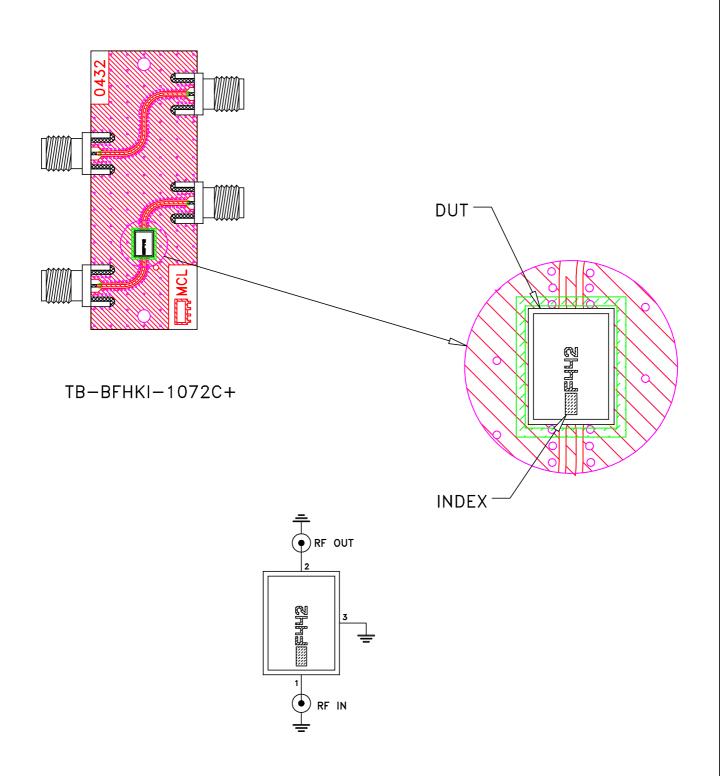


Schematic Diagram

Notes:

- 1. SMA Female connectors.
- 2. PCB Material: Rogers RO4350 or equivalent, Dielectric Constant=3.5, Thickness=.010 inch.

IIII Mini-Circuits®



ENV06T12



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

| Specification | Test/Inspection Condition | Reference/Spec |
|-----------------------|---|--|
| Operating Temperature | -55° to 125° C Ambient Environment | Individual Model Data Sheet |
| Storage Temperature | -55° to 125° C Ambient Environment | Individual Model Data Sheet |
| Thermal Cycling | -55 to 125°C, 100 cycles, Dwell Time 15 minutes. | MIL-STD-202, Method 107, Condition A-3 |
| Humidity | 85°C, 90-95% Relative Humidity, 250hours | |
| Solderability | 10X / 30X Magnification | J-STD-002C Test S, J-STD-002C Test S1 |
| High Temp Storage | 125°C, 250 hours | |
| Bend Test | 1mm, deflection for 5 seconds Span of bending: 2.75" | |

ENV06T12Rev: OR

06/27/23

DCO-1237 File: ENV06T12.pdf