



Bandpass Filter

BFHKL-8501+

50Ω 7.5 to 8.8 GHz

THE BIG DEAL

- LTCC Band Pass Filter with Integrated Interposer Board
- Wide Stopband Rejection, Typ. 33 dB Up to 25 GHz
- Shielded Construction
- Protected by US Patents 11,638,370 and 11,744,057




Generic photo used for illustration purposes only

APPLICATIONS

- Test & Measurement Equipment
- Radar
- SATCOM
- Point-to-Point Radios

FUNCTIONAL DIAGRAM

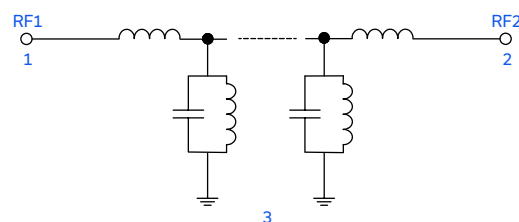

PRODUCT OVERVIEW

BFHKL-8501+ is a miniature low temperature co-fired ceramic (LTCC) ultra-high stopband rejection band pass filter with a 7.5 to 8.8 GHz passband that supports a variety of applications. This model achieves 33 dB typical stopband rejection up to 25 GHz, when mounted on coplanar waveguide layouts. Housed in a small 4.95 mm by 3.65 mm ceramic form factor, the filter is ideal for dense signal chain PCB layouts where it complements MMIC size and performance. The BFHKL family with integrated interposer board enables installation onto PCB layouts with automated manufacturing equipment. This model provides 3.6 dB typical insertion loss over a wide band due to its rugged monolithic construction. The LTCC fabrication process assures minimal RF performance variation while delivering a product that is well suited for environmental extremes of high humidity and temperature.

KEY FEATURES

Features	Advantages
Surface Mountable Due to Integrated Interposer Board	Enables installation with automated manufacturing equipment, making this suitable for high-volume processes.
Wide Rejection	Provides high stopband rejection of 33 dB typical up to 25 GHz.
Small Size (4.95x3.65 mm)	Allows for high layout density of circuit boards, while minimizing effects of parasitics.
Wide Operating and Storage Temperature (-55 to +125°C)	Enables use in high reliability and extreme environment conditions, such as in aerospace & defense applications.
Cost Effective	LTCC is a scalable technology that is cost effective due to ease of production in high volume.



LTCC SURFACE MOUNT

Bandpass Filter

BFHKI-8501+

50Ω 7.5 to 8.8 GHz

ELECTRICAL SPECIFICATIONS^{1,2,3} AT +25°C

Parameter	F#	Frequency (GHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency ⁴			8.15		GHz
	Insertion Loss	F2-F3	7.5-8.8	3.6	5	dB
	Return Loss	F2-F3	7.5-8.8	12		dB
Stopband, Lower	Rejection	DC-F1	0.1-4.7	62	72	dB
Stopband, Upper	Rejection	F4-F5	11.9-17	40	50	dB
			17-25	28	33	

1. Tested on Evaluation Board P/N TB-BFHKI-8501C+. Measured with the connector and feedline effects de-embedded using the 2XThru IEEE P370 method.

2. Bi-directional RF1 and RF2 ports can be interchanged.

3. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.

4. Typical variation $\pm 5\%$.


ABSOLUTE MAXIMUM RATINGS⁵

Parameter	Ratings
Operating Temperature	-55 °C to +125 °C
Storage Temperature	-55 °C to +125 °C
Input Power ⁶	1 W

5. Permanent damage may occur if any of these limits are exceeded.

6. Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 0.5 W at +125°C.

TYPICAL FREQUENCY RESPONSE AT +25°C

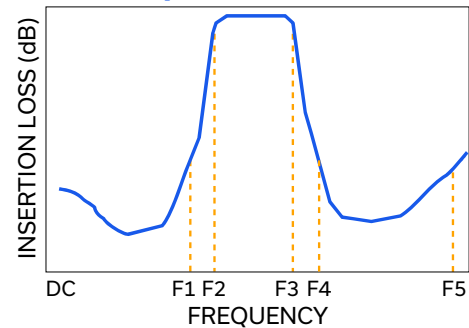



LTCC SURFACE MOUNT




Bandpass Filter

BFHKI-8501+

Mini-Circuits

50 Ω 7.5 to 8.8 GHz

TYPICAL PERFORMANCE GRAPHS AT +25°C

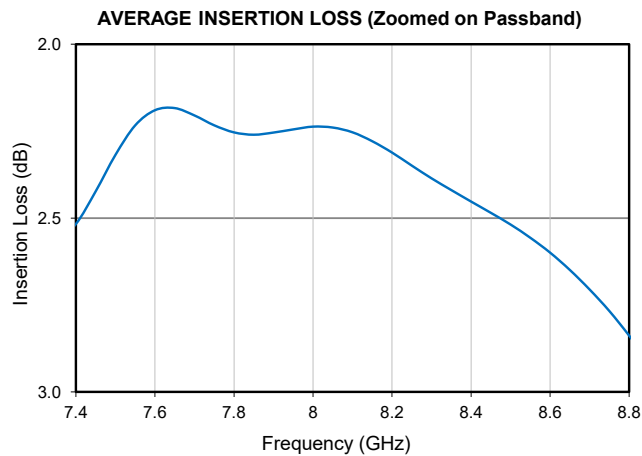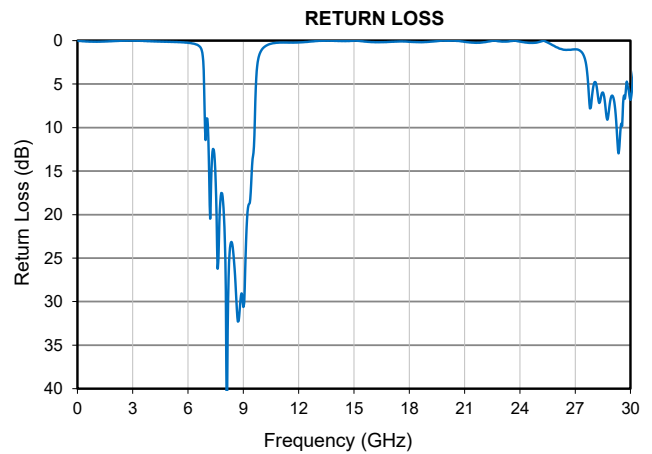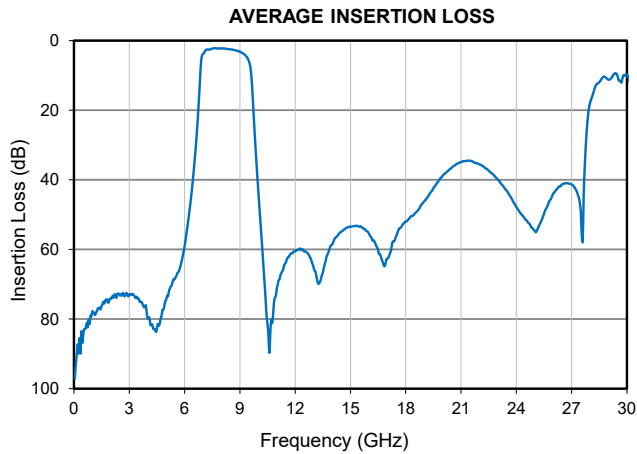



LTCC SURFACE MOUNT

Bandpass Filter

BFHKI-8501+

50Ω 7.5 to 8.8 GHz

FUNCTIONAL DIAGRAM


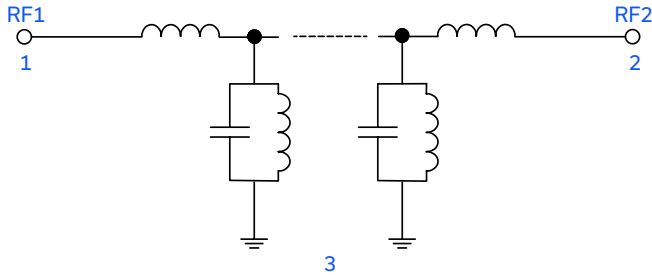


Figure 1. BFHKI-8501+ Functional Diagram

PAD DESCRIPTION

Function	Pad Number	Description
RF1 ²	1	Connects to RF Input Port
RF2 ²	2	Connects to RF Output Port
GROUND	3	Connects to Ground on PCB, (See drawing PL-753)

SUGGESTED PCB LAYOUT (PL-753)

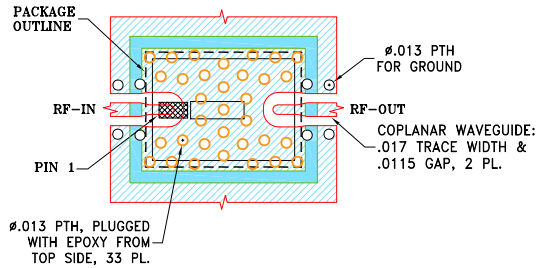


NOTES:

- TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010"; COPPER: 1/2 OZ.
FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB ARE CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Figure 2. Suggested PCB Layout BFHKI-8501+

CASE STYLE DRAWING

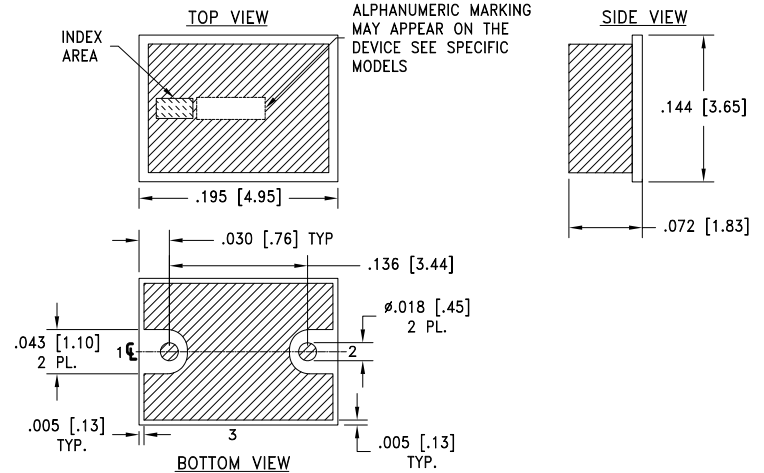

METALLIZATION

Weight: .135 grams.

Dimensions are in inches [mm]. Tolerances: 2 PL. ±.01; 3 PL. ±.005

PRODUCT MARKING*: F440

*Marking may contain other features or characters for internal lot control.



Mini-Circuits

LTCC SURFACE MOUNT

Bandpass Filter

BFHKI-8501+

50Ω 7.5 to 8.8 GHz

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASHBOARD.

[CLICK HERE](#)

Performance Data & Graphs	Data Graphs S-Parameter (S2P Files) Data Set (.zip file) De-embedded to device pads
Case Style	NM3237 Finish: Gold over Nickel Plating
RoHS Status	Compliant
Tape and Reel	TR-F77
Suggested Layout for PCB Design	PL-753
Evaluation Board	TB-BFHKI-8501C+ Gerber File
Environmental Rating	ENV06T12

NOTES




- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



LTCC Bandpass Filter**BFHKL-8501+***Typical Performance Data*


FREQUENCY (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
100	92.92	0.04
1000	77.75	0.13
1500	76.33	0.10
2000	74.11	0.05
2500	73.25	0.01
3000	72.95	0.00
3500	74.09	0.02
4000	79.84	0.09
4500	82.85	0.12
4700	79.96	0.13
5000	74.56	0.14
5500	68.11	0.18
6000	59.09	0.25
6500	37.33	0.48
7000	3.87	8.96
7500	2.32	16.27
8000	2.24	23.26
8500	2.52	25.50
8800	2.84	30.97
9000	3.19	30.61
9500	6.06	13.60
10000	43.17	1.05
11000	71.40	0.22
11900	60.76	0.22
12000	60.52	0.21
13000	65.16	0.05
14000	58.66	0.03
15000	53.52	0.01
16000	55.44	0.17
17000	62.62	0.14
18000	51.99	0.14
20000	38.87	0.01
22000	35.54	0.20
24000	47.81	0.11
25000	54.60	0.18

Typical Performance Data

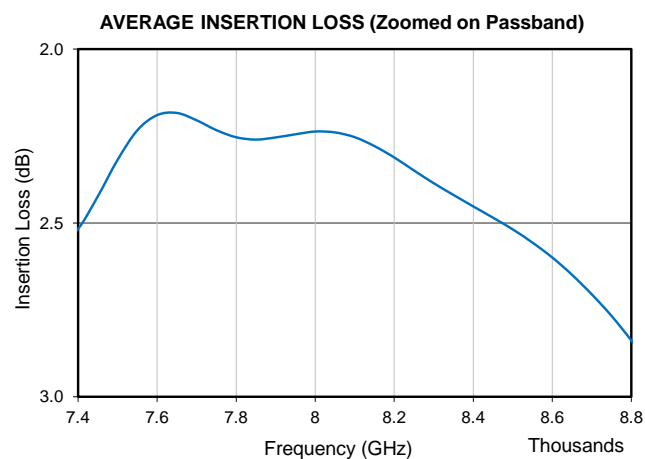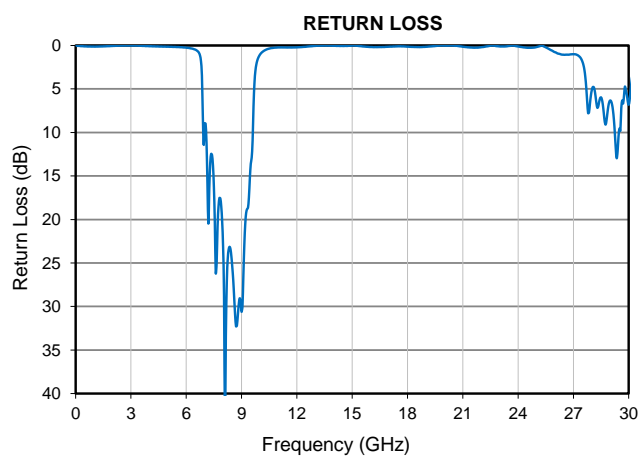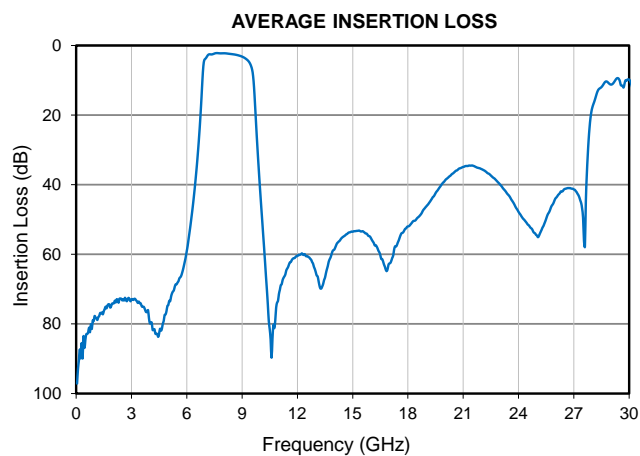

Outline Dimensions

NM3237

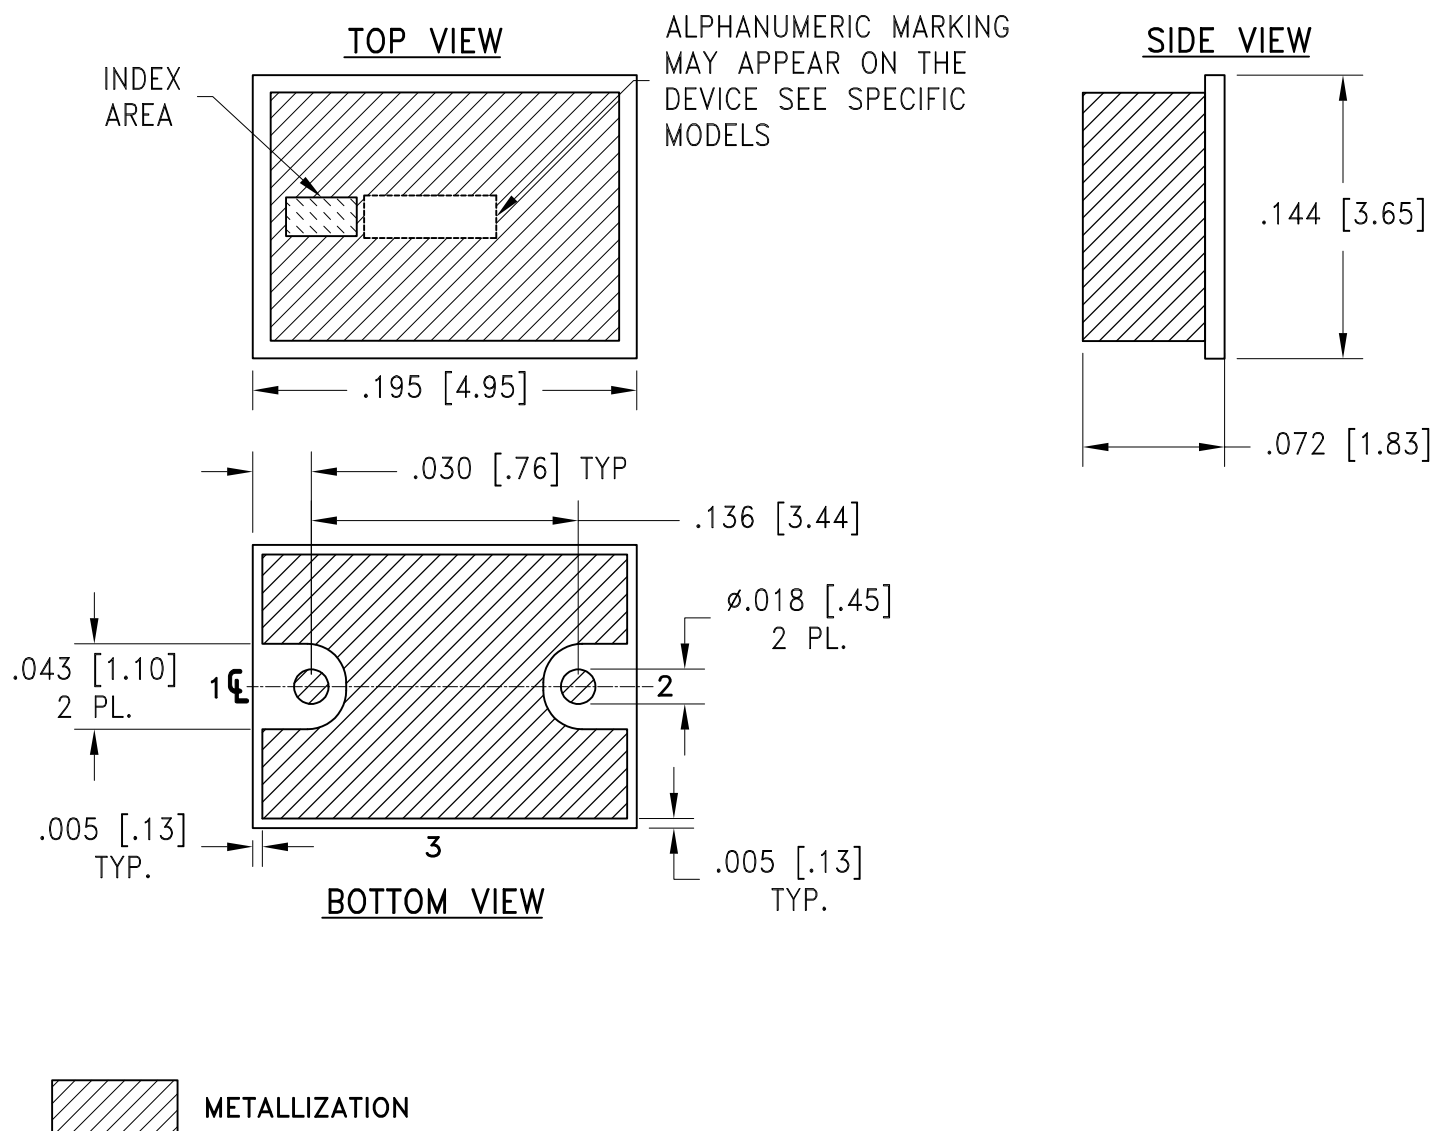

Weight: .135 grams.

Dimensions are in inches (mm). Tolerances: 2 Pl. ±.01; 3 Pl. ±.005

Notes:

1. Case material: LTCC on printed circuit board base.
2. Termination Finish: **as shown below or indicated on Data Sheet.**
For RoHS Case Styles: Gold Plate over Nickel plate. All models, (+) suffix.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

SECONDARY DOT

SECONDARY

PACKAGE OUTLINE

PIN 1

Ø.006 PTH, PLUGGED WITH EPOXY FROM TOP SIDE, 89 PL.

.0181 TRACE WIDTH, 3 PL.


PRIMARY DOT

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4003C WITH DIELECTRIC THICKNESS .008"; COPPER: 1 OZ. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE
DIMENSIONS ARE IN INCHES	DRAWN	NP	06/15/23
TOLERANCES ON:	CHECKED	IL	06/15/23
2 PL DECIMALS ±	APPROVED	CM	06/15/23
3 PL DECIMALS ± .005			
ANGLES ±			
FRACTIONS ±			

 Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.


11


Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235


PL, DG3006, TB-MTX2-133/183C+

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-754		REV: OR
FILE: 98PL754		SCALE: 12:1	SHEET: 1 OF 1	

Evaluation Board and Circuit

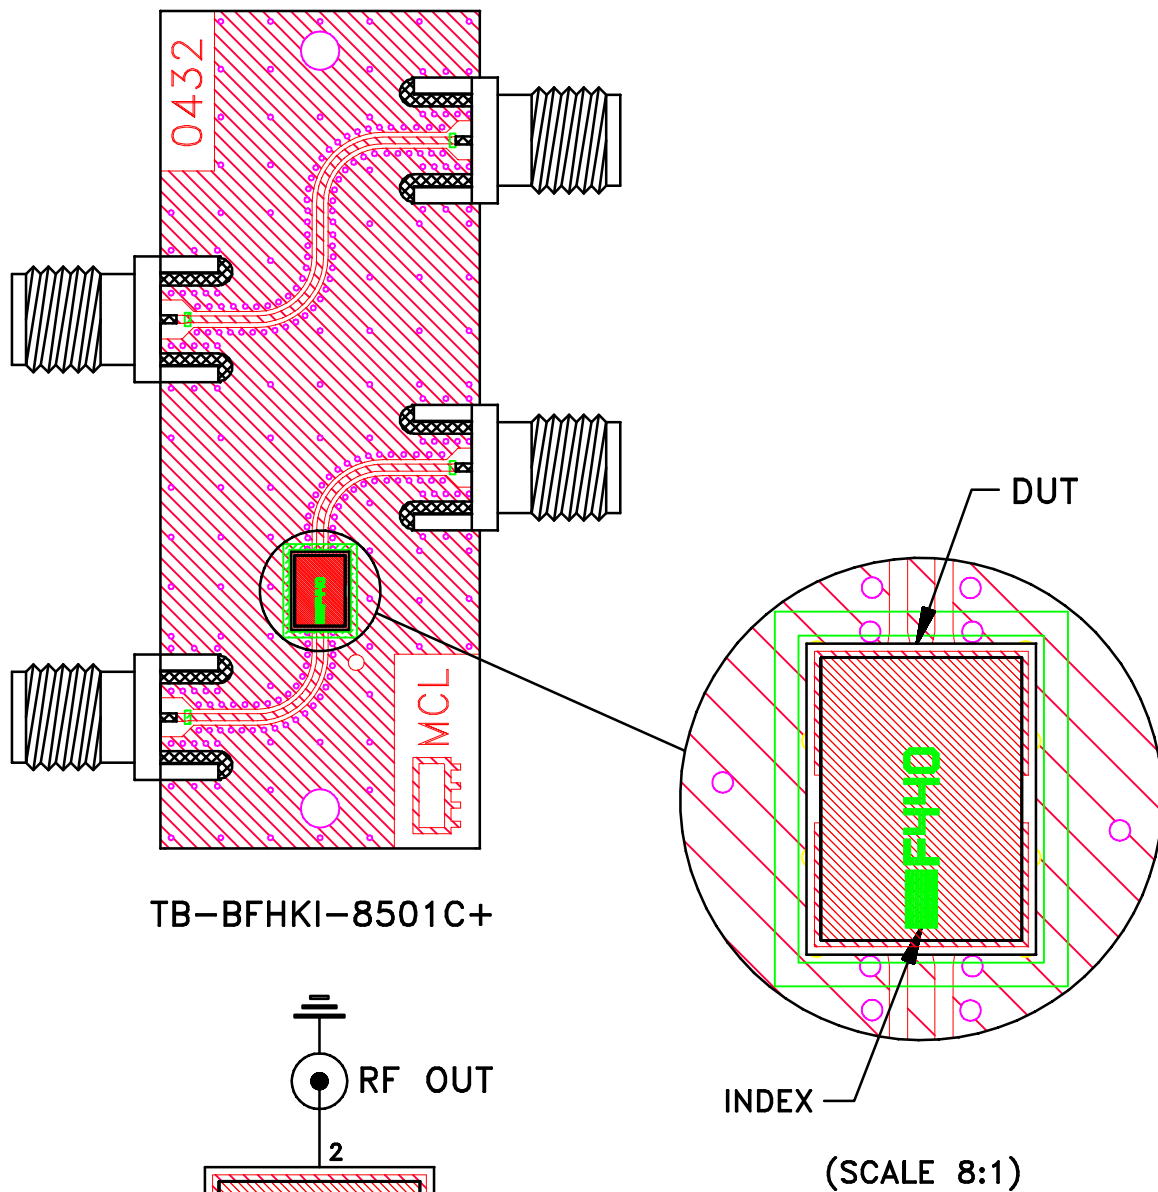

TB-BFHKI-8501C+

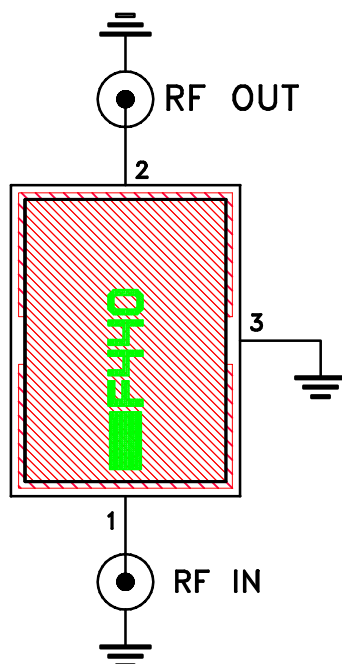

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent, Dielectric Constant=3.5, Thickness=.010 inch.

 Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 125° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 125° C Ambient Environment	Individual Model Data Sheet
Thermal Cycling	-55 to 125°C, 100 cycles, Dwell Time 15 minutes.	MIL-STD-202, Method 107, Condition A-3
Humidity	85°C, 90-95% Relative Humidity, 250hours	
Solderability	10X / 30X Magnification	J-STD-002C Test S, J-STD-002C Test S1
High Temp Storage	125°C, 250 hours	
Bend Test	1mm, deflection for 5 seconds Span of bending: 2.75"	--