

RF Transformer

50Ω 2400 to 2500 MHz 1:4 Ratio

BLJC4-252R+



CASE STYLE: JC0603C

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel at no extra cost

| Reel Size | Devices/Reel |
|-----------|-----------------------------------|
| 7" | 20, 50, 100, 200, 500, 1000, 4000 |

Maximum Ratings

| | |
|-----------------------|---------------|
| Operating Temperature | -40°C to 85°C |
| Storage Temperature* | -40°C to 85°C |
| Input RF Power** | 2W at 25°C |

*Refer to product storage temperature after installation. Suggestion for T&R unused product storage condition: +5-+35°C, Humidity 45-75%RH, 12 Month max. Permanent damage may occur if any of these limits are exceeded.


**Derate linearly to 1W at 85°C.

Pad Connections

| | |
|-------------------------------|-----|
| PRIMARY DOT (Unbalanced Port) | 1 |
| GND or DC FEED | 3 |
| SECONDARY DOT (Balanced) | 4 |
| SECONDARY (Balanced) | 6 |
| NO CONNECTION | 2,5 |

Outline Drawing

PCB Land Pattern

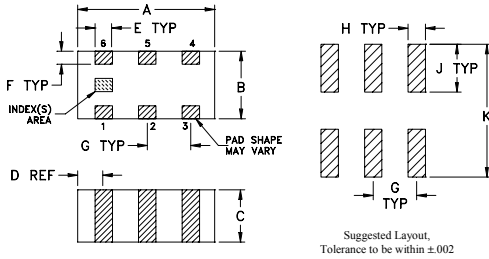

Outline Dimensions (inch/mm)

| A | B | C | D | E | F |
|------|------|------|------|-------|------|
| .063 | .031 | .024 | .012 | .008 | .006 |
| 1.60 | 0.79 | 0.61 | 0.30 | 0.20 | 0.15 |
| G | H | J | K | wt | |
| .020 | .010 | .022 | .053 | grams | |
| 0.51 | 0.25 | 0.56 | 1.35 | 0.005 | |

Features

- miniature size 0603 (0.063" [1.6mm] x 0.031" [0.8mm] x 0.024" [0.6mm])
- low phase unbalance, 0.8 deg. and amplitude unbalance, 0.2 dB typ.
- low cost
- aqueous washable

Applications

- ISM Band
- WLAN
- Bluetooth
- Zigbee

Electrical Specifications at 25°C

| Parameter | Frequency (MHz) | Min. | Typ. | Max. | Unit |
|-----------------------|-----------------|------|------|------|--------|
| Impedance Ratio | | | 4 | | |
| Frequency Range | | 2400 | — | 2500 | MHz |
| Insertion Loss* | 2400 - 2500 | — | 0.9 | 1.5 | dB |
| Amplitude Unbalance | 2400 - 2500 | — | 0.2 | 2 | dB |
| Phase Unbalance† | 2400 - 2500 | — | 0.8 | 10 | Degree |
| Unbalance Return Loss | 2400 - 2500 | 9.5 | 24 | — | dB |

* Tested on Evaluation Board TB-1013+


† Relative to 180°

Typical Performance Data at 25°C**

| FREQUENCY (GHz) | INSERTION LOSS (dB) | INPUT R. LOSS (dB) | AMPLITUDE UNBALANCE (dB) | PHASE UNBALANCE (Deg.) |
|-----------------|---------------------|--------------------|--------------------------|------------------------|
| 2.40 | 0.97 | 20.36 | 0.09 | 1.02 |
| 2.41 | 0.95 | 21.08 | 0.12 | 0.94 |
| 2.42 | 0.94 | 21.77 | 0.15 | 0.85 |
| 2.43 | 0.93 | 22.39 | 0.18 | 0.78 |
| 2.44 | 0.91 | 22.91 | 0.21 | 0.65 |
| 2.45 | 0.90 | 23.32 | 0.24 | 0.52 |
| 2.46 | 0.89 | 23.46 | 0.27 | 0.46 |
| 2.47 | 0.88 | 23.39 | 0.30 | 0.32 |
| 2.48 | 0.88 | 23.05 | 0.32 | 0.21 |
| 2.49 | 0.87 | 22.54 | 0.35 | 0.08 |
| 2.50 | 0.87 | 21.97 | 0.38 | 0.12 |

** Measured with Agilent E5071B network analyzer using impedance conversion and port extension.




Evaluation Board MCL P/N: TB-1013+ Suggested PCB Layout (PL-559)

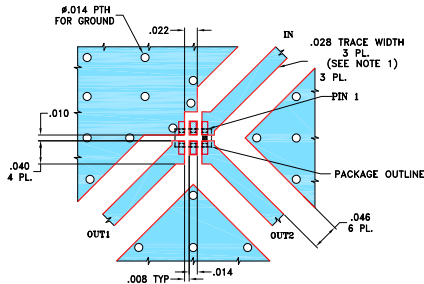


- NOTES:
1. TRACE WIDTH IS SHOWN FOR FR4, GRADE IT-180TC (TECO CORP.) WITH DIELECTRIC THICKNESS .016±.0015, COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

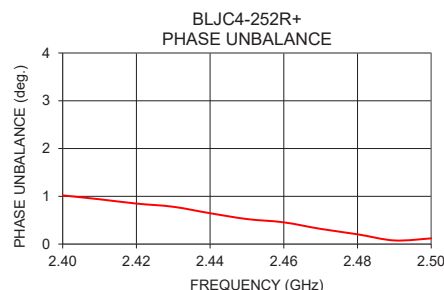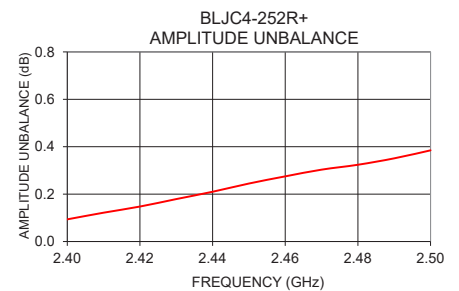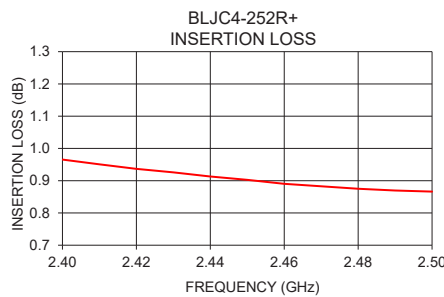

Configuration J

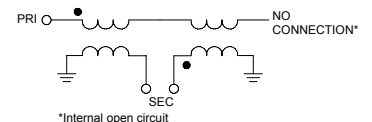

Typical Performance Data




| FREQUENCY (MHz) | AVERAGE INSERTION LOSS (dB) | INPUT RETURN LOSS (dB) | AMPLITUDE UNBALANCE (dB) | PHASE UNBALANCE ⁽¹⁾ (deg.) |
|--------------------|-----------------------------------|------------------------------|--------------------------------|---|
| 2400 | 0.97 | 20.36 | 0.09 | 1.02 |
| 2402 | 0.96 | 20.50 | 0.10 | 1.00 |
| 2405 | 0.96 | 20.74 | 0.10 | 0.98 |
| 2407 | 0.96 | 20.87 | 0.11 | 0.95 |
| 2410 | 0.95 | 21.08 | 0.12 | 0.94 |
| 2413 | 0.95 | 21.30 | 0.13 | 0.92 |
| 2415 | 0.94 | 21.44 | 0.13 | 0.89 |
| 2418 | 0.94 | 21.62 | 0.15 | 0.89 |
| 2421 | 0.94 | 21.84 | 0.15 | 0.86 |
| 2423 | 0.93 | 21.97 | 0.16 | 0.84 |
| 2426 | 0.93 | 22.15 | 0.17 | 0.81 |
| 2428 | 0.93 | 22.27 | 0.17 | 0.80 |
| 2431 | 0.92 | 22.46 | 0.18 | 0.71 |
| 2434 | 0.92 | 22.62 | 0.19 | 0.69 |
| 2436 | 0.92 | 22.72 | 0.20 | 0.69 |
| 2439 | 0.92 | 22.87 | 0.21 | 0.67 |
| 2442 | 0.91 | 23.03 | 0.22 | 0.63 |
| 2444 | 0.91 | 23.10 | 0.22 | 0.62 |
| 2447 | 0.90 | 23.22 | 0.23 | 0.56 |
| 2450 | 0.90 | 23.32 | 0.24 | 0.52 |
| 2452 | 0.90 | 23.35 | 0.25 | 0.50 |
| 2455 | 0.90 | 23.42 | 0.26 | 0.49 |
| 2457 | 0.89 | 23.44 | 0.27 | 0.49 |
| 2460 | 0.89 | 23.46 | 0.27 | 0.46 |
| 2463 | 0.89 | 23.48 | 0.28 | 0.41 |
| 2465 | 0.89 | 23.47 | 0.29 | 0.36 |
| 2468 | 0.88 | 23.42 | 0.30 | 0.33 |
| 2471 | 0.88 | 23.36 | 0.31 | 0.34 |
| 2473 | 0.88 | 23.30 | 0.31 | 0.28 |
| 2476 | 0.88 | 23.22 | 0.32 | 0.25 |
| 2478 | 0.88 | 23.13 | 0.32 | 0.25 |
| 2481 | 0.87 | 23.00 | 0.33 | 0.20 |
| 2484 | 0.87 | 22.87 | 0.34 | 0.14 |
| 2486 | 0.87 | 22.75 | 0.34 | 0.12 |
| 2489 | 0.87 | 22.61 | 0.35 | 0.06 |
| 2492 | 0.87 | 22.44 | 0.36 | 0.01 |
| 2494 | 0.87 | 22.31 | 0.36 | 0.03 |
| 2497 | 0.87 | 22.15 | 0.38 | 0.07 |
| 2500 | 0.87 | 21.97 | 0.38 | 0.12 |

⁽¹⁾ Relative to 180°

LTCC Balun RF Transformer

BLJC4-252R+

Typical Performance Data

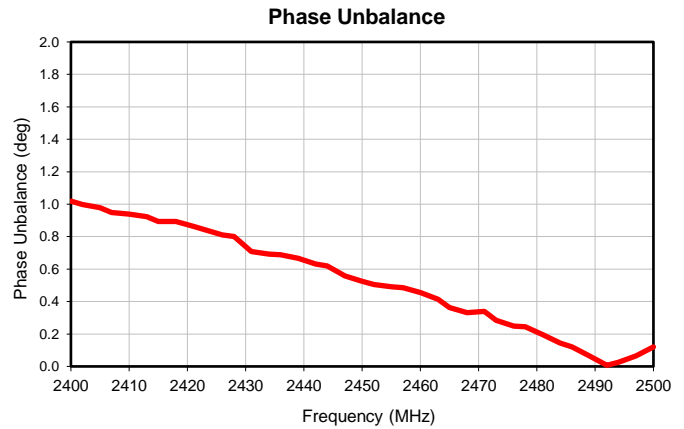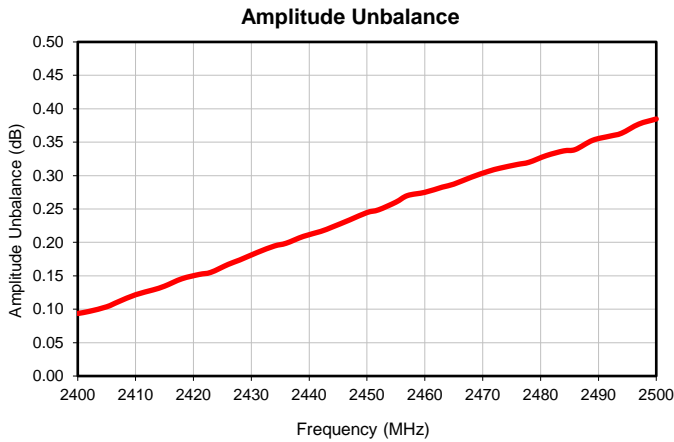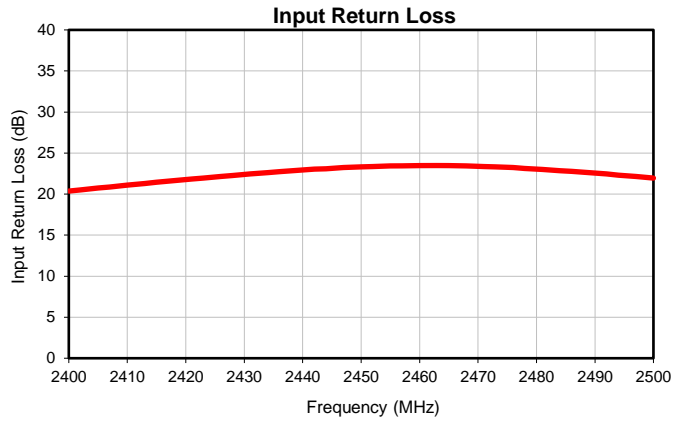

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS


REV. OR
BLJC4-252R+
5/10/2019
Page 1 of 1

Outline Dimensions

JC0603C

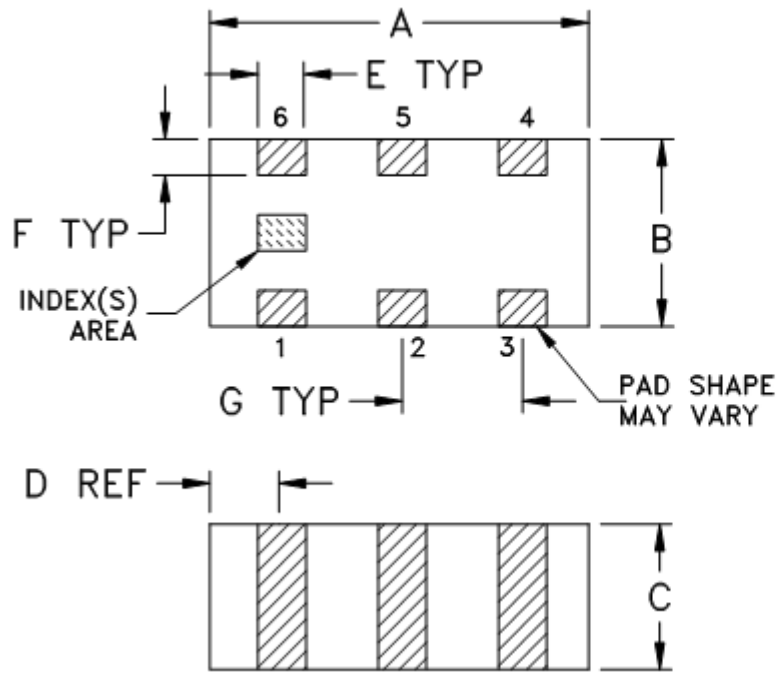

PCB Land Pattern

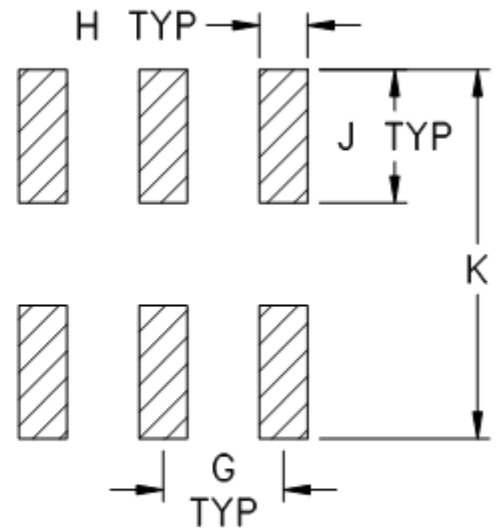

Suggested Layout,
Tolerance to be within $\pm .002$

| CASE # | A | B | C | D | E | F | G | H | J | K | WT. GRAM |
|---------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------|----------|
| JC0603C | .063 (1.60) | .031 (0.80) | .024 (0.60) | .012 (0.30) | .008 (0.20) | .006 (0.15) | .020 (0.50) | .010 (0.25) | .022 (0.55) | 0.053 (1.35) | .005 |

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Open style, ceramic base.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F114

DEVICE ORIENTATION IN T&R

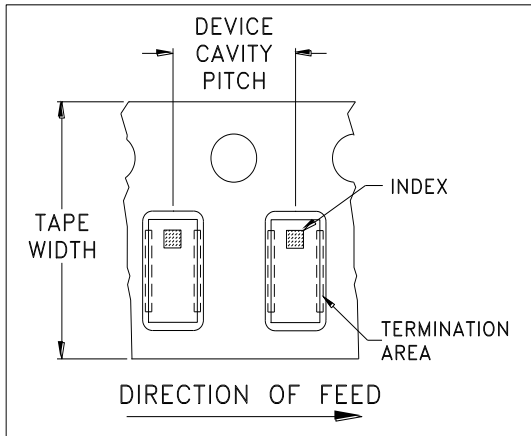


ILLUSTRATION 1

| Applicable Case Styles | |
|------------------------|-----------|
| GE0805C | JC0603C |
| GE0805C-1 | JC0603C-4 |
| GE0805C-1AP | JC0603C-6 |
| GE0805C-7 | |
| GE0805C-9 | |
| GE0805C-10 | |
| GE0805C-11 | |
| GE0805C-12 | |

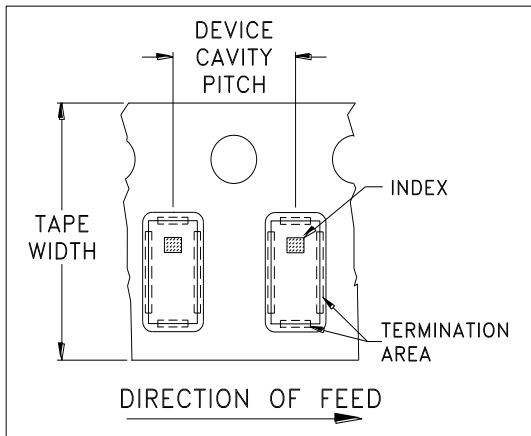


ILLUSTRATION 2

| Applicable Case Styles | |
|------------------------|-----------|
| GE0805C-2 | JC0603C-1 |
| GE0805C-3 | JC0603C-2 |
| GE0805C-4 | JC0603C-3 |
| GE0805C-5 | JC0603C-5 |
| GE0805C-6 | JC0603C-7 |
| GE0805C-8 | JV1210C-1 |

| Tape Width, mm | Device Cavity Pitch, mm | Reel Size, inches | Devices per Reel | |
|----------------|-------------------------|-------------------|-------------------------------------|------|
| 8 | 4 | 7 | Small quantity standards (see note) | 20 |
| | | | | 50 |
| | | | | 100 |
| | | | | 200 |
| | | | | 500 |
| | | | Standard | 4000 |

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION

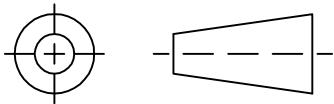

REVISIONS



| REV | ECN No. | DESCRIPTION | DATE | DR | AUTH |
|-----|---------|-------------|----------|----|------|
| OR | M168200 | NEW RELEASE | 05/31/18 | NP | SL |
| | | | | | |
| | | | | | |

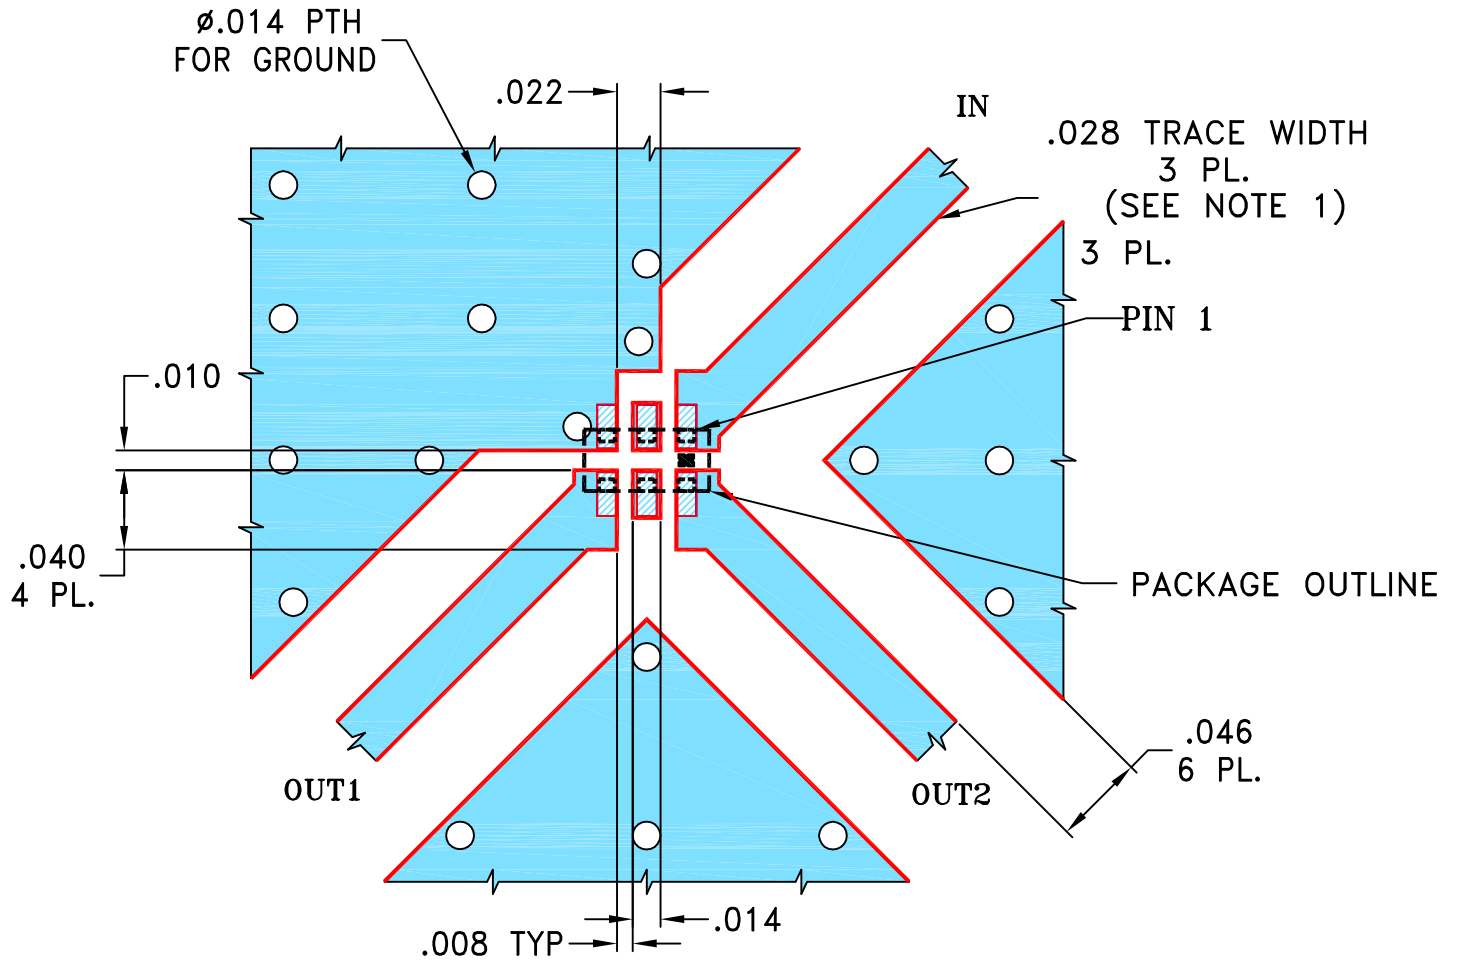**SUGGESTED MOUNTING CONFIGURATION
FOR JC0603C CASE STYLE, "06TJ06" PIN CODE**




NOTES:

1. TRACE WIDTH IS SHOWN FOR FR4, GRADE IT-180TC (ITEQ CORP.) WITH DIELECTRIC THICKNESS $.016 \pm .0015$. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

| UNLESS OTHERWISE SPECIFIED | INITIALS | DATE |
|----------------------------|----------|----------|
| DRAWN | NP | 05/30/18 |
| CHECKED | GF | 05/30/18 |
| APPROVED | SL | 05/31/18 |

 **Mini-Circuits®** 13 Neptune Avenue
Brooklyn NY 11235


PL, 06TJ06, JC0603C, TB-1013+

| | | | |
|------------------|---------------------|--------------------------|------------|
| SIZE A | CODE IDENT 15542 | DRAWING NO: 98-PL-559 | REV: OR |
| FILE: 98PL559 | SCALE: 10:1 | SHEET: 1 OF 1 | |

 **Mini-Circuits®**
 THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.


Evaluation Board and Circuit

UNBALANCED PORT

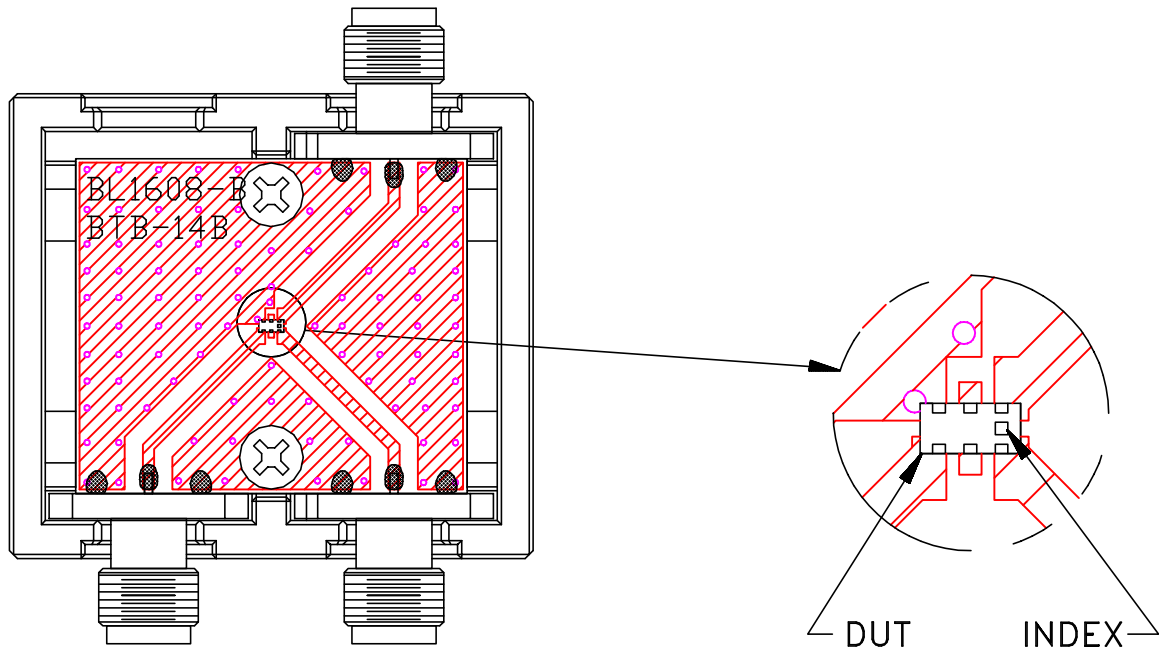

BALANCED PORT 1 BALANCED PORT 2


TB-1013+

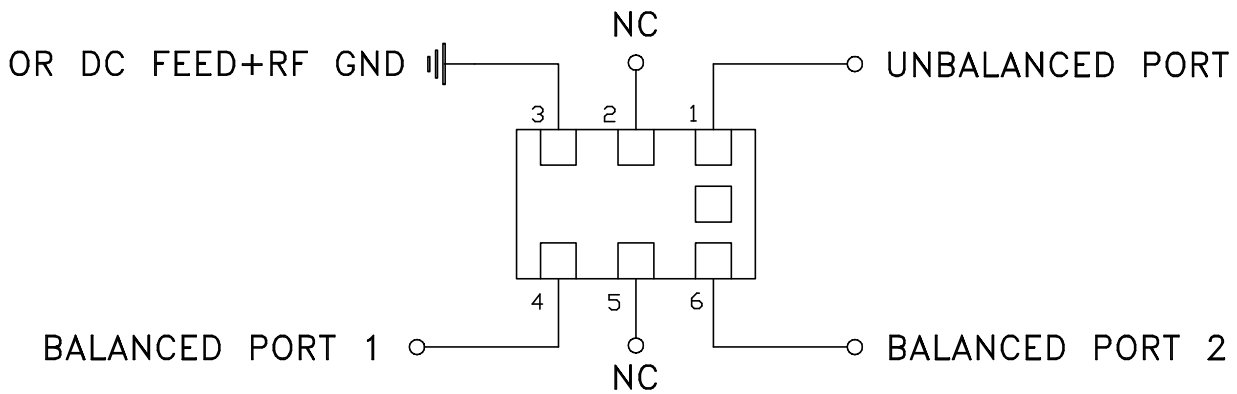

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: FR4 or equivalent,
Dielectric Constant=4.5, Thickness=.016 inch.





All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

| Specification | Test/Inspection Condition | Reference/Spec |
|----------------------------|---|--|
| Operating Temperature | -40° to 85° C Ambient Environment | Individual Model Data Sheet |
| Storage Temperature | -40° to 85° C Ambient Environment | Individual Model Data Sheet |
| Humidity | 90 to 95% RH, 240 hours, 50°C | MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours |
| Thermal Shock | -55° to 100°C, 100 cycles | MIL-STD-202, Method 107, Condition A-3, except +100°C |
| Solder Reflow Heat | Sn-Pb Eutectic Process: 225°C peak Pb-Free Process: 250°C peak | J-STD-020C, Table 4-1, 4-2 and 5-2; Figure 5-1 |
| Solderability | 10X Magnification | J-STD-002, Para 4.2.5, Test S, 95% Coverage |
| Vibration (High Frequency) | 20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36) | MIL-STD-202, Method 204, Condition D |
| Mechanical Shock | 50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes | MIL-STD-202, Method 213, Condition A |