

Low Pass Filter

75Ω DC to 48 MHz
Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Power Input 0.5W max.

Permanent damage may occur if any of these limits are exceeded.

Features

- rugged shielded case
- other standard and custom BLP models available with wide selection of fco

Applications

- test equipment
- lab use
- video equipment

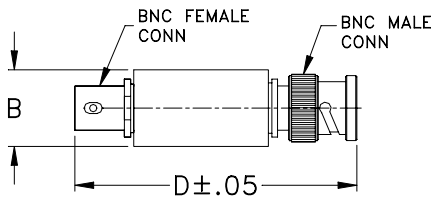
BLP-50-75+


Generic photo used for illustration purposes only

 CASE STYLE: FF55
 Connectors Model
 BNC BLP-50-75+

+RoHS Compliant



The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

Outline Dimensions (inch/mm)

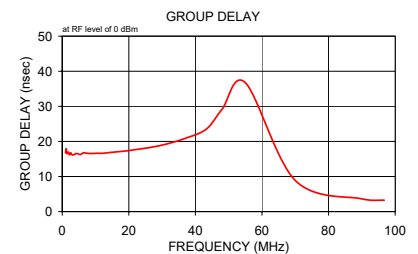
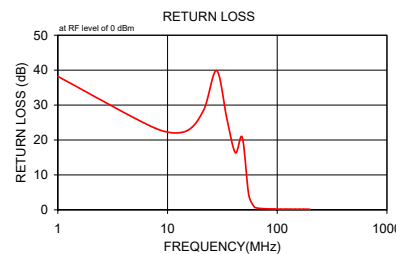
B	D	wt
.57	2.59	grams
14.47	65.79	40.0

Low Pass Filter Electrical Specifications

PASSBAND (MHz)	fco (MHz) Nom.	STOPBAND (MHz)		VSWR (:1)	
(loss < 1 dB)	(loss 3 dB)	(loss > 20 dB)	(loss > 40 dB)	Passband Typ.	Stopband Typ.
DC-48	55	70-90	90-200	1.7	18

typical frequency response

electrical schematic

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	$\bar{x}$	σ		
1.00	0.01	0.00	1.00	16.76
7.80	0.08	0.00	1.17	17.94
14.50	0.12	0.01	1.37	16.55
21.30	0.14	0.01	1.59	16.64
28.00	0.19	0.01	1.86	16.96
34.80	0.27	0.02	2.17	16.16
41.50	0.48	0.03	2.53	16.75
48.00	0.63	0.04	2.95	16.20
55.00	3.81	0.50	3.45	16.18
62.00	14.53	0.69	4.02	16.52
63.60	16.91	0.68	4.69	16.48
65.20	19.16	0.69	5.47	16.26
66.80	21.32	0.68	6.38	16.76
68.40	23.37	0.68	7.53	16.62
70.00	25.32	0.68	8.78	16.58
71.60	27.20	0.68	10.36	16.64
73.30	31.26	0.69	12.08	16.61
79.00	35.00	0.70	14.25	16.83
82.60	38.35	0.70	16.63	17.06
86.30	41.53	0.76	19.61	17.35
90.00	44.62	0.79	22.88	17.79
93.70	47.42	0.86	26.98	18.37
107.00	56.64	1.34	31.48	19.30
120.30	64.18	2.20	37.13	20.94
133.60	72.29	3.53	43.31	23.52
146.90	77.99	7.23	48.00	29.12
160.10	81.98	4.24	55.00	36.74
173.40	84.80	2.33	70.00	8.86
186.70	84.07	3.68	90.00	3.63
200.00	83.20	6.05	96.73	3.25


Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp


www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

 REV. C
 ECO-023903
 BLP-50-75+
 MCL NY
 241210

Coaxial Low Pass Filter

BLP-50-75+

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)	FREQUENCY (MHz)	GROUP DELAY (nsec)
1.0	0.01	38.19	1.0	16.760
7.8	0.08	23.31	1.2	17.940
14.5	0.12	22.43	1.4	16.550
21.3	0.14	28.49	1.6	16.640
28.0	0.19	39.87	1.9	16.960
34.8	0.27	25.97	2.2	16.160
41.5	0.48	16.38	2.5	16.750
48.0	0.63	20.68	3.0	16.200
55.0	3.81	4.27	3.5	16.180
62.0	14.53	0.76	4.0	16.520
63.6	16.91	0.62	4.7	16.480
65.2	19.16	0.53	5.5	16.260
66.8	21.32	0.47	6.4	16.760
68.4	23.37	0.43	7.5	16.620
70.0	25.32	0.40	8.8	16.580
71.6	27.20	0.38	10.4	16.640
75.3	31.26	0.33	12.1	16.610
79.0	35.00	0.31	14.3	16.830
82.6	38.35	0.28	16.6	17.060
86.3	41.53	0.27	19.6	17.350
90.0	44.62	0.25	22.9	17.790
93.7	47.42	0.24	27.0	18.370
107.0	56.64	0.21	31.5	19.300
120.3	64.18	0.20	37.1	20.940
133.6	72.29	0.19	43.3	23.520
146.9	77.99	0.19	48.0	29.120
160.1	81.98	0.19	55.0	36.740
173.4	84.80	0.18	70.0	8.860
186.7	84.07	0.16	90.0	3.630
200.0	83.20	0.15	96.7	3.250

REV. X1
BLP-50-75+
060724
Page 1 of 1



Patent Pending

Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

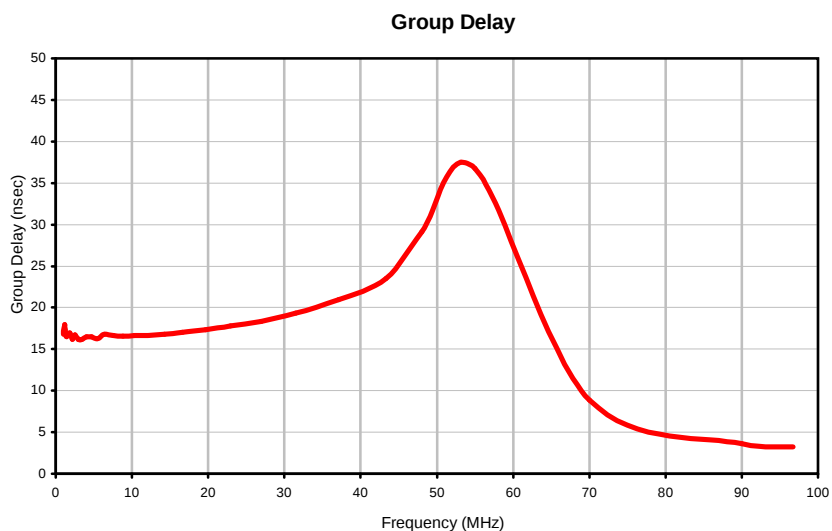
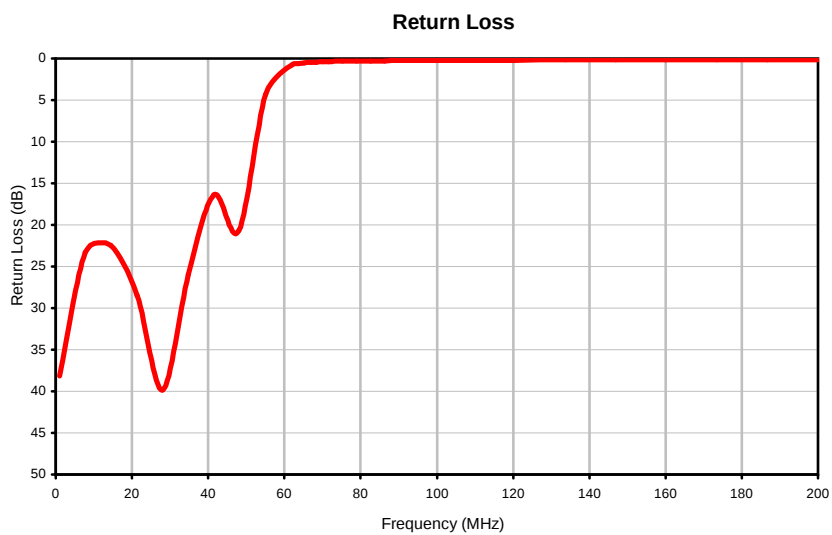
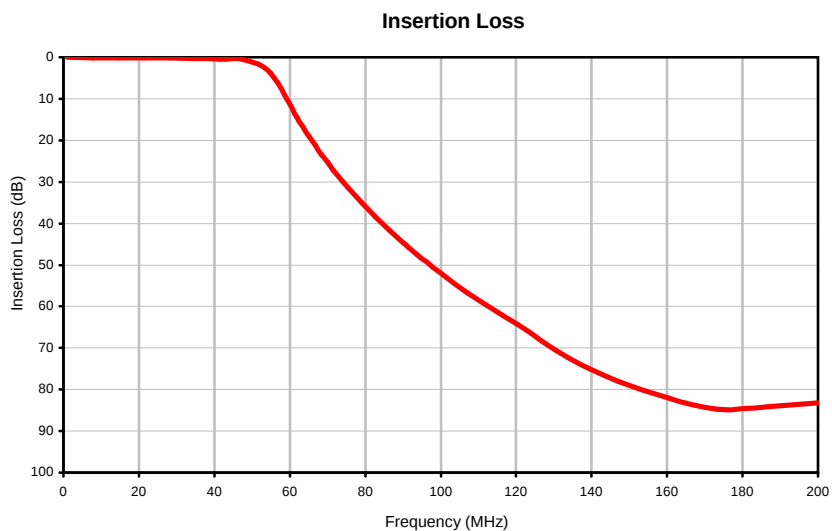
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Coaxial Low Pass Filter

Typical Performance Curves

BLP-50-75+



Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

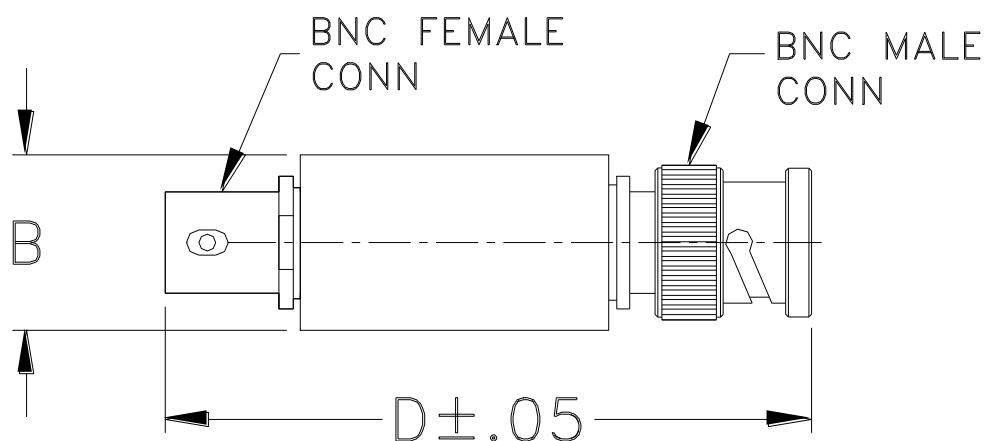


The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



REV. X1
BLP-50-75+
060724
Page 1 of 1

Outline Dimensions



CASE #.	A	B	C	D	E	WT GRAMS
FF55	--	.57 (14.47)	--	2.59 (65.79)	--	40.0

Dimensions are in inches (mm). Tolerances: 2Pl. +.03/-.04; 3Pl. ± .015

Note:

1. Case material: Stainless steel.



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I