

Ceramic

Bandpass Filter

BPJC-542R+

50Ω 4900 to 5900 MHz

The Big Deal

- Passband optimized for high band Wi-Fi
- Tiny size, 0603
- High rejection, 40 dB in lower stopband; 34 dB in upper stopband
- Low cost



CASE STYLE: JC0603C-1

Product Overview

Mini-Circuits' BPJC-542R+ is an LTCC bandpass filter with a passband from 4900 to 5900 MHz, optimized for use in Wi-Fi high-band applications. This model provides 1.0 dB passband insertion loss, 40 dB lower stopband rejection and 34 dB upper stopband rejection. The filter is capable of handling up to 1W RF input power and provides a wide operating temperature range from -55 to +100°C. Utilizing LTCC construction, the unit is fabricated in a tiny ceramic monolith (0.08 x 0.05 x 0.02") with excellent repeatability and low cost, suitable for volume production.

Key Features

Feature	Advantages
Passband optimized for high band Wi-Fi.	Optimized for the 4900 to 5900 MHz passband, this model is ideal for cleaning signal in high band Wi-Fi applications.
Tiny size (0.06 x 0.04 x 0.02")	Minimizes performance variations due to parasitics and saves space in dense circuit board layouts.
High stopband rejection	Effective suppression of unwanted out-of-band spurs over a wide stopband range results in better receiver sensitivity and dynamic range.
Wraparound terminations	Excellent solderability and easy visual inspection.
Wide operating temperature range, -55 to +100°C	Reliable performance in extreme environments.



Ceramic

Bandpass Filter

50Ω 4900 to 5900 MHz

BPJC-542R+



CASE STYLE: JC0603C-1

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Features

- High Rejection.
- miniature size 0603 (1.6x0.8mm)
- LTCC construction
- low cost
- aqueous washable

Applications

- ISM Band
- WLAN
- Bluetooth
- Zigbee

Functional Schematic



Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	—	5400	—	MHz	
	Insertion Loss	4900 – 5900	1.0	1.5	dB	
	VSWR	4900 – 5900	—	1.4	2	:1
Stop Band, Lower	Rejection	DC – 2700	29	40	—	dB
Stop Band, Upper	Rejection	9800 - 12000	30	34	—	dB

1. Tested on Evaluation Board TB-BPJC-542R+

Maximum Ratings

Operating Temperature	-55°C to +100°C
Storage Temperature*	-55°C to +100°C
RF Power Input	1W



* Refer to product storage temperature after installation
Suggestion for T&R unused product storage condition:
+5 ~ +35 °C, Humidity 45~75%RH, 12 month Max

Typical Performance Data at 25°C

Frequency (GHz)	Insertion Loss (dB)	VSWR (:1)
10	74.45	252.64
100	57.82	226.98
500	44.50	128.68
1000	38.84	96.27
2700	40.27	65.23
3300	27.22	41.86
4600	1.93	2.07
4900	1.19	1.47
5400	0.95	1.33
5900	0.95	1.21
6800	2.30	2.10
8000	33.22	15.80
9800	31.76	29.52
11000	33.96	34.59
12000	34.54	38.23

Pad Connections


Input	1
Output	3
Ground	2,4

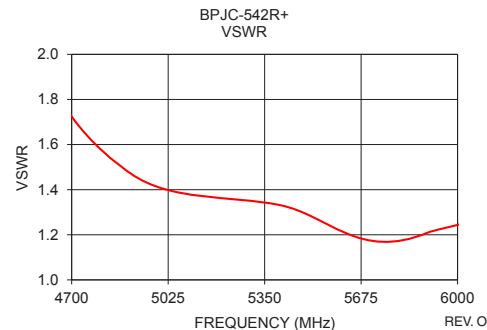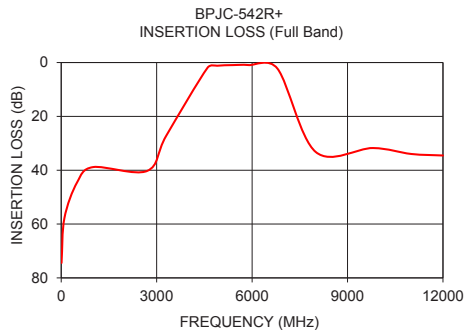

Bandpass Filter

BPJC-542R+


Outline Drawing

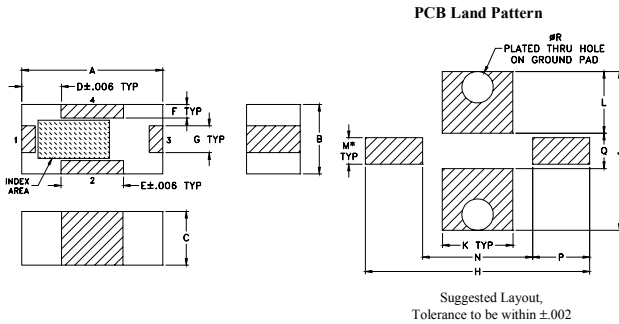

Pad Connections

Input	1
Output	3
Ground	2,4

Evaluation Board MCL P/N: TB-BPJC-542R+ Suggested PCB Layout (PL-412)

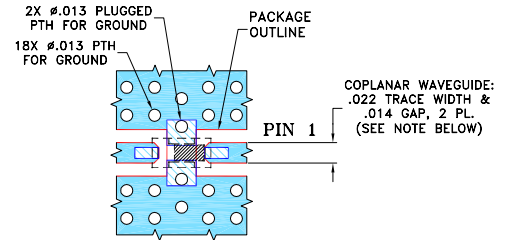

NOTES:

- TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS $.010 \pm .001$ ". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Outline Dimensions ($\frac{\text{inch}}{\text{mm}}$)

A	B	C	D	E	F	G	H	J
.063	.031	.024	.018	.028	.006	.012	.100	.071
1.60	0.79	0.61	0.46	0.71	0.15	0.30	2.54	1.80
K	L	M	N	P	Q	R	wt	
.032	.028	.012	.049	.026	.016	.014	grams	
0.81	0.71	0.30	1.24	0.66	0.41	0.36	0.005	

Additional Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT VSWR (:1)	OUTPUT VSWR (:1)
10	74.45	252.64	217.31
50	63.21	251.08	219.06
100	57.82	226.98	196.33
200	52.10	189.03	161.21
300	48.76	164.27	132.70
400	46.38	135.44	117.67
500	44.50	128.68	105.55
600	42.99	120.13	97.92
700	41.71	109.01	89.62
800	40.63	102.54	85.31
900	39.68	97.21	79.52
1000	38.84	96.27	77.36
1500	35.86	83.92	68.43
2000	34.60	76.62	66.47
2500	36.51	69.21	69.74
2700	40.27	62.97	65.23
3000	41.83	51.31	55.87
3500	21.18	29.14	32.31
4000	9.28	9.43	10.63
4100	7.36	6.99	7.84
4200	5.69	5.13	5.70
4300	4.30	3.82	4.21
4400	3.24	2.92	3.19
4500	2.45	2.32	2.51
4600	1.93	1.94	2.07
4700	1.57	1.69	1.78
4800	1.34	1.54	1.59
4900	1.19	1.45	1.47
5000	1.09	1.39	1.39
5050	1.05	1.37	1.37
5100	1.03	1.36	1.34
5150	1.00	1.35	1.33
5200	0.98	1.34	1.32
5250	0.97	1.33	1.31
5300	0.96	1.34	1.30
5350	0.95	1.34	1.30
5400	0.95	1.33	1.30
5450	0.94	1.33	1.30
5500	0.94	1.33	1.30
5550	0.94	1.33	1.30
5600	0.94	1.31	1.29
5650	0.94	1.30	1.28
5700	0.94	1.29	1.27
5750	0.94	1.28	1.25
5800	0.94	1.26	1.23
5850	0.94	1.24	1.21
5900	0.95	1.21	1.18
6000	0.97	1.16	1.12
6500	1.49	1.54	1.49
7000	2.87	2.18	2.28
7500	10.07	3.49	4.58
8000	33.22	14.46	15.80
8500	28.69	22.66	23.93
9000	29.46	27.73	30.70
9500	31.04	29.62	31.56
9800	31.76	28.40	29.52
10000	32.07	28.39	28.39
10500	33.42	30.07	27.10
11000	33.96	34.59	28.52
11500	34.00	38.49	33.14
11800	34.21	37.65	35.34
12000	34.54	35.64	38.23









P.O. Box 350166, Brooklyn, New York 11235-0003 • Fax (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

Typical Performance Curves

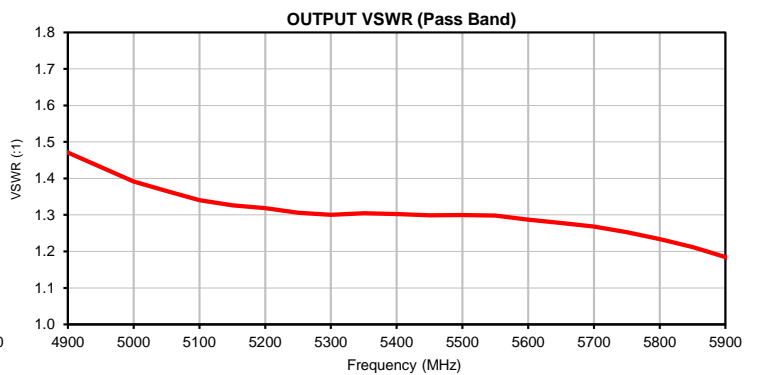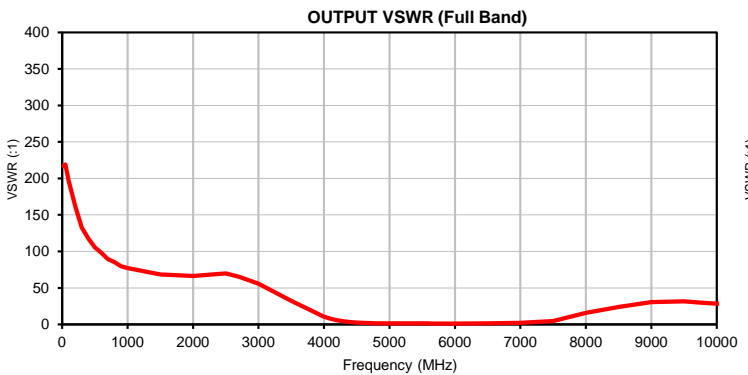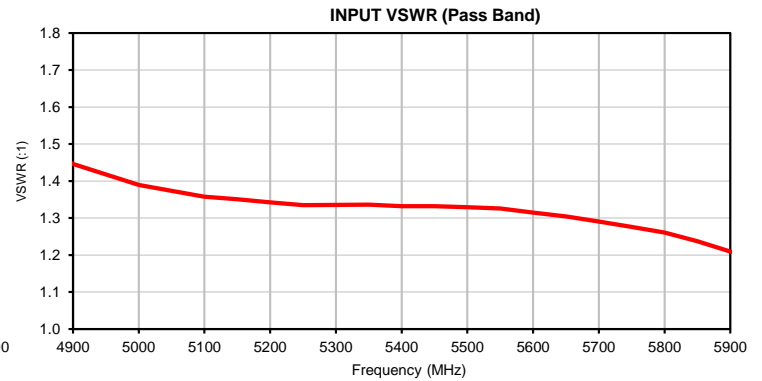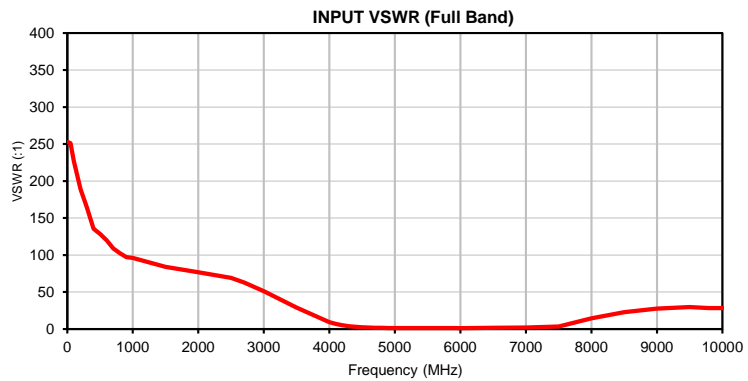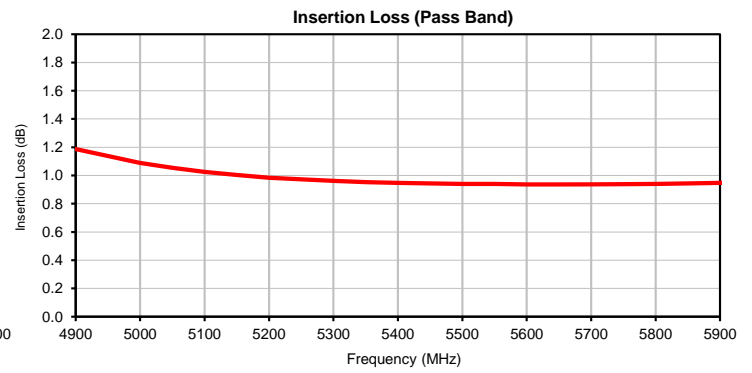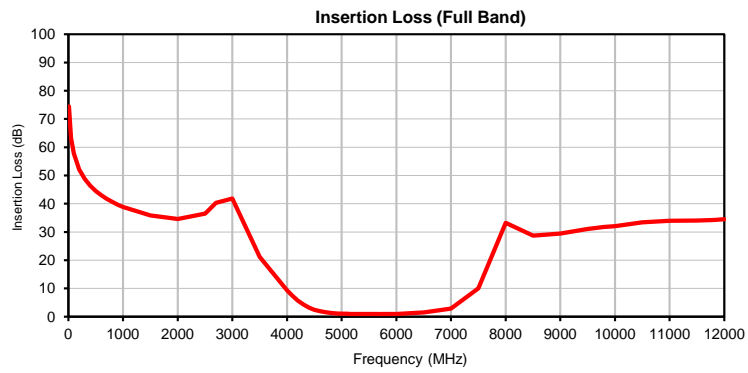


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com




IF/RF MICROWAVE COMPONENTS

Outline Dimensions

JC0603C-1

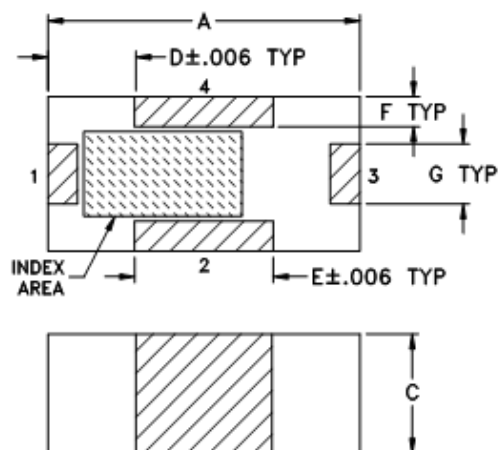

PCB Land Pattern

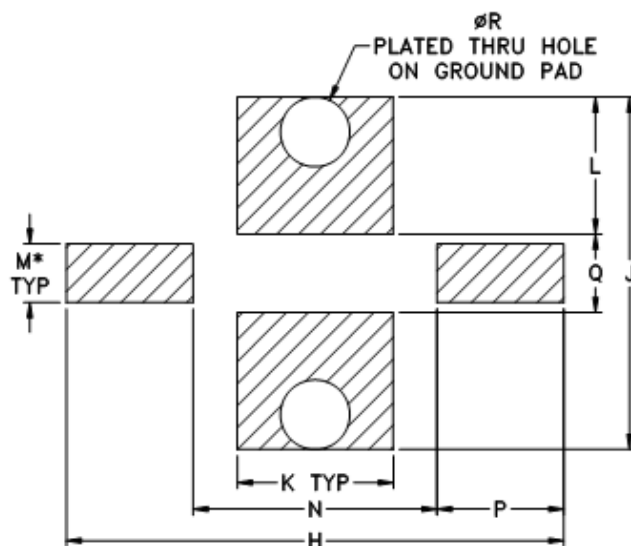

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L
JC0603C-1	.063 (1.60)	.031 (0.80)	.024 (0.60)	.018 (0.45)	.028 (0.70)	.006 (0.15)	.012 (0.30)	.100 (2.54)	.071 (1.80)	.032 (0.80)	.028 (0.70)

CASE #	M*	N	P	Q	R	WT. GRAMS
JC0603C-1	.012 (0.30)	.049 (1.24)	.026 (0.65)	.016 (0.40)	.014 (0.35)	.005

Dimensions are in inches (mm). Tolerances: 3 Pl. $\pm .004$

Notes:

1. Open style, ceramic base.
2. Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
- 3.* - Line width should be designed to match 50 OHMS characteristic impedance, depending on PCB material & thickness.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F114

DEVICE ORIENTATION IN T&R



ILLUSTRATION 1

Applicable Case Styles	
GE0805C	JC0603C
GE0805C-1	JC0603C-4
GE0805C-1AP	JC0603C-6
GE0805C-7	
GE0805C-9	
GE0805C-10	
GE0805C-11	
GE0805C-12	

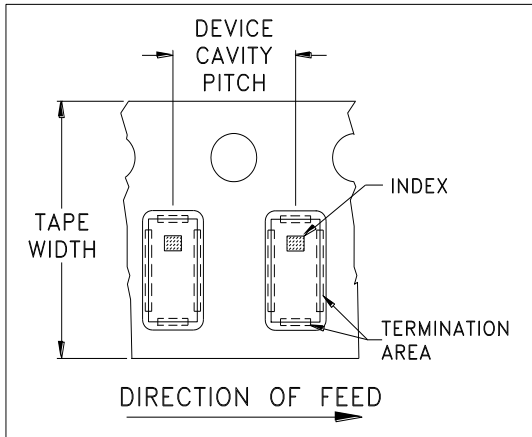


ILLUSTRATION 2

Applicable Case Styles	
GE0805C-2	JC0603C-1
GE0805C-3	JC0603C-2
GE0805C-4	JC0603C-3
GE0805C-5	JC0603C-5
GE0805C-6	JC0603C-7
GE0805C-8	
GE0805C-15	

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
				1000
			Standard	4000

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

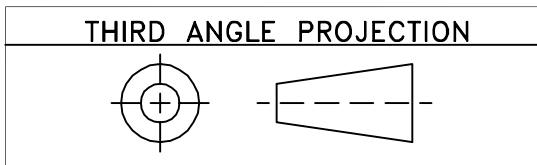


REVISIONS					
REV OR	ECN No.	DESCRIPTION	DATE	DR	AUTH
	M144975	NEW RELEASE	02/04/14	AV	RS

**SUGGESTED MOUNTING CONFIGURATION
FOR JC0603C-1 CASE STYLE, "04FL01" PIN CODE**

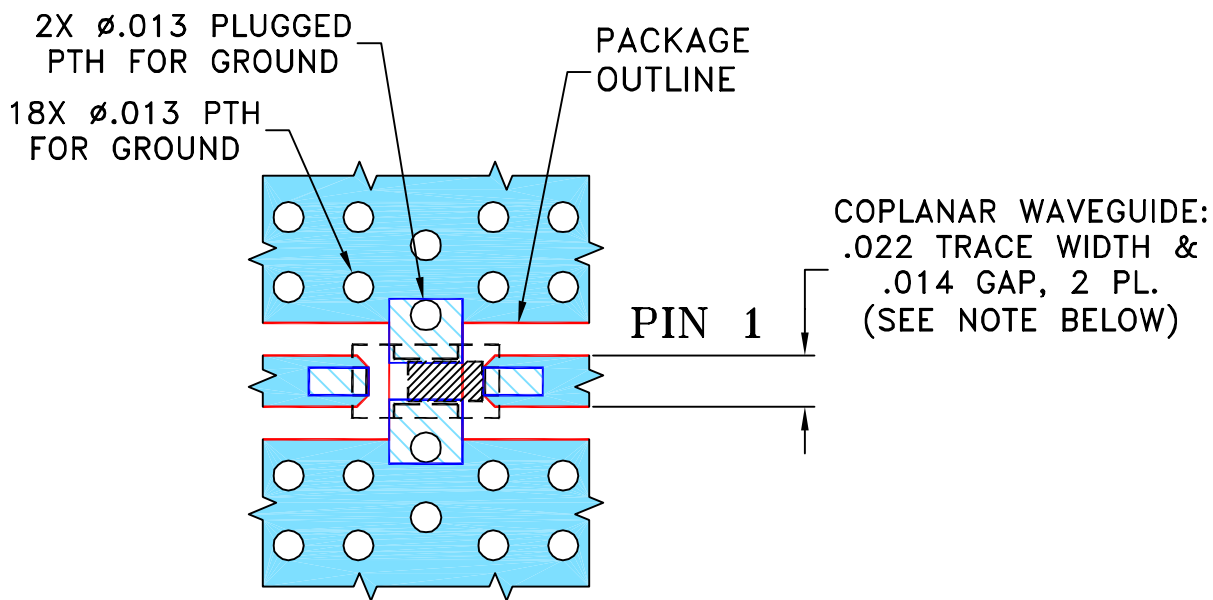

NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN AV	01/24/14
TOLERANCES ON:	CHECKED IL	02/03/14
2 PL DECIMALS ±	APPROVED RS	02/04/14
3 PL DECIMALS ± .005		
ANGLES ±		
FRACTIONS ±		

 **Mini-Circuits®** 13 Neptune Avenue
Brooklyn NY 11235


PL, 04FL01, JC0603C-1, TB-720+

 Mini-Circuits®
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.


ASHEETA1.DWG REV:A DATE:01/12/95

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-412	OR
FILE:	98PL412	SCALE: 12:1	SHEET: 1 OF 1

Evaluation Board and Circuit

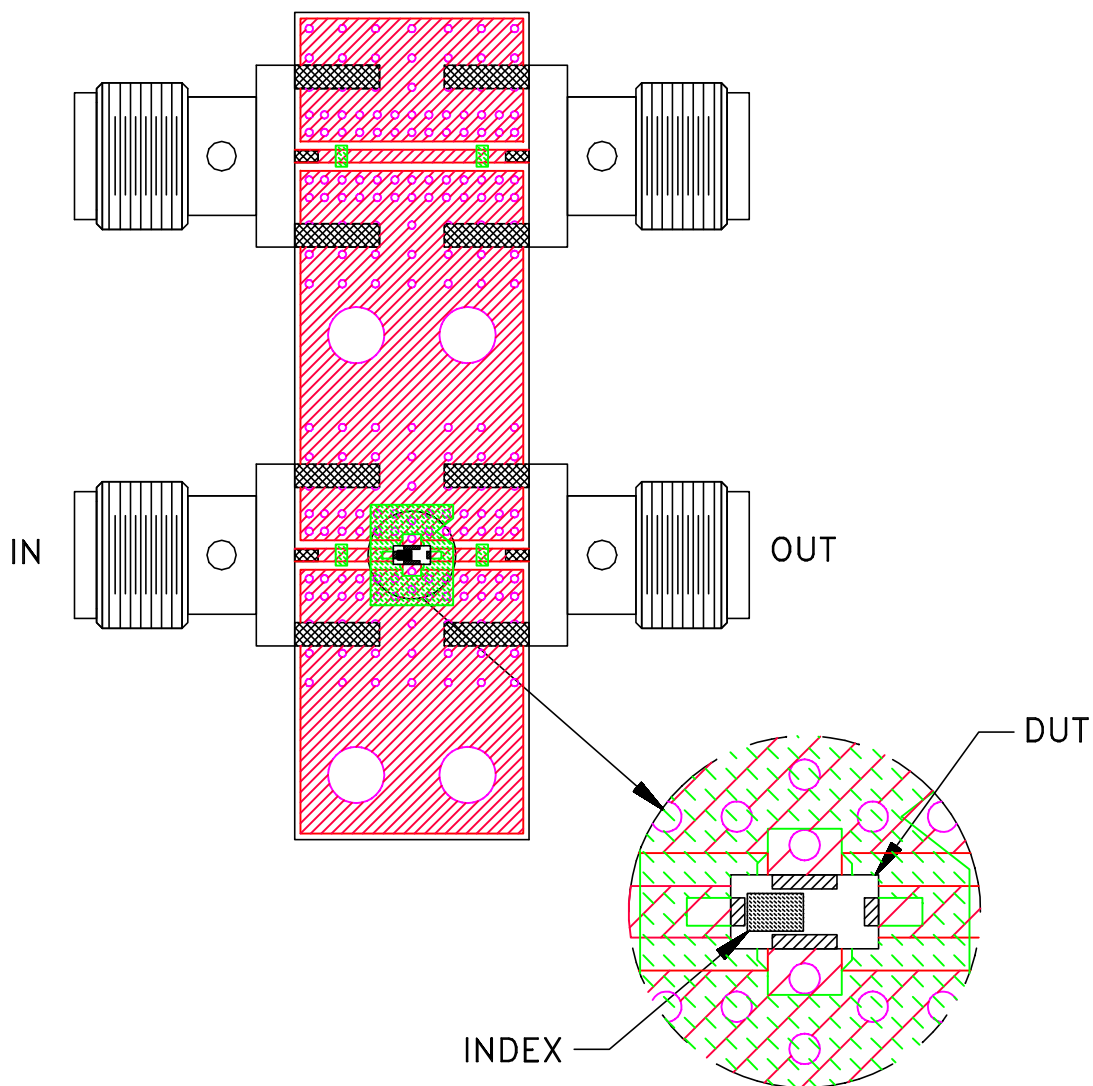


TB-BPJC-542R+

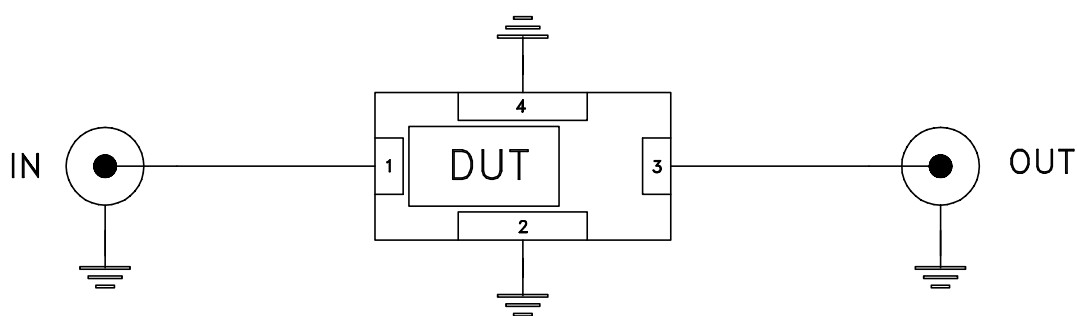

Schematic Diagram

Notes:

1. 50 Ohm 2.92 mm End Launch Female connectors.
2. PCB Material: R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.010 inch.

 **Mini-Circuits®**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A