

**KEY FEATURES**

- Ultra-Wideband, DC to 6 GHz
- Low Insertion Loss, 0.04 dB Typ. to 6 GHz
- Excellent VSWR, 1.13:1 Typ. to 6 GHz
- Straight Body

*Generic photo used for illustration purposes only***PRODUCT OVERVIEW**

Mini-Circuits' DINM-DINM+ is a coaxial DIN male to DIN male adapter supporting a wide range of applications from DC to 6 GHz. This model provides excellent VSWR and low insertion loss over the frequency band. The DINM-DINM+ features passivated stainless-steel construction with a gold-plated beryllium copper center pin and measures only 1.417" in length.

ELECTRICAL SPECIFICATIONS¹ AT +25 °C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		6	GHz
Insertion Loss	0.01-6	-	0.04	0.25	dB
VSWR	0.01-6	-	1.13	1.20	:1

1. Specifications are tested to minimum frequency of 0.01 GHz.

ABSOLUTE MAXIMUM RATINGS²

Operating Case Temperature	-45 °C to +125 °C
Storage Temperature	-45 °C to +125 °C

2. Permanent damage may occur if any of these limits are exceeded.



COAXIAL

Adapter


DINM-DINM+

Mini-Circuits


50 Ω DC to 6 GHz DIN Male to DIN Male

TYPICAL PERFORMANCE GRAPHS


INSERTION LOSS (+25 °C)

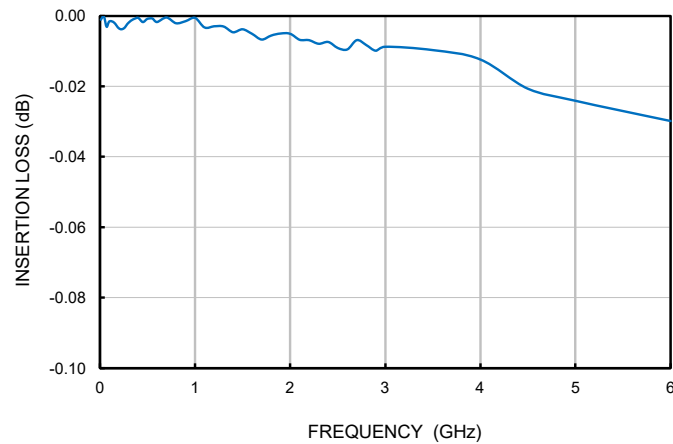

DIN MALE VSWR (+25 °C)

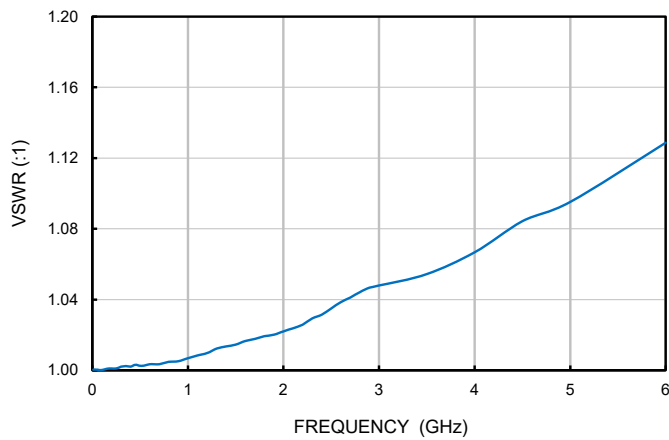

DIN MALE VSWR (+25 °C)

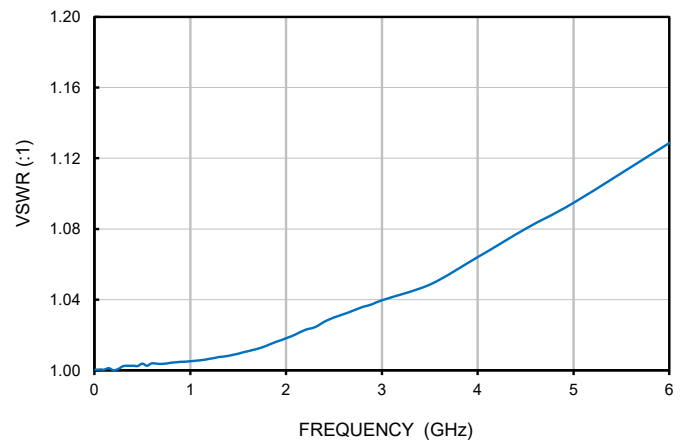




CONNECTOR SPECIFICATIONS

Description	Connector 1	Connector 2
Connector Type	DIN Male	DIN Male
Orientation	Straight	Straight

CASE STYLE DRAWING

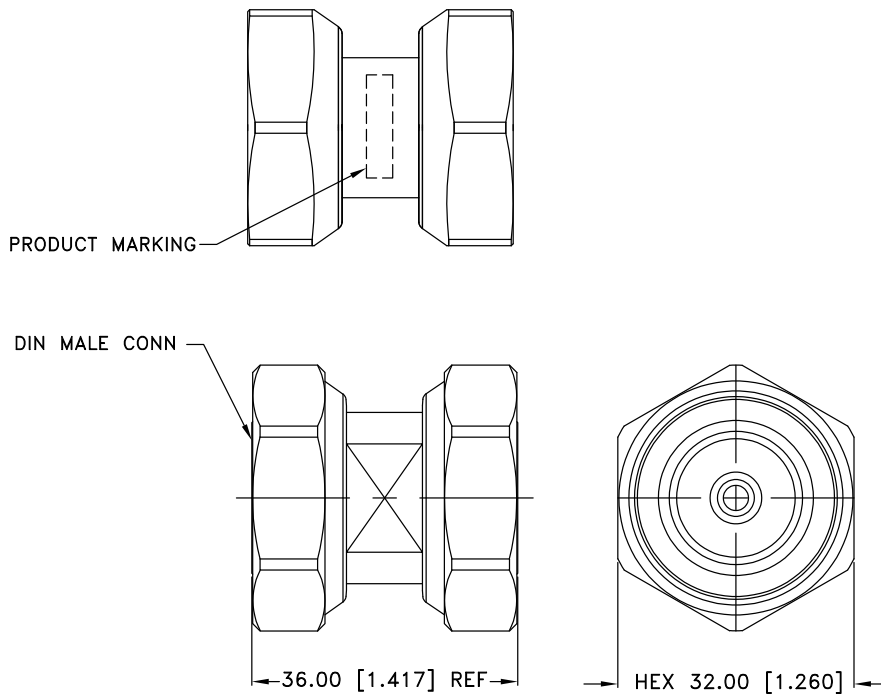

Dimensions are in mm [Inches]. Tolerances: 2 Pl.±0.40 mm

PRODUCT MARKING*: DINM-DINM+

*Marking may contain other features or characters for internal lot control.



ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

CLICK HERE

Performance Data & Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	DJ3847-2
RoHS Status	Compliant
Environmental Ratings	ENV152

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

Adapter, DIN-Male to DIN-Male

DINM-DINM+

Typical Performance Data

FREQ.	INSERTION LOSS	DIN-MALE VSWR	DIN-MALE VSWR
(GHz)	(dB)	(:1)	(:1)
0.01	0.00	1.00	1.00
0.04	0.00	1.00	1.00
0.07	0.00	1.00	1.00
0.10	0.00	1.00	1.00
0.15	0.00	1.00	1.00
0.20	0.00	1.00	1.00
0.25	0.00	1.00	1.00
0.30	0.00	1.00	1.00
0.35	0.00	1.00	1.00
0.40	0.00	1.00	1.00
0.45	0.00	1.00	1.00
0.50	0.00	1.00	1.00
0.55	0.00	1.00	1.00
0.60	0.00	1.00	1.00
0.70	0.00	1.00	1.00
0.80	0.00	1.00	1.00
0.90	0.00	1.00	1.00
1.00	0.00	1.00	1.00
1.10	0.00	1.00	1.01
1.20	0.00	1.01	1.01
1.30	0.00	1.01	1.01
1.40	0.00	1.01	1.01
1.50	0.00	1.01	1.01
1.60	0.01	1.01	1.01
1.70	0.01	1.01	1.01
1.80	0.01	1.01	1.01
1.90	0.00	1.01	1.02
2.00	0.01	1.02	1.02
2.10	0.01	1.02	1.02
2.20	0.01	1.02	1.02
2.30	0.01	1.02	1.02
2.40	0.01	1.02	1.03
2.50	0.01	1.02	1.03
2.60	0.01	1.03	1.03
2.70	0.01	1.03	1.03
2.80	0.01	1.03	1.03
2.90	0.01	1.04	1.04
3.00	0.01	1.04	1.04
3.50	0.01	1.05	1.05
4.00	0.01	1.06	1.06
4.50	0.02	1.08	1.07
5.00	0.02	1.09	1.09
6.00	0.03	1.12	1.12






P.O. Box 350166, Brooklyn, New York 11235-0003 • Fax (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. OR
DINM-DINM+
5/27/2026
Page 1 of 1

Typical Performance Curves

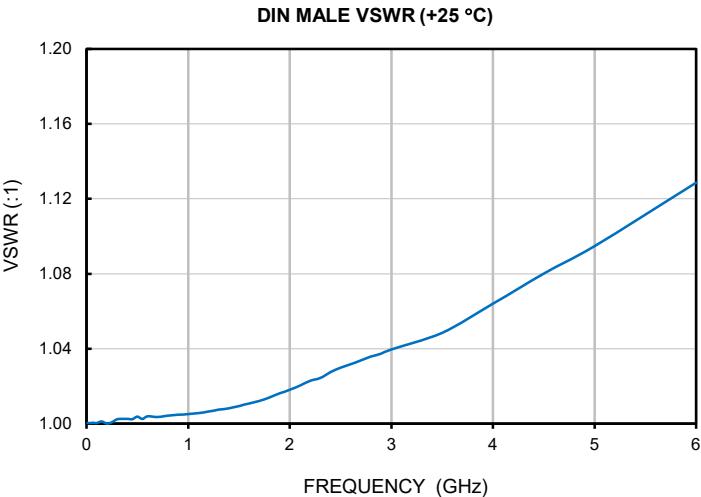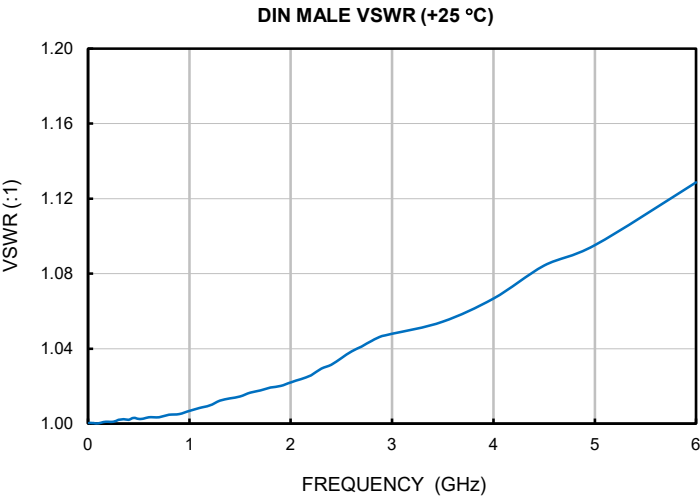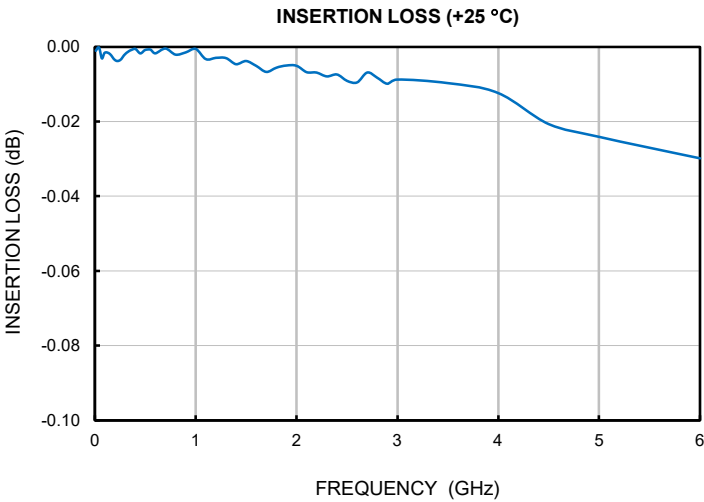


Case Style

DJ

Outline Dimensions

DJ3847-2

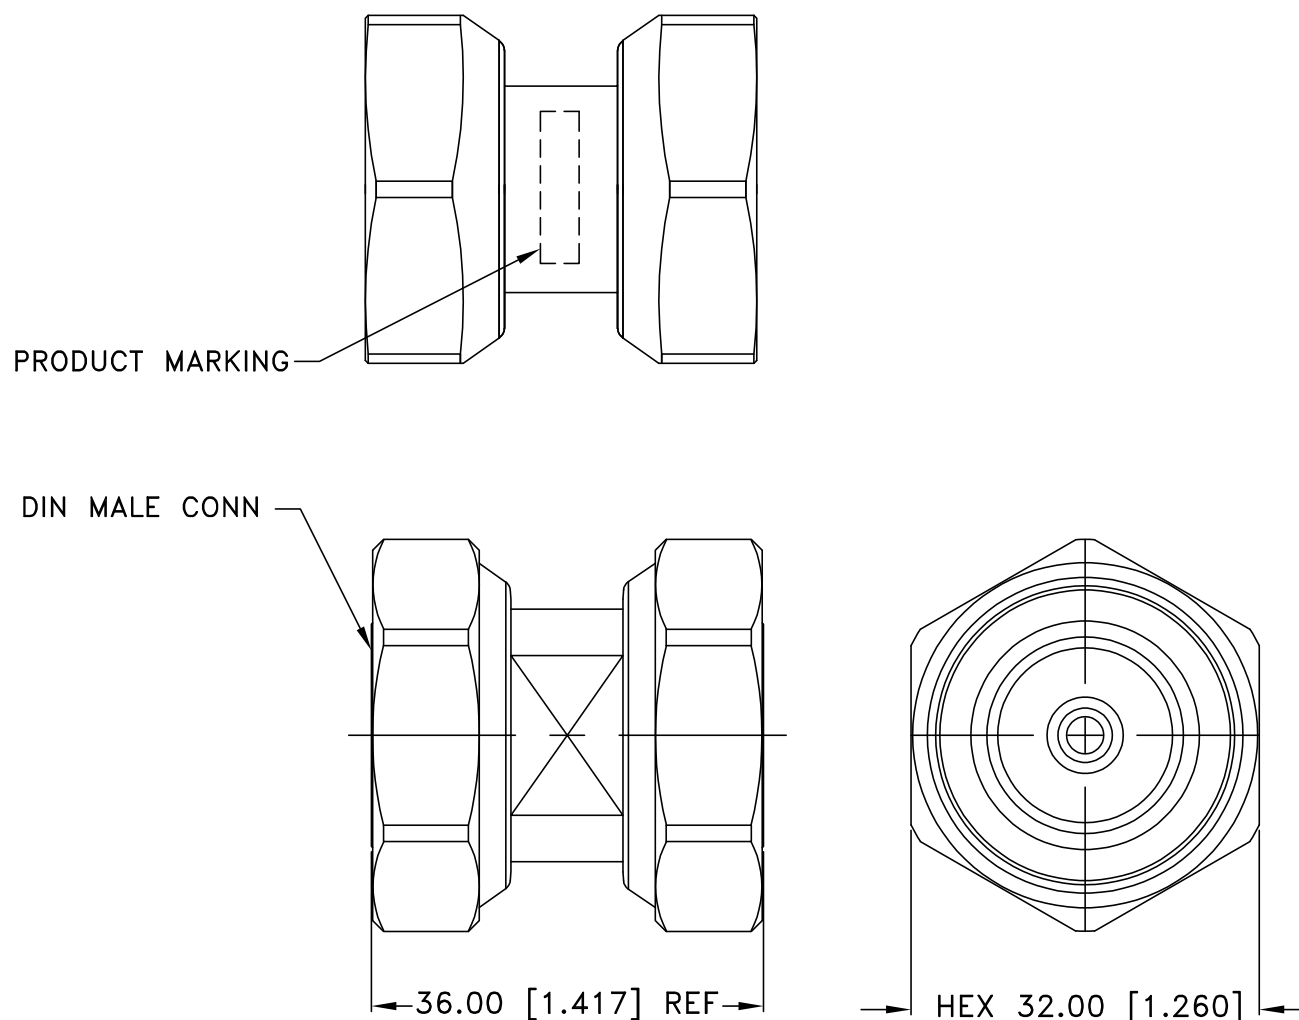

Dimensions are in MM [INCHES]. Tolerances: 2 Pl. ± 0.40 mm

Notes:

Case material: Brass.
Finish: Tri Metal Alloy Plating.

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-45° to +125° C	Individual Model Data Sheet
Storage Temperature	-45° to +125° C	Individual Model Data Sheet
Thermal Shock	-55° to +125° C, 5cycles, 15 min dwell time	MIL-STD-202, Method 107, Condition B except -55° C instead of -65° C
Connector Durability	500 mating/unmating cycles	MIL-PRF-39012E, PARAGRAPH 4.6.12