

Coaxial RF Transformer

75Ω

0.5 to 500 MHz

FTB-1-1-75+



Generic photo used for illustration purposes only

CASE STYLE: H16-1

BNC Connectors	Model
FEMALE/FEMALE	FTB-1-1-75*A15+
MALE/FEMALE	FTB-1-1-75*C15+
BRACKET (OPTION "B")	

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	250mW
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

	Marking
PRIMARY	BAL
SECONDARY	UNBAL


Features

- wideband, 0.5 to 500 MHz
- balanced to single-ended
- balanced port: isolated Female BNC

Applications

- DC Block


Outline Drawing

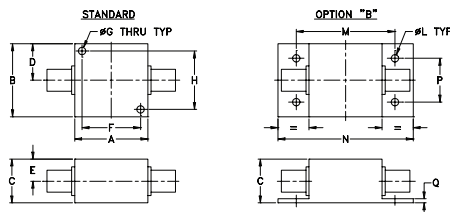

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
1.25	1.25	.81	.63	.41	1.000	.125	1.000
31.75	31.75	20.57	16.00	10.41	25.40	3.18	25.40

J	K	L	M	N	P	Q	wt
--	--	.125	1.688	2.19	.750	.06	grams
--	--	3.18	42.88	55.63	19.05	1.52	70.0





Transformer Electrical Specifications

Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz
1	0.5-500	0.5-500	5-300	10-100

* Insertion Loss is referenced to mid-band loss, 0.6 dB typ.

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
0.50	1.08	8.63
1.00	0.88	11.46
2.00	0.74	13.95
5.00	0.60	17.18
10.00	0.57	18.35
20.00	0.55	18.21
100.00	0.84	13.46
242.19	1.29	9.95
300.00	1.34	10.43
500.00	2.12	9.11

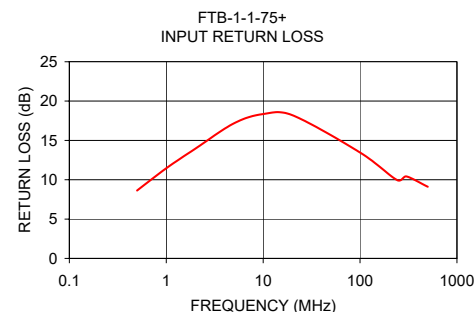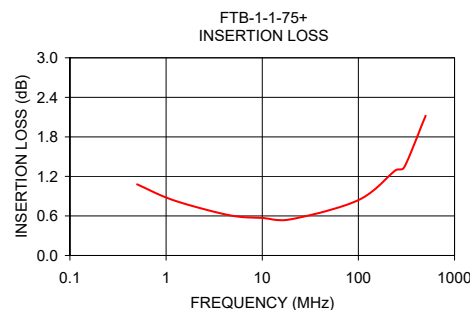

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. E
M151107
FTB-1-1-75+
IG/CP/AM
200528

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
0.50	1.08	8.63
1.00	0.88	11.46
2.00	0.74	13.95
5.00	0.60	17.18
10.00	0.57	18.35
20.00	0.55	18.21
100.00	0.84	13.46
242.19	1.29	9.95
300.00	1.34	10.43
500.00	2.12	9.11


Typical Performance Curves

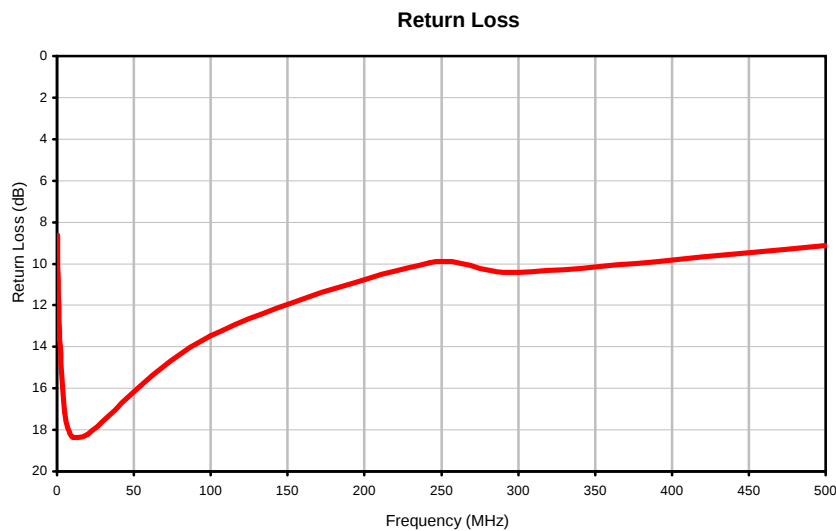


Outline Dimensions

H16-1

STANDARD

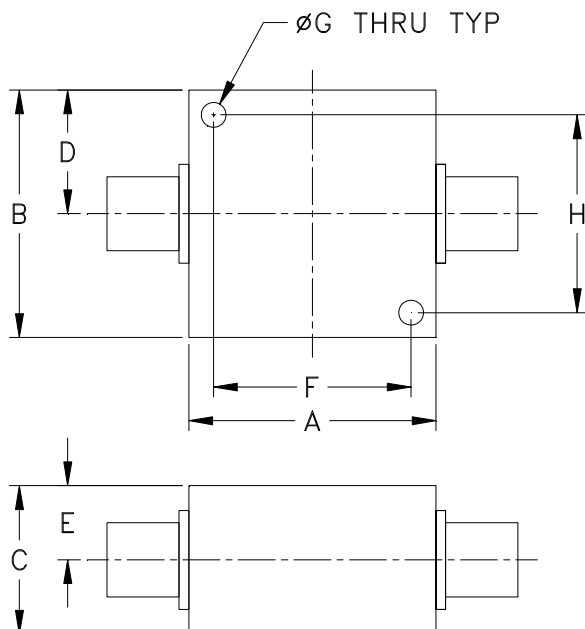

OPTION "B"

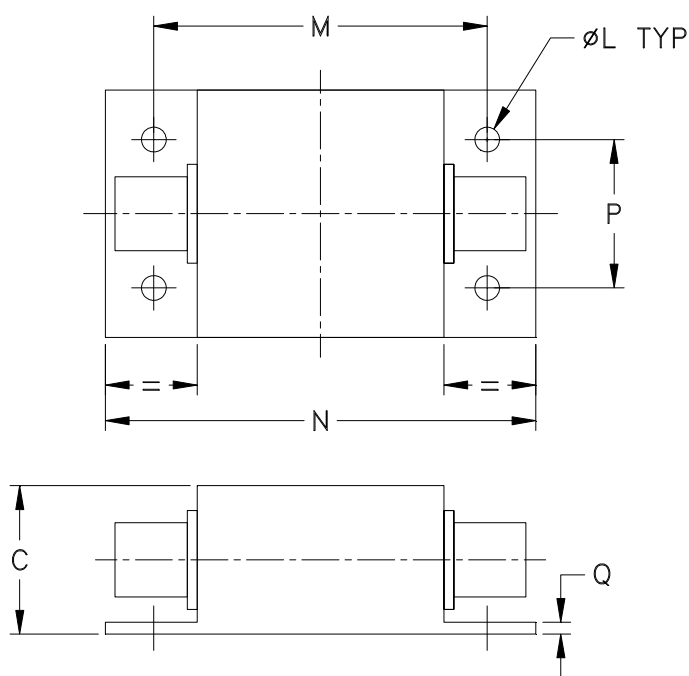

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
H16-1	1.25 (31.75)	1.25 (31.75)	.81 (20.57)	.63 (16.00)	.41 (10.41)	1.000 (25.40)	.125 (3.18)	1.000 (25.40)	--	--	.125 (3.18)	1.688 (42.88)	2.19 (55.63)

CASE#	P	Q	WT.GRAMS
H16-1	.750 (19.05)	.06 (1.52)	70

Dimensions are in inches (mm). Tolerances: 2PL. $\pm .03$; 3PL. $\pm .015$

Notes:

1. Case material: Aluminum alloy.
2. Case finish:
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
3. Mounting bracket available on request. Add suffix B to part number.
4. Bracket version, option B, dimension "C" changes from .81 to 1.00 inches when connectors are type N.
5. Refer to the individual model data sheet for the type of connectors available.



ISO 9001 ISO 14001 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

