CERAMIC

High Pass Filter

HFCN-103+

50Ω 9700 to 15000 MHz

THE BIG DEAL

- Small size (0.12 x 0.06 x .04")
- 7 sections
- Temperature stable
- Excellent power handling, 7W
- Hermetically sealed
- Low cost



Generic photo used for illustration purposes only

CASE STYLE: FV1206-4

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

APPLICATIONS

- Sub-harmonic rejection
- Transmitters/receivers
- Lab use

PRODUCT OVERVIEW

The HFCN-103+ is an LTCC based 7 section design, that extends the upper frequency cut-off range of the existing HFCN series to 10 GHz. Systems that previously relied on large distributed filter elements to support these lower frequencies can save space and system complexity by integrating the HFCN-103+ into new designs. These filters are offered in a EIA 1206 package size and have a typical stop band rejection of 30 dB.

KEY FEATURES

Feature	Advantages
Small Size (3.2mm x 1.6 mm)	Available in the size of typical resistors or capacitors (EIA 1706), the ultra small HFCN series integrates up to 7 high pass sections in a simple SMT chip form factor.
High Power Handling	The HFCN series can withstand up to 7W CW signal without damage making this filter ideal for use in medium power to transmit paths.
Temperature Stability	Over a 155°C operating temperature range (-55°C to +100°C), the HFCN series ceramic filters typically exhibit low pass band insertion loss variation.
High Rejection	Achieving 30dB rejection from DC-5700 MHz; the HFCN-103+ provides a versatile high pass configuration for many up converter applications.

REV. F
ECO-012120
HFCN-103+
AD/CP/AM
220209

ELECTRICAL SPECIFICATIONS [1,2] AT 25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Stop Band	Rejection Loss	DC-F1	DC-5700	30	—	—	dB
		F1-F2	DC-6500	20	—	—	
	Freq. Cut-Off	F3	8400	—	3.0	—	dB
	VSWR	DC-F2	DC-6500	—	20	—	:1
Pass Band	Insertion Loss	F4-F7	9700 - 15000	—	—	2.0	dB
		F5-F6	10000 - 11000	—	—	1.8	dB
	VSWR	F4-F7	9700 - 15000	—	2.0	—	:1

1. In Application where DC voltage is present at either input or output ports, dc de-coupling capacitors are required.
2. Measured on Mini-Circuits Characterization Test Board TB-637+.

MAXIMUM RATINGS

Parameter	Ratings
Operating temperature	-55°C to +100°C
Storage temperature	-55°C to +100°C
RF Power Input[3]	7W max. at 25°C

3. Passband rating, derate linearly to 3W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

TYPICAL FREQUENCY RESPONSE

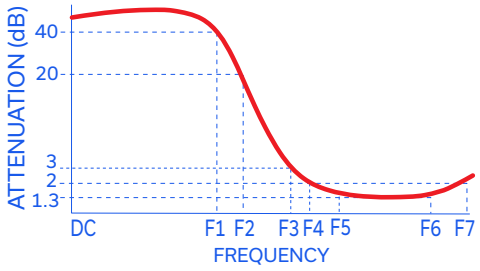

FUNCTIONAL SCHEMATIC

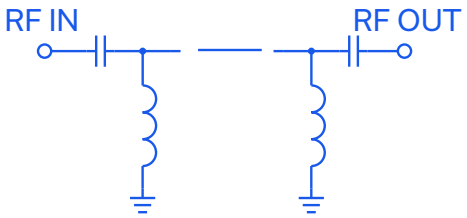

CERAMIC

High Pass Filter

HFCN-103+

PIN CONNECTIONS

RF IN	1
RF OUT	3
GROUND	2,4

PRODUCT MARKING: AR

DEMO BOARD MCL P/N: TB-637+
SUGGESTED PCB LAYOUT (PL-530)

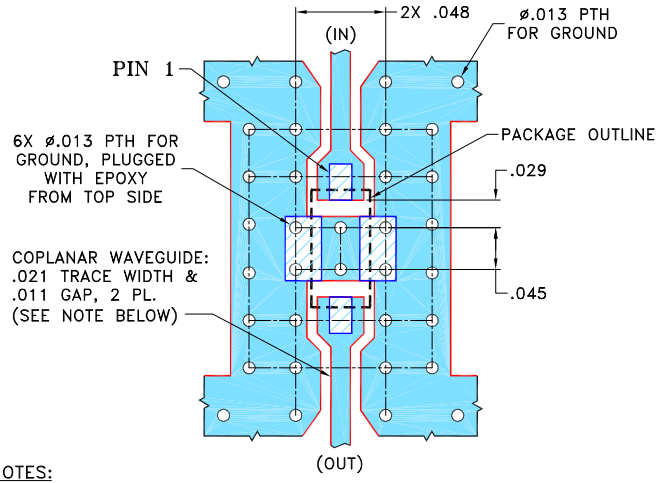

NOTES:

1. TRACE WIDTH & GAP ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

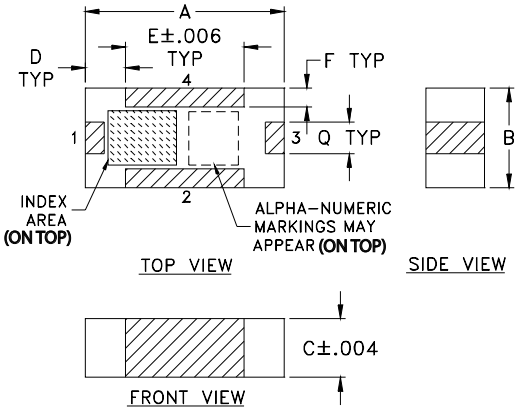

PCB Land Pattern

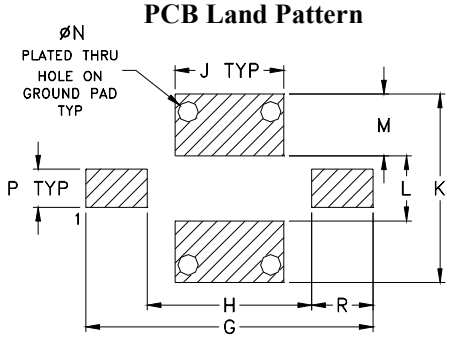

Suggested Layout,
Tolerance to be within ±.002

OUTLINE DIMENSIONS (Inches / mm)

A	B	C	D	E	F	G	H	J
.126	.063	.037	.026	.075	.012	.182	.104	.069
3.20	1.60	0.94	0.66	1.91	0.30	4.62	2.64	1.75

K	L	M	N	P	Q	R	wt
.119	.041	.039	.013	.024	.020	.039	grams
3.02	1.04	0.99	0.33	0.61	0.51	0.99	.020

TAPE & REEL INFORMATION: F75

High Pass Filter

HFCN-103+

TYPICAL PERFORMANCE DATA AT 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR :1
10.00	71.76	322.99
100.00	52.00	394.14
1000.00	34.16	174.73
2160.00	33.48	106.97
4080.00	39.88	89.02
5030.00	44.64	64.14
10050.00	1.22	1.60
12170.00	1.14	1.70
14070.00	1.01	1.15
15200.00	1.18	1.65

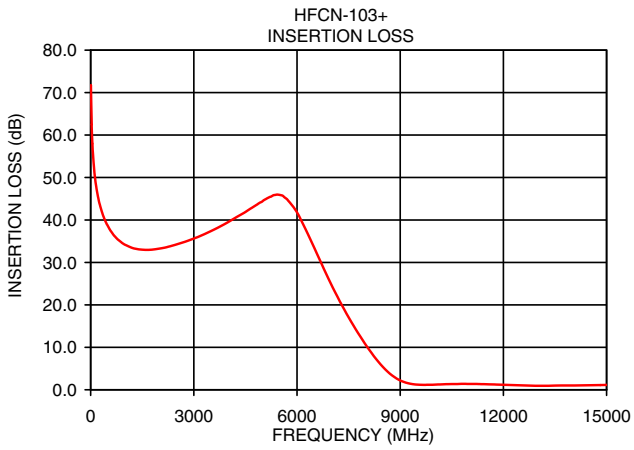

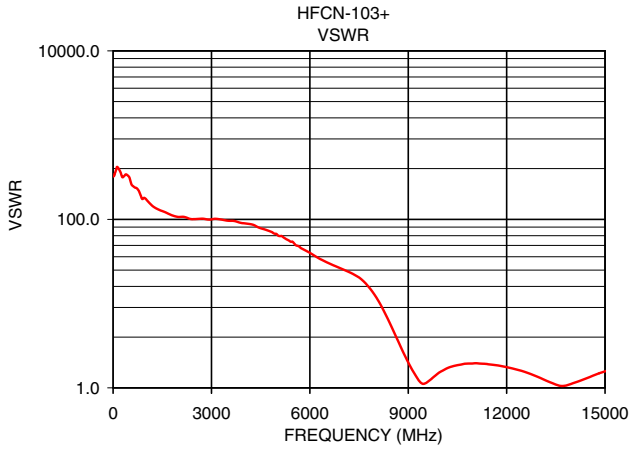

NOTES

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Ceramic High Pass Filter HFCN-103+

Typical Performance Data

FREQ. (MHz)	INSERTION LOSS (dB)			INPUT RETURN LOSS (dB)			OUTPUT RETURN LOSS (dB)		
	@ -55˚C	@+25˚C	@+100˚C	@ -55˚C	@+25˚C	@+100˚C	@ -55˚C	@+25˚C	@+100˚C
10.0	72.34	71.55	72.40	0.05	0.05	0.05	0.05	0.05	0.05
100.0	52.23	52.16	52.13	0.05	0.05	0.06	0.04	0.05	0.05
450.0	39.33	39.31	39.28	0.04	0.07	0.09	0.03	0.07	0.09
500.0	38.51	38.51	38.49	0.04	0.07	0.10	0.04	0.07	0.10
610.0	37.06	37.00	36.99	0.04	0.08	0.10	0.04	0.08	0.12
720.0	35.91	35.89	35.89	0.04	0.08	0.12	0.04	0.08	0.13
830.0	35.08	35.12	35.10	0.04	0.09	0.13	0.05	0.09	0.15
940.0	34.06	34.14	34.20	0.04	0.10	0.13	0.04	0.10	0.14
1000.0	33.84	33.92	33.97	0.05	0.11	0.14	0.05	0.11	0.15
1590.0	32.24	32.35	32.45	0.08	0.15	0.19	0.07	0.15	0.21
2160.0	32.43	32.57	32.65	0.08	0.16	0.21	0.06	0.16	0.21
2550.0	33.25	33.38	33.40	0.08	0.17	0.23	0.07	0.17	0.23
2930.0	33.67	33.95	34.14	0.09	0.19	0.26	0.12	0.19	0.31
3500.0	36.45	36.62	36.57	0.08	0.22	0.32	0.07	0.22	0.32
4080.0	37.80	37.98	38.08	0.11	0.28	0.44	0.09	0.28	0.43
4650.0	40.14	40.50	40.66	0.09	0.27	0.47	0.08	0.27	0.48
5030.0	41.37	41.75	42.06	0.06	0.27	0.51	0.07	0.27	0.53
5470.0	42.27	42.85	43.29	0.03	0.28	0.55	0.04	0.28	0.58
5530.0	42.61	43.02	43.30	0.04	0.28	0.56	0.06	0.28	0.60
5580.0	42.23	42.52	42.90	0.03	0.27	0.55	0.08	0.27	0.60
5640.0	41.84	41.96	42.32	0.04	0.27	0.54	0.08	0.27	0.61
5700.0	41.85	42.15	42.90	0.04	0.28	0.55	0.08	0.28	0.62
5720.0	42.19	42.77	42.70	0.06	0.30	0.58	0.08	0.30	0.63
5980.0	41.01	40.90	41.39	0.06	0.32	0.62	0.09	0.32	0.67
6250.0	38.22	38.21	37.76	0.06	0.34	0.62	0.12	0.34	0.72
6510.0	34.61	34.42	34.23	0.08	0.35	0.64	0.21	0.35	0.79
6780.0	30.30	30.01	30.12	0.10	0.41	0.69	0.25	0.40	0.84
7040.0	25.99	25.57	25.43	0.18	0.46	0.71	0.31	0.46	0.86
7310.0	21.45	21.20	21.21	0.24	0.55	0.80	0.34	0.55	0.93
7570.0	17.81	17.47	17.31	0.36	0.67	0.90	0.44	0.67	1.03
7840.0	14.12	13.81	13.54	0.55	0.88	1.11	0.66	0.88	1.30
8100.0	10.67	10.36	10.06	0.93	1.37	1.70	1.00	1.37	1.87
8370.0	7.17	6.97	6.75	1.80	2.36	2.87	1.84	2.36	3.08
8630.0	4.21	4.21	4.17	3.60	4.47	5.37	3.57	4.48	5.49
8900.0	2.03	2.26	2.44	7.96	9.44	11.10	7.89	9.44	11.36
9160.0	1.05	1.42	1.77	16.50	18.72	21.25	15.56	18.73	19.19
9430.0	0.78	1.19	1.59	21.55	19.62	18.16	20.14	19.57	17.88
9700.0	0.87	1.29	1.61	13.42	13.03	13.32	13.17	13.04	13.22
9720.0	0.93	1.32	1.63	12.85	12.51	12.68	12.69	12.50	12.88
9830.0	0.89	1.28	1.64	12.02	11.79	12.01	11.81	11.79	12.24
9940.0	0.83	1.24	1.58	12.33	12.45	12.96	12.00	12.45	13.00
10050.0	0.87	1.27	1.60	11.87	12.22	12.91	11.60	12.24	12.75
10160.0	0.95	1.30	1.64	10.66	10.92	11.55	10.51	10.89	11.50
10280.0	0.88	1.26	1.61	10.85	11.19	11.82	10.64	11.22	11.71
10390.0	0.77	1.13	1.47	11.73	12.49	13.55	11.41	12.50	13.17
10500.0	0.79	1.18	1.50	11.63	12.45	13.70	11.43	12.48	13.28
10610.0	0.76	1.15	1.52	11.03	11.71	12.83	10.83	11.69	12.44
10720.0	0.72	1.10	1.47	11.74	12.40	13.56	11.35	12.44	12.90
10840.0	0.65	1.03	1.41	13.02	14.38	16.01	12.67	14.34	15.02
10950.0	0.59	0.99	1.39	12.82	14.01	15.62	12.68	14.01	15.11
11060.0	0.61	1.00	1.42	12.38	13.23	14.49	12.17	13.23	14.10
11420.0	0.47	0.88	1.32	14.81	16.29	17.84	14.59	16.29	17.58
11790.0	0.40	0.82	1.27	17.46	19.54	20.88	17.21	19.55	20.46
12170.0	0.38	0.80	1.25	18.96	20.59	20.92	20.36	20.58	22.49
12550.0	0.35	0.80	1.27	20.55	22.47	23.63	22.91	22.48	24.10
14070.0	0.52	1.03	1.54	13.31	13.19	13.25	16.01	13.19	16.27
15200.0	0.35	0.89	1.43	16.96	17.06	16.31	20.47	17.05	23.68

Ceramic High Pass Filter HFCN-103+

Typical Performance Data

INSERTION LOSS vs. TEMPERATURE

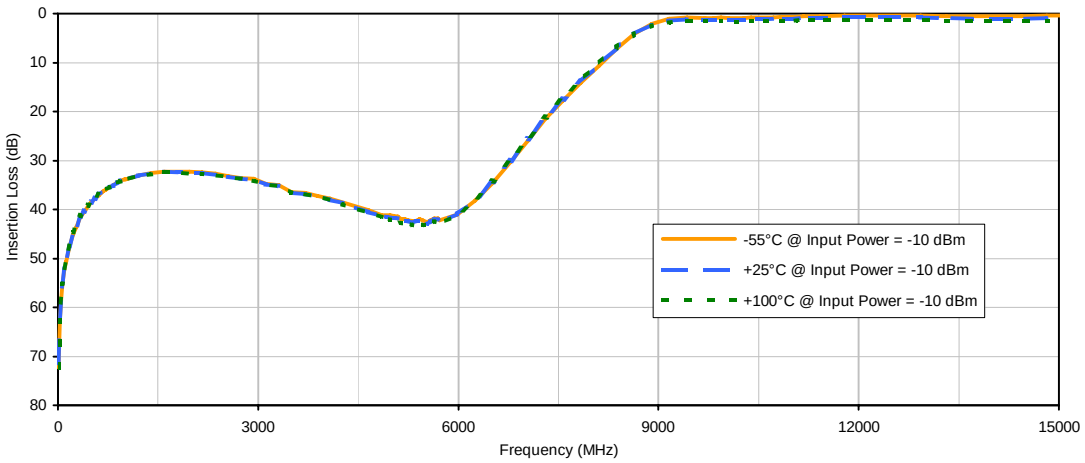

INPUT RETURN LOSS vs. TEMPERATURE

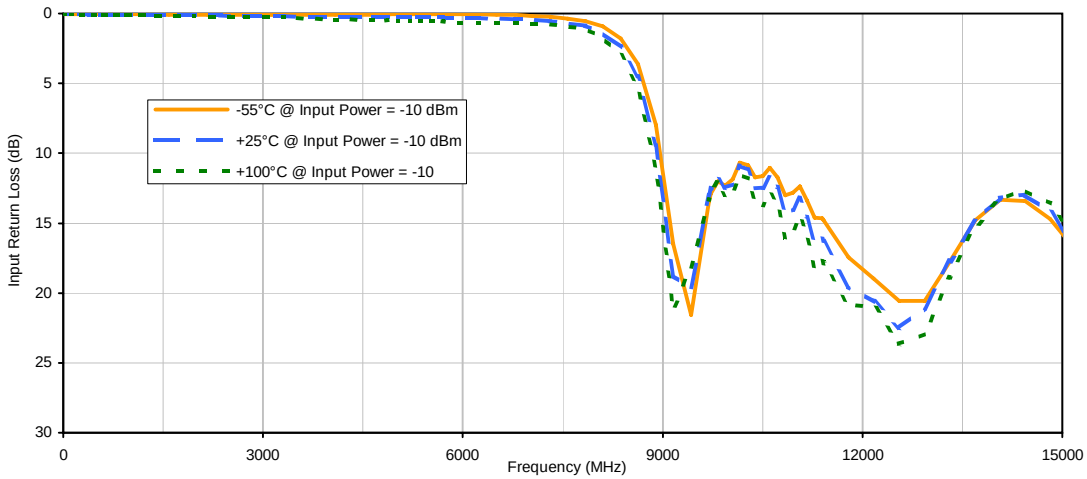

OUTPUT RETURN LOSS vs. TEMPERATURE

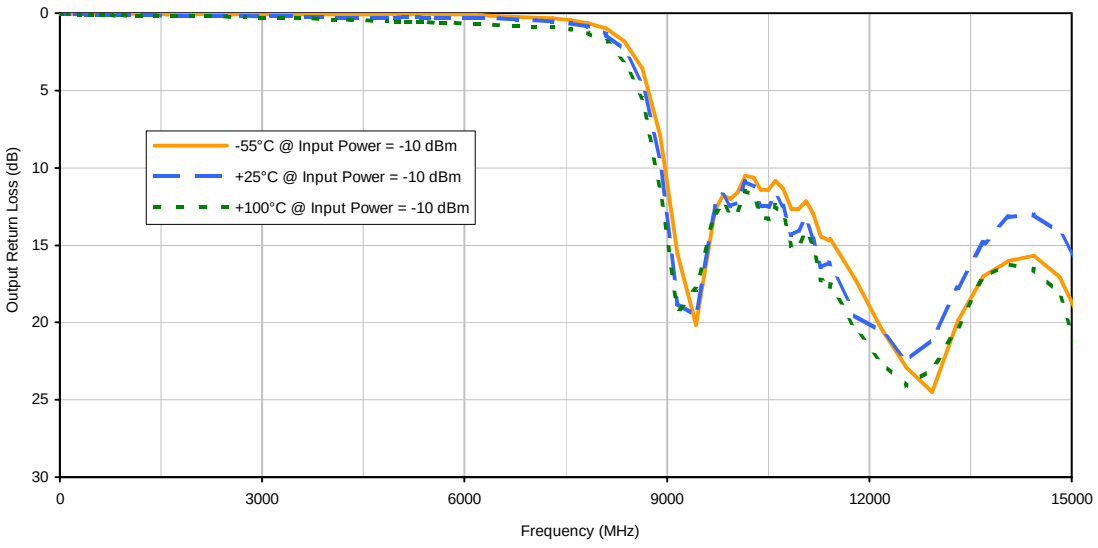

Case Style FV

FV1206-4

Outline Dimensions

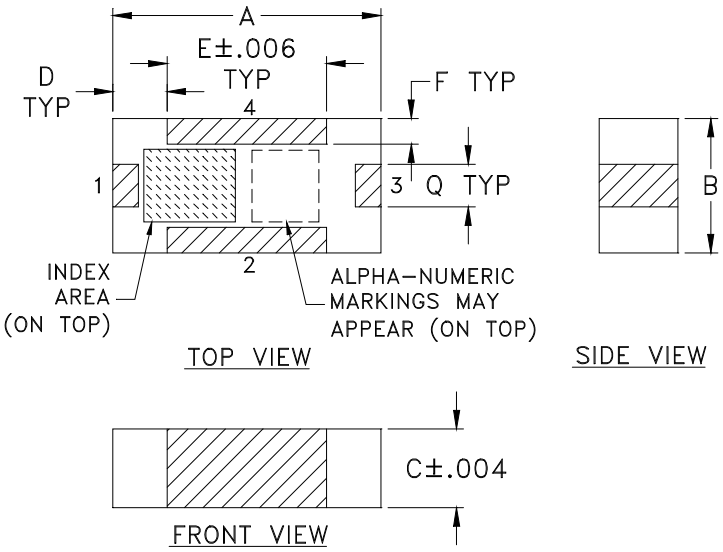

PCB Land Pattern

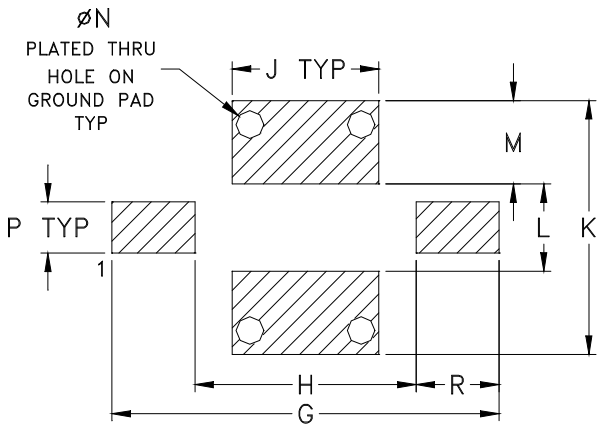

Suggested Layout,
Tolerance to be within ±.002

CASE #	A	B	C	D	E	F	G	H	J	K	L	M
FV1206-4	.126 (3.20)	.063 (1.60)	.037 (0.94)	.026 (0.66)	.075 (1.91)	.012 (0.30)	.182 (4.62)	.104 (2.64)	.069 (1.75)	.119 (3.02)	.041 (1.04)	.039 (0.99)

CASE #	N	P	Q	R	WT. GRAM
FV1206-4	.013 (0.33)	.024 (0.61)	.020 (0.51)	.039 (0.99)	.020

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .01; 3 Pl. ± .005

Notes:

1. Open style, ceramic base.
2. Termination finish: **as shown below or indicated on Data Sheet.**
   For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
   For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

Tape & Reel Packaging TR-F75

DEVICE ORIENTATION IN T&R

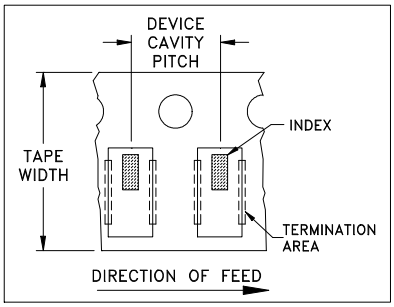

ILLUSTRATION 1

Applicable Case Styles
FV1206-1
FV1206-3

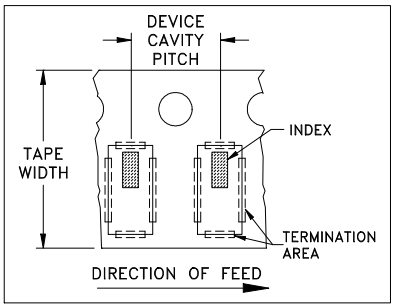

ILLUSTRATION 2

Applicable Case Styles
FV1206-4
FV1206-5
FV1206-6
FV1206-7
FV1206-9

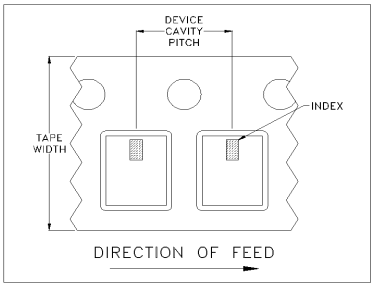

ILLUSTRATION 3

Applicable Case Styles
FV1206-11
FV1206-12
GE0805C-18
NL1008C-6
NL1008C-7
NL1008C-9
NL1008C-10
NL1008C-12

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
				1000
			Standard	3000

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M163991	NEW RELEASE	10/03/17	CA	JLM

SUGGESTED MOUNTING CONFIGURATION FOR FOR FV1206-4 CASE STYLE, "04FL01" PIN CONNECTION

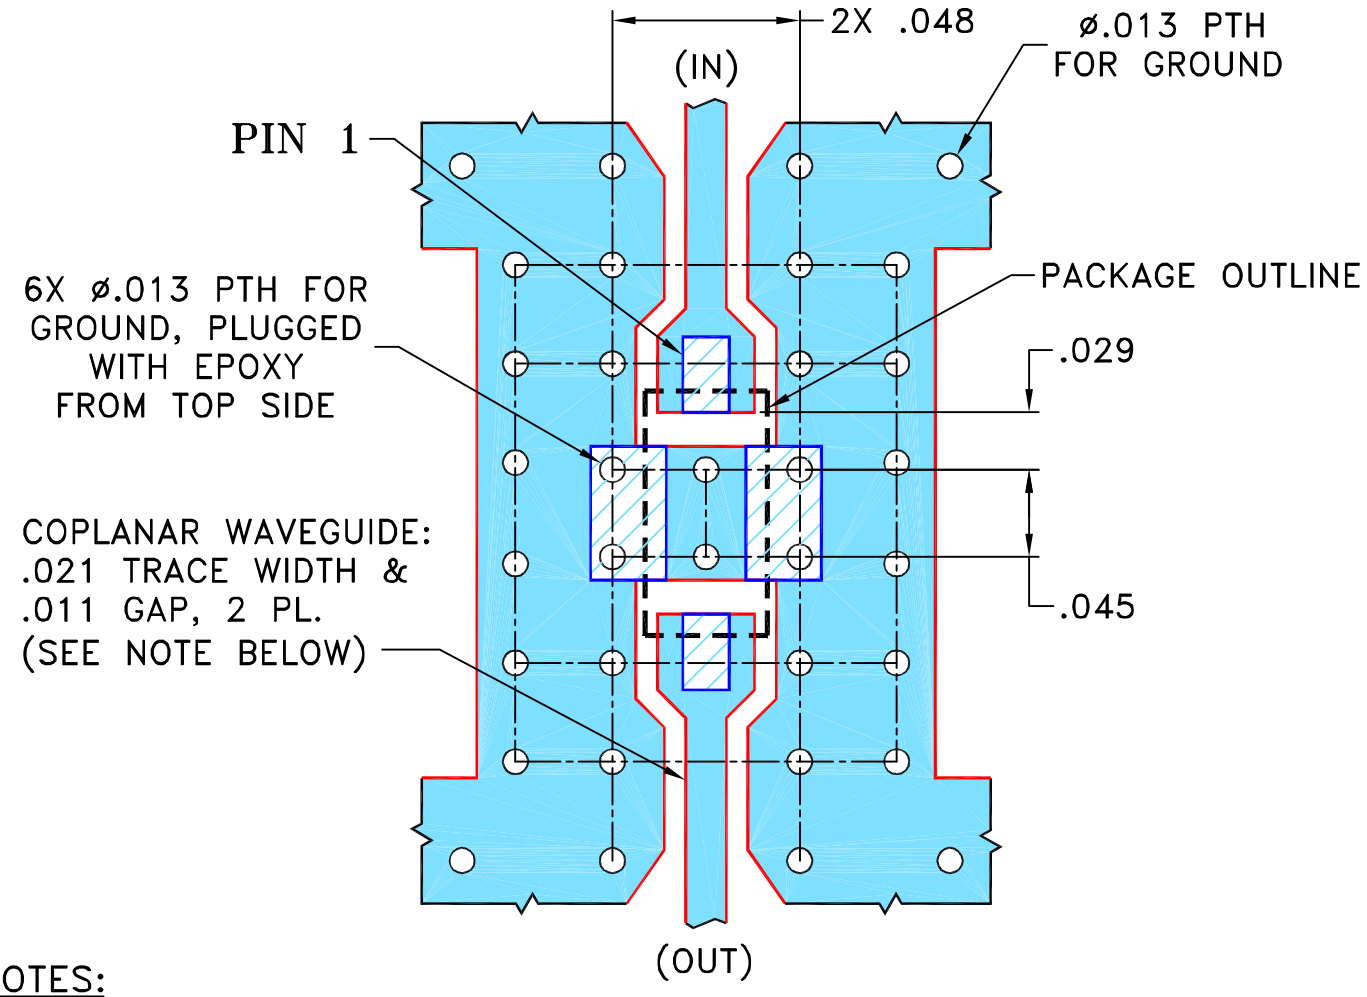

NOTES:

1. TRACE WIDTH & GAP ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	CA	09/27/17
TOLERANCES ON:	CHECKED	GF	10/03/17
2 PL DECIMALS ±	APPROVED	JLM	10/03/17
3 PL DECIMALS ± .005			
ANGLES ±			
FRACTIONS ±			

Mini-Circuits®

ASHEETA1.DWG REV:A DATE:01/12/95

Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235

PL, 04FL01, FV1206-4, TB-637+

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-530	OR

FILE:	SCALE:	SHEET:
98PL530	10:1	1 OF 1

Evaluation Board and Circuit

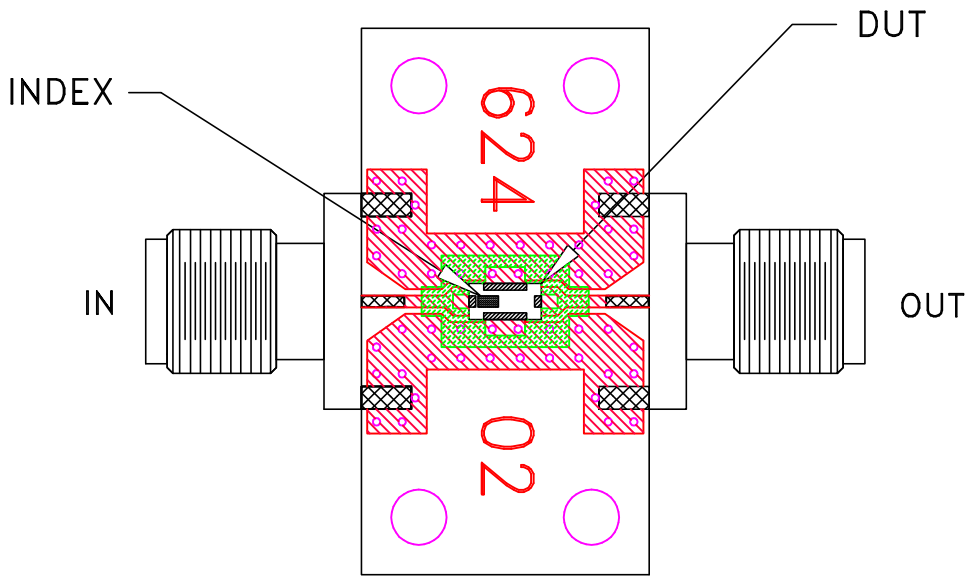

TB-637+

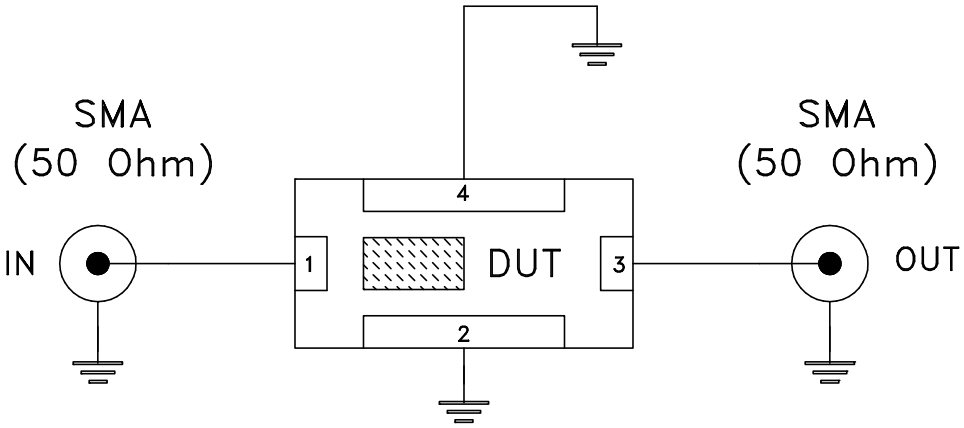

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: RO4350 or equivalent,
   Dielectric Constant=3.5, Thickness=.010 inch.

Mini-Circuits®

Mini-Circuits

Environmental Specifications ENV06

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A