

Non-Catalog Model

Frequency Mixer

JMS-5

Level 7 (LO Power +7 dBm)

Important Note

This is a non-catalog model and can be manufactured on specific request.
Pricing and delivery information can be supplied upon request.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : BH292

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (fL to fU)	5		1500	MHz
	RF (fL to fU)	5		1500	MHz
	IF	0		1000	MHz
Conversion Loss	mid band		6.0	8.0	dB
	Total Range			9.5	dB
LO-RF Isolation	Low Range	40	63		dB
	Mid Range	25	50		dB
	Upper Range	20	35		dB
LO-IF Isolation	Low Range	40	60		dB
	Mid Range	18	30		dB
	Upper Range	8	15		dB
1 dB Comp. Input Power			+1		dBm

Notes: Low Range = [fL to 10fL]
mid band = [2fL to fU/2]

Mid Range = [10fL to fU/2]


Upper Range = [fU/2 to fU]

Phase detection, positive polarity
Non-hermetic

MAXIMUM RATINGS	
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

PIN CONNECTIONS	
LO	6
RF	3
IF	2
GROUND	1, 4, 5

Electrical Schematics

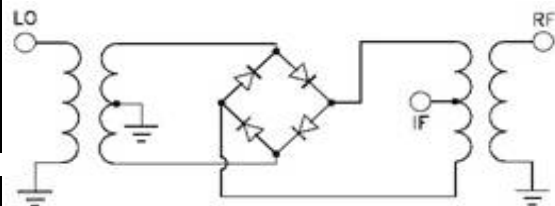

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	5.82	5.57	5.33
49.9	79.9	6.05	5.68	5.48
89.7	119.7	5.96	5.60	5.44
129.5	159.5	6.02	5.68	5.49
169.3	199.3	6.03	5.74	5.58
209.2	239.2	6.09	5.76	5.58
249.0	279.0	6.13	5.80	5.61
288.8	318.8	6.20	5.88	5.65
328.6	358.6	6.27	5.90	5.69
368.4	398.4	6.36	5.98	5.72
408.2	438.2	6.40	5.99	5.74
448.0	478.0	6.44	6.07	5.80
487.8	517.8	6.51	6.08	5.82
527.6	557.6	6.51	6.08	5.82
567.4	597.4	6.58	6.09	5.80
607.2	637.2	6.77	6.22	5.90
647.1	677.1	6.88	6.35	6.01
686.9	716.9	7.06	6.48	6.12
726.7	756.7	7.14	6.55	6.16
766.5	796.5	7.34	6.71	6.31
806.3	836.3	7.46	6.89	6.45
846.1	876.1	7.67	7.09	6.69
885.9	915.9	7.70	7.21	6.83
965.5	995.5	7.67	7.32	7.05
1005.3	1035.3	7.64	7.32	7.08
1045.2	1075.2	7.66	7.35	7.11
1085.0	1115.0	7.72	7.37	7.15
1124.8	1154.8	7.74	7.43	7.18
1164.6	1194.6	7.80	7.48	7.25
1204.4	1234.4	7.83	7.47	7.27
1244.2	1274.2	7.96	7.60	7.37
1284.0	1314.0	8.01	7.59	7.42
1323.8	1353.8	8.12	7.69	7.47
1363.6	1393.6	8.21	7.72	7.52
1403.4	1433.4	8.24	7.79	7.57
1443.2	1473.2	8.34	7.88	7.65
1483.1	1513.1	8.56	7.95	7.78
1522.9	1552.9	8.74	8.11	7.81
1562.7	1592.7	8.92	8.24	7.92
1602.5	1632.5	9.21	8.40	8.02

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	15.21	16.42	19.75
49.9	79.9	18.64	15.40	15.58
89.7	119.7	13.60	12.86	14.82
129.5	159.5	11.05	13.99	17.12
169.3	199.3	11.37	13.20	17.26
209.2	239.2	11.90	15.44	19.74
249.0	279.0	12.35	16.31	21.90
288.8	318.8	12.85	17.26	23.25
328.6	358.6	14.54	19.83	20.30
368.4	398.4	15.79	17.24	17.46
408.2	438.2	16.05	18.92	17.58
448.0	478.0	15.72	18.08	16.31
487.8	517.8	16.55	16.09	14.89
527.6	557.6	15.08	14.33	14.88
567.4	597.4	14.61	14.37	14.72
607.2	637.2	13.75	13.95	14.15
647.1	677.1	11.54	13.04	13.48
686.9	716.9	10.32	12.03	12.68
726.7	756.7	9.64	11.26	12.77
766.5	796.5	8.81	10.96	11.44
806.3	836.3	8.58	10.42	11.74
846.1	876.1	7.85	9.83	11.30
885.9	915.9	7.99	9.10	10.84
965.5	995.5	8.12	9.11	10.04
1005.3	1035.3	9.02	9.36	10.18
1045.2	1075.2	9.81	9.75	10.45
1085.0	1115.0	10.51	10.21	10.67
1124.8	1154.8	10.95	11.11	11.07
1164.6	1194.6	12.61	11.85	11.48
1204.4	1234.4	13.05	14.22	12.53
1244.2	1274.2	13.02	14.21	14.82
1284.0	1314.0	12.17	13.56	14.96
1323.8	1353.8	12.56	14.46	15.21
1363.6	1393.6	11.98	13.73	15.15
1403.4	1433.4	12.47	14.51	16.03
1443.2	1473.2	12.13	14.46	17.47
1483.1	1513.1	13.01	15.34	16.05
1522.9	1552.9	12.17	13.48	15.85
1562.7	1592.7	12.31	14.86	17.00
1602.5	1632.5	12.94	14.39	16.70

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	1.14	0.89	0.74
49.9	79.9	1.41	1.15	0.93
89.7	119.7	1.55	1.22	0.99
129.5	159.5	1.60	1.31	1.02
169.3	199.3	1.53	1.31	1.06
209.2	239.2	1.62	1.29	0.99
249.0	279.0	1.68	1.29	1.12
288.8	318.8	1.70	1.44	1.14
328.6	358.6	1.79	1.47	1.33
368.4	398.4	1.82	1.56	1.32
408.2	438.2	1.86	1.65	1.48
448.0	478.0	2.06	1.70	1.58
487.8	517.8	2.05	1.82	1.62
527.6	557.6	2.01	1.83	1.55
567.4	597.4	2.11	1.81	1.60
607.2	637.2	2.10	1.78	1.57
647.1	677.1	2.32	2.03	1.83
686.9	716.9	2.04	1.92	1.61
726.7	756.7	2.10	1.91	1.75
766.5	796.5	1.96	1.82	1.56
806.3	836.3	1.76	1.69	1.53
846.1	876.1	1.61	1.66	1.50
885.9	915.9	1.44	1.36	1.20
965.5	995.5	1.40	1.12	0.92
1005.3	1035.3	1.34	1.13	1.02
1045.2	1075.2	1.07	0.92	0.77
1085.0	1115.0	1.08	0.77	0.64
1124.8	1154.8	1.01	0.77	0.68
1164.6	1194.6	1.02	0.65	0.70
1204.4	1234.4	0.93	0.73	0.56
1244.2	1274.2	0.98	0.80	0.66
1284.0	1314.0	0.96	0.77	0.55
1323.8	1353.8	1.05	0.70	0.56
1363.6	1393.6	1.00	0.69	0.52
1403.4	1433.4	1.01	0.63	0.50
1443.2	1473.2	0.86	0.66	0.57
1483.1	1513.1	0.97	0.72	0.56
1522.9	1552.9	0.81	0.61	0.41
1562.7	1592.7	0.97	0.61	0.34
1602.5	1632.5	0.92	0.59	0.40

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=750.1MHz (dB)
		@LO (dBm) +7
10.1	740.0	6.83
28.8	721.3	6.85
47.5	702.6	6.85
66.3	683.9	6.89
85.0	665.1	6.89
103.7	646.4	6.89
122.4	627.7	6.90
141.1	609.0	6.85
159.8	590.3	6.85
178.6	571.5	6.80
197.3	552.8	6.78
216.0	534.1	6.75
234.7	515.4	6.72
253.4	496.7	6.70
272.2	478.0	6.66
290.9	459.2	6.68
309.6	440.5	6.69
328.3	421.8	6.65
347.0	403.1	6.62
365.7	384.4	6.58
384.5	365.6	6.49
403.2	346.9	6.54
421.9	328.2	6.52
440.6	309.5	6.50
459.3	290.8	6.46
478.1	272.1	6.47
496.8	253.3	6.46
515.5	234.6	6.42
534.2	215.9	6.42
552.9	197.2	6.41
571.6	178.5	6.46
590.4	159.7	6.50
609.1	141.0	6.50
627.8	122.3	6.54
646.5	103.6	6.53
665.2	84.9	6.61
684.0	66.2	6.60
702.7	47.4	6.59
721.4	28.7	6.58
740.1	10.0	6.59

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)
		@LO (dBm) +7
20.1	10.0	6.01
60.5	50.4	5.66
100.9	90.8	5.67
141.3	131.2	5.63
181.7	171.6	5.68
222.1	212.0	5.72
242.3	232.2	5.77
262.6	252.5	5.79
282.8	272.7	5.77
303.0	292.9	5.84
323.2	313.1	5.85
343.4	333.3	5.88
363.6	353.5	5.89
383.8	373.7	5.91
404.0	393.9	5.94
424.2	414.1	5.95
444.4	434.3	5.99
464.6	454.5	6.03
484.8	474.7	6.02
505.0	494.9	6.01
525.2	515.1	6.05
545.4	535.3	6.11
565.6	555.5	6.12
585.8	575.7	6.21
606.0	595.9	6.22
626.2	616.1	6.28
646.4	636.3	6.35
666.6	656.5	6.41
686.8	676.7	6.48
707.0	696.9	6.54
727.2	717.1	6.59
747.5	737.4	6.65
767.7	757.6	6.76
787.9	777.8	6.83
808.1	798.0	6.91
848.5	838.4	7.10
888.9	878.8	7.28
929.3	919.2	7.48
969.7	959.6	7.72
1010.1	1000.0	7.93

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1500.1MHz (dB)
		@LO (dBm) +7
500.1	1000.0	10.00
540.5	959.6	9.75
580.9	919.2	9.51
621.3	878.8	9.29
661.7	838.4	9.07
702.1	798.0	8.92
722.3	777.8	8.86
742.6	757.6	8.82
762.8	737.4	8.57
783.0	717.1	8.51
803.2	696.9	8.52
823.4	676.7	8.46
843.6	656.5	8.43
863.8	636.3	8.39
884.0	616.1	8.36
904.2	595.9	8.36
924.4	575.7	8.31
944.6	555.5	8.29
964.8	535.3	8.28
985.0	515.1	8.27
1005.2	494.9	8.22
1025.4	474.7	8.21
1045.6	454.5	8.25
1065.8	434.3	8.25
1086.0	414.1	8.30
1106.2	393.9	8.26
1126.4	373.7	8.31
1146.6	353.5	8.26
1166.8	333.3	8.33
1187.0	313.1	8.31
1207.2	292.9	8.31
1227.5	272.7	8.30
1247.7	252.5	8.25
1267.9	232.2	8.28
1288.1	212.0	8.20
1328.5	171.6	8.13
1368.9	131.2	8.07
1409.3	90.8	8.02
1449.7	50.4	8.03
1490.1	10.0	8.32

REV. X2

JMS-5

101012

Page 2 of 4



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
40.1	63.33	61.66	69.58	48.53	63.12	70.31
79.9	65.31	63.27	61.33	53.74	71.59	56.20
119.7	62.95	63.61	59.92	48.81	69.88	51.27
159.5	59.58	63.08	58.63	44.79	59.58	48.10
199.3	56.82	63.16	58.03	42.70	54.14	45.05
239.2	54.76	63.77	57.74	40.82	50.61	42.78
279.0	53.21	63.82	56.96	39.85	47.51	40.08
318.8	51.93	65.53	56.30	39.35	45.04	38.01
358.6	50.40	65.34	56.19	39.03	42.46	35.95
398.4	49.60	67.14	55.14	39.34	39.53	33.81
438.2	48.27	62.58	54.78	39.41	38.22	32.67
478.0	47.35	59.71	53.95	39.79	35.74	30.79
517.8	46.12	56.45	53.07	40.00	34.45	29.80
557.6	44.92	54.51	53.04	39.55	32.55	28.26
597.4	44.30	52.87	51.74	38.47	30.89	26.94
637.2	43.85	51.26	49.67	36.78	29.42	25.79
677.1	43.69	49.99	47.45	34.49	27.98	24.75
716.9	43.19	49.01	46.35	32.79	26.90	23.95
756.7	42.83	48.75	45.64	30.43	25.37	22.75
796.5	42.14	49.31	46.64	28.54	24.15	21.81
836.3	41.18	49.40	47.74	26.76	22.84	20.73
876.1	40.38	49.52	50.17	25.02	21.58	19.69
915.9	38.86	46.56	56.46	23.84	20.67	18.89
995.5	36.69	41.60	50.14	21.62	18.97	17.34
1035.3	35.77	39.90	45.76	20.79	18.31	16.74
1075.2	35.10	38.81	43.48	20.08	17.77	16.27
1115.0	34.39	37.73	41.60	19.37	17.19	15.74
1154.8	34.04	37.23	40.73	18.60	16.61	15.26
1194.6	33.57	36.60	39.85	17.96	16.08	14.82
1234.4	33.06	35.97	39.02	17.30	15.52	14.32
1274.2	32.68	35.48	38.38	16.63	14.97	13.85
1314.0	32.13	34.79	37.53	16.13	14.57	13.50
1353.8	31.50	34.00	36.53	15.57	14.11	13.09
1393.6	30.94	33.31	35.72	15.12	13.77	12.80
1433.4	30.32	32.58	34.85	14.65	13.43	12.51
1473.2	29.69	31.77	33.87	14.18	13.08	12.23
1513.1	29.07	31.01	33.00	13.71	12.72	11.93
1552.9	28.44	30.28	32.19	13.29	12.43	11.69
1592.7	27.69	29.38	31.17	12.90	12.13	11.43
1632.5	27.13	28.67	30.35	12.57	11.87	11.22

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	37.76	34.83	46.50
49.9	79.9	41.77	39.49	40.61
89.7	119.7	38.03	36.02	35.83
129.5	159.5	34.91	33.98	33.81
169.3	199.3	33.71	32.91	32.45
209.2	239.2	32.60	31.82	31.60
249.0	279.0	31.98	31.37	30.95
288.8	318.8	31.73	30.99	30.45
328.6	358.6	31.26	30.67	30.14
368.4	398.4	30.31	29.97	29.58
408.2	438.2	29.13	28.88	28.57
448.0	478.0	27.73	27.41	27.22
487.8	517.8	26.04	25.89	25.73
527.6	557.6	24.52	24.39	24.28
567.4	597.4	23.16	23.04	22.99
607.2	637.2	21.90	21.89	21.85
647.1	677.1	20.84	20.83	20.87
686.9	716.9	20.04	20.05	20.17
726.7	756.7	19.55	19.64	19.74
766.5	796.5	19.34	19.43	19.57
806.3	836.3	19.25	19.42	19.59
846.1	876.1	19.36	19.54	19.73
885.9	915.9	19.42	19.73	19.98
965.5	995.5	19.71	20.12	20.49
1005.3	1035.3	19.78	20.22	20.65
1045.2	1075.2	19.76	20.22	20.65
1085.0	1115.0	19.63	20.09	20.50
1124.8	1154.8	19.44	19.84	20.17
1164.6	1194.6	19.23	19.56	19.86
1204.4	1234.4	19.07	19.33	19.54
1244.2	1274.2	18.90	19.08	19.22
1284.0	1314.0	18.79	18.92	19.02
1323.8	1353.8	18.66	18.75	18.81
1363.6	1393.6	18.51	18.57	18.63
1403.4	1433.4	18.29	18.35	18.42
1443.2	1473.2	17.94	18.05	18.13
1483.1	1513.1	17.50	17.62	17.73
1522.9	1552.9	16.96	17.12	17.25
1562.7	1592.7	16.36	16.51	16.70
1602.5	1632.5	15.77	15.95	16.12







Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=500.1MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+4	+7	+10		+4	+7	+10		+4	+7	+10
10.1	40.1	1.46	1.47	1.51	40.1	1.77	2.49	3.34	10.1	1.13	1.23	1.40
49.9	79.9	1.22	1.19	1.23	79.9	1.89	2.73	3.82	30.3	1.13	1.22	1.30
89.7	119.7	1.16	1.06	1.02	119.7	1.86	2.68	3.72	50.5	1.08	1.24	1.42
129.5	159.5	1.11	1.02	1.03	159.5	1.83	2.63	3.62	70.7	1.06	1.25	1.41
169.3	199.3	1.19	1.11	1.07	199.3	1.86	2.64	3.62	90.9	1.04	1.22	1.40
209.2	239.2	1.15	1.08	1.06	239.2	1.83	2.57	3.49	111.1	1.08	1.19	1.33
249.0	279.0	1.22	1.16	1.13	279.0	1.88	2.62	3.55	131.3	1.13	1.21	1.35
288.8	318.8	1.24	1.19	1.16	318.8	1.89	2.62	3.52	151.5	1.12	1.25	1.40
328.6	358.6	1.32	1.27	1.24	358.6	1.90	2.64	3.52	171.7	1.12	1.24	1.41
368.4	398.4	1.37	1.31	1.28	398.4	1.97	2.71	3.58	191.9	1.14	1.25	1.39
408.2	438.2	1.45	1.39	1.36	438.2	1.95	2.65	3.47	212.1	1.16	1.26	1.41
448.0	478.0	1.53	1.47	1.43	478.0	2.00	2.69	3.50	232.3	1.20	1.31	1.44
487.8	517.8	1.64	1.58	1.53	517.8	1.99	2.63	3.38	252.6	1.21	1.32	1.47
527.6	557.6	1.70	1.63	1.58	557.6	2.00	2.63	3.37	272.8	1.20	1.32	1.47
567.4	597.4	1.84	1.76	1.70	597.4	2.04	2.65	3.35	293.0	1.23	1.34	1.48
607.2	637.2	1.94	1.84	1.77	637.2	2.07	2.66	3.34	313.2	1.24	1.36	1.50
647.1	677.1	2.11	2.01	1.93	677.1	2.12	2.71	3.37	333.4	1.26	1.39	1.53
686.9	716.9	2.23	2.11	2.02	716.9	2.12	2.66	3.29	353.6	1.26	1.40	1.55
726.7	756.7	2.45	2.33	2.23	756.7	2.14	2.67	3.27	373.8	1.25	1.39	1.54
766.5	796.5	2.63	2.49	2.38	796.5	2.16	2.65	3.20	394.0	1.26	1.39	1.54
806.3	836.3	2.81	2.68	2.57	836.3	2.18	2.65	3.17	414.2	1.28	1.41	1.55
846.1	876.1	2.97	2.86	2.77	876.1	2.24	2.70	3.21	434.4	1.27	1.41	1.57
885.9	915.9	2.96	2.90	2.84	915.9	2.25	2.69	3.17	454.6	1.28	1.43	1.57
965.5	995.5	2.86	2.84	2.82	995.5	2.33	2.75	3.20	495.0	1.30	1.44	1.58
1005.3	1035.3	2.93	2.90	2.88	1035.3	2.33	2.72	3.16	515.2	1.32	1.45	1.60
1045.2	1075.2	2.83	2.79	2.77	1075.2	2.36	2.74	3.17	535.4	1.31	1.46	1.61
1085	1115	2.96	2.91	2.88	1115	2.35	2.69	3.09	555.6	1.32	1.46	1.61
1124.8	1154.8	2.91	2.84	2.79	1154.8	2.39	2.72	3.11	575.8	1.32	1.47	1.62
1164.6	1194.6	3.04	2.95	2.89	1194.6	2.41	2.71	3.08	596.0	1.34	1.49	1.64
1204.4	1234.4	2.98	2.88	2.80	1234.4	2.42	2.70	3.05	616.2	1.35	1.51	1.66
1244.2	1274.2	3.06	2.93	2.84	1274.2	2.46	2.73	3.07	636.4	1.34	1.50	1.65
1284	1314	2.99	2.85	2.75	1314	2.46	2.69	3.01	676.8	1.35	1.50	1.65
1323.8	1353.8	3.01	2.86	2.75	1353.8	2.51	2.72	3.03	717.2	1.39	1.55	1.71
1363.6	1393.6	2.91	2.75	2.65	1393.6	2.56	2.73	3.02	757.7	1.38	1.55	1.70
1403.4	1433.4	2.89	2.73	2.62	1433.4	2.60	2.75	3.02	798.1	1.44	1.62	1.77
1443.2	1473.2	2.84	2.67	2.56	1473.2	2.70	2.82	3.07	838.5	1.46	1.64	1.80
1483.1	1513.1	2.92	2.73	2.61	1513.1	2.75	2.84	3.06	878.9	1.49	1.67	1.83
1522.9	1552.9	2.92	2.72	2.60	1552.9	2.88	2.93	3.14	919.3	1.55	1.74	1.90
1562.7	1592.7	3.04	2.82	2.69	1592.7	3.00	3.01	3.19	959.7	1.56	1.75	1.91
1602.5	1632.5	3.10	2.86	2.72	1632.5	3.11	3.08	3.22	1000.1	1.66	1.85	2.01

Frequency Mixer

Typical Performance Curves


JMS-5

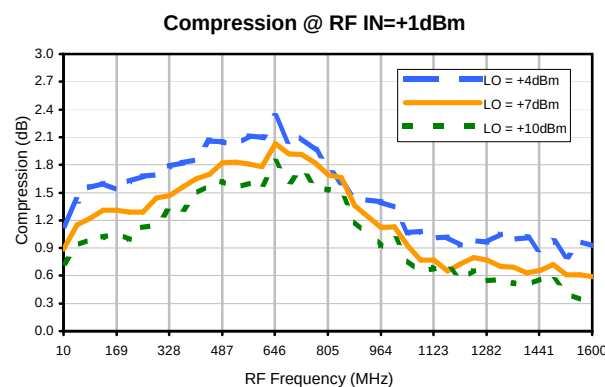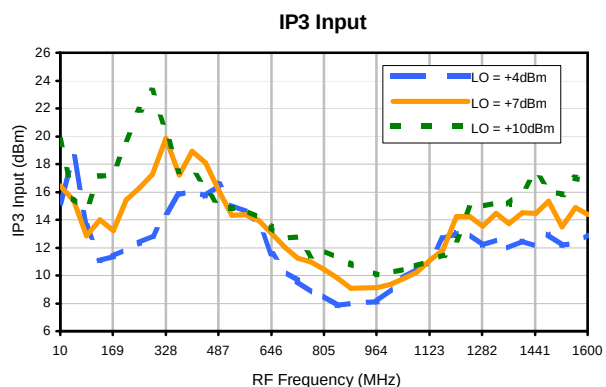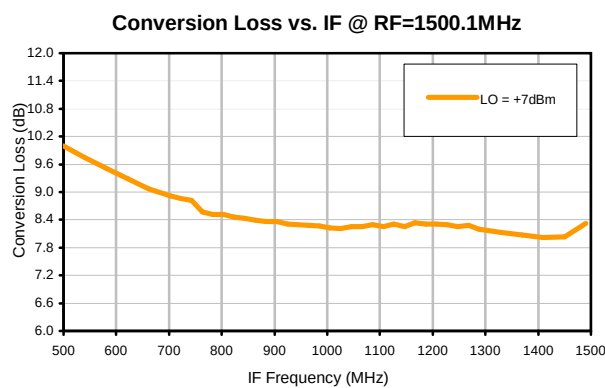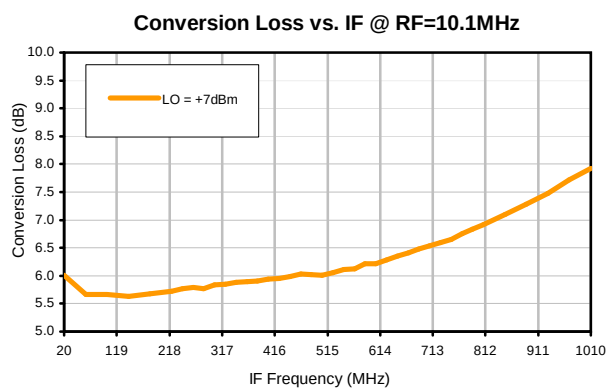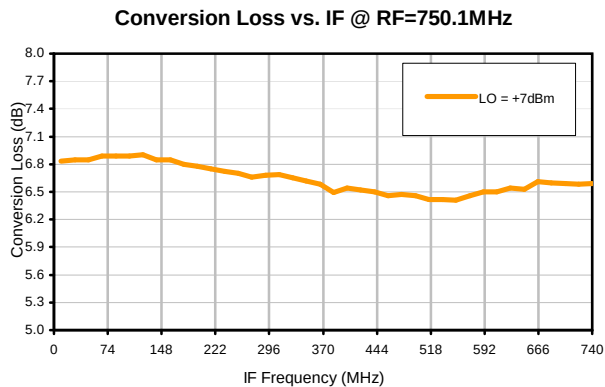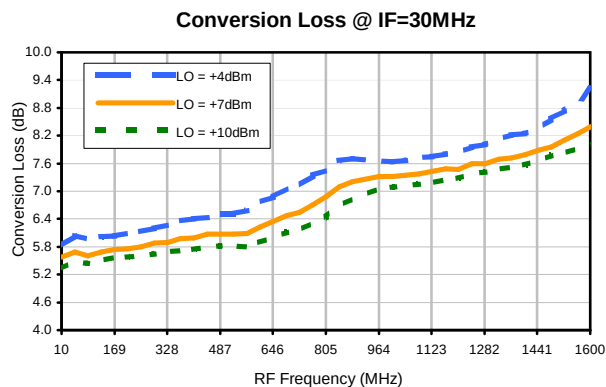


REV. X2
JMS-5
101012
Page 1 of 2

Typical Performance Curves


LO-RF Isolation

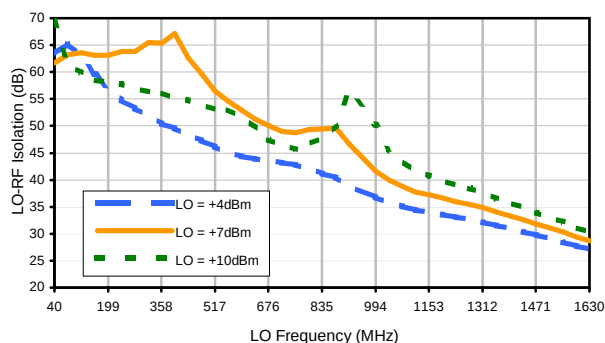


LO-IF Isolation

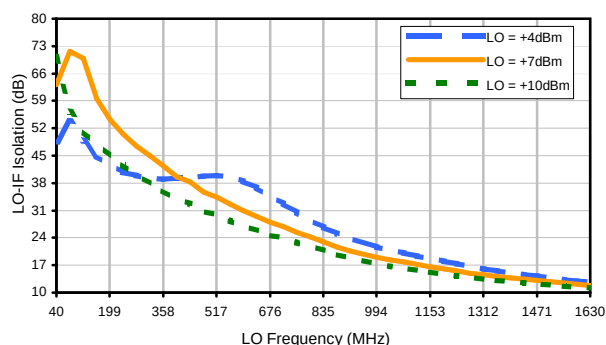


RF-IF Isolation

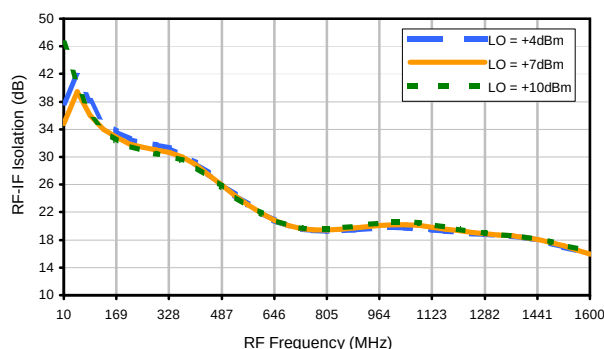


RF VSWR

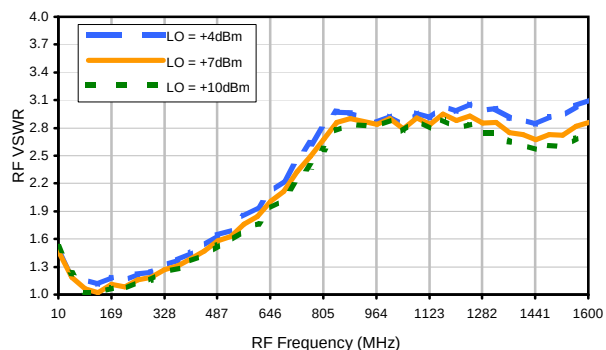

LO VSWR

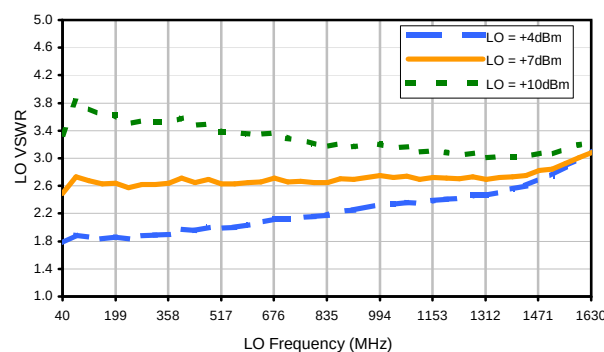

IF VSWR

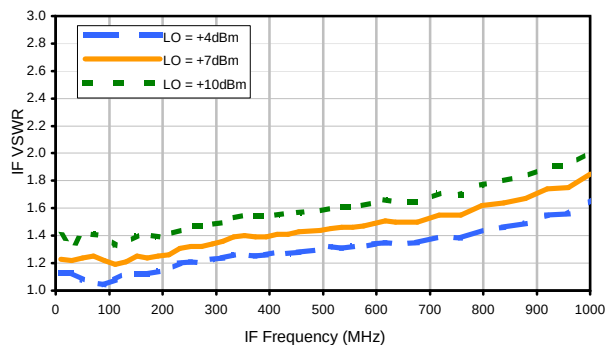

REV. X2

JMS-5

101012

Page 2 of 2




IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350186, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4861




The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Outline Dimensions

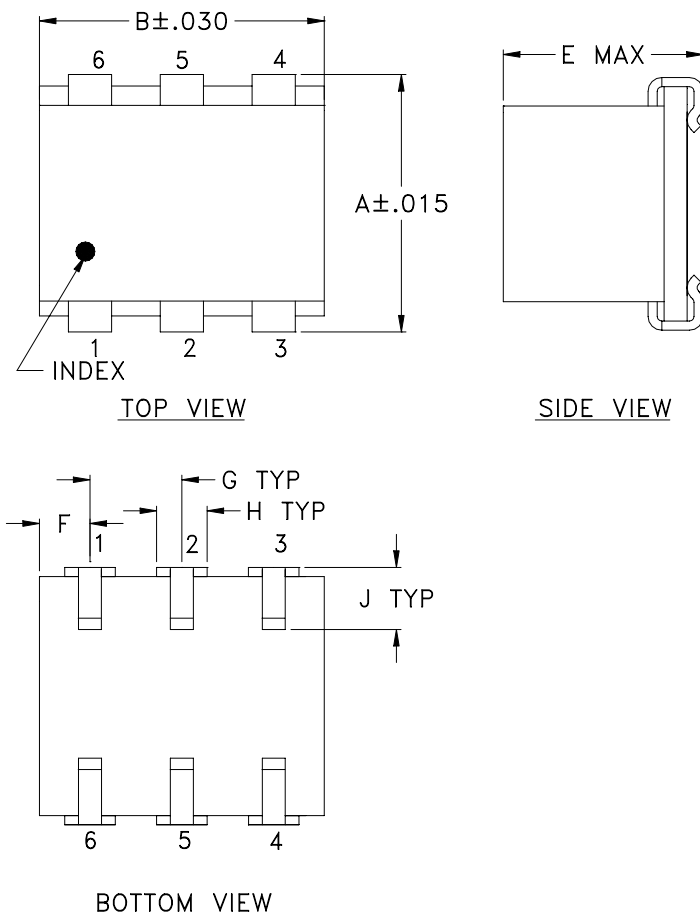

PCB Land Pattern

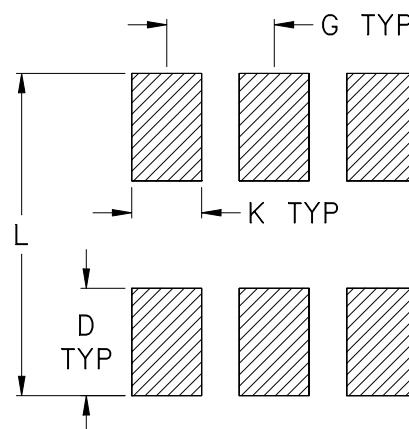

Suggested Layout,
Tolerance to be within $\pm .002$


CASE #	A	B	C	D	E	F	G	H	J	K	L	WT. GRAM
BH292	.280 (7.11)	.310 (7.87)	- -	.100 (2.54)	.225 (5.72)	.055 (1.40)	.100 (2.54)	.047 (1.19)	.065 (1.65)	.065 (1.65)	.300 (7.62)	.45

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .01$; 3Pl. $\pm .005$

Notes:

- Case material: Ceramic.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

Tape & Reel Packaging TR-F24

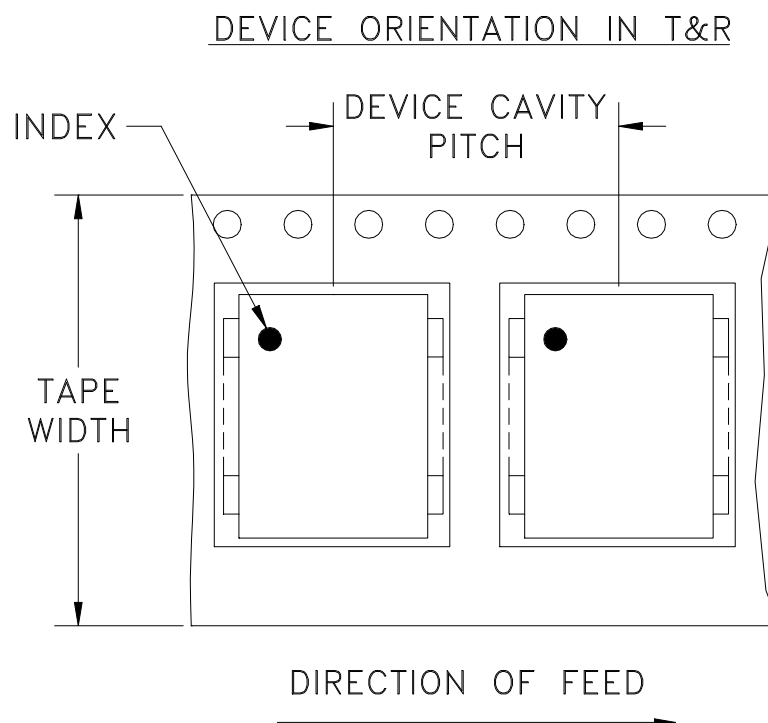

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
16	12	13	500

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M101143	ADDED "gk" PIN CONNECTION, TT100 CASE STYLE & NOTE 2	10/10/05	MMG	DJ
B	M102713	ADDED "...WITH SMOBC"	01/17/06	MMG	IL
C	M108637	REMOVED "PIN 1", ADDED INDEX ON UNIT	12/01/06	MYG	FL


SUGGESTED MOUNTING CONFIGURATION
FOR BH292, CD541/542/636/637, TT100/240 CASE
STYLES, "gk", "ht", "hu", "nd", "w" PIN CONNECTIONS

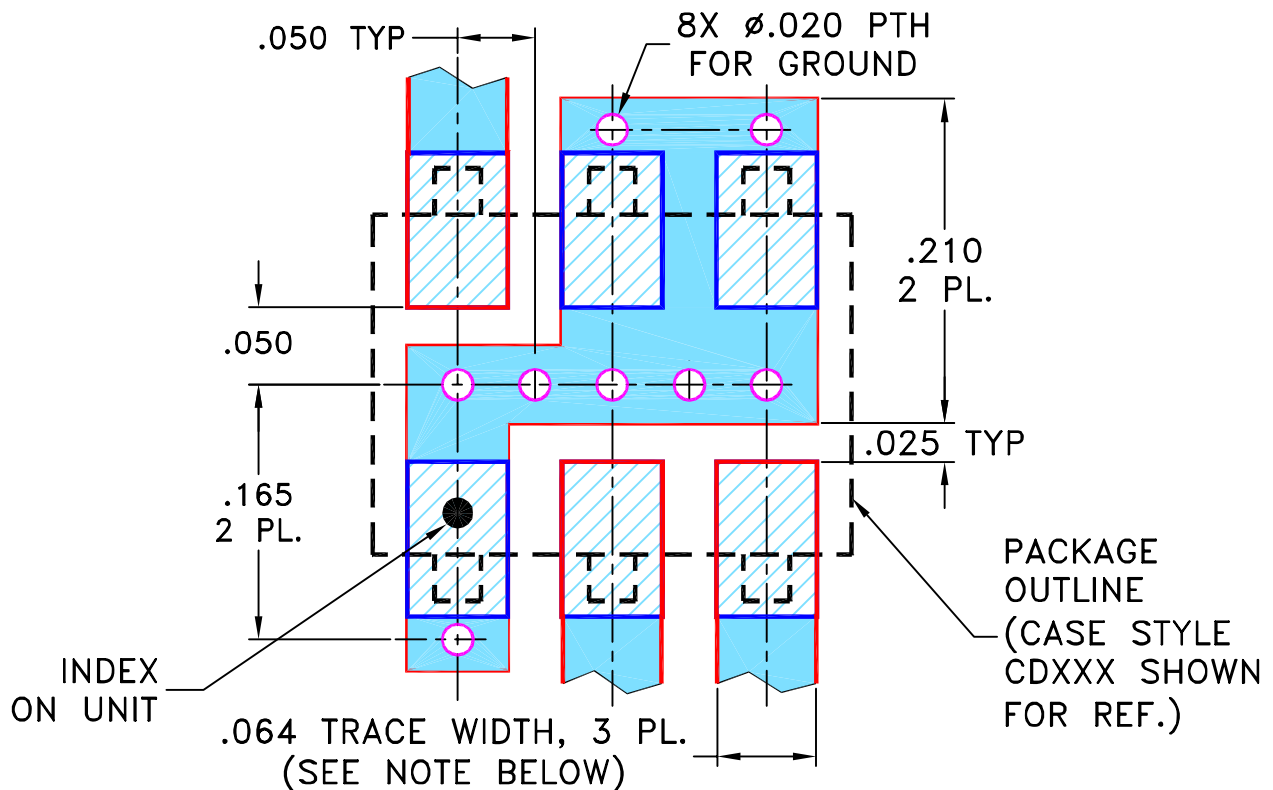

- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE.
 FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
 (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS $\pm$ 3 PL DECIMALS $\pm$.005ANGLES $\pm$ FRACTIONS $\pm$

DRAWN

MMG

07/17/02

CHECKED

WL

08/02/02

APPROVED

DJ

08/05/02



Mini-Circuits®

13 Neptune Avenue
 Brooklyn NY 11235

PL, gk/ht/hu/nd/w, BH292,
 CD541/542/636/637, TT100/240, TB-03

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-052

REV:

C

FILE:

98PL052

SCALE:

8:1

SHEET:


1 OF 1

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.


ASHEETA1.DWG REV:A DATE:01/12/95

THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
E	M119737	UPDATED PCB	10.08	MF	AD
F	M127659	UPDATED CARR	06.10	SW	SG
G	M127846	UPDATED SCHEMATIC DIAGRAM	06.10	SW	SG
H	M131840	UPDATED DWG	05.11	MF	AD

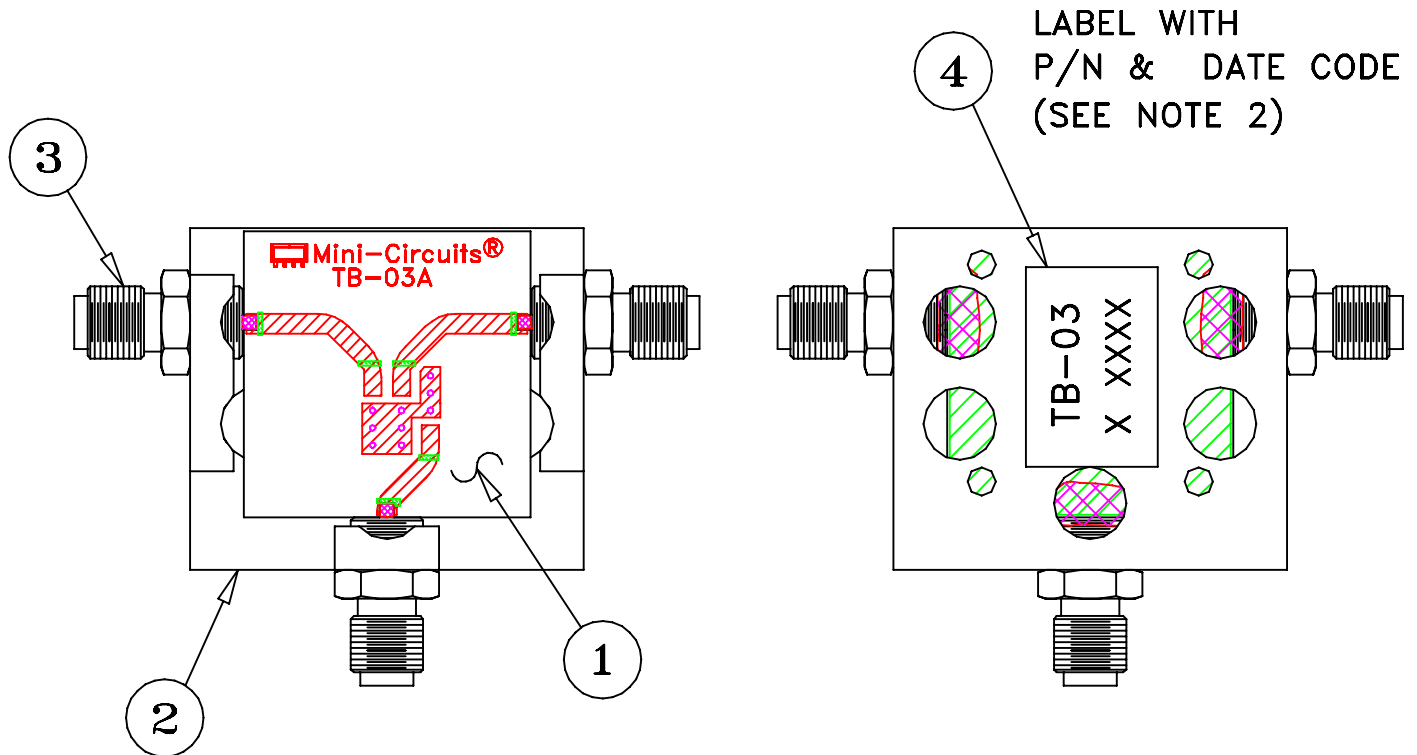**NOTES:**

1. REFER TO -09 PAGE FOR ITEM DESCRIPTIONS.
DESIGNATION NUMBERS ON -20 PAGE CORRESPOND TO THE NUMBERS ON -09 PAGE.
2. FOR TEXT HEIGHT & STYLE ON THE LABEL REFER TO: D3-G209.

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

S.WOLYNSKI

08.29.99

TOLERANCES ON:

CHECKED

SG

07.06.99

2 PL DECIMALS ±

APPROVED

MG

07.10.99

3 PL DECIMALS ±

ANGLES ±

FRACTIONS ±

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95


Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

TB,ADE,CD542/636,06MX01,50

 SIZE
A

 CODE IDENT
15542

 DRAWING NO:
TB-03-20

 REV:
H



FILE: WTB-03

SCALE: 1.5:1

SHEET: 1 OF 2

Evaluation Board and Circuit

For Pin Connections and DUT Orientation Refer to
Data Sheet of the DUT

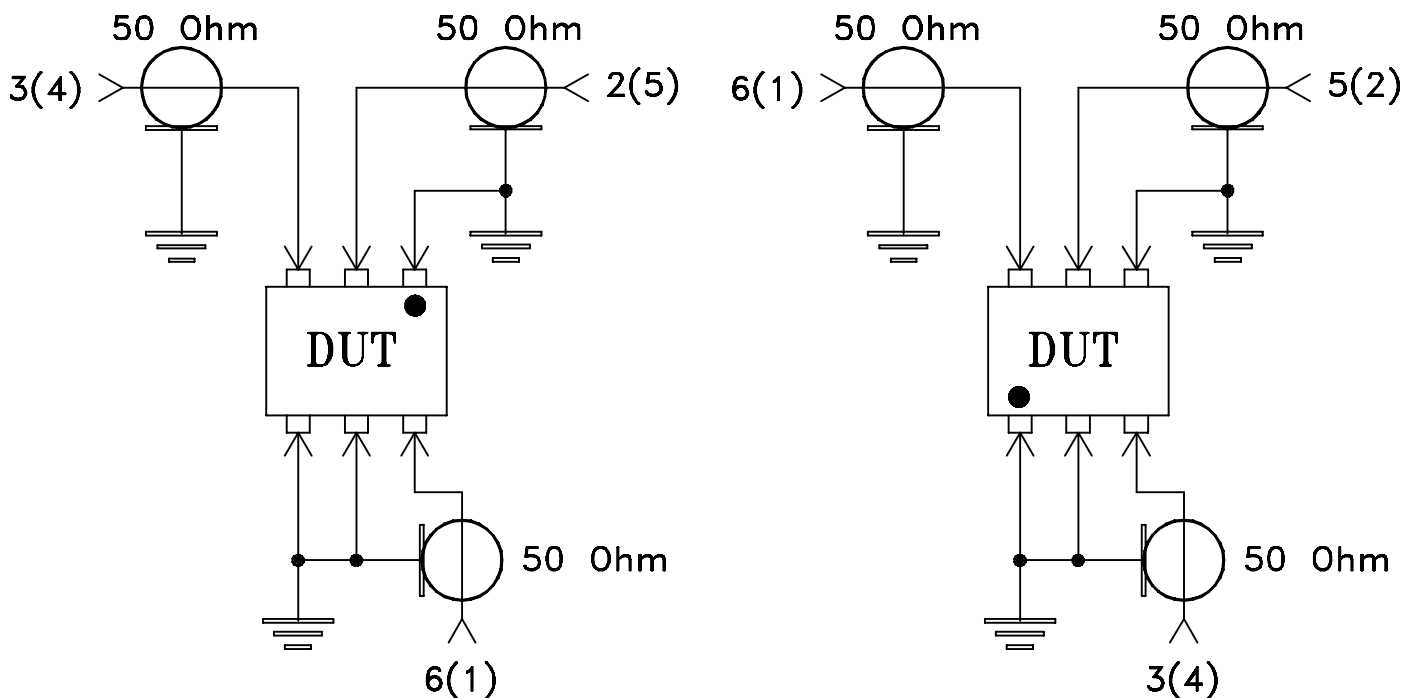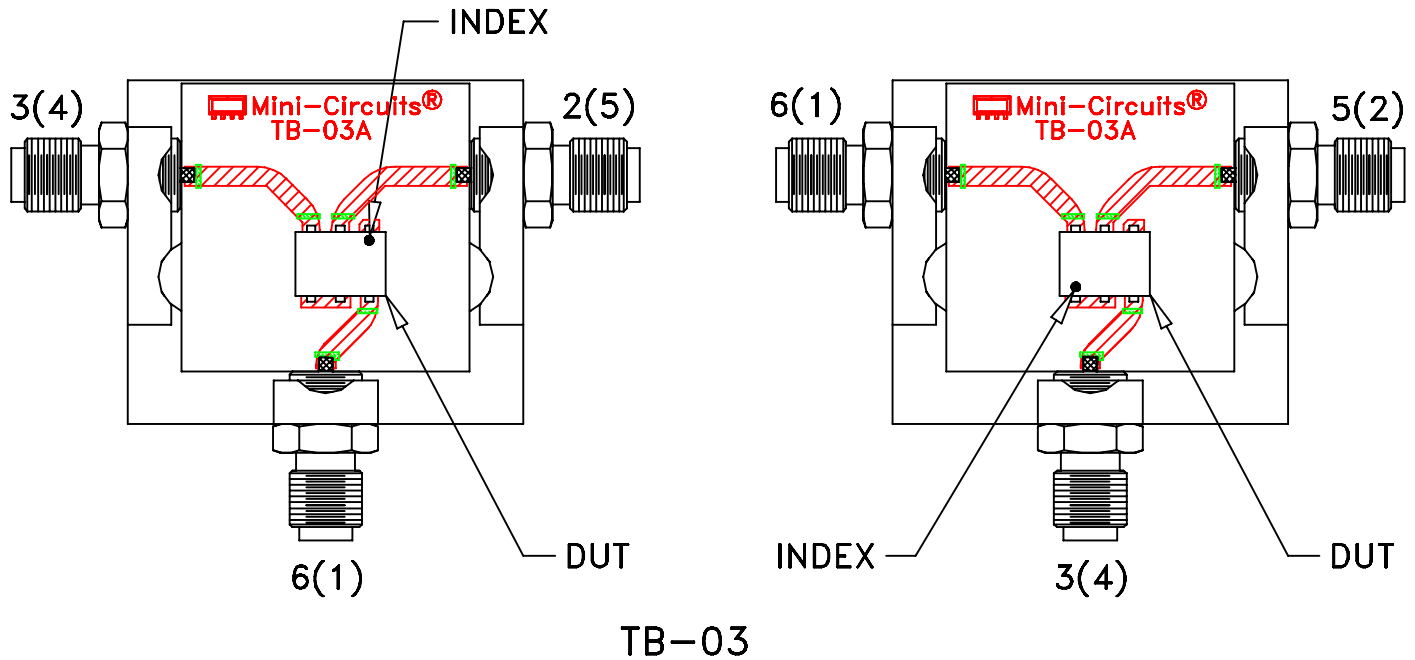

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**