

Surface Mount Voltage Controlled Oscillator

JTOS-535+


Linear Tuning 300 to 525 MHz

Features

- wide frequency range, 300 to 525 MHz
- linear tuning characteristics
- excellent harmonic suppression, -35 dBc typ.
- low phase noise, -144 dBc/Hz at 1 MHz offset
- aqueous washable

Applications

- VHF/UHF
- instrumentation
- signal generators



CASE STYLE: BK377

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, kHz				TUNING VOLTAGE RANGE (V)				3 dB MODULATION BANDWIDTH (MHz)	NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @ 12 dB (MHz)	PUSHING (MHz/V)	DC OPERATING POWER Vcc Current (volts) (mA)	
	Min.	Max.	Typ.	1	10	100	1000	Min.	Max.	Typ.	Typ.	Typ.	Typ.	Typ.	Max.	Typ.	Typ.	Max.	Max.
JTOS-535+	300	525	+10.5	-76	-101	-123	-144	1	16	15-21	350	0.12	-90	-35	-20	2.0	0.5	12	22


Pin Connections

RF OUT	13
VCC	2
V-TUNE	5
GROUND	1,3,4,6,7,8,9,10,11,12,14


Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	+16V
Absolute Max. Tuning Voltage (Vtune)	+18V
all specifications: 50 ohm system	
Permanent damage may occur if any of these limits are exceeded.	

Outline Drawing

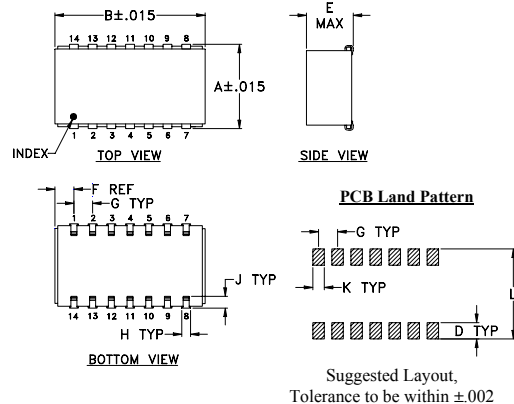

Demo Board MCL PIN: TB-04 Suggested PCB Layout (PL-005)

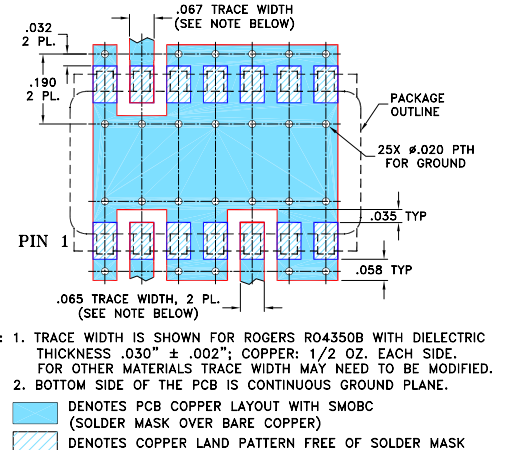

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	wt
.505	.800	--	.100	.250	.100	.100	.047	.065	.065	.525	grams
12.83	20.32	--	2.54	6.35	2.54	2.54	1.19	1.65	1.65	13.34	3.0

Notes







- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Performance Data & Curves

JTOS-535+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			I _{cc} (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (kHz)	PHASE NOISE at 413 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	27.91	260.7	257.2	253.8	5.04	3.30	1.59	17.25	-23.5	-47.8	-34.1	0.33	0.09	-79.95	-101.7	-122.1	-141.8	1.0	-75.92
0.50	22.70	274.4	271.2	268.3	6.89	5.53	4.51	17.31	-23.6	-48.7	-34.7	0.22	0.07	-80.36	-102.7	-123.7	-145.5	2.5	-85.48
1.00	21.00	285.3	282.5	280.0	8.01	7.12	6.33	17.30	-24.7	-44.6	-37.4	0.27	0.06	-81.52	-103.6	-124.7	-146.2	4.2	-90.77
2.00	17.56	305.4	302.6	299.7	9.82	9.38	8.42	17.34	-30.3	-43.3	-44.7	0.06	0.19	-82.85	-104.7	-125.7	-147.1	7.3	-95.89
3.00	16.45	323.3	319.7	316.3	10.91	10.28	9.23	17.16	-35.3	-42.9	-46.1	0.08	0.26	-80.34	-102.7	-124.0	-148.7	8.7	-97.44
4.00	20.25	340.3	337.2	335.1	10.92	10.69	10.09	16.91	-37.3	-42.8	-49.9	0.35	0.35	-80.91	-104.5	-125.6	-147.1	10.0	-99.04
5.00	19.72	360.0	357.5	354.4	11.64	11.61	10.94	16.81	-35.7	-40.6	-62.7	0.14	0.55	-84.39	-105.1	-125.0	-145.6	24.0	-107.00
6.00	18.31	380.1	376.8	372.7	11.85	11.89	11.18	16.63	-35.2	-41.2	-55.3	0.08	1.32	-80.69	-103.4	-124.8	-148.0	40.2	-111.59
7.00	19.29	399.4	394.9	390.4	11.77	11.64	10.81	16.32	-34.5	-40.3	-51.2	0.01	1.42	-77.62	-100.4	-122.1	-148.4	66.3	-116.36
8.00	20.76	420.0	415.0	411.2	11.49	11.15	10.56	16.10	-35.1	-42.3	-51.2	0.56	1.63	-76.63	-99.4	-120.9	-147.2	79.3	-118.16
8.50	19.67	430.4	425.4	421.6	11.28	10.97	10.50	16.03	-36.5	-42.4	-50.7	0.49	1.22	-76.83	-99.8	-121.1	-146.9	100.0	-120.63
9.00	18.67	440.2	435.2	431.5	11.03	10.79	10.42	15.95	-37.5	-42.1	-50.5	0.41	1.24	-76.66	-100.2	-121.7	-146.7	130.7	-123.35
10.00	17.12	458.0	453.6	450.2	10.48	10.43	10.18	15.79	-37.6	-43.0	-46.4	0.19	0.95	-79.54	-102.0	-123.2	-145.9	183.5	-127.27
11.00	17.10	473.9	470.5	467.1	9.88	10.02	9.86	15.61	-39.5	-44.6	-43.4	0.11	1.56	-78.72	-102.0	-123.2	-144.8	219.3	-129.47
12.00	18.24	492.2	488.0	483.8	9.43	9.64	9.49	15.46	-48.5	-48.7	-41.7	0.54	1.56	-75.53	-99.6	-120.8	-143.3	307.9	-133.60
12.50	17.83	501.5	497.1	492.8	9.27	9.47	9.31	15.40	-52.3	-51.6	-42.8	0.55	2.19	-75.39	-98.9	-120.1	-142.3	361.5	-135.57
13.00	17.12	510.5	506.0	501.8	9.13	9.31	9.14	15.36	-46.2	-54.8	-42.9	0.47	2.47	-75.71	-99.1	-120.1	-141.7	507.5	-139.63
14.00	15.93	527.2	522.8	519.0	8.87	9.00	8.84	15.27	-37.6	-55.3	-43.3	0.37	1.14	-76.34	-99.0	-119.6	-140.6	606.7	-141.64
15.00	14.82	542.6	538.4	535.0	8.59	8.69	8.55	15.20	-33.4	-54.2	-44.4	0.33	1.60	-76.81	-98.7	-119.2	-139.6	851.6	-145.30
16.00	13.37	556.7	552.9	549.7	8.32	8.40	8.27	15.13	-31.5	-55.1	-45.3	0.29	1.92	-79.17	-98.4	-118.5	-139.0	1000.0	-147.14

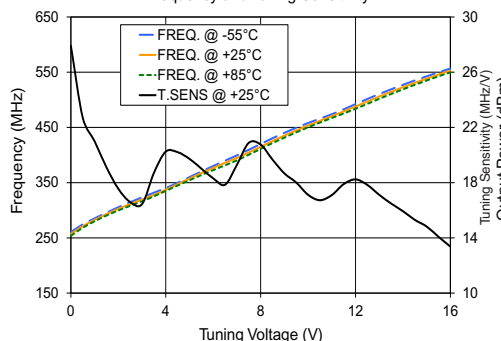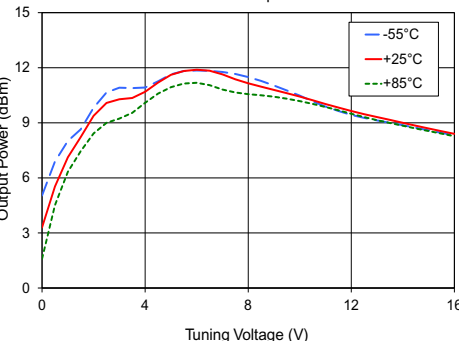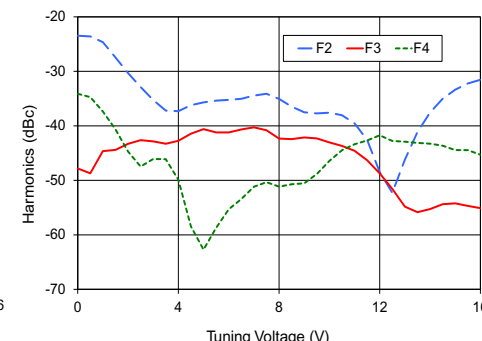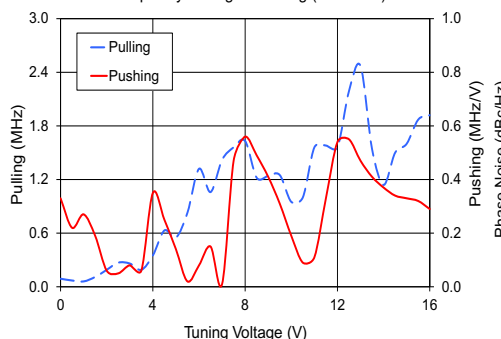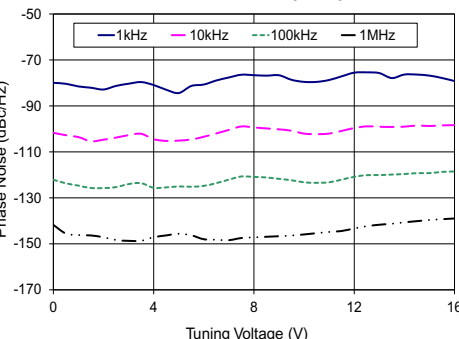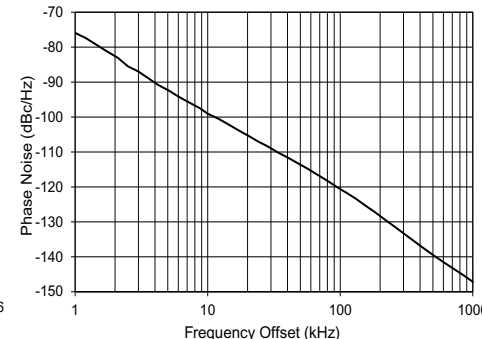JTOS-535+
Frequency and Tuning SensitivityJTOS-535+
Power OutputJTOS-535+
Harmonics LevelJTOS-535+
Frequency Pulling & Pushing (V_{cc} ± 5%)JTOS-535+
Phase Noise Vs. Tuning VoltageJTOS-535+
Phase Noise

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Voltage Controlled Oscillator

JTOS-535+

Typical Performance Data

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ OFFSET (KHz)	PHASE NOISE (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C	F2	F3	F4			
1.0	31.50	285.0	278.9	274.8	8.25	8.38	8.25	-26.6	-37.3	-34.1	0.97	1	-75
2.0	26.00	310.2	304.9	301.2	8.55	8.95	8.94	-30.9	-41.3	-33.7	0.64	10	-97
3.0	20.90	331.3	325.8	321.5	8.49	9.23	9.33	-35.3	-40.9	-35.4	0.97	100	-117
4.0	20.90	352.8	346.7	341.3	8.61	9.35	9.47	-38.4	-41.9	-37.0	0.41	1000	-137
5.0	17.80	370.7	364.5	358.8	8.76	9.43	9.49	-41.5	-40.0	-41.0	0.07		
6.0	16.20	386.8	380.7	374.9	8.70	9.37	9.34	-43.3	-36.9	-43.6	-0.36		
7.0	16.80	402.9	397.5	393.2	8.12	8.91	9.07	-45.7	-37.1	-38.6	1.04		
8.0	23.90	427.1	421.3	416.1	7.81	8.00	8.91	-43.7	-37.4	-35.8	0.35		
9.0	20.30	447.0	441.6	436.5	7.73	8.53	8.63	-41.6	-40.1	-36.2	-0.14		
10.0	18.00	464.8	459.6	454.8	7.80	8.51	8.55	-39.9	-42.7	-39.7	-0.23		
11.0	16.30	480.8	476.0	471.0	7.78	8.49	8.56	-38.3	-43.3	-35.7	-0.37		
12.0	11.90	490.3	487.9	483.7	7.40	8.25	8.35	-37.6	-42.5	-32.1	-0.58		
13.0	16.80	511.1	504.8	500.4	6.94	7.76	8.08	-37.9	-40.0	-32.6	0.93		
14.0	19.60	531.2	524.4	519.3	7.04	7.73	7.95	-34.5	-36.7	-33.1	0.73		
15.0	17.30	548.7	541.7	536.1	7.34	7.96	8.11	-32.7	-35.2	-34.0	0.38		
16.0	14.60	563.3	556.3	550.4	7.41	8.08	8.21	-29.5	-33.2	-41.1	0.12		

REV. X1
JTOS-535+
070131
Page 1 of 1



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661








The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Voltage Controlled Oscillator

JTOS-535+

Typical Performance Data

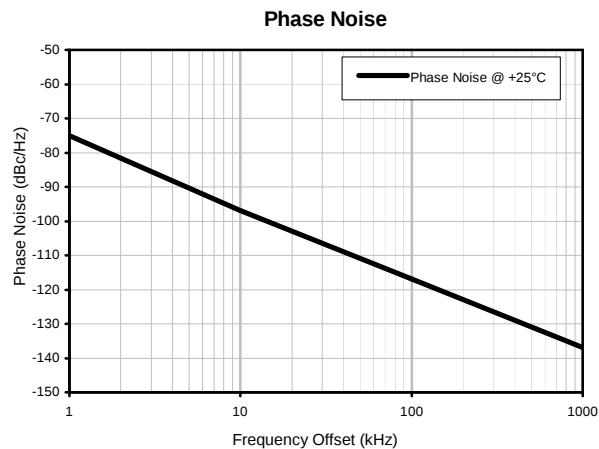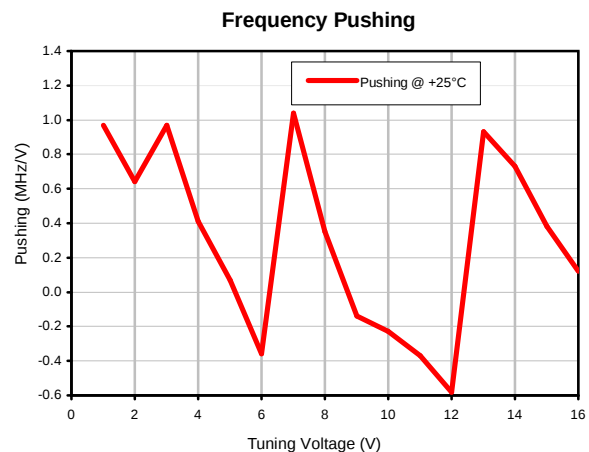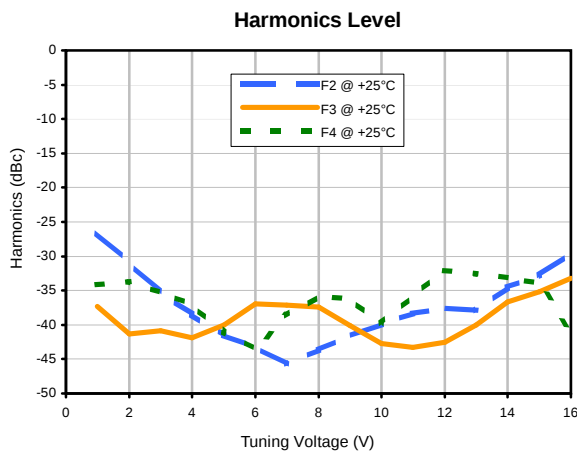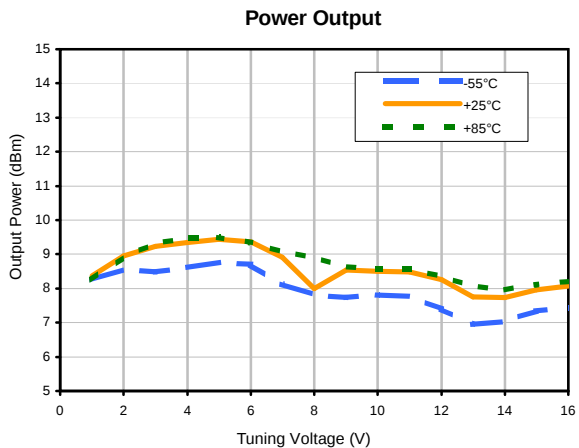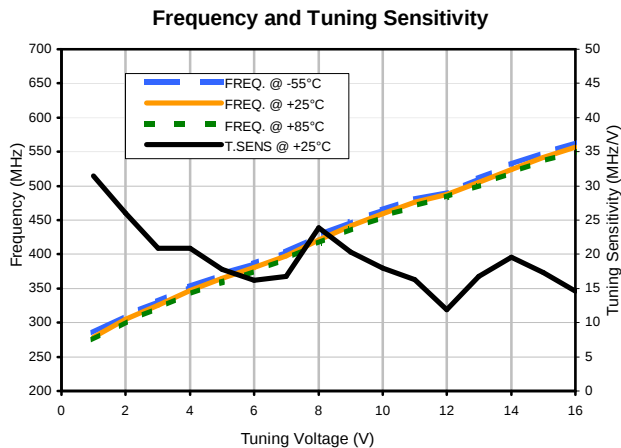

REV. X1
JTOS-535+
070131
Page 1 of 1






The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see

Mini-Circuits®


IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



Outline Dimensions

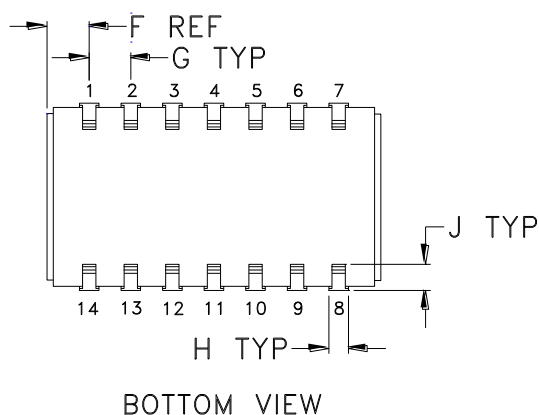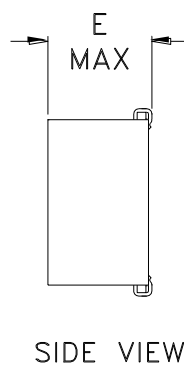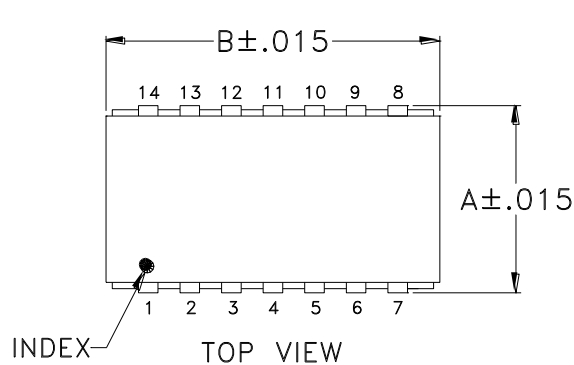

PCB Land Pattern

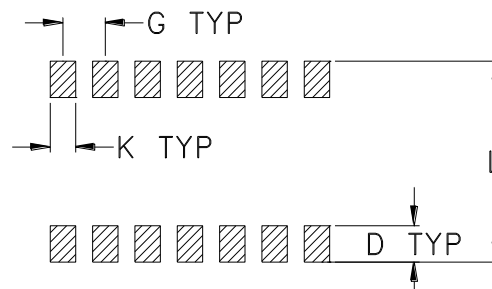

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L	WT. GRAM
BK377	.505 (12.83)	.800 (20.32)	-- --	.100 (2.54)	.250 (6.35)	.100 (2.54)	.100 (2.54)	.047 (1.19)	.065 (1.65)	.065 (1.65)	.525 (13.34)	2.0 MAX.

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .01$; 3Pl. $\pm .005$

Notes:

- Case material: Copper Nickel alloy.
- Base material: Printed wiring laminate.
- Termination finish:
 - For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
 - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.



INTERNET <http://www.minicircuits.com>


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F107

DEVICE ORIENTATION IN T&R

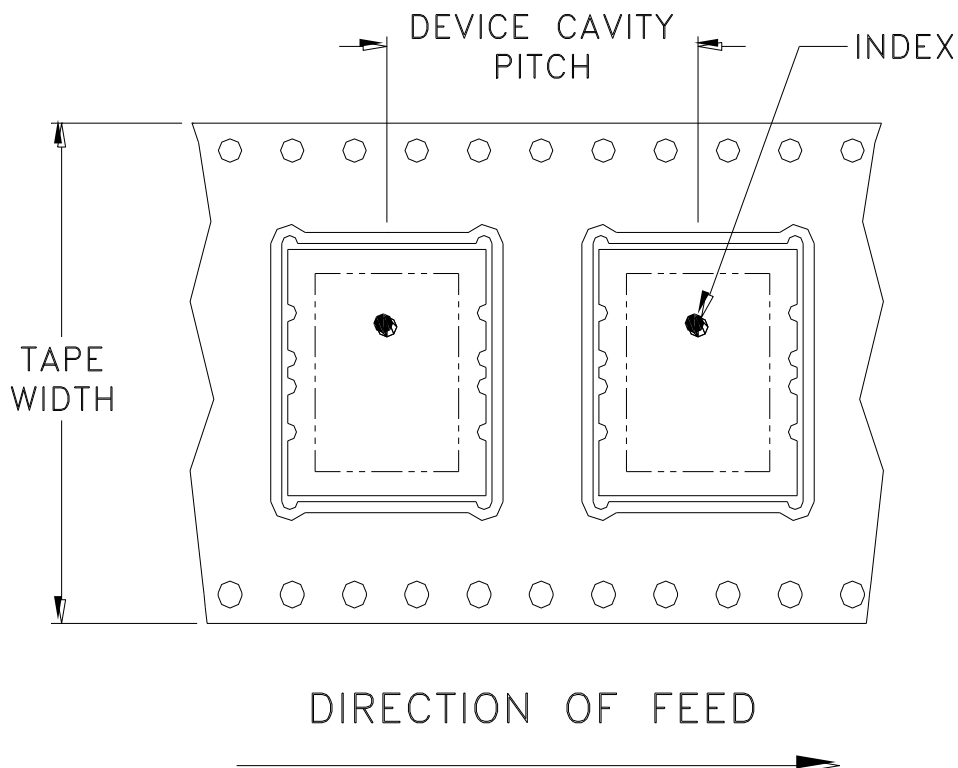

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
32	20	7	Small quantity standards (see note)	10
				20
				50
				100
		13	Standard	200

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
B	M76077	UPDATED DRAWING	04/01	GF	MM
C	M82575	UPDATED DRAWING	08/08/02	IL	MM
D	M102713	UPDATED DIMENSIONS & NOTES	01/17/06	MMG	IL
E	M115059	CORRECTED NOTE 2	12/18/07	MMG	IL


SUGGESTED MOUNTING CONFIGURATION FOR BK377 CASE STYLE, "jc" PIN CONNECTION

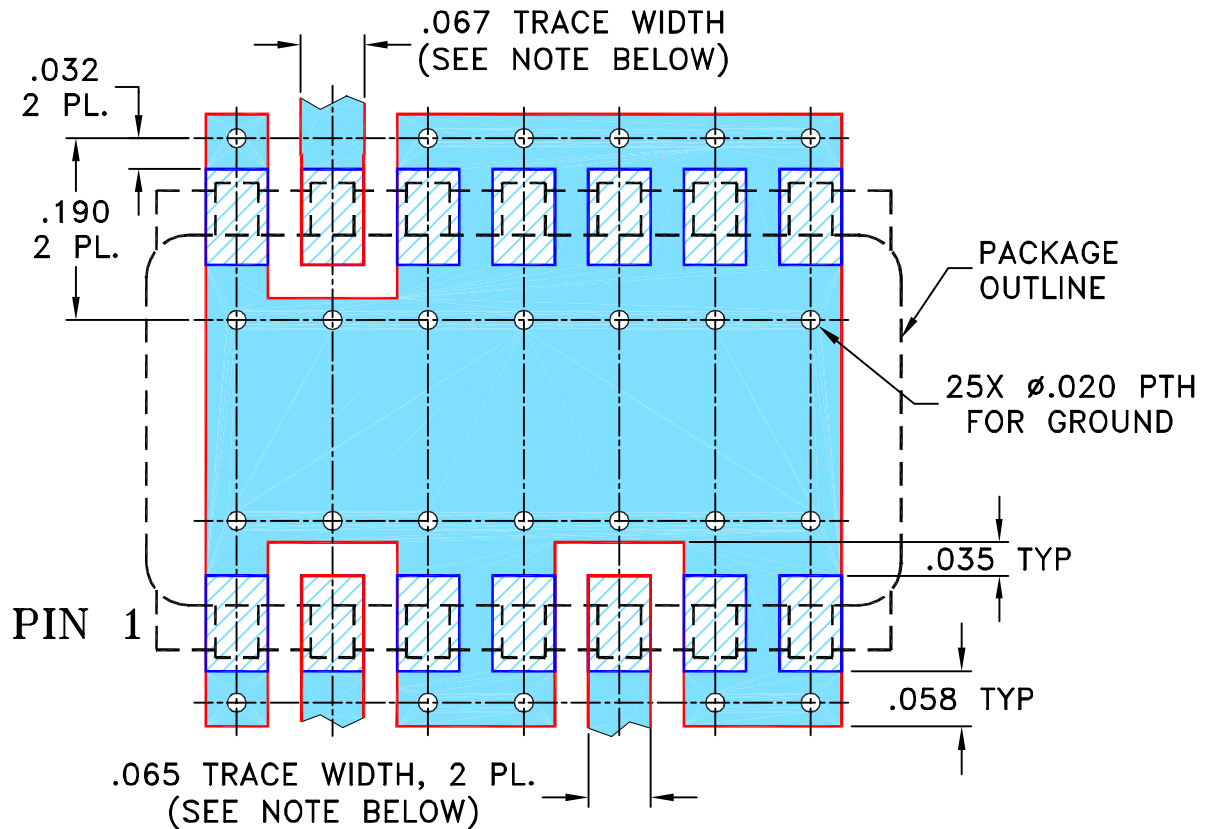

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS $.030'' \pm .002''$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS $\pm$ 3 PL DECIMALS $\pm .005$ ANGLES $\pm$ FRACTIONS $\pm$

DRAWN

FB

05/20/00

CHECKED

MM

05/24/00

APPROVED

DB

05/24/00



Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

PL, jc, BK377, JTOS, TB-04

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-005

REV:

E

FILE: 98PL005

SCALE:

5:1

SHEET:



1 OF 1

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit

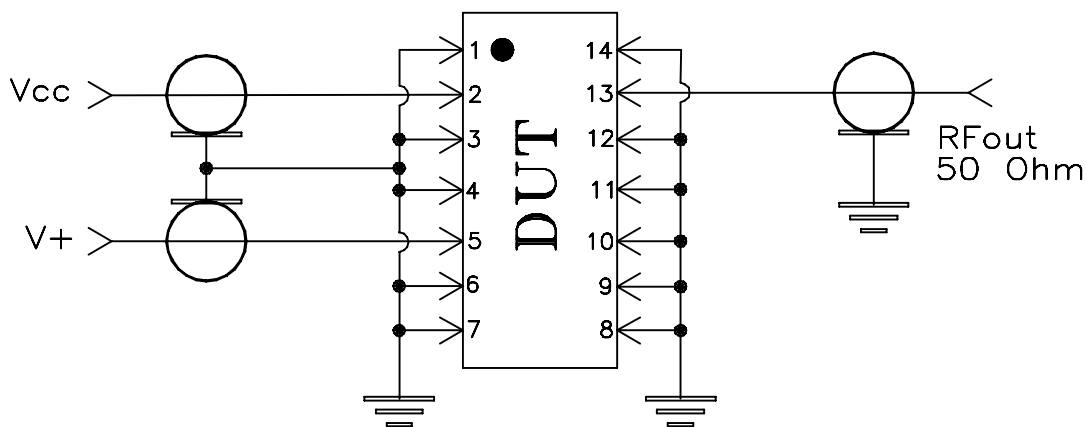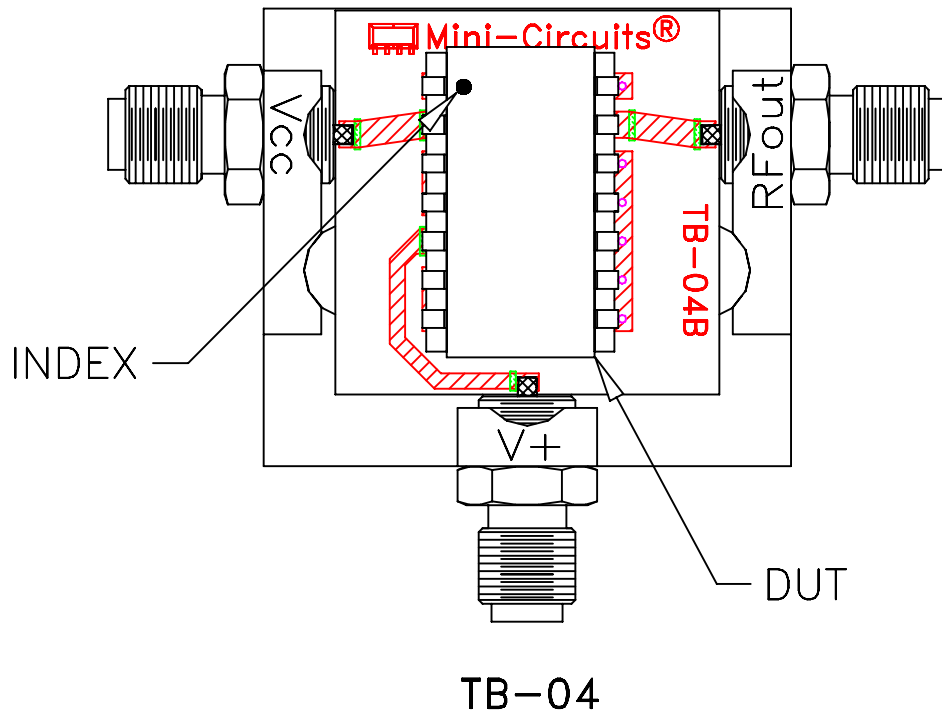

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent, Dielectric Constant=3.5, Thickness=.030 inch.

 Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutectic Process: 225°C peak Pb-Free Process, 245°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 20-2000 Hz, 4 times in each of three axes (total 12)	MIL-STD-883, Method 2007.3, Condition A
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215