

RF Transformer

JTX1-ED11400/1

Impedance Ratio : 1

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : 99-01-519


ELECTRICAL SPECIFICATIONS 50Ω @ +25°C				
Parameter		Min.	Typ.	Max. Units
Frequency		.3		200 MHz
Insertion Loss *	3 dB Bandwidth		.3-200	MHz
	2 dB Bandwidth		2-125	MHz
	1 dB Bandwidth		10-70	MHz

Note:

* Insertion Loss is referenced to mid-band loss, 0.18 dB typ.

MAXIMUM RATINGS	
Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30 mA

PIN CONNECTIONS	
PRIMARY DOT	4
PRIMARY	6
SECONDARY DOT	1
SECONDARY	3
SECONDARY CT	2
NOT USED	5

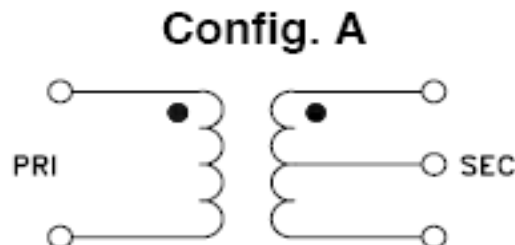

RF Transformer

JTX1-ED11400/1

Typical Performance Data

FREQUENCY MHz	AVERAGE INSERTION LOSS (dB)	INPUT RETURN LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
0.30	0.28	21.49	0.02	0.01
0.40	0.26	23.34	0.02	0.06
0.50	0.25	24.59	0.02	0.07
0.60	0.25	25.47	0.02	0.07
0.70	0.25	26.14	0.02	0.07
0.80	0.24	26.66	0.02	0.08
0.90	0.24	27.13	0.02	0.07
1.00	0.24	27.49	0.02	0.05
2.00	0.20	29.75	0.02	0.07
3.00	0.19	30.61	0.02	0.05
4.00	0.18	30.87	0.02	0.06
5.00	0.18	30.77	0.01	0.05
7.00	0.18	30.08	0.01	0.03
8.00	0.19	29.57	0.01	0.01
9.00	0.20	28.93	0.00	0.07
10.00	0.21	28.30	0.00	0.18
20.00	0.24	24.10	0.00	0.15
30.00	0.29	21.21	0.00	0.11
40.00	0.34	19.00	0.02	0.05
50.00	0.41	17.26	0.03	0.01
60.00	0.47	15.86	0.05	0.02
70.00	0.55	14.67	0.07	0.02
80.00	0.62	13.65	0.09	0.03
83.00	0.65	13.37	0.10	0.01
85.00	0.67	13.19	0.10	0.04
87.00	0.68	13.01	0.11	0.04
89.00	0.70	12.84	0.11	0.05
90.00	0.71	12.76	0.11	0.07
91.00	0.72	12.68	0.12	0.07
93.00	0.74	12.51	0.13	0.10
95.00	0.75	12.35	0.13	0.12
97.00	0.77	12.20	0.14	0.14
100.00	0.80	11.97	0.15	0.19
125.00	1.05	10.39	0.27	0.40
150.00	1.33	9.13	0.41	0.85
175.00	1.63	8.14	0.60	1.44
200.00	1.96	7.33	0.83	2.24



P.O. Box 350186, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4861 For detailed performance specs & shopping online see Mini-Circuits web site



Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/MICROWAVE COMPONENTS







REV. X1
JTX1-ED11400/1
11/27/2007
Page 1 of 1

RF Transformer

JTX1-ED11400/1

Typical Performance Data

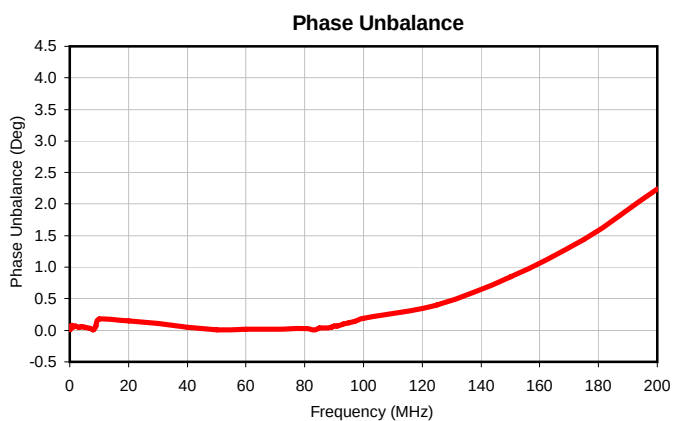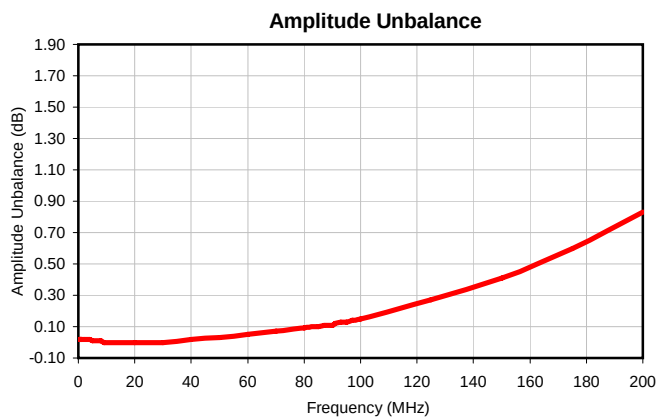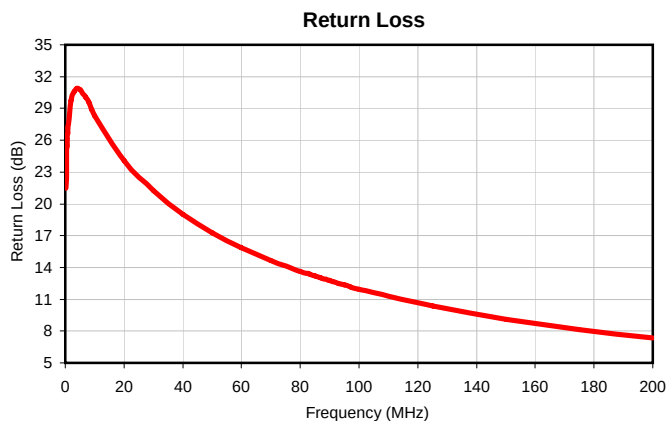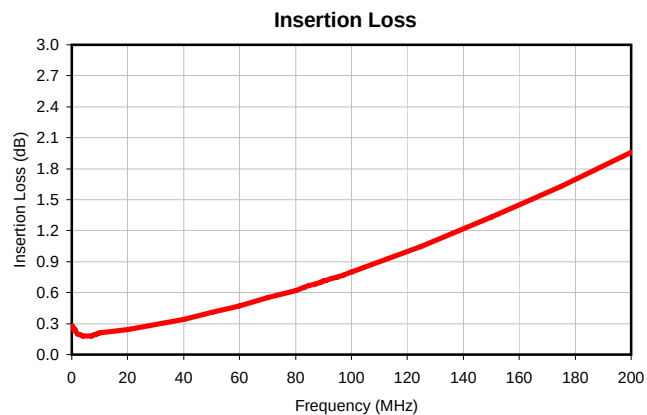

P.O. Box 350186, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4861 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/MICROWAVE COMPONENTS



REV. X1
JTX1-ED11400/1
11/27/2007
Page 1 of 1



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-20° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215