

# Surface Mount Frequency Mixer

## JYM-30H+

Level 17 (LO Power +17 dBm) 2 to 3000 MHz



Generic photo used for illustration purposes only  
CASE STYLE: BJ293

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	


### Pin Connections

LO	5
RF	1
IF	7
GROUND	2,3,4,6,8

### Outline Drawing

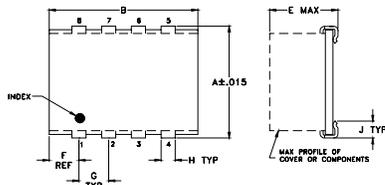

### PCB Land Pattern




### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.395	.500	--	.100	.230	.100	.100
10.03	12.70	--	2.54	5.84	2.54	2.54

H	J	K	L	wt
.047	.065	.065	.425	grams
1.19	1.65	1.65	10.80	0.80

### Demo Board MCL P/N: TB-259 Suggested PCB Layout (PL-080)

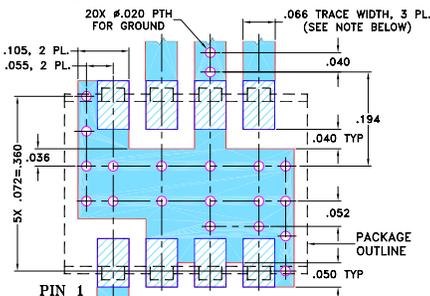

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
■ DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

### Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- wide bandwidth, 2 to 3000 MHz
- good IP3, 24 dBm typ.
- high L-R isolation, 40 dB typ.

### Applications

- cellular
- GPS
- satellite distribution
- MMDS

### Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			IP3 at center band (dBm)						
		L	M	U	L	M	U							
2-3000	4-1400	40	30	40	25	30	25	40	35	30	20	22	15	24


1 dB COMP.: +10 dBm typ.







L = low range [ $f_L$  to  $10 f_L$ ] M = mid range [ $10 f_L$  to  $f_U/2$ ] U = upper range [ $f_U/2$  to  $f_U$ ]  
m = mid band [ $2 f_L$  to  $f_U/2$ ]

### Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
2.10	32.10	5.44	39.95	43.97	1.16	2.63
4.10	34.10	5.26	42.60	47.96	1.11	2.62
10.10	40.10	5.30	45.22	51.67	1.09	2.61
50.10	80.10	5.31	45.58	51.80	1.07	2.59
100.10	130.10	5.41	45.25	51.16	1.08	2.52
200.10	230.10	5.53	44.76	50.33	1.13	2.47
300.10	330.10	5.59	45.14	49.28	1.21	2.37
400.10	430.10	5.66	45.99	46.27	1.34	2.24
800.10	830.10	5.88	50.23	35.40	1.90	2.07
1000.10	1030.10	6.20	45.07	31.64	2.09	1.93
1200.10	1230.10	6.23	42.15	30.32	2.04	1.77
1500.10	1530.10	6.34	44.76	28.69	1.83	1.56
1800.10	1830.10	6.55	44.84	26.88	1.63	1.46
2000.10	2030.10	6.81	41.91	26.46	1.73	1.39
2200.10	2230.10	6.90	37.99	26.21	1.70	1.41
2400.10	2430.10	6.82	35.70	26.50	1.57	1.57
2500.10	2530.10	6.85	33.01	26.84	1.47	1.65
2600.10	2630.10	6.93	32.55	27.26	1.35	1.73
2800.10	2830.10	7.25	32.37	28.09	1.23	1.99
3000.10	3030.10	8.05	33.83	28.71	1.58	2.26

### Electrical Schematic

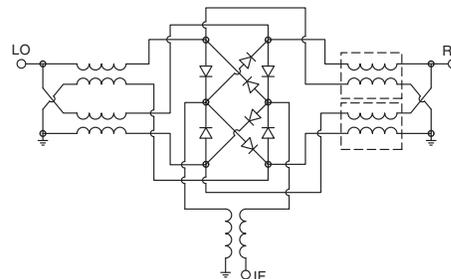

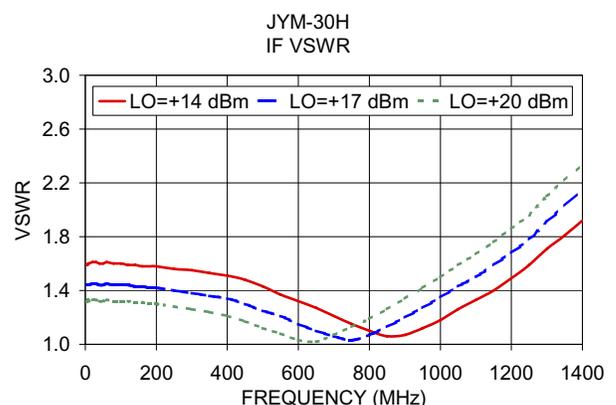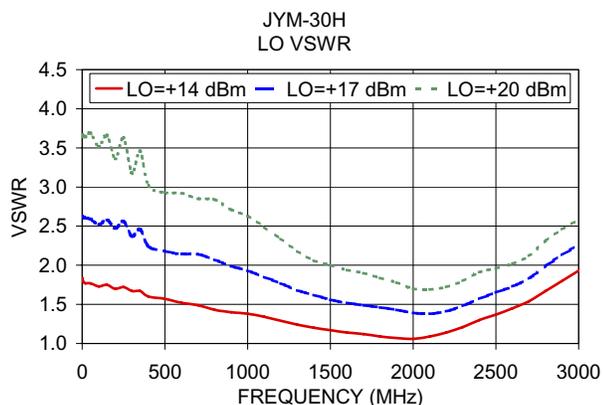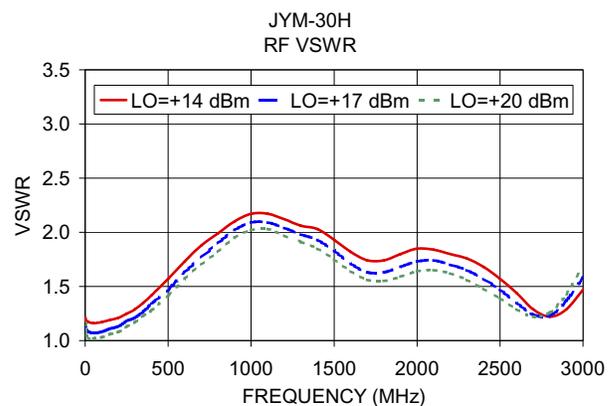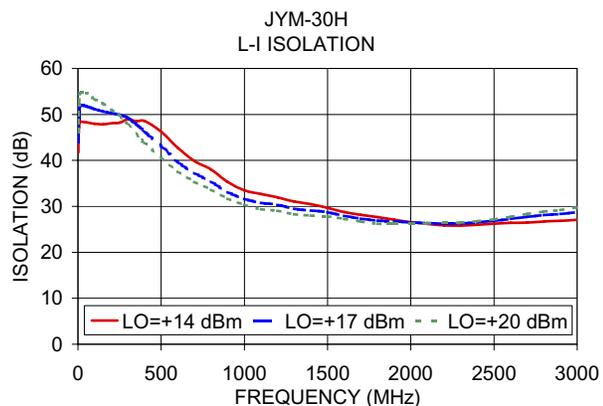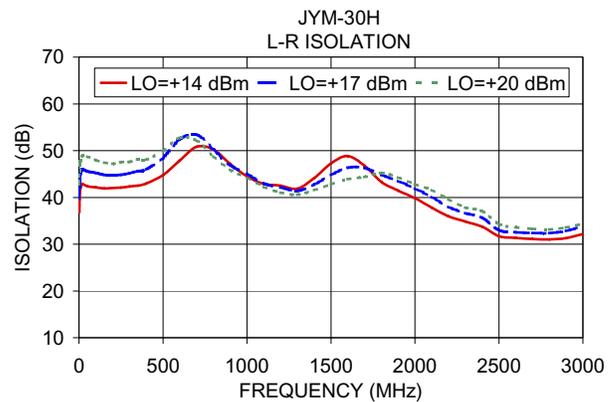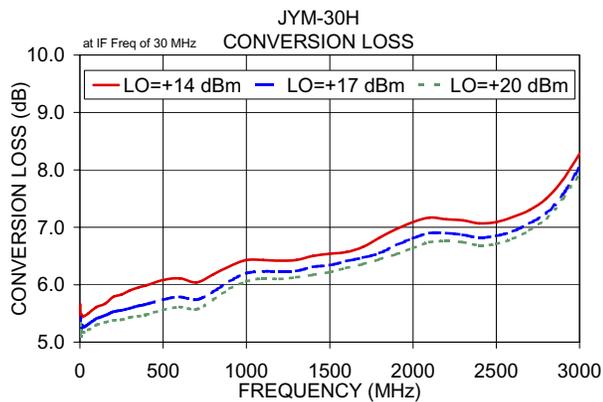

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Frequency Mixer

# JYM-30H+

## Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+10dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
		+14	+17	+20			+14	+17	+20			+14	+17	+20
2.0	32.0	6.04	5.76	5.71	10.1	40.1	27.68	27.42	27.47	10.1	40.1	0.66	0.46	0.32
4.0	34.0	5.89	5.71	5.58	90.8	120.8	23.03	21.87	22.65	90.8	120.8	0.53	0.38	0.25
10.0	40.0	4.58	4.33	4.48	171.6	201.6	20.01	21.01	23.74	171.6	201.6	0.53	0.39	0.30
90.8	120.8	5.63	5.42	5.34	252.3	282.3	19.88	22.81	29.38	252.3	282.3	0.58	0.48	0.36
171.6	201.6	5.76	5.54	5.41	333.0	363.0	21.15	25.89	39.77	333.0	363.0	0.70	0.54	0.42
252.3	282.3	5.81	5.54	5.43	413.8	443.8	22.43	27.39	30.27	413.8	443.8	0.80	0.65	0.51
413.8	443.8	5.90	5.61	5.49	494.5	524.5	26.12	31.78	26.77	494.5	524.5	0.85	0.67	0.53
494.5	524.5	5.92	5.66	5.55	575.3	605.3	29.78	26.79	26.17	575.3	605.3	0.93	0.73	0.57
575.3	605.3	5.99	5.74	5.62	656.0	686.0	28.47	25.01	24.69	656.0	686.0	0.95	0.74	0.59
656.0	686.0	6.04	5.78	5.66	736.7	766.7	25.16	24.73	25.64	736.7	766.7	0.97	0.78	0.62
736.7	766.7	6.13	5.88	5.75	817.5	847.5	23.76	24.33	24.87	817.5	847.5	0.86	0.72	0.62
817.5	847.5	6.36	6.08	5.95	898.2	928.2	22.90	23.83	24.45	898.2	928.2	0.69	0.59	0.51
898.2	928.2	6.55	6.28	6.14	978.9	1008.9	21.42	22.18	24.06	978.9	1008.9	0.58	0.49	0.43
978.9	1008.9	6.55	6.32	6.21	1059.7	1089.7	20.47	21.20	21.82	1059.7	1089.7	0.55	0.45	0.42
1059.7	1089.7	6.52	6.34	6.25	1140.4	1170.4	20.82	21.90	22.80	1140.4	1170.4	0.49	0.43	0.42
1140.4	1170.4	6.40	6.22	6.14	1221.1	1251.1	21.00	22.22	23.26	1221.1	1251.1	0.43	0.38	0.40
1221.1	1251.1	6.40	6.23	6.15	1301.9	1331.9	21.09	21.83	22.73	1301.9	1331.9	0.40	0.35	0.36
1301.9	1331.9	6.39	6.21	6.16	1382.6	1412.6	22.64	22.74	23.75	1382.6	1412.6	0.37	0.33	0.34
1382.6	1412.6	6.40	6.21	6.15	1463.4	1493.4	23.90	25.12	24.46	1463.4	1493.4	0.35	0.29	0.33
1463.4	1493.4	6.45	6.26	6.19	1544.1	1574.1	23.89	25.56	25.76	1544.1	1574.1	0.35	0.29	0.33
1544.1	1574.1	6.52	6.33	6.25	1624.8	1654.8	24.45	24.94	25.20	1624.8	1654.8	0.37	0.28	0.31
1624.8	1654.8	6.62	6.44	6.38	1705.6	1735.6	26.56	25.33	24.48	1705.6	1735.6	0.39	0.34	0.36
1705.6	1735.6	6.81	6.59	6.50	1786.3	1816.3	24.89	24.66	23.33	1786.3	1816.3	0.48	0.44	0.48
1867.0	1897.0	7.14	6.86	6.75	1867.0	1897.0	25.24	24.38	19.52	1867.0	1897.0	0.54	0.51	0.55
1947.8	1977.8	7.22	6.91	6.88	1947.8	1977.8	22.67	20.67	18.07	1947.8	1977.8	0.63	0.59	0.54
2028.5	2058.5	7.33	7.03	6.97	2028.5	2058.5	25.53	22.75	22.11	2028.5	2058.5	0.69	0.67	0.62
2109.2	2139.2	7.44	7.13	6.99	2109.2	2139.2	24.57	24.27	22.04	2109.2	2139.2	0.73	0.72	0.77
2210.2	2240.2	7.42	7.15	7.00	2210.2	2240.2	20.53	21.91	21.35	2210.2	2240.2	0.92	0.86	0.94
2290.9	2320.9	7.31	7.07	6.94	2290.9	2320.9	19.29	20.47	20.66	2290.9	2320.9	1.08	1.02	1.09
2391.8	2421.8	7.22	6.97	6.87	2391.8	2421.8	18.89	19.79	19.76	2391.8	2421.8	1.27	1.23	1.31
2472.6	2502.6	7.22	6.96	6.84	2472.6	2502.6	17.97	18.61	18.98	2472.6	2502.6	1.34	1.32	1.44
2573.5	2603.5	7.24	7.01	6.91	2573.5	2603.5	16.95	17.70	17.91	2573.5	2603.5	1.37	1.36	1.54
2654.2	2684.2	7.34	7.10	7.00	2654.2	2684.2	16.26	16.94	17.12	2654.2	2684.2	1.38	1.38	1.64
2755.1	2785.1	7.46	7.24	7.16	2755.1	2785.1	15.83	16.54	16.75	2755.1	2785.1	1.39	1.40	1.74
2835.9	2865.9	7.63	7.41	7.36	2835.9	2865.9	15.86	17.02	16.38	2835.9	2865.9	1.42	1.42	1.77
2936.8	2966.8	8.04	7.83	7.80	2936.8	2966.8	16.26	18.06	16.35	2936.8	2966.8	1.25	1.24	1.57
3017.5	3047.5	8.42	8.20	8.19	3017.5	3047.5	17.02	18.78	16.20	3017.5	3047.5	1.12	1.12	1.48
3118.4	3148.4	9.10	8.90	9.04	3118.4	3148.4	17.95	19.27	15.11	3118.4	3148.4	0.98	1.10	1.47
3199.2	3229.2	9.76	9.57	10.06	3199.2	3229.2	18.05	18.79	15.58	3199.2	3229.2	1.01	1.06	1.13
3300.1	3330.1	10.45	10.33	11.23	3300.1	3330.1	17.60	18.10	18.93	3300.1	3330.1	0.95	0.90	0.64



# Frequency Mixer

# JYM-30H+

## Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1500.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=3000.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+17			+17			+17
1400.0	100.1	8.59	10.0	20.1	5.24	1400.0	1600.1	8.04
1359.7	140.4	8.55	50.3	60.4	5.18	1359.7	1640.4	8.07
1319.4	180.7	8.45	90.6	100.7	5.18	1319.4	1680.7	8.06
1279.1	221.0	8.37	130.9	141.0	5.12	1279.1	1721.0	8.11
1238.8	261.3	8.29	171.2	181.3	5.16	1238.8	1761.3	8.12
1198.6	301.5	8.11	211.4	221.5	5.12	1198.6	1801.5	8.14
1158.3	341.8	8.03	251.7	261.8	5.14	1158.3	1841.8	8.20
1118.0	382.1	7.93	292.0	302.1	5.12	1118.0	1882.1	8.23
1077.7	422.4	7.81	332.3	342.4	5.11	1077.7	1922.4	8.24
1037.4	462.7	7.75	372.6	382.7	5.12	1037.4	1962.7	8.29
997.1	503.0	7.67	412.9	423.0	5.10	997.1	2003.0	8.28
956.8	543.3	7.59	453.2	463.3	5.13	956.8	2043.3	8.24
916.5	583.6	7.53	493.5	503.6	5.15	916.5	2083.6	8.19
876.2	623.9	7.47	533.8	543.9	5.18	876.2	2123.9	8.09
835.9	664.2	7.40	574.1	584.2	5.23	835.9	2164.2	7.99
795.7	704.4	7.32	614.3	624.4	5.23	795.7	2204.4	7.86
755.4	744.7	7.29	654.6	664.7	5.29	755.4	2244.7	7.77
715.1	785.0	7.15	694.9	705.0	5.33	715.1	2285.0	7.69
674.8	825.3	7.10	735.2	745.3	5.46	674.8	2325.3	7.67
634.5	865.6	6.98	775.5	785.6	5.54	634.5	2365.6	7.65
594.2	905.9	6.84	815.8	825.9	5.61	594.2	2405.9	7.57
553.9	946.2	6.75	856.1	866.2	5.71	553.9	2446.2	7.55
513.6	986.5	6.61	896.4	906.5	5.78	513.6	2486.5	7.51
493.5	1006.6	6.57	916.5	926.6	5.86	493.5	2506.6	7.47
453.2	1046.9	6.47	956.8	966.9	5.96	453.2	2546.9	7.46
433.0	1067.1	6.44	977.0	987.1	6.01	433.0	2567.1	7.45
392.8	1107.3	6.42	1017.2	1027.3	6.05	392.8	2607.3	7.44
372.6	1127.5	6.43	1037.4	1047.5	6.09	372.6	2627.5	7.45
332.3	1167.8	6.44	1077.7	1087.8	6.17	332.3	2667.8	7.45
312.2	1187.9	6.46	1097.8	1107.9	6.20	312.2	2687.9	7.46
271.9	1228.2	6.48	1138.1	1148.2	6.28	271.9	2728.2	7.48
251.7	1248.4	6.46	1158.3	1168.4	6.32	251.7	2748.4	7.49
211.4	1288.7	6.42	1198.6	1208.7	6.38	211.4	2788.7	7.53
191.3	1308.8	6.39	1218.7	1228.8	6.41	191.3	2808.8	7.56
151.0	1349.1	6.38	1259.0	1269.1	6.48	151.0	2849.1	7.67
130.9	1369.2	6.38	1279.1	1289.2	6.56	130.9	2869.2	7.71
90.6	1409.5	6.35	1319.4	1329.5	6.60	90.6	2909.5	7.83
70.4	1429.7	6.36	1339.6	1349.7	6.68	70.4	2929.7	7.88
30.1	1470.0	6.33	1379.9	1390.0	6.75	30.1	2970.0	7.99
10.0	1490.1	6.47	1400.0	1410.1	6.77	10.0	2990.1	8.14

REV. X2  
JYM-30H+  
100817  
Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



# Frequency Mixer

# JYM-30H+

## Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+14	+17	+20	+14	+17	+20
2.0	36.50	39.50	42.10	40.00	42.20	43.90
4.0	39.10	41.90	44.80	43.70	45.90	47.50
10.0	42.81	45.85	48.82	47.11	50.37	53.07
90.8	42.32	45.48	48.74	45.94	47.15	47.52
171.6	42.90	46.36	50.58	43.06	43.23	42.83
252.3	44.01	49.12	54.65	41.20	40.69	39.58
413.8	45.87	52.31	62.22	37.41	35.78	34.43
494.5	47.06	53.37	61.37	36.14	34.03	32.62
575.3	48.52	53.17	54.64	34.58	32.31	30.94
656.0	47.51	48.43	47.95	33.37	31.05	29.65
736.7	46.11	45.74	45.01	31.78	29.73	28.18
817.5	44.95	43.89	43.09	30.34	28.42	27.01
898.2	43.34	41.81	41.25	29.19	27.02	25.81
978.9	42.32	40.59	39.79	28.47	26.41	25.20
1059.7	42.29	40.29	39.26	27.89	25.84	24.52
1140.4	41.73	39.82	38.79	27.33	25.52	24.27
1221.1	41.39	39.43	38.39	26.88	25.28	24.04
1301.9	41.20	39.40	38.32	26.43	24.86	23.77
1382.6	40.03	38.23	37.48	26.28	24.76	23.66
1463.4	39.07	37.87	37.40	26.00	24.99	23.96
1544.1	39.26	38.73	38.63	25.36	24.56	23.82
1624.8	40.62	40.19	39.98	24.73	24.04	23.44
1705.6	42.23	41.96	41.89	24.33	23.57	23.03
1867.0	45.61	43.87	43.74	23.26	23.03	22.64
1947.8	46.81	44.23	42.98	22.69	22.68	22.39
2028.5	43.17	40.59	39.21	22.17	22.22	21.98
2109.2	42.20	39.35	38.18	21.74	21.79	21.60
2210.2	43.11	41.29	39.49	21.41	21.70	21.70
2290.9	42.19	42.07	41.12	21.30	21.57	21.70
2391.8	40.44	42.03	42.30	21.07	21.46	21.76
2472.6	38.88	40.60	41.92	21.10	21.45	21.75
2573.5	37.86	39.78	41.52	21.19	21.76	21.86
2654.2	36.17	38.05	39.80	20.98	21.82	22.00
2755.1	34.31	35.37	36.61	20.81	21.80	22.15
2835.9	34.01	34.92	35.99	20.67	21.83	22.35
2936.8	33.30	34.10	35.25	20.62	21.85	22.62
3017.5	32.22	33.26	34.30	20.23	21.65	22.40
3118.4	30.96	32.17	33.35	20.03	21.50	22.29
3199.2	31.26	32.68	34.38	19.47	21.16	22.14
3300.1	33.20	34.86	36.58	19.02	20.85	21.95

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+14	+17	+20
10.1	40.1	33.46	34.61	33.91
90.8	120.8	34.61	35.18	35.60
171.6	201.6	35.46	35.67	35.90
252.3	282.3	36.68	36.98	37.60
333.0	363.0	37.84	38.84	39.67
413.8	443.8	38.82	39.53	40.62
494.5	524.5	39.17	39.41	39.85
575.3	605.3	39.43	39.37	39.45
656.0	686.0	39.22	39.24	39.45
736.7	766.7	39.64	39.86	40.49
817.5	847.5	39.84	40.08	40.46
898.2	928.2	40.06	39.99	39.82
978.9	1008.9	39.41	39.01	39.37
1059.7	1089.7	38.65	39.00	38.95
1140.4	1170.4	38.03	38.56	39.78
1221.1	1251.1	38.13	38.13	38.09
1301.9	1331.9	38.46	38.75	38.72
1382.6	1412.6	38.39	38.93	39.04
1463.4	1493.4	36.86	36.78	36.71
1544.1	1574.1	34.80	34.40	33.81
1624.8	1654.8	33.17	32.98	32.53
1705.6	1735.6	31.90	31.93	31.85
1786.3	1816.3	31.56	31.50	31.67
1867.0	1897.0	30.79	31.18	31.57
1947.8	1977.8	30.25	30.79	31.40
2028.5	2058.5	29.85	30.17	30.39
2109.2	2139.2	28.95	28.96	29.08
2210.2	2240.2	29.62	29.37	29.36
2290.9	2320.9	30.47	30.23	30.28
2391.8	2421.8	31.45	31.03	31.05
2472.6	2502.6	32.84	32.48	32.09
2573.5	2603.5	33.59	33.89	33.51
2654.2	2684.2	32.60	33.29	33.75
2755.1	2785.1	31.53	31.76	32.08
2835.9	2865.9	30.63	30.65	31.06
2936.8	2966.8	29.61	29.51	30.00
3017.5	3047.5	29.18	29.31	29.70
3118.4	3148.4	29.20	29.73	30.45
3199.2	3229.2	29.83	30.06	29.67
3300.1	3330.1	30.59	30.23	28.84

# Frequency Mixer

# JYM-30H+

## Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)		
		@LO (dBm)		
		+14	+17	+20
2.0	32.0	1.48	1.37	1.29
4.0	34.0	1.49	1.37	1.29
10.0	40.0	1.53	1.14	1.08
90.8	120.8	1.17	1.08	1.03
171.6	201.6	1.20	1.12	1.07
252.3	282.3	1.25	1.18	1.14
333.0	363.0	1.34	1.27	1.23
413.8	443.8	1.46	1.38	1.33
494.5	524.5	1.58	1.50	1.45
575.3	605.3	1.74	1.66	1.60
656.0	686.0	1.89	1.80	1.74
736.7	766.7	2.01	1.92	1.85
817.5	847.5	2.14	2.04	1.96
898.2	928.2	2.24	2.14	2.07
978.9	1008.9	2.28	2.19	2.13
1059.7	1089.7	2.30	2.21	2.14
1140.4	1170.4	2.26	2.16	2.09
1221.1	1251.1	2.22	2.12	2.05
1301.9	1331.9	2.16	2.04	1.96
1382.6	1412.6	2.09	1.96	1.88
1463.4	1493.4	2.04	1.91	1.82
1544.1	1574.1	2.01	1.88	1.78
1624.8	1654.8	2.00	1.86	1.76
1705.6	1735.6	2.05	1.92	1.81
1786.3	1816.3	2.14	2.00	1.90
1867.0	1897.0	2.20	2.06	1.94
1947.8	1977.8	2.22	2.07	1.89
2028.5	2058.5	2.17	2.03	1.88
2109.2	2139.2	2.10	2.00	1.89
2210.2	2240.2	1.99	1.89	1.81
2290.9	2320.9	1.90	1.80	1.72
2391.8	2421.8	1.78	1.68	1.61
2472.6	2502.6	1.68	1.59	1.53
2573.5	2603.5	1.59	1.50	1.43
2654.2	2684.2	1.52	1.45	1.40
2755.1	2785.1	1.46	1.43	1.43
2835.9	2865.9	1.44	1.46	1.50
2936.8	2966.8	1.50	1.58	1.66
3017.5	3047.5	1.57	1.68	1.79
3118.4	3148.4	1.67	1.78	1.90
3199.2	3229.2	1.81	1.92	2.06
3300.1	3330.1	2.12	2.26	2.47

LO (MHz)	LO VSWR (:1)		
	@LO (dBm)		
	+14	+17	+20
2.0	1.53	2.20	3.02
4.0	1.49	2.18	2.98
10.0	1.60	2.23	3.05
90.8	1.72	2.50	3.47
171.6	1.71	2.49	3.45
252.3	1.71	2.49	3.45
333.0	1.69	2.46	3.40
413.8	1.64	2.37	3.26
494.5	1.56	2.25	3.08
575.3	1.51	2.16	2.92
656.0	1.46	2.08	2.79
736.7	1.41	2.00	2.68
817.5	1.37	1.94	2.59
898.2	1.33	1.87	2.48
978.9	1.28	1.81	2.39
1059.7	1.26	1.76	2.33
1140.4	1.24	1.74	2.29
1221.1	1.23	1.73	2.27
1301.9	1.24	1.73	2.26
1382.6	1.27	1.75	2.27
1463.4	1.31	1.79	2.32
1544.1	1.36	1.84	2.37
1624.8	1.40	1.89	2.42
1705.6	1.43	1.92	2.44
1786.3	1.46	1.93	2.44
1867.0	1.48	1.93	2.42
1947.8	1.49	1.93	2.39
2028.5	1.52	1.95	2.38
2109.2	1.54	1.96	2.39
2210.2	1.58	1.99	2.39
2290.9	1.63	2.03	2.42
2391.8	1.69	2.08	2.45
2472.6	1.77	2.14	2.51
2573.5	1.87	2.24	2.59
2654.2	1.95	2.32	2.67
2755.1	2.08	2.46	2.82
2835.9	2.18	2.57	2.91
2936.8	2.34	2.72	3.07
3017.5	2.43	2.82	3.16
3118.4	2.59	2.96	3.30
3199.2	2.66	3.02	3.35
3300.1	2.73	3.07	3.36

IF (OUT) (MHz)	IF VSWR @LO=3000.1MHz (:1)		
	@LO (dBm)		
	+14	+17	+20
4.0	1.28	1.51	1.68
8.0	1.27	1.50	1.67
10.0	1.75	1.63	1.50
50.3	1.80	1.67	1.55
90.6	1.83	1.70	1.58
130.9	1.88	1.73	1.60
171.2	1.80	1.65	1.51
211.4	1.83	1.68	1.54
251.7	1.81	1.65	1.50
292.0	1.77	1.61	1.46
332.3	1.70	1.54	1.39
372.6	1.68	1.51	1.37
412.9	1.63	1.46	1.31
453.2	1.58	1.41	1.28
493.5	1.59	1.42	1.28
533.8	1.50	1.33	1.20
574.1	1.49	1.33	1.22
614.3	1.47	1.30	1.17
654.6	1.38	1.22	1.14
694.9	1.37	1.22	1.14
735.2	1.31	1.15	1.10
775.5	1.23	1.09	1.13
815.8	1.20	1.07	1.16
856.1	1.15	1.04	1.18
896.4	1.08	1.07	1.25
916.5	1.05	1.11	1.29
956.8	1.04	1.12	1.30
977.0	1.01	1.15	1.33
1017.2	1.07	1.24	1.44
1037.4	1.09	1.26	1.47
1077.7	1.11	1.27	1.48
1097.8	1.16	1.33	1.55
1138.1	1.25	1.44	1.66
1158.3	1.25	1.42	1.64
1198.6	1.31	1.49	1.71
1218.7	1.36	1.55	1.79
1259.0	1.42	1.61	1.85
1279.1	1.43	1.61	1.85
1319.4	1.52	1.72	1.98
1339.6	1.56	1.76	2.02
1379.9	1.63	1.83	2.08
1400.0	1.67	1.88	2.14

## Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+4	17	6	25	11	34	19	34	29	37
1	-	29	+0	47	14	43	31	48	34	41	54	48
2	91	61	50	67	49	62	51	68	54	72	53	57
3	>100	87	67	88	69	80	82	81	84	87	78	75
4	>100	>89	>89	>89	>89	>89	88	>89	>89	>89	>89	>89
5	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
6	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
7	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
8	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
9	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
10	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 1500.1 MHz; -5.00 dBm.  
 LO IN: 1530.01 MHz; +17.00 dBm  
 IF OUT: 29.91 MHz; -11.31 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	6	27	16	35	23	43	33	49	42	52
1	-	29	+0	46	14	46	31	51	35	45	52	49
2	80	54	40	67	38	62	42	58	45	63	46	56
3	>100	68	46	72	47	71	55	67	60	69	57	61
4	>100	89	71	75	62	67	60	65	62	70	65	80
5	>100	80	80	77	78	74	74	73	75	79	83	89
6	>100	87	91	>99	>99	>99	92	82	86	79	86	85
7	>100	>99	>99	96	97	97	92	89	88	90	87	95
8	>100	92	>99	98	>99	>99	>99	>99	92	>99	96	96
9	>100	>99	>99	>99	>99	>99	>99	>99	>99	>99	>99	>99
10	>100	>99	>99	>99	>99	>99	>99	>99	>99	>99	>99	>99
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 1500.1 MHz; 5.00 dBm.  
 LO IN: 1530.01 MHz; +17.00 dBm  
 IF OUT: 29.91 MHz; -1.36 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.  
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.  
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2  
 JYM-30H+  
 100817  
 Page 5 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant  
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




# Frequency Mixer


# JYM-30H+

## Typical Performance Curves


Conversion Loss @ IF=30MHz

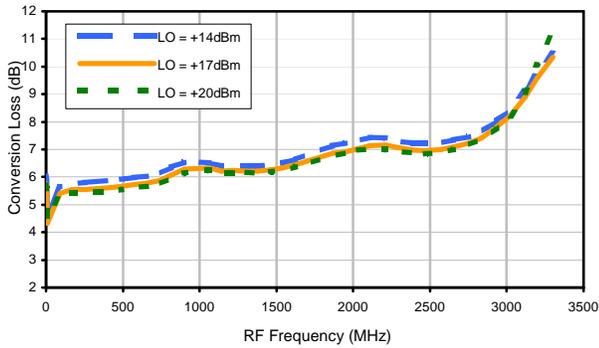


Conversion Loss vs. IF @ RF=1500.1MHz

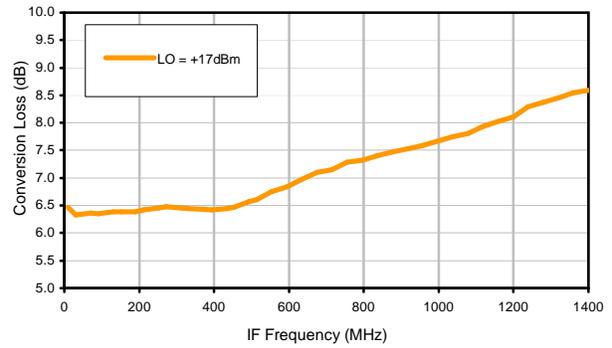


Conversion Loss vs. IF @ RF=10.1MHz

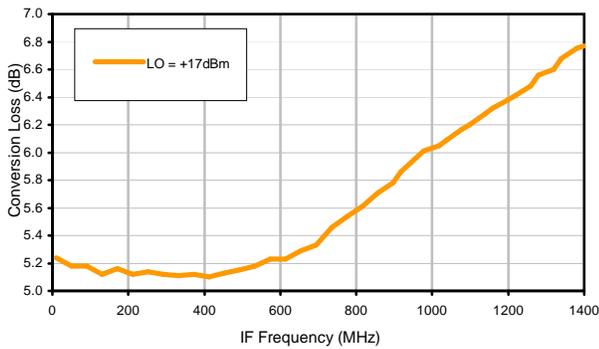


Conversion Loss vs. IF @ RF=3000.1MHz

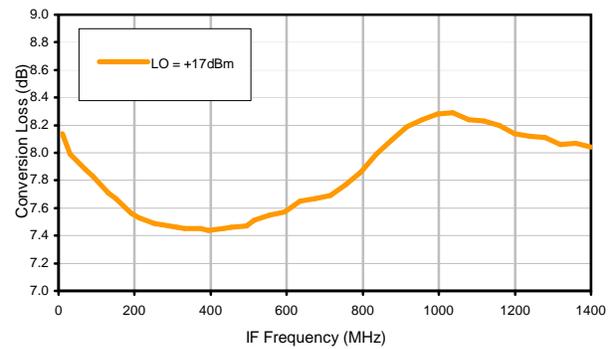

IP3 Input

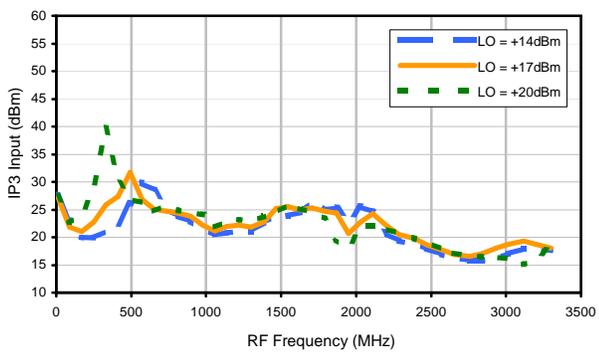

Compression @ RF IN=+10dBm

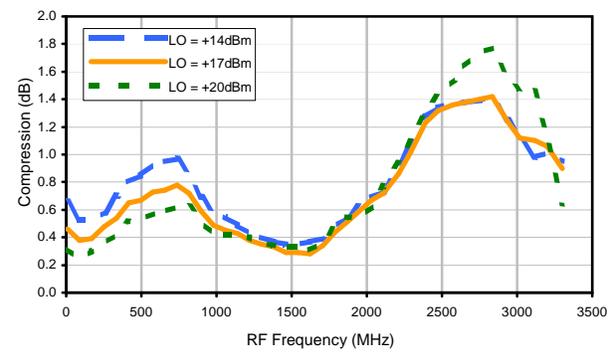

REV. X2

JYM-30H+

100817

Page 1 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




## Typical Performance Curves


LO-RF Isolation

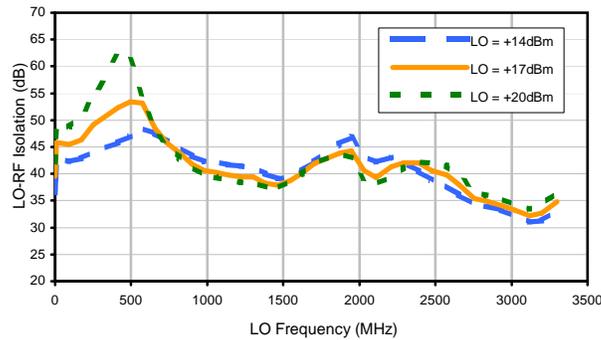


LO-IF Isolation

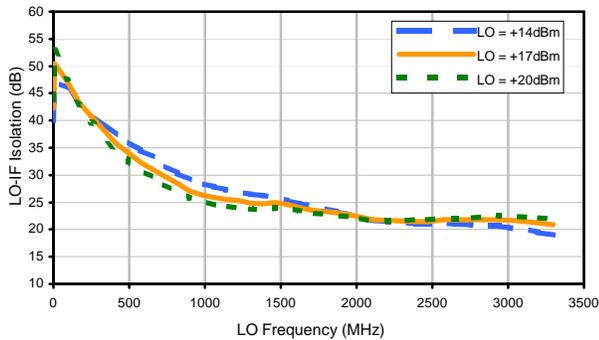


RF-IF Isolation

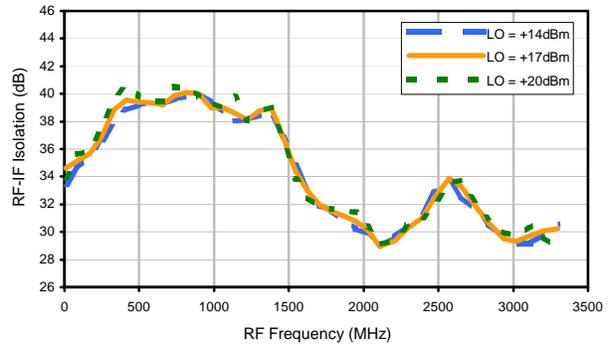


RF VSWR

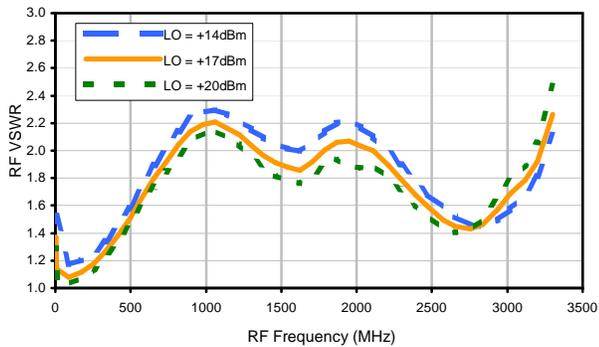

LO VSWR

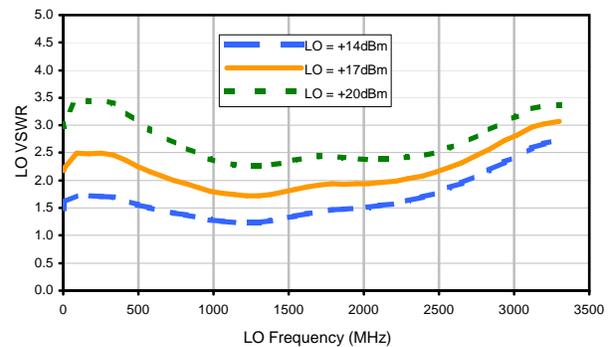

IF VSWR

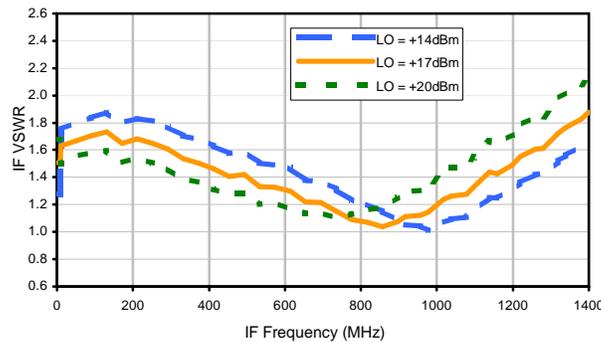

## Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+4	17	6	25	11	34	19	34	29	37
1	-	29	+0	47	14	43	31	48	34	41	54	48
2	91	61	50	67	49	62	51	68	54	72	53	57
3	>100	87	67	88	69	80	82	81	84	87	78	75
4	>100	>89	>89	>89	>89	>89	88	>89	>89	>89	>89	>89
5	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
6	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
7	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
8	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
9	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
10	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 1500.1 MHz; -5.00 dBm.  
 LO IN: 1530.01 MHz; +17.00 dBm  
 IF OUT: 29.91 MHz; -11.31 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	6	27	16	35	23	43	33	49	42	52
1	-	29	+0	46	14	46	31	51	35	45	52	49
2	80	54	40	67	38	62	42	58	45	63	46	56
3	>100	68	46	72	47	71	55	67	60	69	57	61
4	>100	89	71	75	62	67	60	65	62	70	65	80
5	>100	80	80	77	78	74	74	73	75	79	83	89
6	>100	87	91	>99	>99	>99	92	82	86	79	86	85
7	>100	>99	>99	96	97	97	92	89	88	90	87	95
8	>100	92	>99	98	>99	>99	>99	>99	92	>99	96	96
9	>100	>99	>99	>99	>99	>99	>99	>99	>99	>99	>99	>99
10	>100	>99	>99	>99	>99	>99	>99	>99	>99	>99	>99	>99
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 1500.1 MHz; 5.00 dBm.  
 LO IN: 1530.01 MHz; +17.00 dBm  
 IF OUT: 29.91 MHz; -1.36 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.  
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.  
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2  
 JYM-30H+  
 100817  
 Page 3 of 3




IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant  
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see [minicircuits.com](http://minicircuits.com)

## Outline Dimensions

BJ293  
BJ398

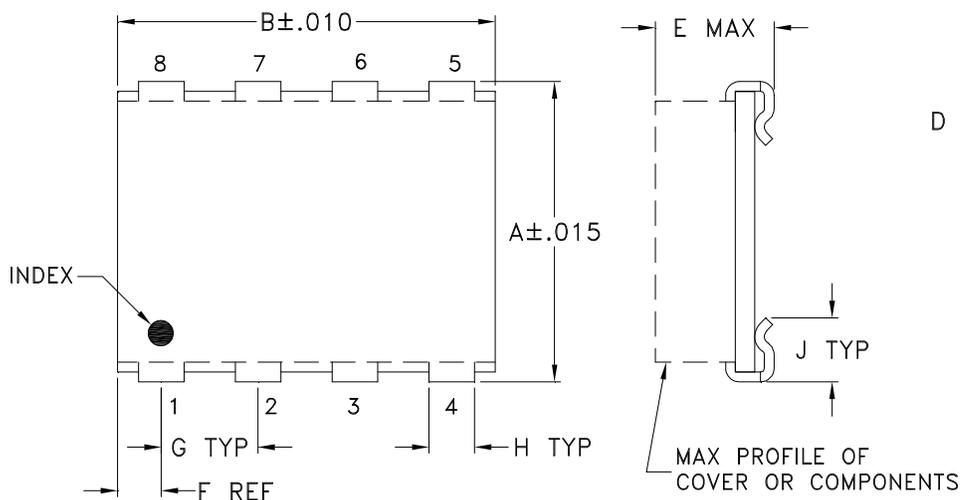

## PCB Land Pattern

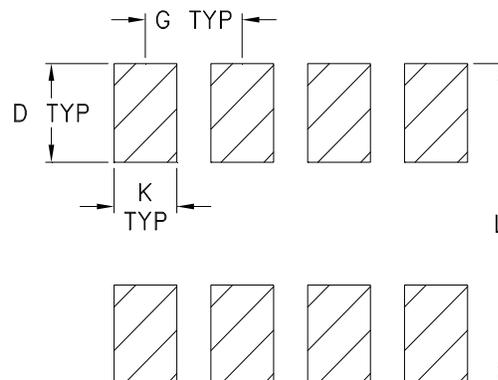

Suggested Layout,  
Tolerance to be within  $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT. GRAMS
BJ293	.395 (10.03)	.500 (12.70)	-- --	.100 (2.54)	.230 (5.84)	.100 (2.54)	.100 (2.54)	.047 (1.19)	.065 (1.65)	.065 (1.65)	.425 (10.80)	.80
BJ398	.305 (7.75)	.390 (9.91)	-- --	.100 (2.54)	.105 (2.67)	.045 (1.14)	.100 (2.54)	.047 (1.19)	.065 (1.65)	.065 (1.65)	.325 (8.26)	.20

Dimensions are in inches (mm). Tolerances: 2Pl.  $\pm .01$ ; 3Pl.  $\pm .005$

### Notes:

- Case material: Plastic.
- Base material: Printed wiring laminate.
- Termination finish:
  - For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
  - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

# Tape & Reel Packaging TR-F10

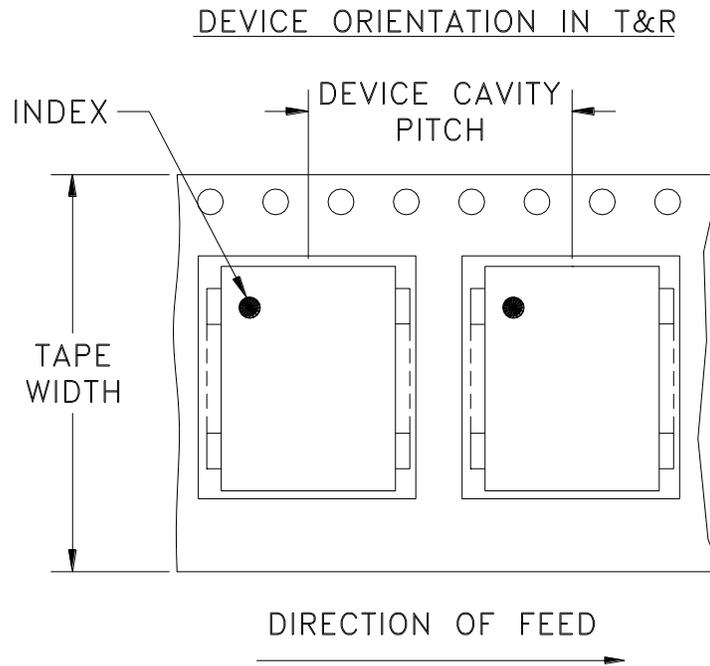

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
24	16	7	10,20,50,100
		13	200,500

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)

Note: Please consult individual model data sheet to determine device per reel availability.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M94649	NEW RELEASE	10/11/04	MMG	WL
A	M102713	ADDED "...WITH SMOBC"	01/14/06	GF	IL

**SUGGESTED MOUNTING CONFIGURATION  
FOR BJ293 CASE STYLE, "hp" PIN CONNECTION.**

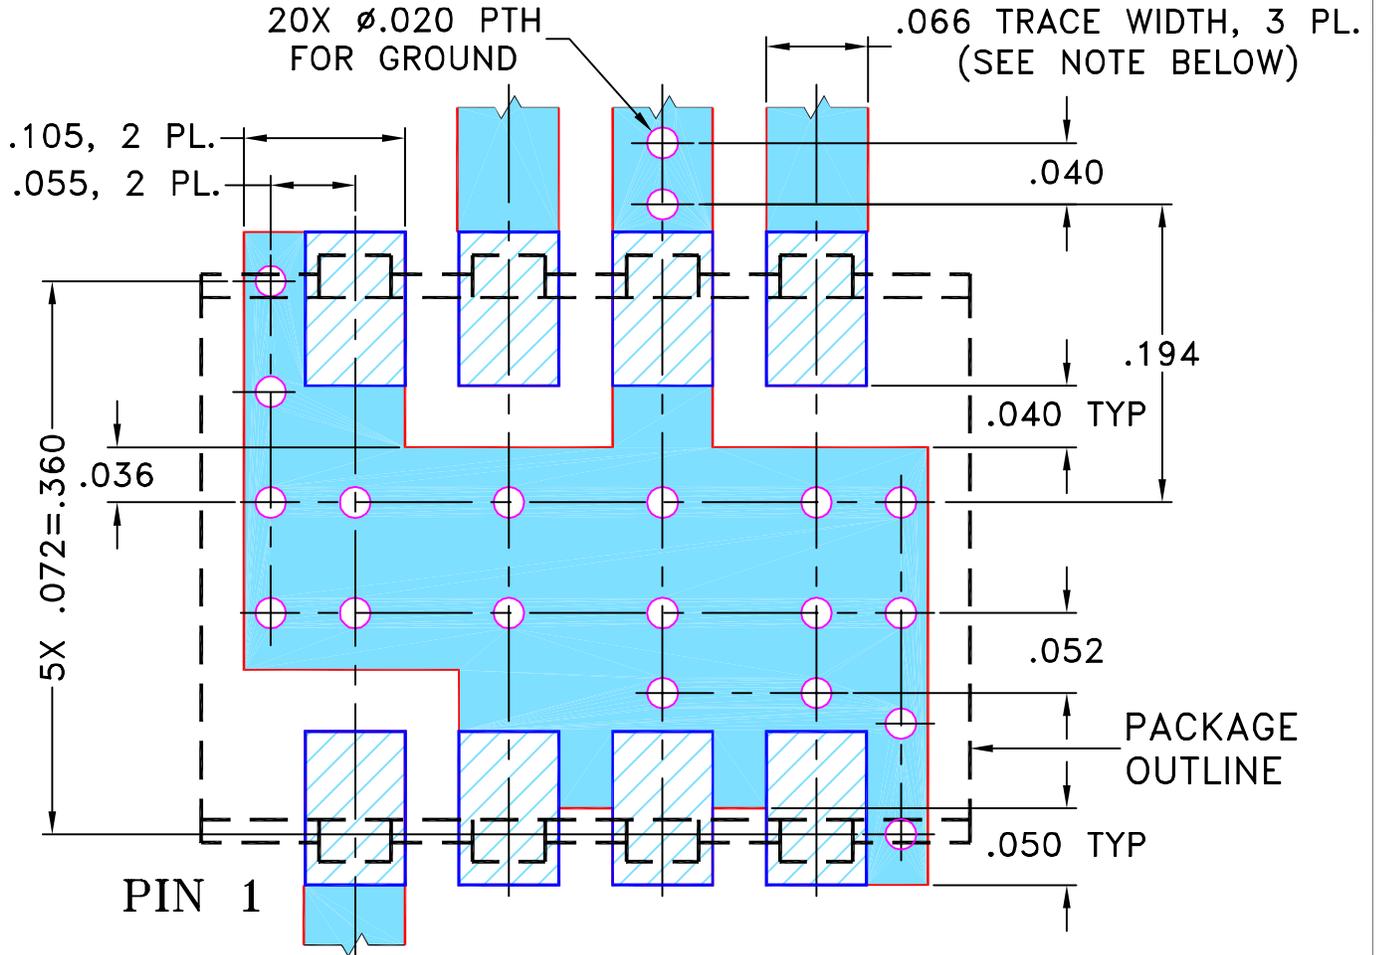

- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DRAWN	MMG	10/04/04
CHECKED	AV	10/11/04
APPROVED	WL	10/11/04


**Mini-Circuits®**  
 THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.  
 ASHEETA1.DWG REV:A DATE:01/12/95

**Mini-Circuits®** 13 Neptune Avenue  
Brooklyn NY 11235


**PL, hp, BJ293, JYM, TB-259**

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-080	REV: A
FILE: 98PL080	SCALE: 8:1	SHEET: 1 OF 1	

# Evaluation Board and Circuit

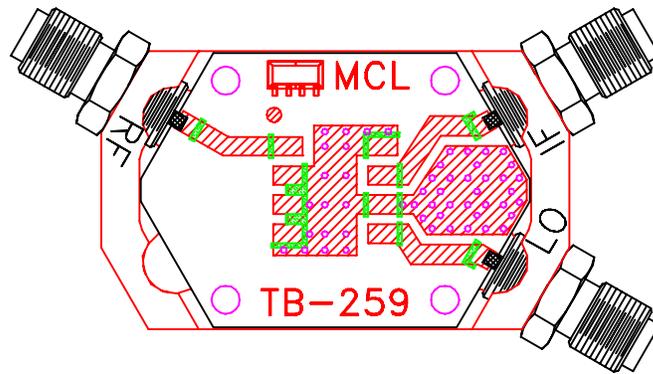


TB-259

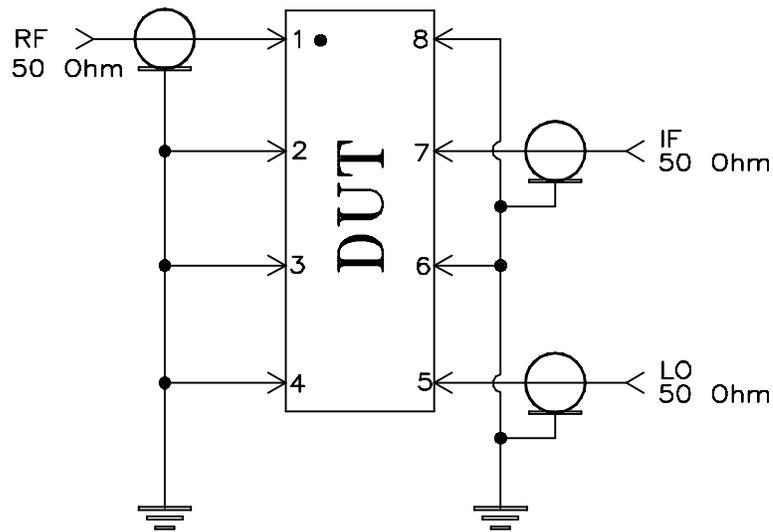

Schematic Diagram

## Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,  
Dielectric Constant=3.5, Thickness=.030 inch.

 Mini-Circuits®

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215