




Mini-Circuits

DESIGNER'S KIT K2-ZX05+

Frequency Mixers (Level 10,13)

50Ω 0.5 to 15000 MHz

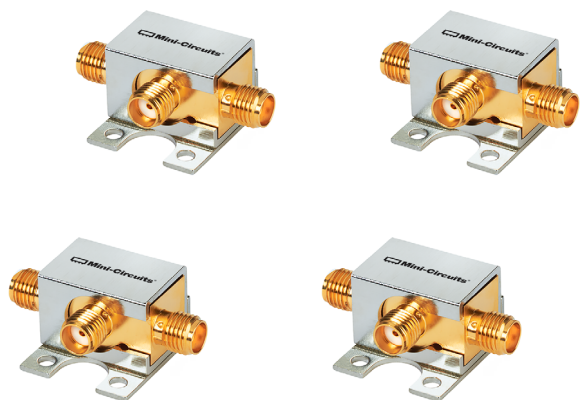

FEATURES

- Only 4 models for full frequency coverage
- Low conversion loss
- Wide IF bandwidth, up to 4 GHz
- Excellent L-R isolation
- Rugged unibody construction
- SMA-F connectors
- Small size, (L) 0.74"x (W) 0.90"x (H) 0.54"

MINI-CIRCUITS DESIGNER'S KITS
SPEED UP
THE SOLUTION



K2-ZX05+ ELECTRICAL SPECIFICATIONS

(4 models, 1 of each, 4 total)

Model	LO Level (dBm)	Frequency (MHz)		Conversion Loss (dB)			RF In @ 1 dB Compr. (dBm)	IP3 (dBm)	LO-RF Isolation (dB)	LO-IF Isolation (dB)
		LO/Rf	IF	Typ	ó	Max.				
ZX05-1MHW+	13	0.5-600	DC-600	5.2	0.1	8.0	+9	17	53	44
ZX05-12MH+	13	10-1200	DC-1200	6.3	0.1	9.3	+9	22	45	42
ZX05-63LH+	10	750-6000	DC-1000	6.5	0.1	9.6	+3	13	30	20
ZX05-153MH+	13	3200-15000	DC-4000	7.0	0.3	13.6	+5	17	35	20


Protected under U.S. Patents 6,133,525 6,790,049 7,027,795

REV. A
ECO-009343
K2-ZX05+
210820



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Outline Dimensions

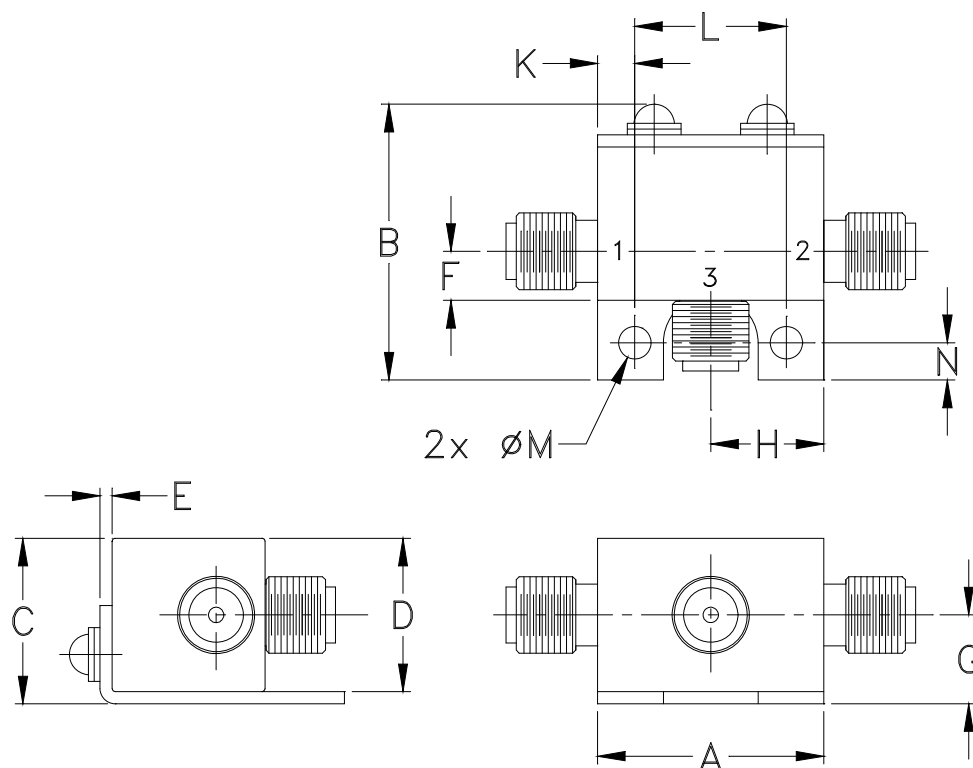

CASE #.	A	B	C	D	E	F	G	H	J	K	L	M	N	WT, GRAM
FL905	.74 (18.80)	.90 (22.86)	.54 (13.72)	.50 (12.70)	.04 (1.02)	.16 (4.06)	.29 (7.37)	.37 (9.40)	- -	.122 (3.10)	.496 (12.60)	.106 (2.69)	.122 (3.10)	20.0

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .03$; 3Pl. $\pm .015$.

Tolerance on hole size and interaxes dimensions to be $\pm .005$.

Notes:

1. Case material: Brass.
2. Case finish: Nickel plate.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified