Engineering Development Model

Frequency Mixer LAVI-ED12344A/1

Level 21 (LO Power + 21 dBm)

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability.
At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.

Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : CK605

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		**Min.**	**Typ.**	**Max.**	**Units**
Frequency	**LO** (f_L to f_U)	270		970	MHz
	RF (f_L to f_U)	270		970	MHz
	IF	10		600	MHz
Conversion Loss	**Total Range**		7.5		dB
LO-RF Isolation			48		dB
LO-IF Isolation			36		dB
Input IP3			+32		dBm
1 dB Compression			+20		dBm

MAXIMUM RATINGS	
Operating Temperature	-45°C to 85°C
Storage Temperature	-55°C to +100°C

PIN CONNECTIONS	
LO	10
RF	2
IF	14
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

Electrical Schematic

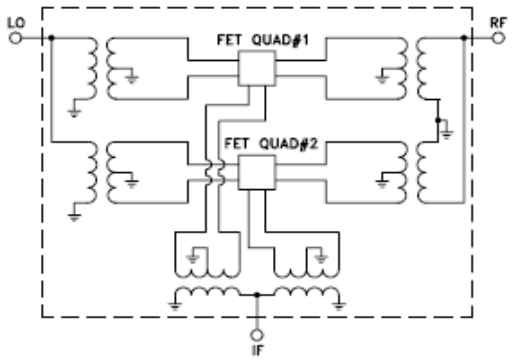

Frequency Mixer LAVI-ED12344A/1

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=70MHz (dB) @LO (dBm)		
		+19	+21	+23
10.1	80.1	7.00	6.90	6.81
40.1	110.1	7.06	6.95	6.88
70.1	140.1	7.28	7.21	7.14
100.1	170.1	7.41	7.33	7.26
130.1	200.1	7.39	7.30	7.23
160.1	230.1	7.45	7.37	7.31
190.1	260.1	7.47	7.39	7.33
220.1	290.1	7.36	7.29	7.23
250.1	320.1	7.37	7.30	7.24
280.1	350.1	7.51	7.43	7.37
310.1	380.1	7.40	7.32	7.26
340.1	410.1	7.41	7.34	7.29
370.1	440.1	7.52	7.45	7.40
400.1	470.1	7.52	7.45	7.40
430.1	500.1	7.56	7.49	7.45
460.1	530.1	7.63	7.58	7.54
490.1	560.1	7.63	7.57	7.53
520.1	590.1	7.64	7.58	7.53
550.1	620.1	7.74	7.69	7.65
580.1	650.1	7.85	7.80	7.75
610.1	680.1	7.95	7.88	7.83
640.1	710.1	8.00	7.93	7.88
670.1	740.1	8.01	7.94	7.89
700.1	770.1	8.00	7.94	7.86
730.1	800.1	8.05	7.98	7.94
760.1	830.1	8.09	8.02	7.97
790.1	860.1	8.12	8.04	7.99
820.1	890.1	8.20	8.12	8.06
850.1	920.1	8.28	8.21	8.14
880.1	950.1	8.40	8.32	8.27
910.1	980.1	8.56	8.49	8.43
940.1	1010.1	8.71	8.62	8.56
970.1	1040.1	8.80	8.70	8.64
1000.1	1070.1	8.90	8.80	8.72
1040.1	1110.1	9.07	8.95	8.84
1070.1	1140.1	9.23	9.09	8.96
1110.1	1180.1	9.73	9.55	9.40
1140.1	1210.1	10.35	10.16	10.02
1180.1	1250.1	11.45	11.24	11.07
1210.1	1280.1	12.83	12.58	12.38

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm) @LO (dBm)		
		+19	+21	+23
10.1	80.1	23.69	25.84	27.71
40.1	110.1	26.99	27.60	28.34
70.1	140.1	26.88	27.85	28.88
100.1	170.1	27.08	28.31	29.03
130.1	200.1	27.35	28.46	29.48
160.1	230.1	27.66	28.58	29.69
190.1	260.1	28.49	29.63	30.73
220.1	290.1	28.91	30.11	31.29
250.1	320.1	28.40	29.68	30.86
280.1	350.1	28.23	29.44	30.67
310.1	380.1	29.09	30.44	31.95
340.1	410.1	28.96	30.47	31.79
370.1	440.1	29.39	30.79	32.05
400.1	470.1	29.92	31.57	32.78
430.1	500.1	30.34	31.87	33.81
460.1	530.1	31.02	32.74	34.27
490.1	560.1	31.56	33.26	34.83
520.1	590.1	32.19	34.06	35.95
550.1	620.1	33.25	34.60	36.38
580.1	650.1	32.73	34.40	36.02
610.1	680.1	32.92	34.76	35.94
640.1	710.1	33.16	34.45	35.96
670.1	740.1	32.85	34.48	35.92
700.1	770.1	33.45	35.15	37.16
730.1	800.1	33.03	34.99	36.42
760.1	830.1	32.59	34.51	35.93
790.1	860.1	32.21	34.04	36.33
820.1	890.1	31.27	33.32	34.73
850.1	920.1	30.36	31.99	33.65
880.1	950.1	30.04	31.61	33.29
910.1	980.1	29.71	31.36	33.02
940.1	1010.1	29.27	31.18	33.41
970.1	1040.1	28.65	30.72	32.56
1000.1	1070.1	27.47	29.57	31.56
1040.1	1110.1	25.47	27.36	29.26
1070.1	1140.1	23.53	25.39	27.26
1110.1	1180.1	20.30	21.83	23.48
1140.1	1210.1	18.96	20.48	22.13
1180.1	1250.1	16.93	18.58	20.61
1210.1	1280.1	15.41	16.69	18.43

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+20dBm (dB) @LO (dBm)		
		+19	+21	+23
10.1	80.1	3.07	1.92	1.15
40.1	110.1	1.13	0.65	0.42
70.1	140.1	0.64	0.41	0.28
100.1	170.1	0.60	0.39	0.27
130.1	200.1	0.55	0.36	0.25
160.1	230.1	0.55	0.36	0.24
190.1	260.1	0.45	0.30	0.20
220.1	290.1	0.39	0.26	0.17
250.1	320.1	0.43	0.28	0.19
280.1	350.1	0.52	0.34	0.22
310.1	380.1	0.41	0.26	0.17
340.1	410.1	0.37	0.24	0.16
370.1	440.1	0.37	0.24	0.16
400.1	470.1	0.39	0.25	0.16
430.1	500.1	0.32	0.19	0.13
460.1	530.1	0.27	0.16	0.11
490.1	560.1	0.27	0.16	0.11
520.1	590.1	0.33	0.20	0.13
550.1	620.1	0.30	0.17	0.11
580.1	650.1	0.30	0.18	0.11
610.1	680.1	0.29	0.16	0.10
640.1	710.1	0.30	0.18	0.11
670.1	740.1	0.34	0.20	0.13
700.1	770.1	0.34	0.21	0.13
730.1	800.1	0.40	0.24	0.15
760.1	830.1	0.45	0.27	0.17
790.1	860.1	0.49	0.29	0.17
820.1	890.1	0.61	0.37	0.23
850.1	920.1	0.71	0.45	0.26
880.1	950.1	0.80	0.48	0.28
910.1	980.1	0.96	0.57	0.32
940.1	1010.1	1.21	0.67	0.37
970.1	1040.1	1.48	0.82	0.45
1000.1	1070.1	1.85	1.08	0.60
1040.1	1110.1	2.63	1.69	0.98
1070.1	1140.1	3.28	2.30	1.43
1110.1	1180.1	4.11	3.07	2.13
1140.1	1210.1	4.68	3.61	2.58
1180.1	1250.1	5.16	4.13	3.09
1210.1	1280.1	5.27	4.24	3.22

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=490.1MHz (dB) @LO (dBm) +21
480.0	10.1	9.76
447.6	42.5	8.15
415.2	74.9	7.95
399.0	91.1	7.96
366.6	123.5	7.92
350.3	139.8	7.86
317.9	172.2	7.84
301.7	188.4	7.82
269.3	220.8	7.72
253.1	237.0	7.72
220.7	269.4	7.68
204.5	285.6	7.63
172.1	318.0	7.67
155.9	334.2	7.63
123.4	366.7	7.65
107.2	382.9	7.66
74.8	415.3	7.67
58.6	431.5	7.66
26.2	463.9	7.64
10.0	480.1	7.78
34.8	524.9	7.53
59.7	549.8	7.60
109.3	599.4	7.58
134.1	624.2	7.54
183.8	673.9	7.84
208.6	698.7	7.84
258.3	748.4	7.75
283.1	773.2	7.76
332.8	822.9	7.87
357.6	847.7	7.94
407.2	897.3	8.09
432.1	922.2	8.12
481.7	971.8	8.38
506.6	996.7	8.41
556.2	1046.3	8.58
581.0	1071.1	8.72
630.7	1120.8	8.88
655.5	1145.6	9.03
705.2	1195.3	9.81
730.0	1220.1	10.43

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB) @LO (dBm) +21
10.0	20.1	7.82
50.0	60.1	6.94
90.0	100.1	6.84
130.0	140.1	6.87
170.0	180.1	6.87
190.0	200.1	6.96
230.0	240.1	7.05
250.0	260.1	7.01
290.0	300.1	6.97
310.0	320.1	7.10
350.0	360.1	7.11
370.0	380.1	7.08
410.0	420.1	7.10
430.0	440.1	7.14
470.0	480.1	7.18
490.0	500.1	7.19
530.0	540.1	7.26
550.0	560.1	7.30
590.0	600.1	7.37
610.0	620.1	7.33
650.0	660.1	7.26
670.0	680.1	7.34
710.0	720.1	7.31
730.0	740.1	7.38
770.0	780.1	7.58
790.0	800.1	7.55
830.0	840.1	7.68
850.0	860.1	7.60
890.0	900.1	7.74
910.0	920.1	7.89
950.0	960.1	8.09
970.0	980.1	8.18
1010.0	1020.1	8.27
1030.0	1040.1	8.25
1070.0	1080.1	8.53
1090.0	1100.1	8.50
1130.0	1140.1	8.87
1150.0	1160.1	8.97
1190.0	1200.1	9.61
1210.0	1220.1	10.00

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=970.1MHz (dB) @LO (dBm) +21
960.0	10.1	10.88
940.0	30.1	9.54
920.0	50.1	9.40
900.0	70.1	9.29
880.0	90.1	9.17
860.0	110.1	9.14
840.0	130.1	9.10
810.0	160.1	9.07
790.0	180.1	9.04
760.0	210.1	9.02
740.0	230.1	9.09
710.0	260.1	8.94
690.0	280.1	8.96
660.0	310.1	8.98
640.0	330.1	8.91
610.0	360.1	8.94
590.0	380.1	8.96
560.0	410.1	8.91
540.0	430.1	8.87
510.0	460.1	8.81
490.0	480.1	8.77
460.0	510.1	8.73
440.0	530.1	8.64
410.0	560.1	8.68
390.0	580.1	8.65
360.0	610.1	8.65
340.0	630.1	8.58
310.0	660.1	8.52
290.0	680.1	8.40
260.0	710.1	8.45
240.0	730.1	8.44
210.0	760.1	8.41
190.0	780.1	8.34
160.0	810.1	8.30
140.0	830.1	8.28
110.0	860.1	8.27
90.0	880.1	8.27
60.0	910.1	8.34
40.0	930.1	8.36
10.0	960.1	8.63

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB) @LO (dBm)			LO-IF ISOLATION (dB) @LO (dBm)		
	+19	+21	+23	+19	+21	+23
80.1	62.50	62.12	61.79	44.80	44.52	44.35
110.1	59.11	58.54	58.05	44.15	44.02	43.88
140.1	57.94	56.90	56.54	44.10	44.03	44.00
170.1	56.60	55.81	55.08	44.00	43.94	43.93
200.1	56.53	55.76	55.25	43.36	43.22	43.09
230.1	56.27	55.49	54.89	42.77	42.65	42.58
260.1	55.44	54.71	54.13	41.89	41.77	41.70
290.1	54.95	54.27	53.63	40.93	40.82	40.76
320.1	54.95	54.30	53.72	40.16	40.00	39.89
350.1	54.72	54.07	53.52	39.63	39.44	39.29
380.1	53.02	52.55	52.27	38.96	38.79	38.68
410.1	51.53	51.18	50.89	38.27	38.10	37.98
440.1	50.00	49.69	49.42	37.76	37.58	37.47
470.1	49.64	49.37	49.10	37.94	37.78	37.68
500.1	48.67	48.36	48.28	38.17	37.98	38.03
530.1	47.67	47.36	47.36	37.99	37.76	37.49
560.1	46.09	45.82	45.70	37.70	37.49	37.47
590.1	44.67	44.38	44.34	37.37	37.13	37.16
620.1	43.90	43.84	43.70	37.30	37.26	37.03
650.1	43.65	43.62	43.48	36.97	36.89	36.63
680.1	42.96	42.76	42.71	36.18	36.01	36.02
710.1	41.68	41.45	41.41	35.90	35.69	35.65
740.1	41.06	40.85	40.83	35.88	35.54	35.43
770.1	41.02	41.10	40.98	36.18	36.07	35.80
800.1	41.48	41.44	41.62	36.57	36.25	36.26
830.1	42.22	42.31	42.59	37.11	36.85	36.86
860.1	43.92	44.05	44.39	38.03	37.72	37.67
890.1	46.00	46.04	46.36	39.19	38.77	38.74
920.1	48.24	48.16	47.92	41.00	40.85	40.66
950.1	46.29	45.89	45.35	42.77	42.79	42.83
980.1	42.95	42.51	41.96	43.53	43.50	43.38
1010.1	40.52	39.92	39.67	42.63	42.30	42.19
1040.1	39.53	39.03	38.84	42.72	42.41	42.33
1070.1	39.51	39.00	38.80	43.20	42.81	42.72
1110.1	39.96	39.63	39.19	44.47	44.23	43.84
1140.1	40.35	39.96	39.41	45.84	45.44	44.89
1180.1	40.67	40.20	39.49	47.43	46.80	45.85
1210.1	41.19	40.70	40.02	49.72	49.14	48.26
1250.1	42.23	41.76	41.05	52.09	52.36	52.18
1280.1	43.20	42.73	42.09	50.04	50.39	50.57

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB) @LO (dBm)		
		+19	+21	+23
10.1	80.1	34.89	35.34	36.57
40.1	110.1	37.77	38.07	38.57
70.1	140.1	38.49	38.29	37.88
100.1	170.1	39.93	39.25	38.13
130.1	200.1	47.89	48.63	52.26
160.1	230.1	57.28	63.54	64.02
190.1	260.1	60.39	58.46	55.10
220.1	290.1	44.21	43.61	42.44
250.1	320.1	43.49	42.74	41.33
280.1	350.1	44.18	43.38	42.18
310.1	380.1	45.54	45.67	45.73
340.1	410.1	43.89	43.71	43.24
370.1	440.1	41.86	41.36	40.76
400.1	470.1	40.03	39.39	38.38
430.1	500.1	39.05	38.31	37.26
460.1	530.1	39.90	39.46	39.85
490.1	560.1	39.55	39.20	38.83
520.1	590.1	39.59	39.27	38.84
550.1	620.1	39.55	39.19	38.67
580.1	650.1	40.51	40.30	39.99
610.1	680.1	40.57	40.37	40.27
640.1	710.1	40.28	40.04	39.85
670.1	740.1	39.75	39.65	39.56
700.1	770.1	39.47	39.32	39.25
730.1	800.1	39.62	39.56	39.54
760.1	830.1	39.59	39.54	39.59
790.1	860.1	39.62	39.48	39.41
820.1	890.1	38.96	38.74	38.70
850.1	920.1	39.24	39.05	38.95
880.1	950.1	39.68	39.60	39.64
910.1	980.1	39.30	39.30	39.28
940.1	1010.1	38.56	38.43	38.33
970.1	1040.1	37.32	37.25	37.19
1000.1	1070.1	35.95	35.88	35.87
1040.1	1110.1	34.14	34.08	34.18
1070.1	1140.1	32.71	32.65	32.69
1110.1	1180.1	32.34	32.35	32.66
1140.1	1210.1	32.39	32.31	32.50
1180.1	1250.1	30.47	29.60	28.77
1210.1	1280.1	29.42	27.97	26.65

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1) @LO (dBm)		
		+19	+21	+23
10.1	80.1	1.18	1.20	1.22
40.1	110.1	1.20	1.22	1.25
70.1	140.1	1.18	1.21	1.23
100.1	170.1	1.19	1.21	1.23
130.1	200.1	1.20	1.22	1.24
160.1	230.1	1.22	1.24	1.26
190.1	260.1	1.25	1.27	1.29
220.1	290.1	1.27	1.29	1.31
250.1	320.1	1.27	1.30	1.32
280.1	350.1	1.27	1.29	1.31
310.1	380.1	1.28	1.30	1.32
340.1	410.1	1.28	1.30	1.32
370.1	440.1	1.27	1.29	1.30
400.1	470.1	1.26	1.28	1.30
430.1	500.1	1.26	1.28	1.29
460.1	530.1	1.25	1.27	1.29
490.1	560.1	1.24	1.26	1.27
520.1	590.1	1.22	1.23	1.24
550.1	620.1	1.20	1.21	1.22
580.1	650.1	1.18	1.19	1.19
610.1	680.1	1.17	1.17	1.17
640.1	710.1	1.17	1.16	1.16
670.1	740.1	1.17	1.17	1.16
700.1	770.1	1.18	1.17	1.16
730.1	800.1	1.20	1.19	1.17
760.1	830.1	1.23	1.21	1.20
790.1	860.1	1.25	1.23	1.21
820.1	890.1	1.28	1.25	1.23
850.1	920.1	1.29	1.27	1.24
880.1	950.1	1.29	1.27	1.24
910.1	980.1	1.30	1.27	1.24
940.1	1010.1	1.31	1.27	1.25
970.1	1040.1	1.33	1.30	1.27
1000.1	1070.1	1.37	1.33	1.30
1040.1	1110.1	1.43	1.39	1.36
1070.1	1140.1	1.48	1.44	1.40
1110.1	1180.1	1.53	1.49	1.44
1140.1	1210.1	1.55	1.51	1.46
1180.1	1250.1	1.58	1.55	1.51
1210.1	1280.1	1.57	1.54	1.51

LO (MHz)	LO VSWR (:1) @LO (dBm)		
	+19	+21	+23
80.1	7.31	7.31	7.28
110.1	6.89	6.89	6.89
140.1	7.38	7.34	7.34
170.1	7.66	7.66	7.66
200.1	8.01	8.01	8.01
230.1	8.20	8.20	8.16
260.1	8.23	8.23	8.20
290.1	8.05	8.05	8.05
320.1	7.73	7.73	7.73
350.1	7.34	7.31	7.31
380.1	6.73	6.73	6.73
410.1	6.09	6.09	6.09
440.1	5.52	5.52	5.52
470.1	4.87	4.88	4.88
500.1	4.25	4.25	4.26
530.1	3.70	3.71	3.70
560.1	3.25	3.26	3.26
590.1	2.84	2.85	2.86
620.1	2.49	2.50	2.50
650.1	2.22	2.22	2.22
680.1	2.03	2.04	2.04
710.1	1.94	1.95	1.96
740.1	1.95	1.96	1.97
770.1	2.06	2.07	2.09
800.1	2.25	2.26	2.27
830.1	2.50	2.51	2.52
860.1	2.78	2.79	2.80
890.1	3.05	3.06	3.08
920.1	3.31	3.31	3.32
950.1	3.52	3.53	3.54
980.1	3.65	3.67	3.68
1010.1	3.68	3.68	3.67
1040.1	3.64	3.65	3.65
1070.1	3.47	3.48	3.50
1110.1	3.14	3.14	3.14
1140.1	2.86	2.87	2.88
1180.1	2.46	2.47	2.47
1210.1	2.20	2.20	2.20
1250.1	1.88	1.89	1.89
1280.1	1.68	1.68	1.69

IF (OUT) (MHz)	IF VSWR @LO=1040MHz (:1) @LO (dBm)		
	+19	+21	+23
10.0	1.18	1.22	1.25
30.0	1.22	1.26	1.29
50.0	1.21	1.25	1.28
70.0	1.25	1.29	1.32
90.0	1.28	1.31	1.34
110.0	1.30	1.33	1.35
130.0	1.38	1.40	1.42
150.0	1.39	1.41	1.43
170.0	1.43	1.45	1.47
190.0	1.50	1.52	1.53
210.0	1.53	1.54	1.56
230.0	1.61	1.62	1.64
250.0	1.62	1.63	1.64
270.0	1.68	1.68	1.69
290.0	1.76	1.76	1.76
310.0	1.77	1.77	1.77
350.0	1.86	1.86	1.85
370.0	1.90	1.90	1.90
410.0	1.97	1.96	1.96
430.0	2.04	2.03	2.02
470.0	2.08	2.06	2.05
490.0	2.15	2.13	2.12
530.0	2.16	2.13	2.11
550.0	2.15	2.12	2.10
590.0	2.23	2.20	2.17
610.0	2.16	2.12	2.10
650.0	2.21	2.17	2.13
670.0	2.22	2.17	2.14
710.0	2.13	2.08	2.04
730.0	2.17	2.12	2.08
770.0	2.13	2.08	2.03
790.0	2.14	2.08	2.04
830.0	2.12	2.07	2.02
850.0	2.12	2.07	2.01
890.0	2.11	2.05	2.00
910.0	2.06	2.00	1.94
950.0	2.09	2.03	1.97
970.0	2.05	1.99	1.93
1010.0	2.00	1.93	1.88
1030.0	2.04	1.97	1.92

Harmonics Tables

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	14	19	16	26	35	45	37	46	50	55
1	-	33	+0	37	12	42	22	44	33	46	41	51
2	55	61	63	63	63	55	54	54	55	56	57	58
3	83	86	68	82	65	81	69	79	72	80	78	84
4	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
5	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
6	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
7	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
8	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
9	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
10	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: **RF IN: 490.1 MHz; 5.00 dBm.**
LO IN: 560.1 MHz; +21.00 dBm
IF OUT: 70 MHz; -2.95 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	24	27	25	34	44	52	43	52	46	57
1	-	33	+0	37	13	43	23	45	36	48	39	53
2	36	52	53	53	54	46	45	45	46	46	49	50
3	55	70	50	67	48	63	50	62	53	63	59	66
4	76	90	81	80	77	76	78	74	75	72	74	73
5	>90	94	76	92	76	86	75	84	80	85	79	89
6	>90	>96	>96	>96	95	>96	91	>96	91	>96	>96	>96
7	>90	>96	>96	>96	>96	>96	>96	>96	>96	92	>96	>96
8	>90	>96	>96	>96	>96	>96	>96	>96	94	>96	>96	>96
9	>90	>96	>96	>96	>96	>96	>96	92	>96	>96	>96	>96
10	>90	>96	>96	>96	>96	>96	>96	>96	>96	>96	>96	>96
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: **RF IN: 490.1 MHz; 15.00 dBm.**
LO IN: 560.1 MHz; +21.00 dBm
IF OUT: 70 MHz; 6.38 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Typical Performance Curves

Conversion Loss @ IF=70MHz

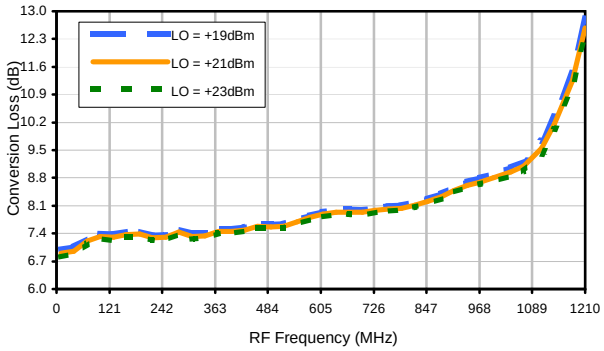

Conversion Loss vs. LO @ RF=490.1MHz

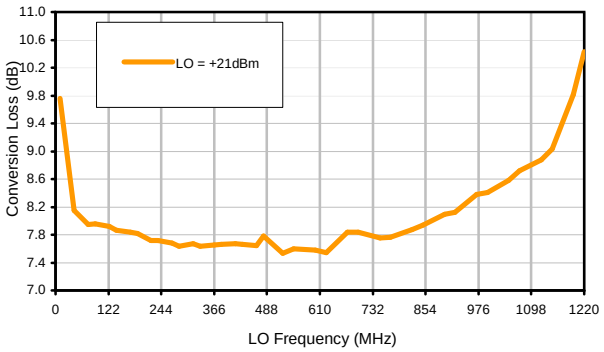

Conversion Loss vs. IF @ RF=490.1MHz

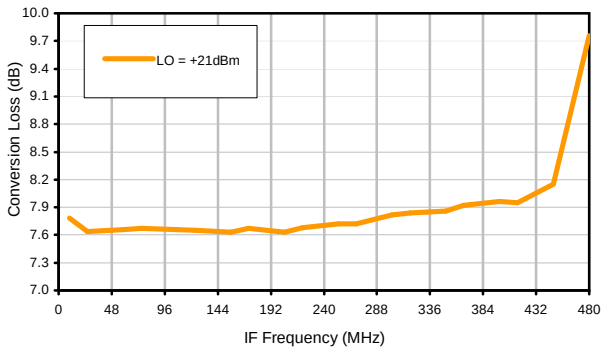

Conversion Loss vs. IF @ RF=10.1MHz

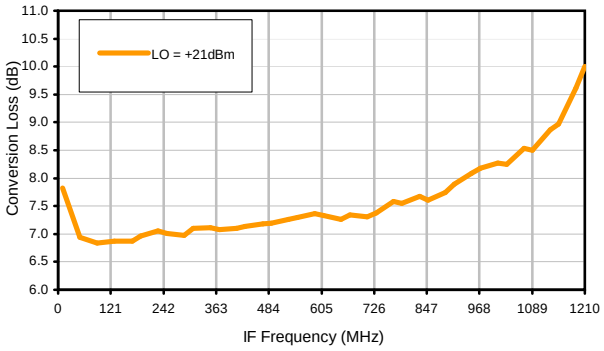

Conversion Loss vs. IF @ RF=970.1MHz

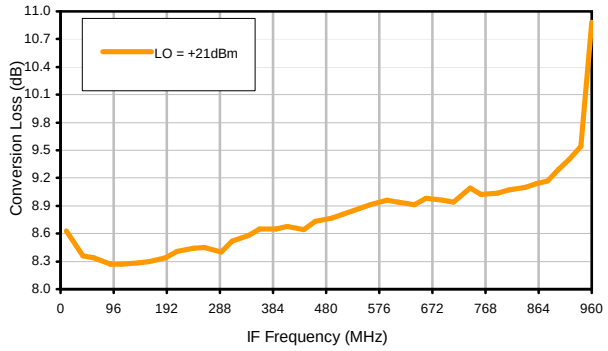

IP3 Input

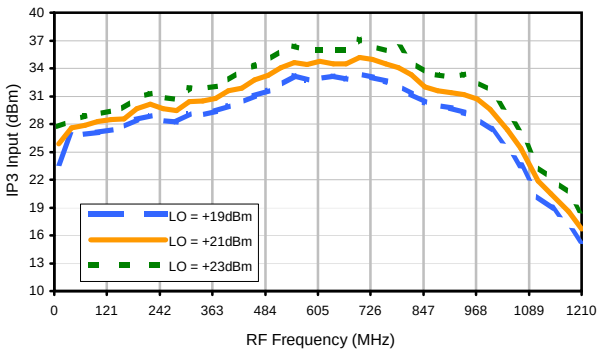

Compression @ RF IN=+20dBm

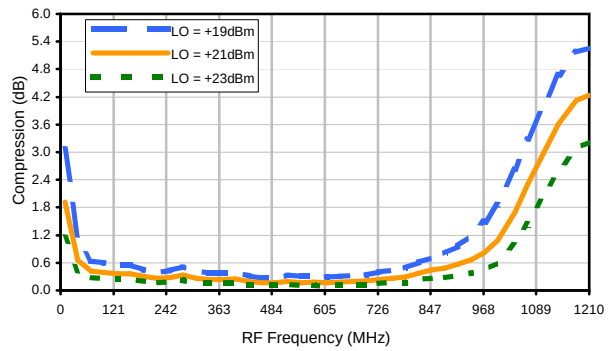

Typical Performance Curves

LO-RF Isolation

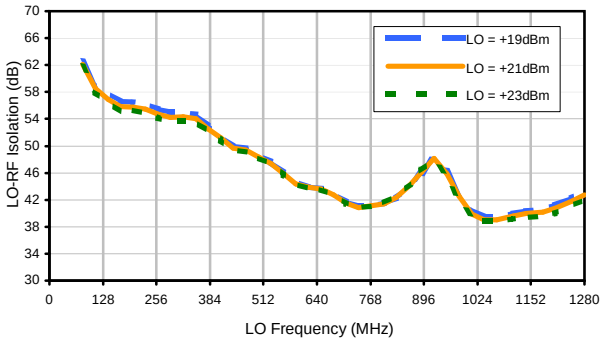

LO-IF Isolation

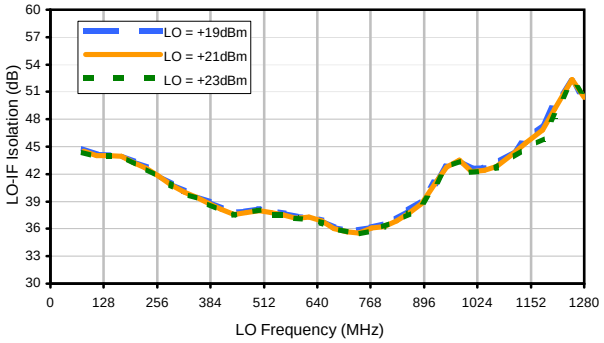

RF-IF Isolation

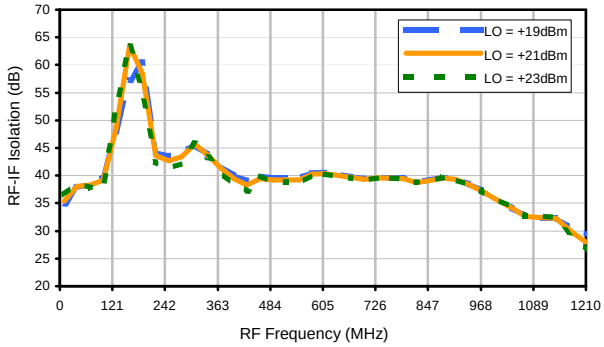

RF VSWR

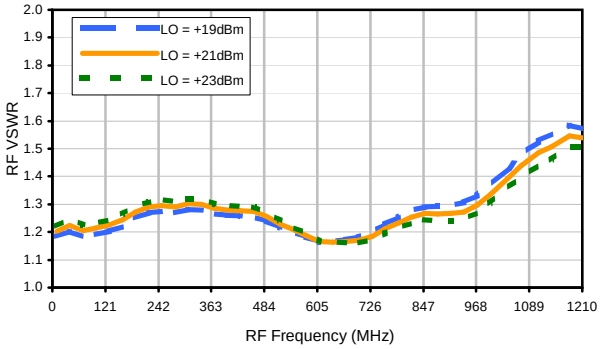

LO VSWR

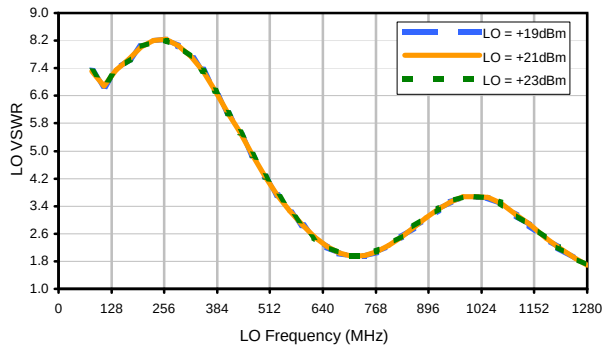

IF VSWR

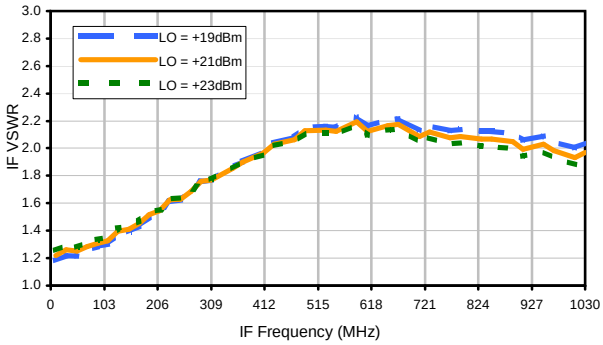

Harmonics Tables

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	14	19	16	26	35	45	37	46	50	55
1	-	33	+0	37	12	42	22	44	33	46	41	51
2	55	61	63	63	63	55	54	54	55	56	57	58
3	83	86	68	82	65	81	69	79	72	80	78	84
4	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
5	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
6	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
7	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
8	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
9	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
10	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: **RF IN: 490.1 MHz; 5.00 dBm.**
LO IN: 560.1 MHz; +21.00 dBm
IF OUT: 70 MHz; -2.95 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	24	27	25	34	44	52	43	52	46	57
1	-	33	+0	37	13	43	23	45	36	48	39	53
2	36	52	53	53	54	46	45	45	46	46	49	50
3	55	70	50	67	48	63	50	62	53	63	59	66
4	76	90	81	80	77	76	78	74	75	72	74	73
5	>90	94	76	92	76	86	75	84	80	85	79	89
6	>90	>96	>96	>96	95	>96	91	>96	91	>96	>96	>96
7	>90	>96	>96	>96	>96	>96	>96	>96	>96	92	>96	>96
8	>90	>96	>96	>96	>96	>96	>96	>96	94	>96	>96	>96
9	>90	>96	>96	>96	>96	>96	>96	92	>96	>96	>96	>96
10	>90	>96	>96	>96	>96	>96	>96	>96	>96	>96	>96	>96
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: **RF IN: 490.1 MHz; 15.00 dBm.**
LO IN: 560.1 MHz; +21.00 dBm
IF OUT: 70 MHz; 6.38 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Case Style CK

CK605

Outline Dimensions

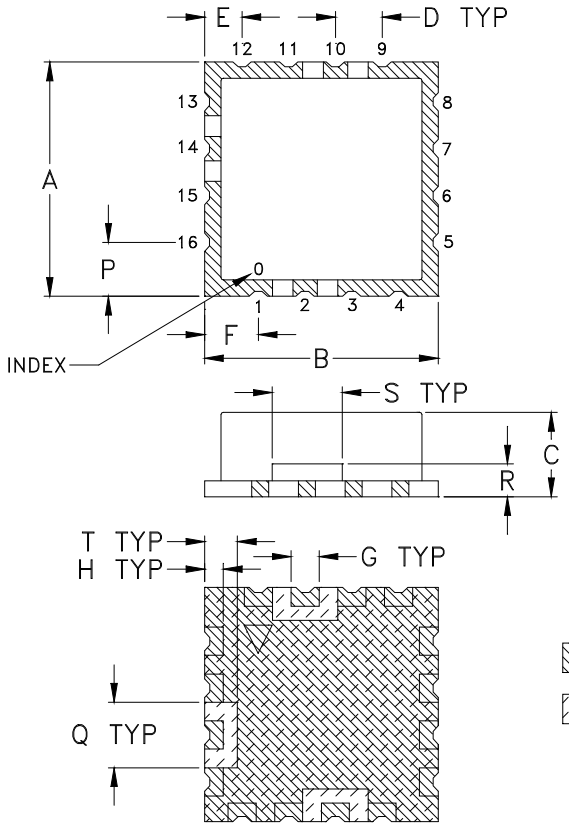

PCB Land Pattern

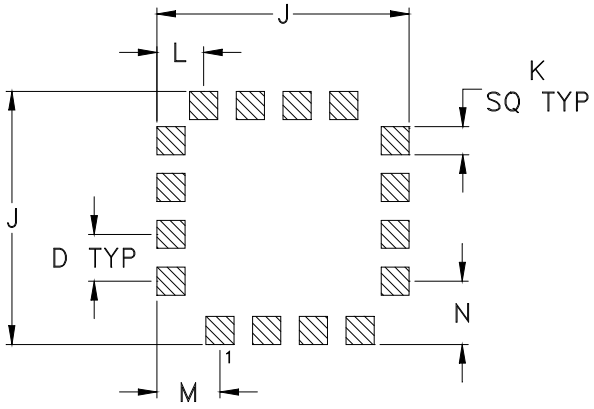

Suggested Layout,
Tolerance to be within ±.002

CASE #	A	B	C	D	E	F	G	H	J	K
CK605	.500 (12.70)	.500 (12.70)	.180 (4.57)	.100 (2.54)	.080 (2.03)	.115 (2.92)	.060 (1.52)	.040 (1.02)	.540 (13.72)	.060 (1.52)

CASE #	L	M	N	P	Q	R	S	T	WT. GRAM	
CK605	.100 (2.54)	.135 (3.43)	.135 (3.43)	.115 (2.92)	.140 (3.56)	.070 (1.78)	.150 (3.81)	.070 (1.78)	1.2	+0.5 -0.0

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .03; 3Pl. ± .015

Notes:

1. Case material: Nickel-Silver alloy.
2. Base: Printed wiring laminate.
3. Termination finish:
   For RoHS Case Styles: 3-5 µ inch (.08-.13 microns) Gold over 120-240 µ inch (3.05-6.10 microns) Nickel plate. All models, (+) suffix.

Tape & Reel Packaging TR-F37

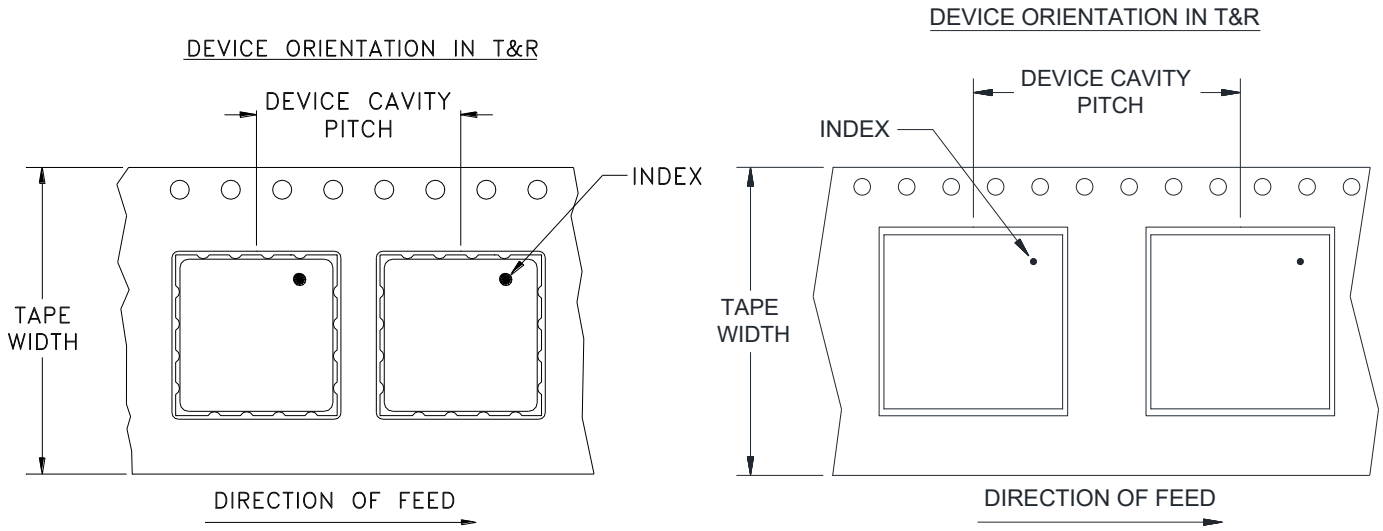

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
24	16	7	Small quantity standards (see note)	10
				20
				50
				100
		13	Standard	200
				500

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION

REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
E	M105563	ADDED "rl" PIN CONNECTION	06/02/06	MMG	DJ
F	M105640	CORRECTED NOTE 2	06/08/06	MMG	MM
G	M124395	ADDED "RAMP"	09/09	EM	HH
G	R77589	ADDED "RAMP"	09/09	EM	HH

SUGGESTED MOUNTING CONFIGURATION FOR CK605 CASE STYLE, "kg/rl/16AM01" PIN CONNECTION

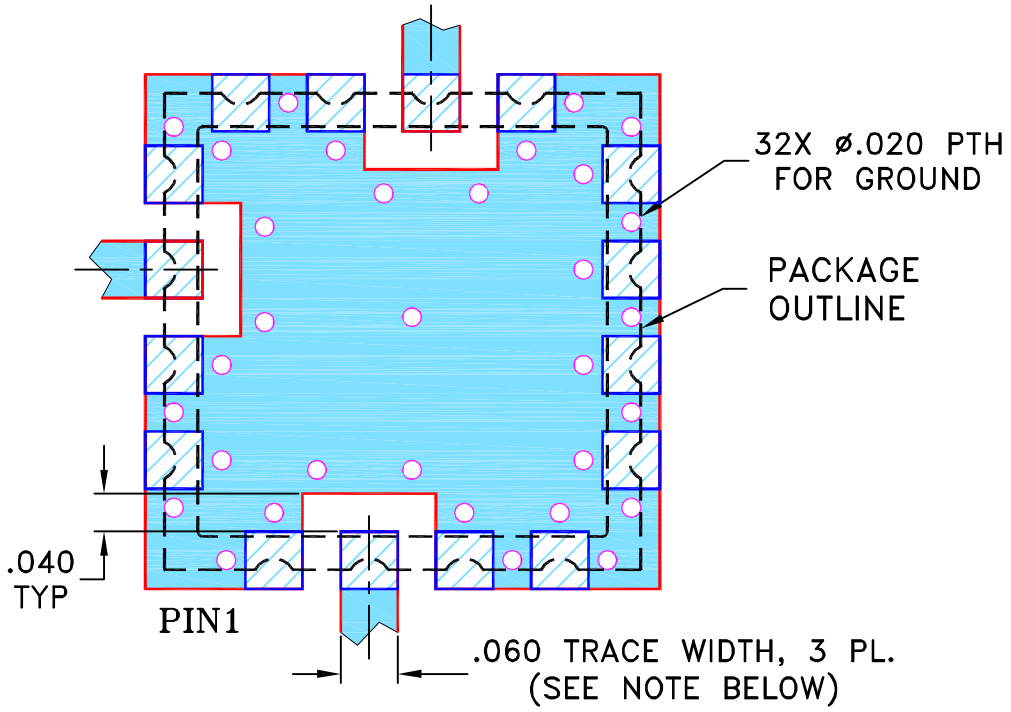

NOTES:

1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE BOTTOM IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	AV	08/07/00
TOLERANCES ON:	CHECKED	SK	08/08/00
2 PL DECIMALS ±	APPROVED	DB	08/08/00
3 PL DECIMALS ± .005			
ANGLES ±			
FRACTIONS ±			

Mini-Circuits®

ASHEETA1.DWG REV:A DATE:01/12/95

Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235

PL,kg/rl/16AM01,CK605,ROS/LAVI/RAMP

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-012	G

FILE:	SCALE:	SHEET:
98PL012	5:1	1 OF 1

Evaluation Board and Circuit

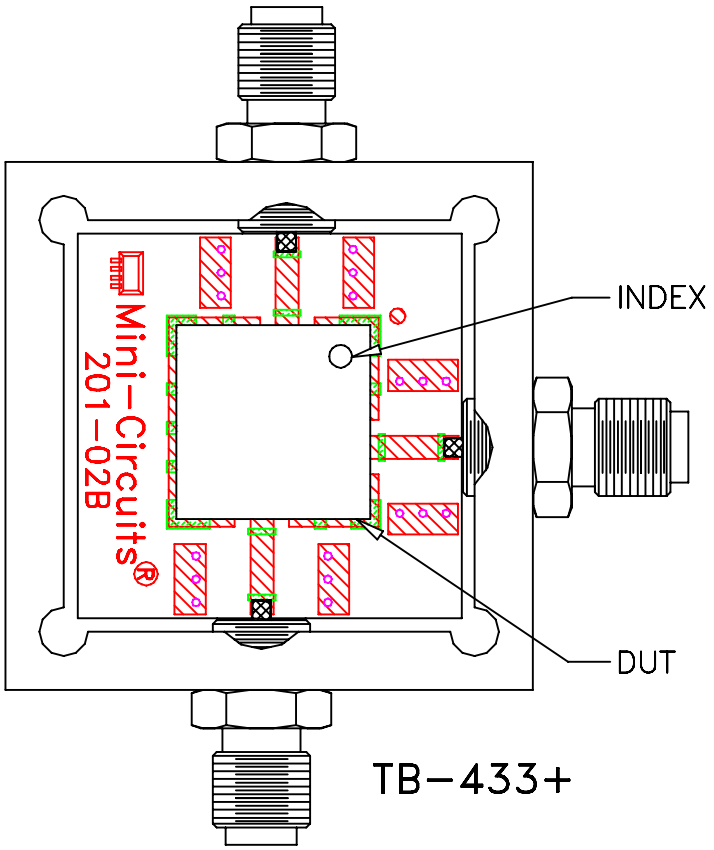

TB-433+

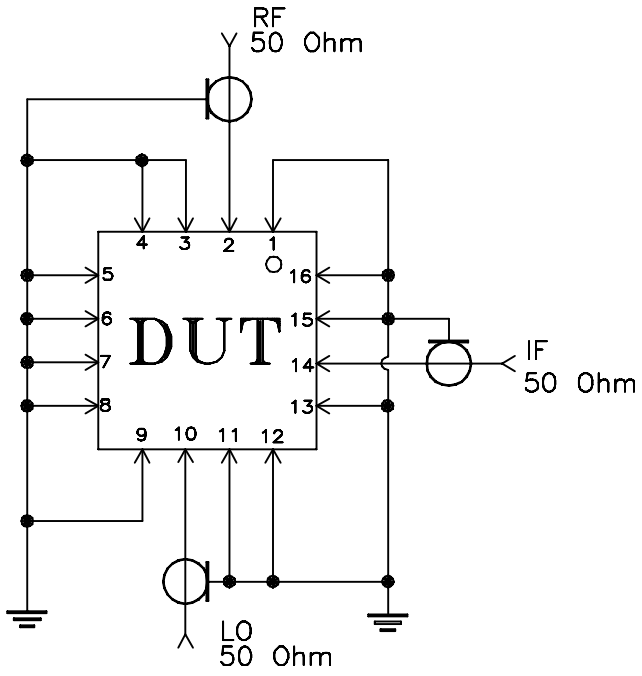

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers RO4350 or equivalent, Dielectric Constant=3.5, Thickness=.028 inch.

Mini-Circuits®

Mini-Circuits

Environmental Specifications ENV31

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-45° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutectic Process: 225°C peak Pb-Free Process, 245°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215