

Engineering Development Model

Frequency Mixer

LAVI-ED12973/1

Level 20 (LO Power + 20 dBm)

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.



CASE STYLE : CK605

Please click "Back", and then click "Contact Us" for Applications support.

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (f _L to f _u)	10		2000	MHz
	RF (f _L to f _u)	10		2000	MHz
	IF	50		900	MHz
Conversion Loss	Mid Range		7.3		dB
	Total Range		8.3		
LO-RF Isolation	Low Range		49		dB
	Mid Range		55		dB
	Upper Range		56		dB
LO-IF Isolation	Low Range		33		dB
	Mid Range		39		dB
	Upper Range		46		dB
Input IP3			+28		dBm
1 dB Compression			+10		dBm

Note: Low Range = [f_L to 10f_L]
mid band = [2f_L to f_u/2]


Mid Range = [10f_L to f_u/2]

Upper Range = [f_u/2 to f_u]

MAXIMUM RATINGS	
Operating Temperature	-45°C to 85°C
Storage Temperature	-55°C to +100°C

PIN CONNECTIONS	
LO	10
RF	2
IF	14
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

Electrical Schematic

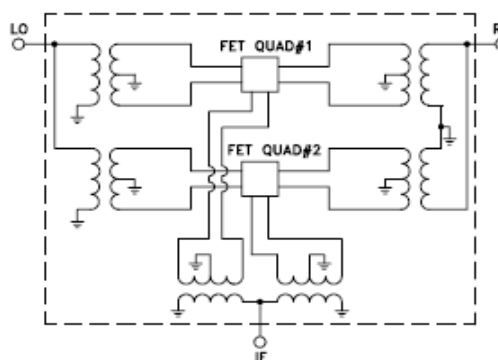

P.O. Box 350188, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4851 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. X2
LAVI-ED12973/1
12/10/2008
Page 1 of 1

Frequency Mixer

LAVI-ED12973/1

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=500MHz (dB)		
		@LO (dBm)		
		+17	+20	+23
10.1	510.1	7.56	7.42	7.34
74.1	574.1	7.30	7.19	7.09
138.1	638.1	7.10	6.96	6.86
202.1	702.1	7.06	6.92	6.81
266.1	766.1	7.05	6.91	6.81
330.1	830.1	7.01	6.87	6.78
394.1	894.1	7.06	6.91	6.79
458.1	958.1	7.05	6.88	6.76
522.1	1022.1	7.06	6.88	6.76
586.1	1086.1	7.25	7.07	6.93
650.1	1150.1	7.42	7.25	7.11
714.1	1214.1	7.49	7.32	7.18
778.1	1278.1	7.62	7.45	7.31
842.1	1342.1	7.80	7.63	7.49
906.1	1406.1	7.95	7.80	7.80
970.1	1470.1	8.06	7.93	7.82
1034.1	1534.1	8.14	8.02	7.94
1098.1	1598.1	8.22	8.11	8.02
1162.1	1662.1	8.34	8.24	8.20
1226.1	1726.1	8.33	8.23	8.16
1290.1	1790.1	8.35	8.31	8.27
1354.1	1854.1	8.33	8.18	8.13
1418.1	1918.1	8.24	8.07	7.94
1478.1	1978.1	8.28	8.10	7.94
1542.1	2042.1	8.42	8.20	8.03
1602.1	2102.1	8.43	8.18	7.98
1666.1	2166.1	8.47	8.20	7.99
1726.1	2226.1	8.67	8.39	8.15
1790.1	2290.1	8.74	8.45	8.19
1850.1	2350.1	8.73	8.42	8.18
1914.1	2414.1	8.94	8.59	8.34
1974.1	2474.1	9.00	8.63	8.36
2038.1	2538.1	8.99	8.60	8.33
2098.1	2598.1	9.26	8.81	8.50
2162.1	2662.1	9.37	8.90	8.57
2222.1	2722.1	9.44	8.98	8.63
2286.1	2786.1	9.80	9.30	8.91
2346.1	2846.1	9.99	9.50	9.09
2410.1	2910.1	10.28	9.78	9.36
2470.1	2970.1	10.75	10.20	9.76

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+17	+20	+23
10.1	510.1	22.93	25.93	29.29
74.1	574.1	25.74	27.73	28.63
138.1	638.1	25.57	27.33	29.46
202.1	702.1	25.41	27.64	29.87
266.1	766.1	25.25	27.43	29.85
330.1	830.1	25.65	28.05	30.50
394.1	894.1	26.22	28.82	31.60
458.1	958.1	26.38	29.01	31.52
522.1	1022.1	26.17	28.83	31.86
586.1	1086.1	26.32	29.14	32.19
650.1	1150.1	26.12	28.95	32.11
714.1	1214.1	25.01	28.02	31.10
778.1	1278.1	25.22	28.39	31.67
842.1	1342.1	25.21	28.64	32.47
906.1	1406.1	24.94	28.19	29.71
970.1	1470.1	24.91	28.23	31.89
1034.1	1534.1	25.87	29.40	33.33
1098.1	1598.1	26.22	29.81	34.21
1162.1	1662.1	26.70	30.04	31.98
1226.1	1726.1	27.25	30.65	32.61
1290.1	1790.1	28.07	29.11	30.91
1354.1	1854.1	27.82	30.75	32.43
1418.1	1918.1	26.99	29.80	32.46
1478.1	1978.1	26.85	29.49	32.32
1542.1	2042.1	26.16	28.90	31.24
1602.1	2102.1	25.13	28.09	31.14
1666.1	2166.1	24.86	27.98	30.92
1726.1	2226.1	24.31	27.00	30.12
1790.1	2290.1	23.34	25.90	29.05
1850.1	2350.1	22.80	25.41	28.35
1914.1	2414.1	21.87	24.59	27.35
1974.1	2474.1	21.03	23.79	26.36
2038.1	2538.1	20.79	23.35	26.07
2098.1	2598.1	20.27	22.82	25.27
2162.1	2662.1	19.72	22.24	24.79
2222.1	2722.1	19.77	22.23	24.73
2286.1	2786.1	19.47	22.00	24.27
2346.1	2846.1	19.16	21.72	24.20
2410.1	2910.1	19.31	21.96	24.46
2470.1	2970.1	18.99	21.77	24.62

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+10dBm (dB)		
		@LO (dBm)		
		+17	+20	+23
10.1	510.1	0.36	0.12	0.14
74.1	574.1	0.22	0.10	0.05
138.1	638.1	0.20	0.09	0.05
202.1	702.1	0.19	0.09	0.05
266.1	766.1	0.19	0.10	0.05
330.1	830.1	0.17	0.08	0.04
394.1	894.1	0.15	0.07	0.03
458.1	958.1	0.14	0.06	0.03
522.1	1022.1	0.12	0.05	0.02
586.1	1086.1	0.10	0.05	0.03
650.1	1150.1	0.09	0.04	0.02
714.1	1214.1	0.09	0.04	0.02
778.1	1278.1	0.09	0.04	0.02
842.1	1342.1	0.09	0.05	0.02
906.1	1406.1	0.09	0.05	0.01
970.1	1470.1	0.10	0.05	0.03
1034.1	1534.1	0.09	0.05	0.03
1098.1	1598.1	0.10	0.05	0.03
1162.1	1662.1	0.11	0.05	0.04
1226.1	1726.1	0.10	0.05	0.03
1290.1	1790.1	0.14	0.08	0.05
1354.1	1854.1	0.11	0.05	0.03
1418.1	1918.1	0.13	0.07	0.03
1478.1	1978.1	0.15	0.07	0.03
1542.1	2042.1	0.17	0.08	0.04
1602.1	2102.1	0.21	0.10	0.05
1666.1	2166.1	0.21	0.10	0.05
1726.1	2226.1	0.26	0.13	0.06
1790.1	2290.1	0.33	0.16	0.07
1850.1	2350.1	0.36	0.18	0.09
1914.1	2414.1	0.47	0.22	0.11
1974.1	2474.1	0.57	0.28	0.15
2038.1	2538.1	0.62	0.31	0.16
2098.1	2598.1	0.74	0.37	0.19
2162.1	2662.1	0.86	0.43	0.23
2222.1	2722.1	0.87	0.46	0.24
2286.1	2786.1	0.95	0.51	0.26
2346.1	2846.1	1.00	0.53	0.27
2410.1	2910.1	1.01	0.53	0.28
2470.1	2970.1	1.13	0.57	0.29

REV. X2

LAVI-ED12973/1

101012

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

LAVI-ED12973/1

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1151MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1123.9MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1178.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+20			+20			+20
741.0	410.0	10.71	10.1	1134.0	8.33	770.1	408.0	10.94
702.5	448.5	9.02	50.1	1174.0	8.12	750.6	427.5	10.02
664.1	486.9	8.25	90.1	1214.0	8.15	731.1	447.0	9.19
625.6	525.4	7.88	130.1	1254.0	8.16	711.6	466.5	8.66
587.1	563.9	7.85	170.1	1294.0	8.16	692.2	485.9	8.37
548.6	602.4	7.87	210.1	1334.0	8.15	672.7	505.4	8.18
510.2	640.8	7.82	250.1	1374.0	8.16	653.2	524.9	8.00
471.7	679.3	7.85	290.1	1414.0	8.14	633.7	544.4	7.97
433.2	717.8	7.87	330.1	1454.0	8.21	614.2	563.9	7.95
394.7	756.3	7.96	370.1	1494.0	8.22	594.7	583.4	7.93
356.3	794.7	7.99	410.1	1534.0	8.19	575.2	602.9	7.95
317.8	833.2	8.04	450.1	1574.0	8.17	555.7	622.4	7.90
279.3	871.7	8.12	490.1	1614.0	8.15	536.3	641.8	7.92
240.8	910.2	8.12	530.1	1654.0	8.19	516.8	661.3	7.96
202.4	948.6	8.11	570.1	1694.0	8.20	497.3	680.8	7.90
163.9	987.1	8.11	610.1	1734.0	8.23	477.8	700.3	7.98
125.4	1025.6	8.12	650.1	1774.0	8.28	458.3	719.8	7.94
86.9	1064.1	8.15	690.1	1814.0	8.29	438.8	739.3	7.94
48.5	1102.5	8.20	730.1	1854.0	8.27	419.3	758.8	8.01
10.0	1141.0	8.44	770.1	1894.0	8.30	399.8	778.3	8.01
65.1	1216.1	8.20	810.1	1934.0	8.36	380.4	797.7	8.11
147.6	1298.6	8.25	850.1	1974.0	8.41	360.9	817.2	8.07
230.2	1381.2	8.27	890.1	2014.0	8.49	341.4	836.7	8.14
312.8	1463.8	8.30	930.1	2054.0	8.52	321.9	856.2	8.15
395.4	1546.4	8.26	970.1	2094.0	8.58	302.4	875.7	8.17
477.9	1628.9	8.23	1010.1	2134.0	8.63	282.9	895.2	8.18
560.5	1711.5	8.25	1050.1	2174.0	8.70	263.4	914.7	8.17
643.1	1794.1	8.36	1090.1	2214.0	8.86	243.9	934.2	8.19
725.7	1876.7	8.28	1130.1	2254.0	9.00	224.5	953.6	8.19
808.3	1959.3	8.33	1170.1	2294.0	9.16	205.0	973.1	8.19
890.8	2041.8	8.47	1210.1	2334.0	9.15	185.5	992.6	8.16
973.4	2124.4	8.66	1250.1	2374.0	9.25	166.0	1012.1	8.18
1056.0	2207.0	8.86	1290.1	2414.0	9.36	146.5	1031.6	8.17
1138.6	2289.6	9.11	1330.1	2454.0	9.48	127.0	1051.1	8.19
1221.2	2372.2	9.21	1370.1	2494.0	9.68	107.5	1070.6	8.27
1303.7	2454.7	9.47	1410.1	2534.0	9.85	88.0	1090.1	8.26
1358.8	2509.8	9.69	1450.1	2574.0	10.06	68.6	1109.5	8.32
1441.4	2592.4	10.08	1490.1	2614.0	10.33	49.1	1129.0	8.26
1496.4	2647.4	10.44	1530.1	2654.0	10.57	29.6	1148.5	8.24
1579.0	2730.0	11.04	1590.1	2714.0	11.01	10.1	1168.0	8.45

REV. X2

LAVI-ED12973/1

101012

Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

LAVI-ED12973/1

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+17	+20	+23	+17	+20	+23
510.1	47.45	48.98	50.42	36.58	35.70	34.92
574.1	49.82	50.67	51.33	33.88	33.30	32.79
638.1	49.88	50.26	50.43	32.99	32.47	32.03
702.1	49.37	49.50	49.31	32.49	32.18	31.81
766.1	49.98	49.94	49.64	32.48	32.05	31.70
830.1	51.08	51.19	50.90	32.95	32.57	32.30
894.1	51.80	52.29	52.40	33.92	33.54	33.13
958.1	52.23	52.61	52.87	35.48	35.10	35.01
1022.1	52.92	53.12	52.95	37.94	37.56	37.41
1086.1	55.57	55.97	56.24	41.58	41.23	40.96
1150.1	60.61	60.62	60.54	44.54	44.20	44.05
1214.1	60.67	59.98	59.27	46.87	46.55	46.00
1278.1	61.26	60.35	59.40	47.93	47.92	47.47
1342.1	62.00	60.80	59.77	46.66	46.81	46.70
1406.1	59.87	58.70	62.01	44.56	44.66	44.59
1470.1	57.71	56.77	56.29	42.69	42.86	42.97
1534.1	58.12	57.78	57.95	41.12	41.36	41.53
1598.1	60.86	61.06	60.73	40.13	40.29	40.38
1662.1	56.18	56.88	54.90	39.50	39.75	40.04
1726.1	50.87	51.01	51.07	39.71	40.07	39.85
1790.1	51.15	50.20	50.55	40.77	40.75	41.04
1854.1	51.55	51.21	51.60	42.10	42.23	42.46
1918.1	53.28	53.07	53.05	43.29	43.61	43.80
1978.1	55.16	55.79	56.51	44.54	44.89	45.15
2042.1	55.04	55.32	55.84	45.98	46.16	46.66
2102.1	54.73	54.15	53.57	47.60	47.72	48.16
2166.1	57.54	56.58	55.74	49.63	49.65	49.99
2226.1	59.62	58.66	57.26	52.42	52.40	52.29
2290.1	60.35	59.14	57.52	55.72	55.08	54.30
2350.1	60.70	59.29	57.86	56.34	55.02	53.76
2414.1	61.23	59.51	58.16	52.50	51.38	50.66
2474.1	62.51	60.40	58.73	48.64	47.80	47.25
2538.1	63.31	61.22	59.89	45.90	45.23	44.81
2598.1	65.03	62.61	60.59	44.44	43.78	43.22
2662.1	66.84	64.48	62.51	43.49	42.96	42.74
2722.1	67.13	65.55	63.81	43.12	42.78	42.15
2786.1	67.96	67.84	67.40	43.00	42.73	41.97
2846.1	66.09	67.42	69.91	43.36	43.05	42.23
2910.1	63.54	64.87	67.95	43.80	43.43	42.50
2970.1	60.98	62.25	63.24	44.87	44.29	43.55

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+17	+20	+23
10.1	510.1	48.05	39.32	35.66
74.1	574.1	49.71	46.00	41.11
138.1	638.1	49.22	43.31	36.96
202.1	702.1	41.73	50.00	44.69
266.1	766.1	40.82	47.69	55.05
330.1	830.1	39.62	46.39	46.52
394.1	894.1	35.87	38.70	42.99
458.1	958.1	34.66	36.31	39.20
522.1	1022.1	36.52	39.32	47.58
586.1	1086.1	36.97	39.68	48.24
650.1	1150.1	37.62	40.13	45.94
714.1	1214.1	38.24	41.52	59.41
778.1	1278.1	38.47	41.18	47.07
842.1	1342.1	40.02	43.47	50.80
906.1	1406.1	41.12	46.37	50.71
970.1	1470.1	39.63	43.13	50.74
1034.1	1534.1	38.13	40.49	43.91
1098.1	1598.1	36.88	38.93	41.96
1162.1	1662.1	35.72	37.27	38.30
1226.1	1726.1	35.13	36.65	43.56
1290.1	1790.1	32.44	32.58	33.38
1354.1	1854.1	33.18	36.44	42.14
1418.1	1918.1	33.20	34.68	36.54
1478.1	1978.1	33.26	34.41	35.57
1542.1	2042.1	33.35	34.58	35.54
1602.1	2102.1	33.46	34.83	36.77
1666.1	2166.1	33.65	34.96	35.98
1726.1	2226.1	34.06	35.41	36.80
1790.1	2290.1	34.12	35.36	36.33
1850.1	2350.1	34.35	35.68	37.09
1914.1	2414.1	34.25	35.56	36.61
1974.1	2474.1	34.36	35.52	36.36
2038.1	2538.1	34.99	36.26	37.08
2098.1	2598.1	35.20	36.36	36.06
2162.1	2662.1	35.74	37.03	38.08
2222.1	2722.1	36.53	37.81	38.09
2286.1	2786.1	37.00	38.32	37.70
2346.1	2846.1	37.94	39.49	40.52
2410.1	2910.1	39.32	41.04	42.26
2470.1	2970.1	40.51	42.38	44.16

Frequency Mixer

LAVI-ED12973/1

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=2050.1001MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+17	+20	+23		+17	+20	+23		+17	+20	+23
10.1	510.1	1.33	1.38	1.40	510.1	4.09	4.09	4.08	10.1	2.12	2.27	2.41
74.1	574.1	1.22	1.27	1.31	574.1	4.21	4.22	4.21	50.6	2.10	2.25	2.39
138.1	638.1	1.19	1.23	1.27	638.1	4.24	4.24	4.23	91.0	2.03	2.17	2.30
202.1	702.1	1.23	1.25	1.27	702.1	4.18	4.18	4.15	131.5	2.03	2.16	2.29
266.1	766.1	1.31	1.32	1.33	766.1	4.10	4.10	4.09	171.9	1.93	2.06	2.18
330.1	830.1	1.39	1.39	1.39	830.1	4.01	4.01	4.00	212.4	1.92	2.04	2.16
394.1	894.1	1.51	1.48	1.47	894.1	3.88	3.86	3.84	252.9	1.82	1.93	2.04
458.1	958.1	1.69	1.65	1.63	958.1	3.78	3.78	3.77	293.3	1.78	1.89	1.99
522.1	1022.1	1.89	1.85	1.81	1022.1	3.66	3.66	3.65	333.8	1.70	1.80	1.89
586.1	1086.1	2.15	2.11	2.07	1086.1	3.52	3.50	3.48	374.2	1.62	1.71	1.80
650.1	1150.1	2.39	2.34	2.30	1150.1	3.41	3.40	3.40	414.7	1.55	1.64	1.73
714.1	1214.1	2.54	2.50	2.46	1214.1	3.29	3.28	3.28	455.2	1.45	1.53	1.61
778.1	1278.1	2.66	2.61	2.57	1278.1	3.14	3.13	3.10	495.6	1.41	1.49	1.56
842.1	1342.1	2.75	2.71	2.67	1342.1	3.02	3.02	3.02	536.1	1.31	1.38	1.44
906.1	1406.1	2.75	2.73	2.63	1406.1	2.91	2.92	2.81	576.5	1.27	1.34	1.40
970.1	1470.1	2.65	2.62	2.61	1470.1	2.79	2.80	2.80	617.0	1.19	1.25	1.30
1034.1	1534.1	2.49	2.47	2.46	1534.1	2.71	2.72	2.72	657.5	1.15	1.21	1.26
1098.1	1598.1	2.34	2.32	2.31	1598.1	2.66	2.68	2.69	697.9	1.11	1.17	1.22
1162.1	1662.1	2.15	2.13	2.11	1662.1	2.62	2.64	2.63	738.4	1.07	1.12	1.17
1226.1	1726.1	1.93	1.90	1.88	1726.1	2.61	2.62	2.62	778.8	1.08	1.13	1.18
1290.1	1790.1	1.80	1.75	1.72	1790.1	2.65	2.66	2.66	819.3	1.09	1.12	1.16
1354.1	1854.1	1.77	1.69	1.65	1854.1	2.68	2.69	2.70	859.8	1.12	1.15	1.19
1418.1	1918.1	1.83	1.75	1.68	1918.1	2.71	2.71	2.69	900.2	1.17	1.19	1.22
1478.1	1978.1	1.82	1.74	1.67	1978.1	2.75	2.75	2.75	960.9	1.21	1.24	1.27
1542.1	2042.1	1.80	1.72	1.66	2042.1	2.77	2.77	2.78	1001.4	1.24	1.28	1.32
1602.1	2102.1	1.82	1.74	1.66	2102.1	2.78	2.76	2.73	1062.1	1.32	1.36	1.41
1666.1	2166.1	1.82	1.74	1.68	2166.1	2.80	2.81	2.80	1102.5	1.36	1.41	1.46
1726.1	2226.1	1.80	1.73	1.66	2226.1	2.81	2.82	2.81	1163.2	1.46	1.52	1.57
1790.1	2290.1	1.77	1.70	1.63	2290.1	2.78	2.78	2.73	1203.7	1.56	1.62	1.68
1850.1	2350.1	1.70	1.63	1.57	2350.1	2.78	2.80	2.80	1264.4	1.66	1.73	1.79
1914.1	2414.1	1.64	1.58	1.52	2414.1	2.76	2.78	2.77	1304.8	1.72	1.79	1.85
1974.1	2474.1	1.58	1.51	1.45	2474.1	2.72	2.73	2.70	1365.5	1.86	1.94	2.01
2038.1	2538.1	1.50	1.44	1.37	2538.1	2.72	2.73	2.73	1406.0	1.97	2.05	2.13
2098.1	2598.1	1.45	1.38	1.32	2598.1	2.68	2.68	2.64	1466.7	2.11	2.20	2.28
2162.1	2662.1	1.38	1.32	1.26	2662.1	2.66	2.65	2.61	1507.1	2.25	2.34	2.43
2222.1	2722.1	1.33	1.27	1.22	2722.1	2.65	2.65	2.63	1567.8	2.45	2.55	2.64
2286.1	2786.1	1.28	1.23	1.18	2786.1	2.60	2.58	2.54	1608.3	2.57	2.68	2.77
2346.1	2846.1	1.25	1.22	1.20	2846.1	2.58	2.56	2.53	1669.0	2.79	2.90	2.98
2410.1	2910.1	1.27	1.25	1.26	2910.1	2.55	2.53	2.52	1709.4	3.07	3.18	3.28
2470.1	2970.1	1.28	1.28	1.31	2970.1	2.50	2.46	2.43	1770.1	3.35	3.46	3.56

REV. X2

LAVI-ED12973/1

101012

Page 4 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	12	8	23	20	30	45	28	52	39	45
1	-	32	+0	39	23	43	41	60	43	54	52	54
2	83	67	65	75	73	65	>82	63	>82	>82	61	71
3	>90	>82	77	80	71	>82	79	>82	>82	>82	81	>82
4	>90	>82	>82	>82	>82	>82	79	>82	>82	>82	>82	>82
5	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
6	>90	>82	>82	80	82	>82	>82	>82	>82	>82	79	>82
7	88	>82	>82	>82	76	>82	>82	>82	>82	>82	>82	>82
8	>90	>82	81	80	>82	>82	>82	>82	>82	80	>82	80
9	87	>82	>82	81	>82	>82	>82	>82	>82	>82	>82	>82
10	>90	80	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 1151 MHz; 0.00 dBm.
LO IN: 1651 MHz; +20.00 dBm
IF OUT: 500 MHz; -8.18 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	23	18	33	30	40	50	40	59	52	57
1	-	32	+0	39	23	43	42	61	44	54	53	55
2	62	57	53	65	61	55	69	55	68	76	54	66
3	>90	76	51	74	49	81	69	75	73	69	63	73
4	>90	78	91	89	78	85	85	87	90	83	>92	75
5	>90	86	85	>92	79	90	84	88	89	88	87	86
6	>90	92	>92	91	>92	>92	>92	>92	>92	>92	91	91
7	88	>92	>92	>92	>92	>92	87	90	>92	>92	91	>92
8	>90	>92	>92	>92	>92	>92	>92	>92	89	89	>92	91
9	>90	>92	>92	>92	>92	>92	>92	>92	>92	>92	91	>92
10	90	>92	>92	91	>92	>92	>92	>92	>92	>92	>92	>92
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:


RF IN: 1151 MHz; 10.00 dBm.
LO IN: 1651 MHz; +20.00 dBm
IF OUT: 500 MHz; 1.77 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.


REV. X2
LAVI-ED12973/1
101012
Page 5 of 5

Typical Performance Curves


Conversion Loss @ IF=500MHz

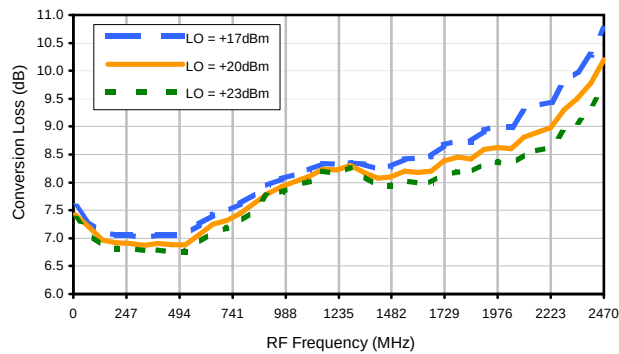


Conversion Loss vs. LO @ RF=1151MHz

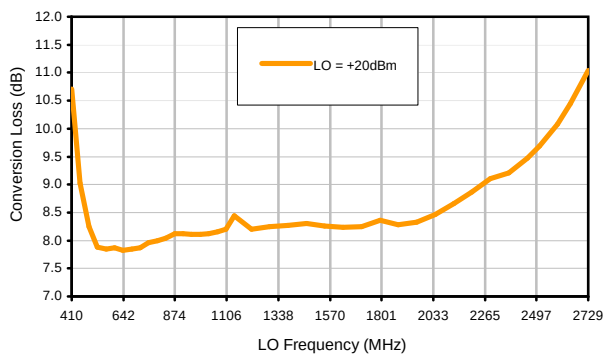


Conversion Loss vs. IF @ RF=1151MHz

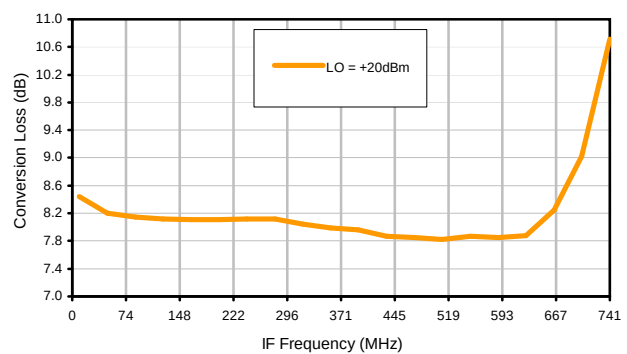


Conversion Loss vs. IF @ RF=1123.9MHz

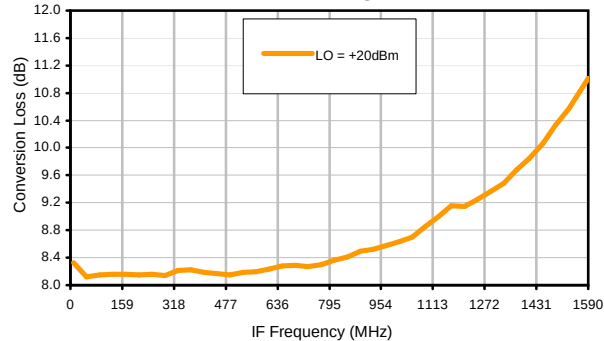


Conversion Loss vs. IF @ RF=1178.1MHz

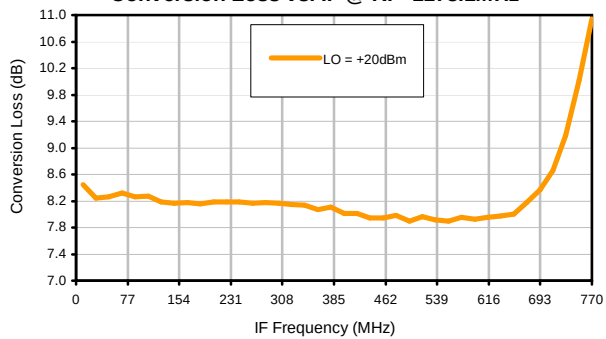

IP3 Input

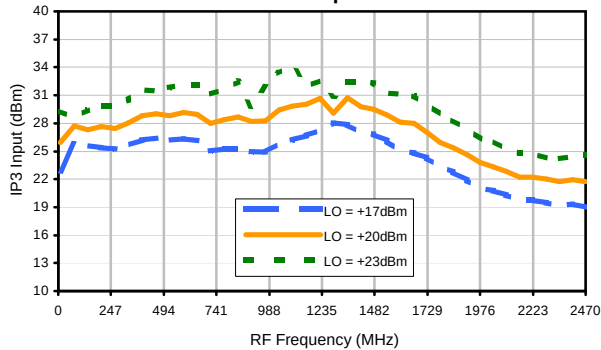

Compression @ RF IN=+10dBm

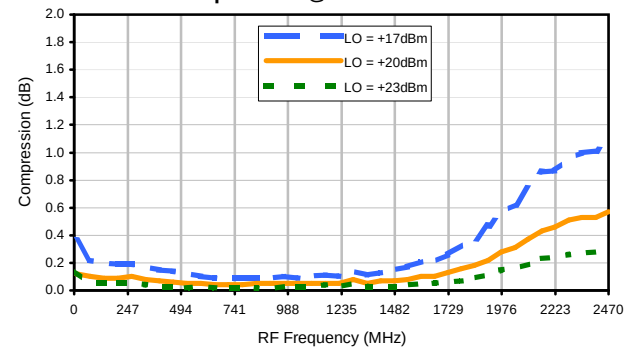

REV. X2

LAVI-ED12973/1

101012

Page 1 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Typical Performance Curves


LO-RF Isolation

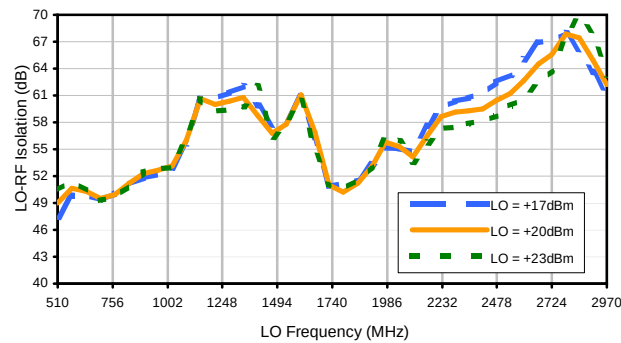


LO-IF Isolation

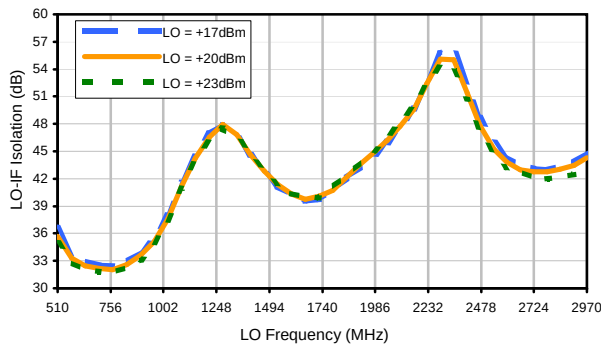


RF-IF Isolation

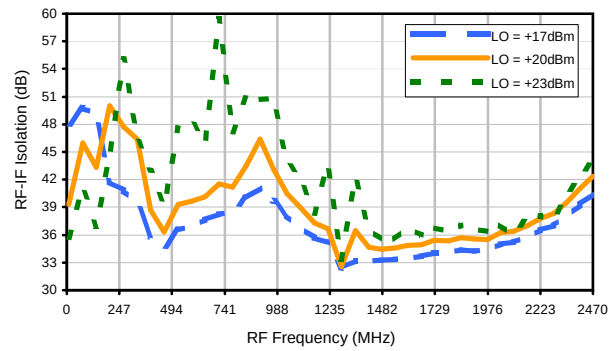


RF VSWR

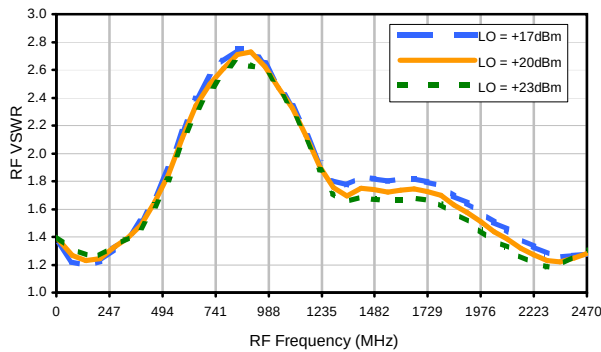

LO VSWR

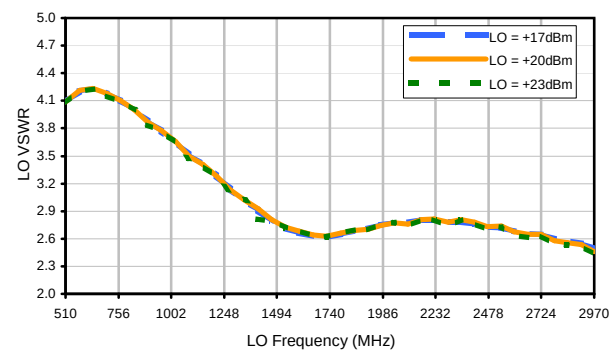

IF VSWR

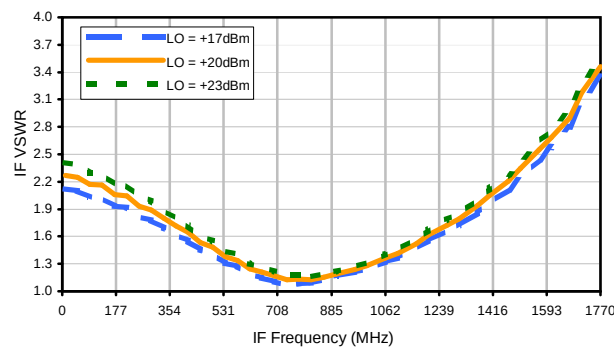

REV. X2

LAVI-ED12973/1

101012

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	12	8	23	20	30	45	28	52	39	45
1	-	32	+0	39	23	43	41	60	43	54	52	54
2	83	67	65	75	73	65	>82	63	>82	>82	61	71
3	>90	>82	77	80	71	>82	79	>82	>82	>82	81	>82
4	>90	>82	>82	>82	>82	>82	79	>82	>82	>82	>82	>82
5	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
6	>90	>82	>82	80	82	>82	>82	>82	>82	>82	79	>82
7	88	>82	>82	>82	76	>82	>82	>82	>82	>82	>82	>82
8	>90	>82	81	80	>82	>82	>82	>82	>82	80	>82	80
9	87	>82	>82	81	>82	>82	>82	>82	>82	>82	>82	>82
10	>90	80	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 1151 MHz; 0.00 dBm.
LO IN: 1651 MHz; +20.00 dBm
IF OUT: 500 MHz; -8.18 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	23	18	33	30	40	50	40	59	52	57
1	-	32	+0	39	23	43	42	61	44	54	53	55
2	62	57	53	65	61	55	69	55	68	76	54	66
3	>90	76	51	74	49	81	69	75	73	69	63	73
4	>90	78	91	89	78	85	85	87	90	83	>92	75
5	>90	86	85	>92	79	90	84	88	89	88	87	86
6	>90	92	>92	91	>92	>92	>92	>92	>92	>92	91	91
7	88	>92	>92	>92	>92	>92	87	90	>92	>92	91	>92
8	>90	>92	>92	>92	>92	>92	>92	>92	89	89	>92	91
9	>90	>92	>92	>92	>92	>92	>92	>92	>92	>92	91	>92
10	90	>92	>92	91	>92	>92	>92	>92	>92	>92	>92	>92
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 1151 MHz; 10.00 dBm.
LO IN: 1651 MHz; +20.00 dBm
IF OUT: 500 MHz; 1.77 dBm



- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
LAVI-ED12973/1
101012
Page 3 of 3

Outline Dimensions

CK605

PCB Land Pattern

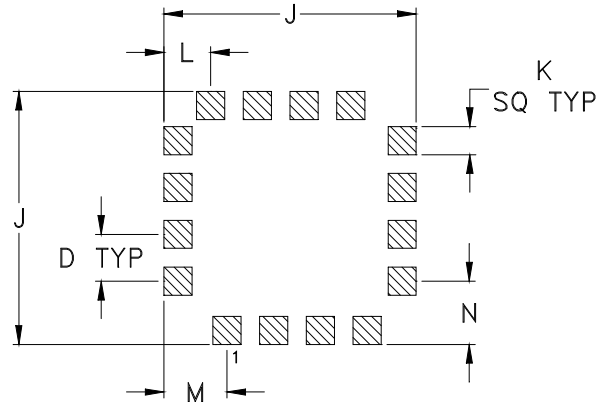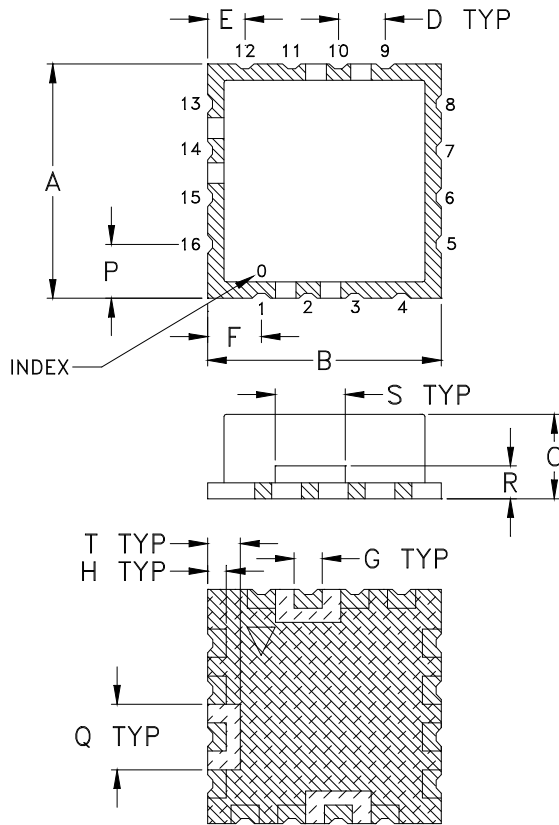

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K
CK605	.500 (12.70)	.500 (12.70)	.180 (4.57)	.100 (2.54)	.080 (2.03)	.115 (2.92)	.060 (1.52)	.040 (1.02)	.540 (13.72)	.060 (1.52)

CASE #	L	M	N	P	Q	R	S	T	WT. GRAM
CK605	.100 (2.54)	.135 (3.43)	.135 (3.43)	.115 (2.92)	.140 (3.56)	.070 (1.78)	.150 (3.81)	.070 (1.78)	1.2 +0.5 -0.0

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3Pl. $\pm .015$

Notes:

- Case material: Nickel-Silver alloy.
- Base: Printed wiring laminate.
- Termination finish:
For RoHS Case Styles: 3-5 μ inch (.08-.13 microns) Gold over 120-240 μ inch (3.05-6.10 microns) Nickel plate.
All models, (+) suffix.




P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F37

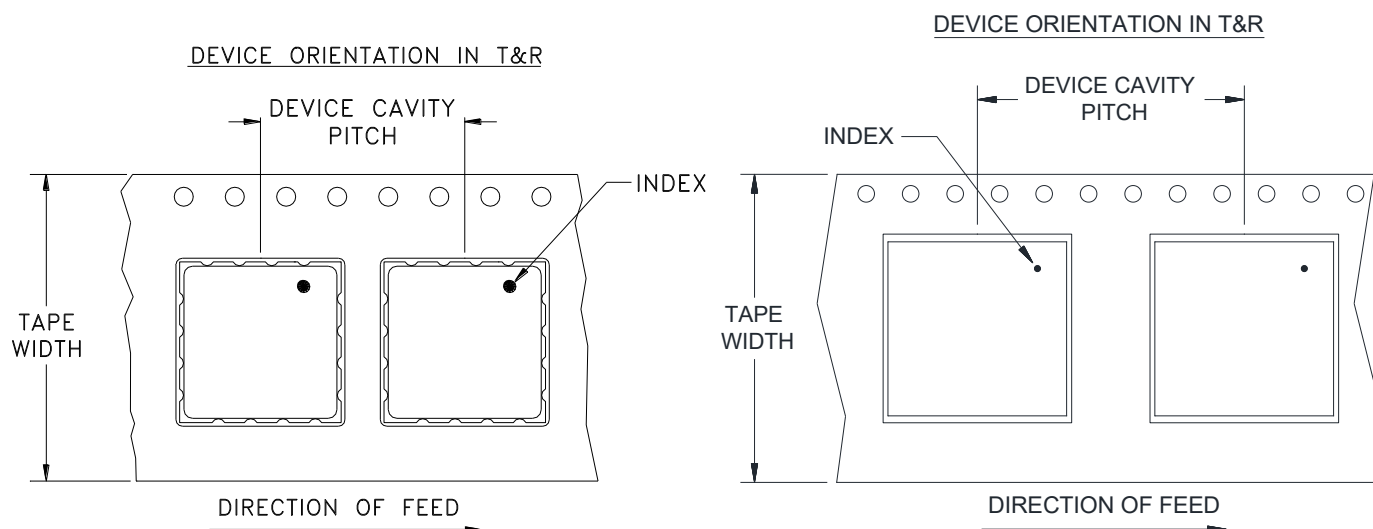

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
24	16	7	Small quantity standards (see note)	10
				20
				50
				100
		13	Standard	200
				500

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
E	M105563	ADDED "rl" PIN CONNECTION	06/02/06	MMG	DJ
F	M105640	CORRECTED NOTE 2	06/08/06	MMG	MM
G	M124395	ADDED "RAMP"	09/09	EM	HH
G	R77589	ADDED "RAMP"	09/09	EM	HH


SUGGESTED MOUNTING CONFIGURATION FOR
CK605 CASE STYLE, "kg/rl/16AM01" PIN CONNECTION

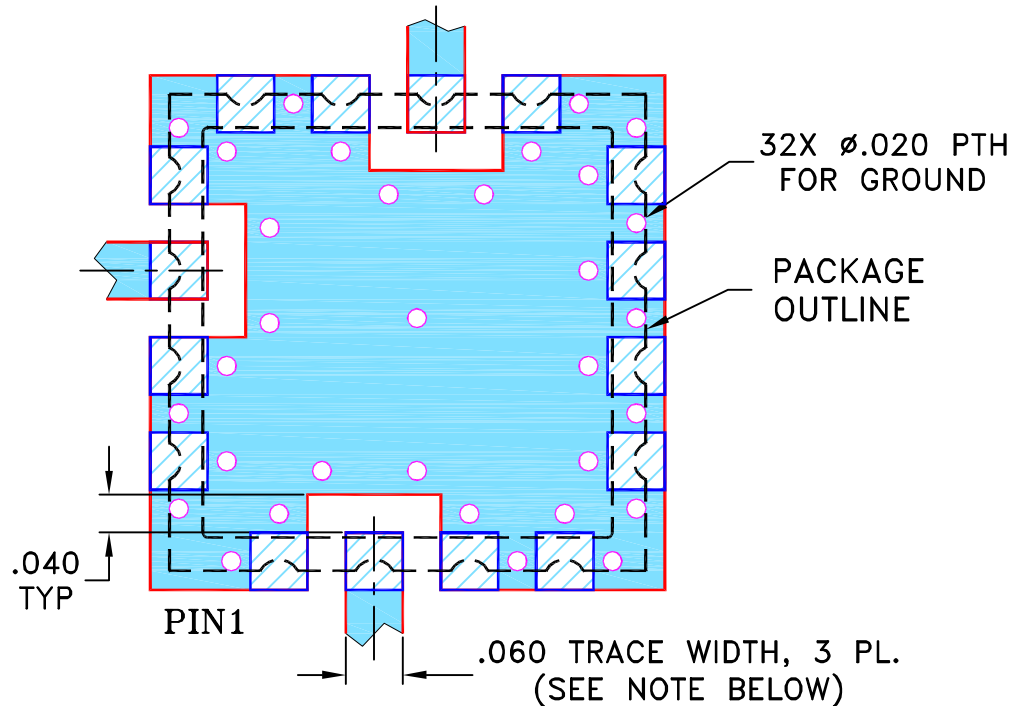NOTES:

- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE BOTTOM IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

AV

08/07/00

TOLERANCES ON:

CHECKED

SK

08/08/00

2 PL DECIMALS $\pm$

APPROVED

DB

08/08/00

3 PL DECIMALS $\pm$.005ANGLES $\pm$ FRACTIONS $\pm$

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95





Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

PL,kg/rl/16AM01,CK605,ROS/LAVI/RAMP

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-012	REV: G
FILE: 98PL012	SCALE: 5:1	SHEET: 1 OF 1	

Evaluation Board and Circuit

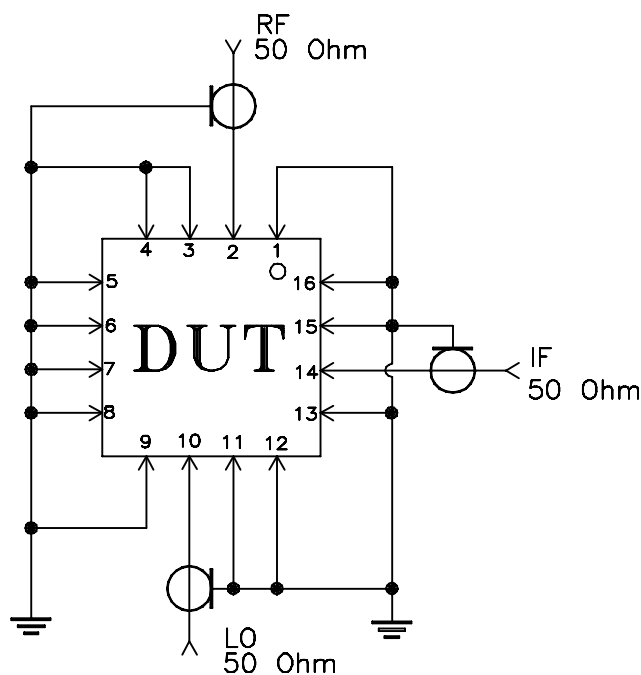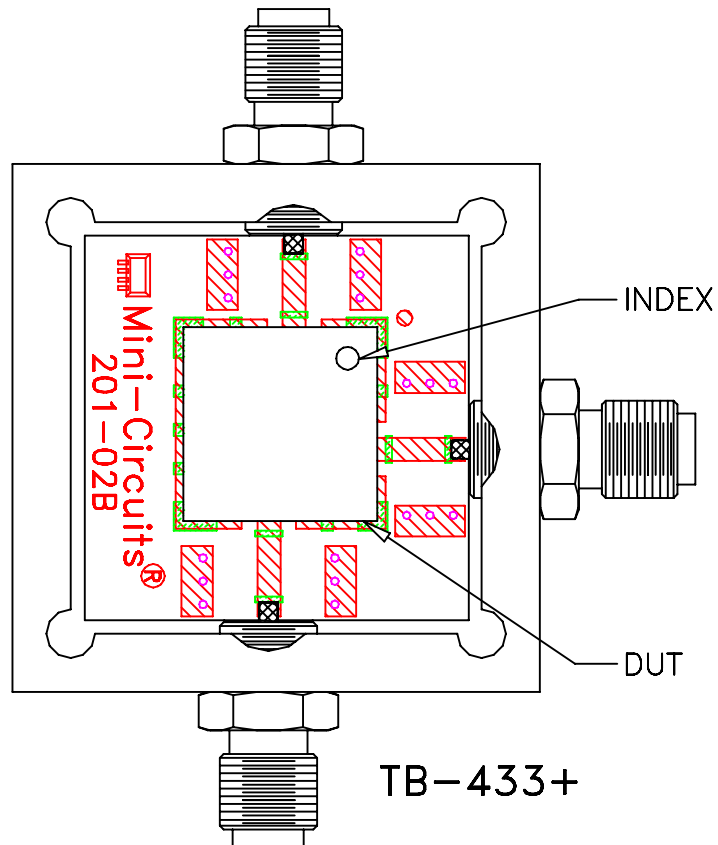

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.028 inch.

Schematic Diagram

 Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-45° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutectic Process: 225°C peak Pb-Free Process, 245°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215