# LFCV-1450+

DC to 1450 MHz  $50\Omega$ 

#### **Product Features**

- Small size (.126" x .098"x .059")
- Temperature stable
- Hermetically sealed




+RoHS Compliant The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

#### **Typical Applications**

- Harmonic rejection
- VHF/UHF transmitters / receivers
- Lab use
- DECT/PACS/PHS/GSM/DCS/WLAN

#### **General Description**

The LFCV-1450+ (RoHS compliant) is constructed with new Ferrite material LTCC multi layer. The existing LFCN-1450+ is cut off at frequency 1825 MHz. But LFCV-1450+ is cut off at frequency 1500 MHz with same pass band frequency, DC-1450 MHz. The rejection frequency is much improved.



#### **Pad Description**

Function	Pad Number	Description
RF IN	1	RF input
RF-OUT	3	RF output
GND	2,4	Connected to ground

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.


C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

#### Electrical Specifications<sup>1</sup> at 25°C, 50Ω

	Parameter	F#	Frequency (MHz)	Min.	Тур.	Max.	Unit
	Insertion Loss	DC-F1	DC-1450	_	_	2.2	dB
Pass Band	Freq. Cut-Off	F2	1500	_	3.0	_	dB
	VSWR	DC - F1	DC-1450	_	1.3	_	:1
Stop Band	Rejection Loss	F3 F4 - F5	1650 1800 - 2300	20 —	— 40	_	dB dB
Stop Band	VSWR	F6 F3 - F6	3000 1650-3000	_	20 20	_	dB :1

<sup>1.</sup> Coupling capacitors at input and output are recmmended for use in applications that require DC isolation of input to output port or other port to ground.

#### Typical Frequency Response




#### **Absolute Maximum Ratings**

Operating Temperature	-40°C to 85°C		
Storage Temperature*	-55°C to 100°C		
RF Input Power**	0.5W at 25°C		

<sup>\*12</sup> months in vacuum sealed bag and 1 week after opened.
\*\*Passband rating, derate linearly to 0.125W at 85°C ambient

#### **Product Marking**



Permanent damage may occur if any of these limits are exceeded.

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

#### **Characterization Test Circuit**







Fig 1. Block diagram of Test Circuit used for characterization, Test board TB-526+ Conditions: Insertion loss, VSWR: Pin= 0 dBm

#### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Group Delay (ns)
1.00	0.04	1.00	0.46
10.00	0.03	1.00	0.49
50.00	0.06	1.02	0.46
100.00	0.08	1.05	0.46
500.00	0.26	1.23	0.46
1025.00	0.42	1.07	0.60
1450.00	1.54	1.22	1.61
1550.00	5.66	2.19	
1650.00	30.39	10.50	
1800.00	40.74	25.62	
2000.00	58.94	40.77	
2300.00	30.57	52.42	
2500.00	26.20	56.69	
3000.00	21.46	54.87	
4000.00	17.29	38.02	








Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

#### Suggested PCB Layout (PL-307)



#### NOTES:

- 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Additional Detailed Technical Information  additional information is available on our dash board. To access this information click here						
Performance Data	Data Table					
Performance Data	Swept Graphs					
Case Style	JV1210C Ceramic package, Terminal finish: Tin plate over Nickel plate					
Tape & Reel Packaging	F74					
Standard quantities available on reel	7" reels with 20, 50, 100, 200, 500, 1K or 2K devices.					
Suggested Layout for PCB Design	PL-307					
Evaluation Board	TB-526+					
Environmental Ratings	ENV06T2					

#### **ESD Rating**

Human Body Model (HBM):

Machine Model (MM):

#### MSL Rating

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp


# **Low Pass Filter**


# Typical Performance Data


FREQUENCY	INSERTION LOSS	VSWR	GROUP DELAY
(MHz)	(dB)	(:1)	(ns)
1.0	0.04	1.00	0.46
5.0	0.04	1.00	0.46
10.0	0.03	1.00	0.49
30.0	0.04	1.01	0.47
50.0	0.06	1.02	0.46
100.0	0.08	1.05	0.46
300.0	0.18	1.16	0.45
500.0	0.26	1.23	0.46
700.0	0.32	1.21	0.49
900.0	0.36	1.08	0.53
1025.0	0.42	1.07	0.60
1075.0	0.47	1.13	0.65
1125.0	0.53	1.19	0.69
1175.0	0.60	1.26	0.74
1225.0	0.69	1.32	0.79
1275.0	0.80	1.35	0.86
1325.0	0.92	1.36	0.97
1375.0	1.08	1.32	1.12
1425.0	1.33	1.25	1.35
1450.0	1.54	1.22	1.61
1500.0	2.41	1.30	2.04
1550.0	5.66	2.19	2.96
1600.0	16.14	5.55	2.85
1800.0	40.74	25.62	0.49
2200.0	34.40	50.17	0.27
2300.0	30.57	52.42	0.32
2400.0	28.03	54.76	0.32
2500.0	26.20	56.69	0.31
2600.0	24.82	57.78	0.30
3000.0	21.46	54.87	0.28
4000.0	17.29	38.02	0.26

Page 1 of 1

# Typical Performance Curves

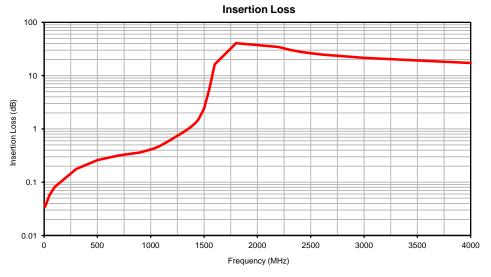

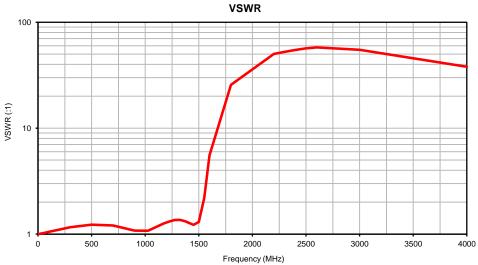

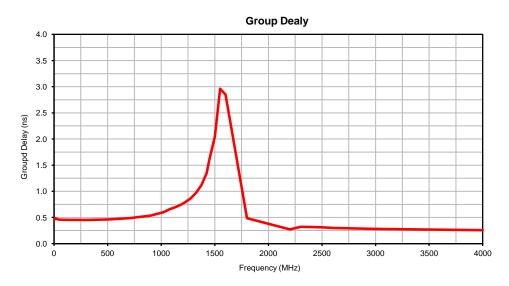


Page 1 of 1

## **Outline Dimensions**

**JV1210C** 

### **PCB Land Pattern**

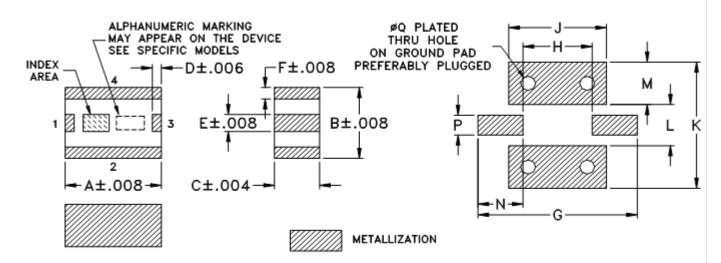

Suggested Layout, Tolerance to be within ±.002

CASE#	A	В	С	D	Е	F	G	Н	J	K	L	M	N	P	Q	WT. GRAM
JV1210C	.126 (3.2)	.098 (2.5)	.059 (1.5)	.012 (.3)	.024 (.6)	.016 (.4)	.209 (5.3)	.091 (2.3)	.128 (3.25)	.175 (4.45)	.057 (1.45)	.059 (1.5)	.059 (1.5)	.028 (.7)	.020 (.5)	.03

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .01; 3 Pl. ± .005

#### **Notes:**

- 1. Open style, ceramic base.
- 2. Termination finish: as shown below or indicated on Data Sheet.

For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.

For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

3. Pad tolerance is non-cumulative. Minimum spacing between each pad is .004.






P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

# THIRD ANGLE PROJECTION


		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M123026	NEW RELEASE	06/08/09	PW	ABD

## SUGGESTED MOUNTING CONFIGURATION FOR JV1210C CASE STYLE. "04FL01" PIN CONNECTIONS

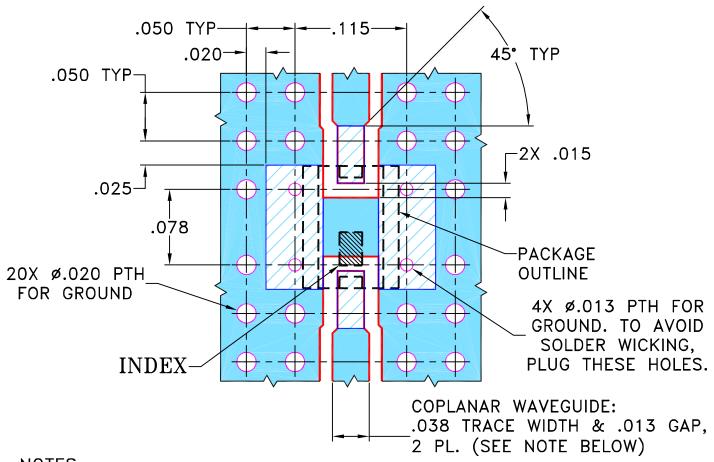

## NOTES:

- 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

INITIALS DATE Mini-Circuits Brooklyn NY 11235 UNLESS OTHERWISE SPECIFIED 05/27/09 DIMENSIONS ARE IN INCHES PW DRAWN

TOLERANCES ON: 06/04/09 IL CHECKED 2 PL DECIMALS ± 06/08/09 3 PL DECIMALS ± .005 APPROVED ABD

☐ Mini-Circuits ®	
-------------------	--


THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE: MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

A:	SHEETA	1.DWG	REV:A	DATE:01/12/95


PL, 04FL01, JV1210C, LFCF, TB-526+

SIZE A	code ident 15542	DRAWING	<sup>NO:</sup> 98-PL	-307		REV: OR
FILE:	98PL307	SCALE:	10:1	SHEET:	1	OF 1

# Evaluation Board and Circuit

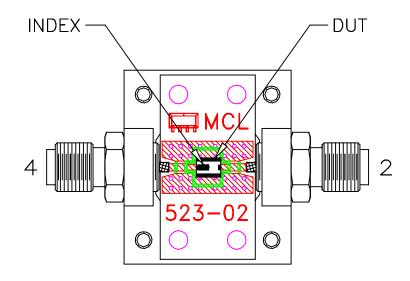

TB - 526 +

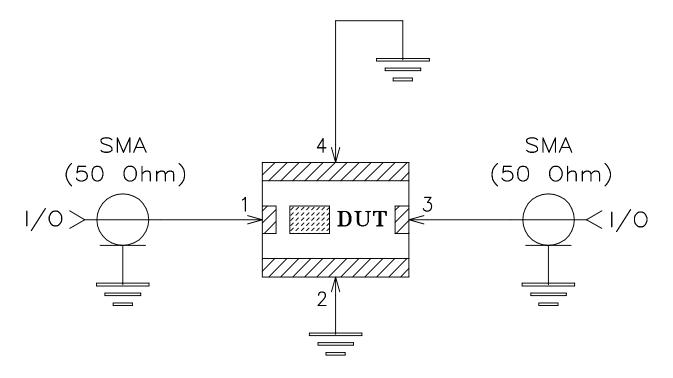

Schematic Diagram

### Notes:

- 1. 50 Ohm SMA Female connectors.
- 2. PCB Material: RO4350 or equivalent, Dielectric Constant=3.5, Thickness=.020 inch.

∭Mini-Circuits®



#### **Environmental Specifications**

## ENV06T2

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A

ENV06T2 Rev: A

02/25/11

M130240 File: ENV06T2.pdf

This document and its contents are the property of Mini-Circuits.