

### LFCV-2202+

### **THE BIG DEAL**

- Stop Band Rejection, 40 dB Typ.
- Rugged, Ceramic Construction
- Stop Band Rejection, 35 dB Typ.
- Small size, 1210



Generic photo used for illustration purposes only CASE STYLE: JV1210C-13

+RoHS Compliant The +Suffix identifies RoHS Compliance. See our website for methodologies and qualification

### **APPLICATIONS**

Communications, Radar, EW and ECM Defense Systems

### **PRODUCT OVERVIEW**

LFCV-2202+ is a miniature low temperature co-fired ceramic (LTCC) low pass filter with a DC to 22 GHz passband supporting a variety of applications. This model provides 1.7 dB typical insertion loss over a wide band due to its rugged monolithic construction. Housed in a small 1210 ceramic form factor, the filter is ideal for dense signal chain PCB layouts where it complements MMIC size and performance. The LTCC fabrication process assures minimal RF performance variation while delivering a product that is well suited for environmental extremes of high humidity and temperature.

### **KEY FEATURES**

Feature	Advantages
Ultra-wide Stopband	The LTCC lowpass filter provides a very good stopband rejection to 51 GHz suitable for high end applications.
LTCC Construction	Provides repeatable performance in a rugged, ceramic package well suited for tough environments such as high humidity and temperature extremes.
Cost effective	LTCC is scalable technology that is cost effective due to ease of production in high volume.
Small footprint (1210)	Allows for high layout density of circuit boards, while minimizing effects of parasitics.
Surface Mountable	Suitable for very high-volume automated assembly processes.

Mini-Circuits





Mini-Circuits

### ELECTRICAL SPECIFICATIONS<sup>1,2</sup> AT 25°C

P	arameter	F#	Frequency (GHz)	Min.	Тур.	Max.	Units
Deschand	Insertion Loss	F1 - F2	DC-22	_	1.7	2.3	dB
Passband	Return Loss	F1 - F2	DC-22	—	14	_	dB
		F3 - F4	29.8-42	30	40	_	
Stop Band	Insertion Loss	F4 - F5	42-48	25	35	_	dB
		F5 - F6	48-51	_	25	_	

1. Measured on Mini-Circuits Test Board TB-LFCV-2202C+ with the connector and feedline effects de-embedded using the 2XThru IEEE P370 method 2. DC Blocking capacitors are required in Applications where DC voltage and/or current is present at either RF1 or RF2 ports.


Please contact Mini-Circuits for alternatives if DC pass from RF1-RF2 is required.

**ABSOLUTE MAXIMUM RATINGS<sup>1</sup>** 


Parameter	Ratings	
Operating Temperature	-55°C to +125°C	
Storage Temperature	-55°C to +125°C	
RF Power Input <sup>2</sup>	1W max.	

1. Permanent damage may occur if any of these limits are exceeded. 2. Derate linearly to 0.5 W at 125°C.

### **TYPICAL FREQUENCY RESPONSE**



### **FUNCTIONAL SCHEMATIC**








Mini-Circuits

### **PAD CONNECTIONS**

RF 1	1
RF 2	2
GROUND	3

### **OUTLINE DRAWING**



**PRODUCT MARKING: VT** 

METALLIZATION


Weight: .024 grams

Dimensions are in inches [mm]. Tolerances:2 Pl.±.010; 3 Pl. ±.005

### OUTLINE DIMENSIONS (Inches)

А	В	С	D	Е	F	G	н	wt
.126	.098	.030	.049	.008	.010	.024	.032	grams
3.2	2.5	0.8	1.2	0.20	0.3	0.6	0.8	0.030

### **TAPE & REEL INFORMATION: F74**



NOTES:

1. PCB IS MULTILAYER PCB, SEE STACK-UP DIAGRAM.

2. TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR MEGTRON-7 R-5785(N/GN), WITH DIELECTRIC THICKNESS .0079; COPPER: 1/2 OZ. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER) DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK



50Ω

## ow Pass Filter

DC to 22 GHz




18 20 22

Mini-Circuits

### **TYPICAL PERFORMANCE DATA AT 25°C**

Frequency (GHz)	Insertion Loss (dB)	Return Loss (dB)
0.05	0.07	39.47
0.5	0.14	33.97
1.0	0.19	32.63
5.0	0.28	23.13
6.0	0.25	23.48
7.0	0.21	21.96
8.0	0.24	19.68
9.0	0.25	19.57
10	0.33	18.32
15	0.47	29.21
20	0.80	21.04
25	7.13	4.26
30	53.14	0.75
40	42.70	0.48
50	54.92	0.82

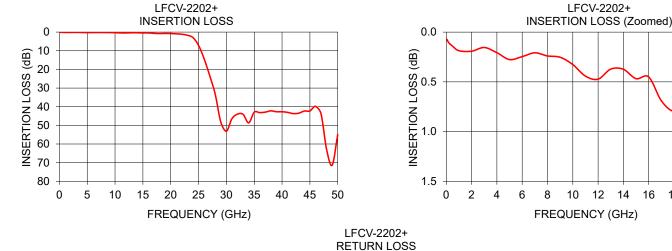



#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

### Mini-Circuits

## Low Pass Filter Typical Performance Data


LFCV-2202+

FREQUENCY	INSERTION LOSS	RETURN LOSS
(GHz)	(dB)	(dB)
0.05	0.07	39.47
0.05	0.07	39.47 37.72
0.2	0.14	33.97
1.0	0.14	32.63
2.0	0.19	30.87
3.0	0.15	36.01
4.0	0.21	28.25
5.0	0.28	23.13
6.0	0.25	23.48
7.0	0.21	21.96
8.0	0.24	19.68
9.0	0.25	19.57
10.0	0.33	18.32
11.0	0.44	18.32
12.0	0.47	20.30
13.0	0.37	21.85
14.0	0.37	23.11
15.0 16.0	0.47 0.45	29.21 26.39
17.0	0.43	23.64
18.0	0.80	20.22
19.0	0.00	20.22
20.0	0.80	21.04
21.0	0.93	19.14
22.0	1.17	17.09
23.0	1.69	13.27
24.0	2.96	9.59
25.0	7.13	4.26
26.0	14.32	2.02
27.0	23.33	1.06
28.0	33.41	0.87
29.0	48.31	0.85
30.0	53.14	0.75
31.0 32.0	46.39	1.00 0.80
32.0	43.99 44.08	0.80
33.0	44.08	0.56
34.0	48.05	0.56
36.0	43.18	0.81
37.0	42.89	1.03
38.0	42.22	0.78
39.0	42.70	0.48
40.0	42.70	0.48
41.0	43.04	0.71
42.0	43.68	0.80
43.0	43.47	0.69
44.0	42.33	0.81
45.0	42.27	0.87
46.0	39.79	0.88
47.0	43.79	1.40
48.0	62.92	1.06
49.0	71.37	0.97
50.0	54.92	0.82
51.0	42.98	1.03




### Low Pass Filter

## Typical Performance Curves

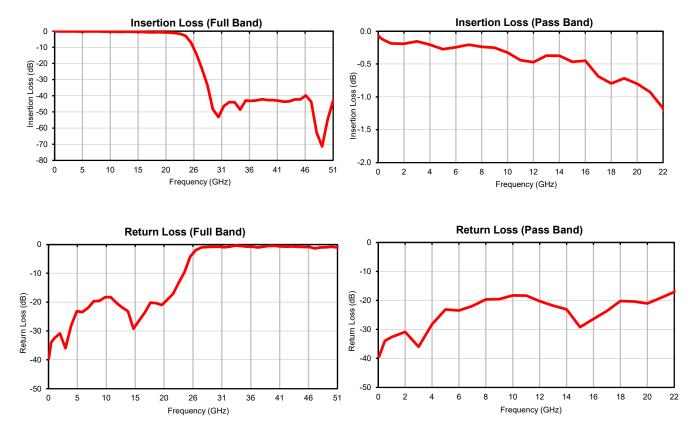




REV. X1 LFCV-2202+ 12/9/2022 Page 1 of 1

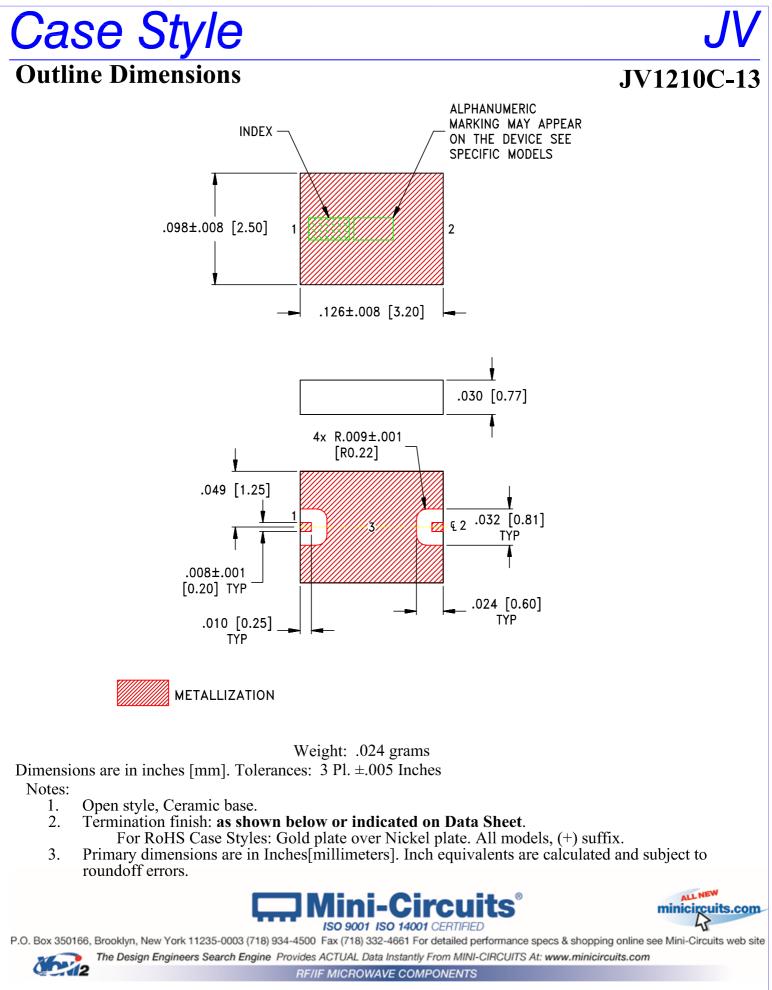

# Tape & Reel Packaging TR-F74

### **DEVICE ORIENTATION IN T&R**

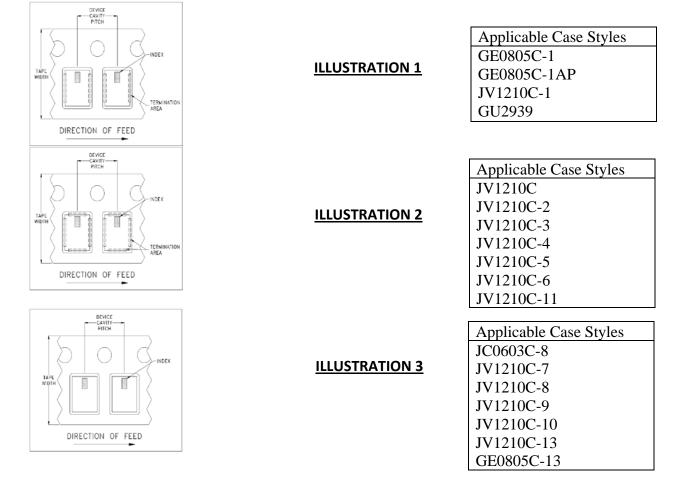

Tape Width, mm	Device Cavity Pitch, mm	Real Size, inches	Devices per Reel	
8	4	7	Small quantity standards ( <b>see note</b> )	20 50 100 200 500 1000
			Standard	2000 4000


Note: Small reel availability varies by model. Refer to pricing and availability on individual model dashboard.


Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541. Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET http://www.minicircuits.com P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010 Mini-Circuits ISO 9001 & ISO 14001 Certified

98-TR-F74 Rev.: L (01/17/23) ECO-016486 File:98-TR-F74 This document and its contents are the property of Mini-Circuits. Sheet 1 of 1

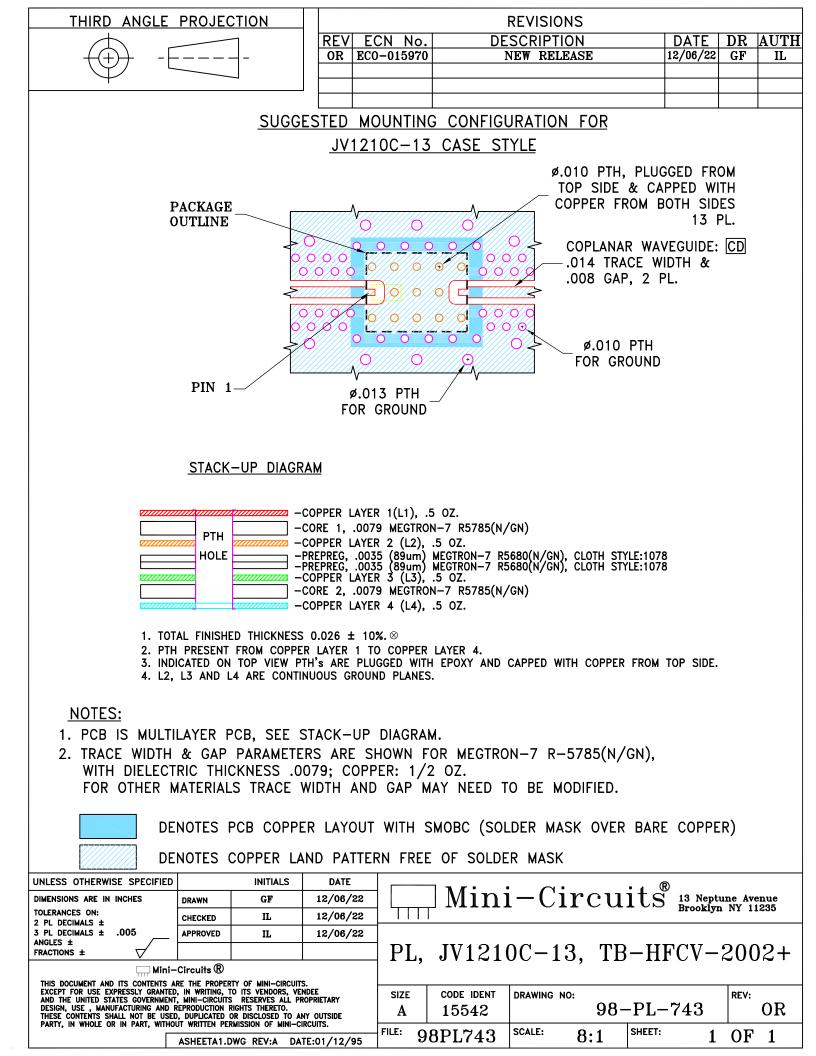

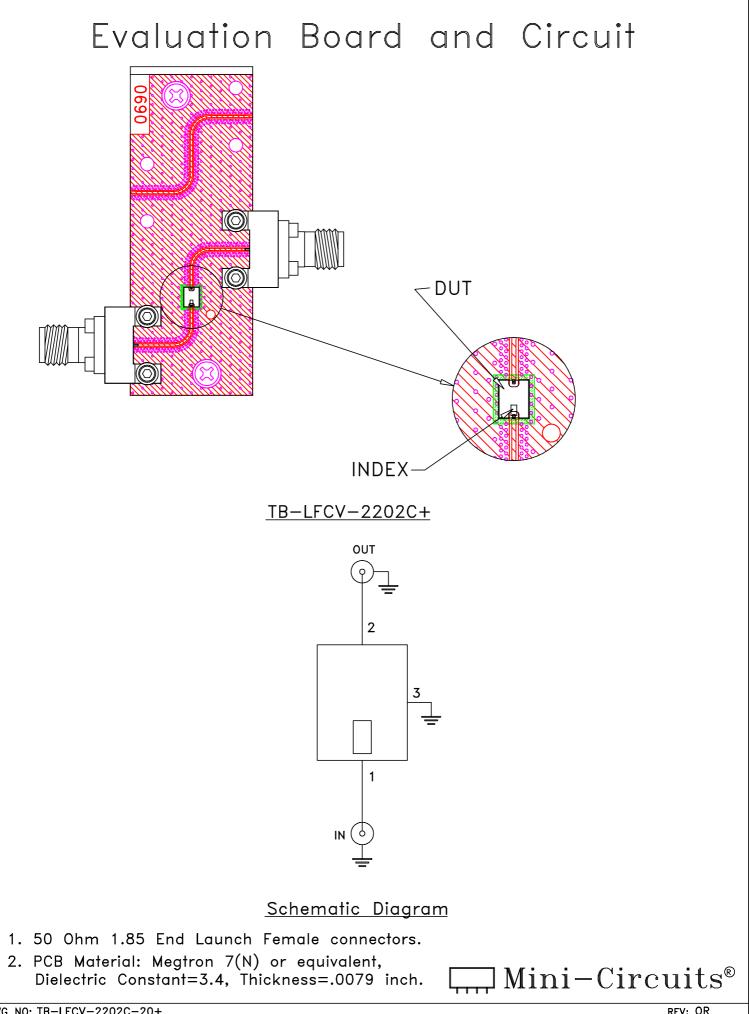

### Environmental Specifications ENV06T10

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 125° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 125° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Solder Reflow Heat	Sn-Pb Eutectic Process 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020C, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Test B,B1, 95% Coverage
Thermal Shock	-55° to +125°C, 15 min dwell,250 cycles	MIL-STD-202, Method 107
Bend Test	1mm, deflection for 5 seconds Span of bending: 2.75"	
High Temp Storage	125°C to 1000 Hrs	

ENV06T10 Rev: OR 12/23/22 ECO-15970File: ENV06T10.pdf

This document and its contents are the property of Mini-Circuits.

Mini-Circuits