

Ceramic Low Pass Filter

50Ω DC¹ to 2690 MHz

LFCW-272+



Generic photo used for illustration purposes only

CASE STYLE: JC0603C

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Features

- Low loss, 0.8 dB typ.
- Small size 0603 (1.6 x 0.8 mm)
- Temperature stable
- LTCC construction

Applications

- Wireless communication
- Harmonic Rejection
- VHF/UHF transmitters / receivers
- Lab use

Functional Schematic

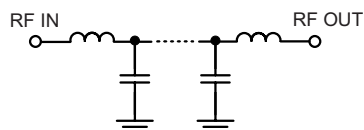

Electrical Specifications^{1,2} at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	DC - F0	—	0.8	1.2	dB
		F0 - F1	—	0.5	0.8	dB
	Freq. Cut-Off	F2	—	3.0	—	dB
	VSWR	F0 - F1	—	1.6	—	:1
Stop Band	Rejection Loss	F3	—	20	—	dB
		F4 - F5	25	30	—	dB
		F6	—	20	—	dB
		F6	10000	—	—	dB

1. In Application where DC voltage is present at either input or output port, coupling capacitors are required.

2. Measured on Mini-Circuits Characterization Test Board TB-797+

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input ³	3W at 25°C

3. Passband rating, derate linearly to 1.5W at 100°C ambient

Permanent damage may occur if any of these limits are exceeded.



Typical Performance Data⁴ at 25°C

Typical Frequency Response



Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
10	0.11	1.01
100	0.07	1.06
500	0.18	1.33
800	0.32	1.55
1200	0.53	1.81
1500	0.64	1.93
2300	0.51	1.54
2690	0.46	1.11
3200	2.93	4.08
4400	20.61	37.43
4800	26.69	41.77
5400	31.02	46.74
6000	28.38	59.83
7000	23.15	106.88
8000	19.89	111.91
10000	14.96	33.43

4. Measured with Agilent E5071B network analyzer using port extension.

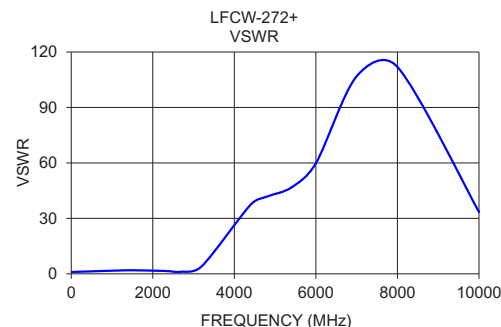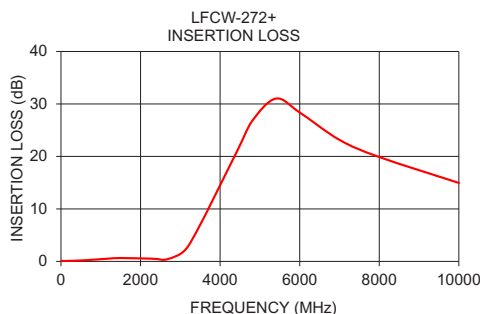

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com


REV. A
M151107
ED-16419/25
LFCW-272+
MY/CP/AM
200513

Pad Connections



INPUT	6
OUTPUT	4
GROUND	2,5
NC	1,3

Product Marking: N/A

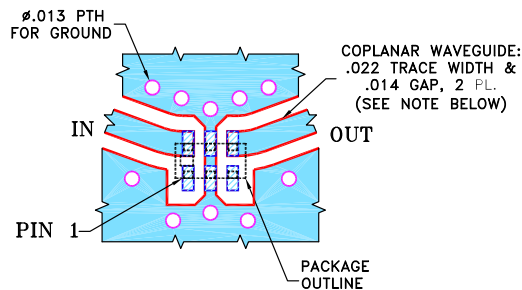
Evaluation Board MCL P/N: TB-797+
Suggested PCB Layout (PL-426)



NOTES:

- COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS $.010" \pm .001"$. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Outline Drawing

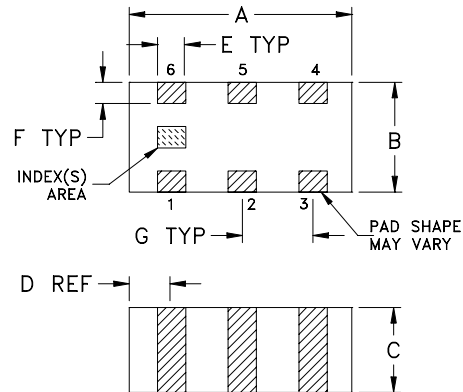

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	wt
.063	.031	.024	.012	.008	.006	.020	grams
1.60	0.79	0.61	0.30	0.20	0.15	0.51	0.005

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Ceramic Low Pass Filter

LFCW-272+

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	VSWR (:1)
10.0	0.11	1.01
50.0	0.01	1.04
100.0	0.07	1.06
200.0	0.09	1.12
300.0	0.11	1.19
400.0	0.14	1.26
500.0	0.18	1.33
600.0	0.22	1.40
700.0	0.27	1.48
800.0	0.32	1.55
900.0	0.38	1.62
1000.0	0.42	1.69
1200.0	0.53	1.81
1500.0	0.64	1.93
1800.0	0.68	1.93
2000.0	0.65	1.83
2300.0	0.51	1.54
2690.0	0.46	1.11
3000.0	1.38	2.27
3200.0	2.93	4.08
3400.0	5.24	7.49
3600.0	8.01	13.05
3800.0	11.04	20.16
4000.0	14.19	27.58
4200.0	17.39	34.14
4400.0	20.61	37.43
4600.0	23.77	39.03
4800.0	26.69	41.77
5000.0	29.08	42.57
5200.0	30.58	43.12
5400.0	31.02	46.74
5600.0	30.60	50.97
5800.0	29.62	52.98
6000.0	28.38	59.83
6200.0	27.15	66.08
6400.0	25.99	74.22
6600.0	24.88	86.15
6800.0	23.95	91.49
7000.0	23.15	106.88
7200.0	22.37	129.83
7400.0	21.69	126.14
7600.0	21.05	114.74
7800.0	20.45	120.59
8000.0	19.89	111.91
8400.0	18.87	85.76
8800.0	17.88	62.92
9000.0	17.36	57.08
9400.0	16.41	44.85
9800.0	15.42	36.78
10000.0	14.96	33.43



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site www.minicircuits.com





The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. OR
LFCW-272+
10/31/2014
Page 1 of 1

Typical Performance Curves

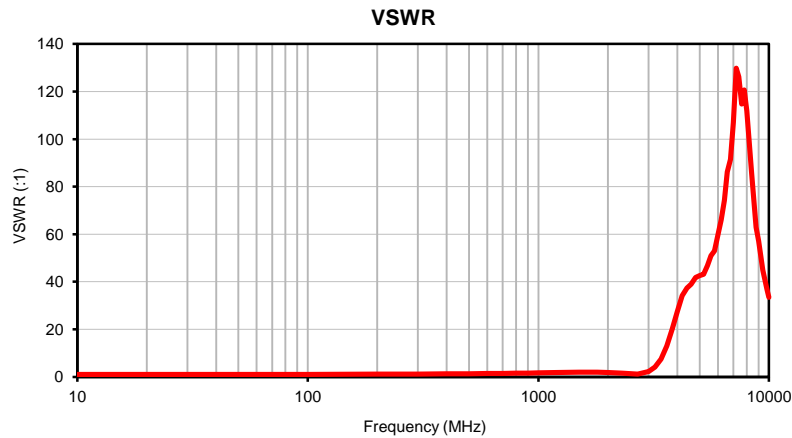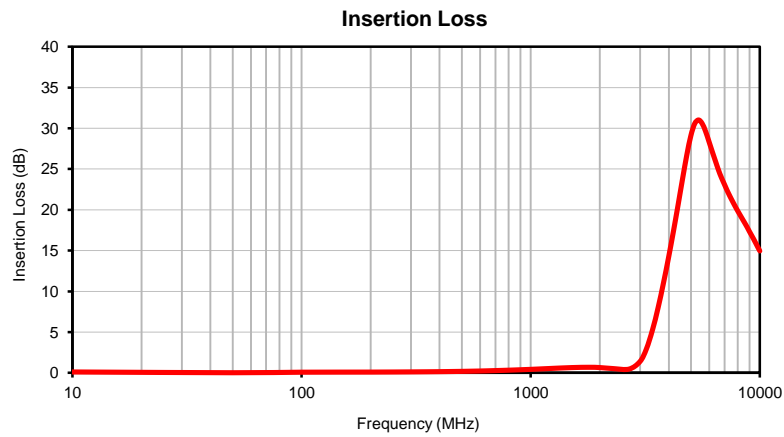

Tape & Reel Packaging TR-F114

DEVICE ORIENTATION IN T&R



ILLUSTRATION 1

Applicable Case Styles	
GE0805C	JC0603C
GE0805C-1	JC0603C-4
GE0805C-1AP	JC0603C-6
GE0805C-7	
GE0805C-9	
GE0805C-10	
GE0805C-11	
GE0805C-12	

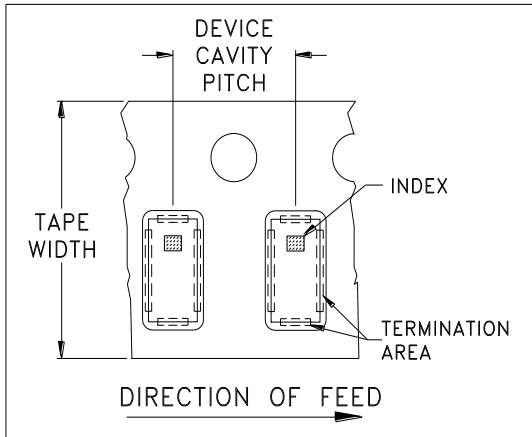


ILLUSTRATION 2

Applicable Case Styles	
GE0805C-2	JC0603C-1
GE0805C-3	JC0603C-2
GE0805C-4	JC0603C-3
GE0805C-5	JC0603C-5
GE0805C-6	JC0603C-7
GE0805C-8	
GE0805C-15	

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
			Standard	1000
			Standard	4000

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION




REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M148461	NEW RELEASE	10/02/14	GF	MY

**SUGGESTED MOUNTING CONFIGURATION
FOR JC0603C CASE STYLE, "06FL07" PIN CODE**

∅.013 PTH
FOR GROUND

COPLANAR WAVEGUIDE:
.022 TRACE WIDTH &
.014 GAP, 2 PL.
(SEE NOTE BELOW)

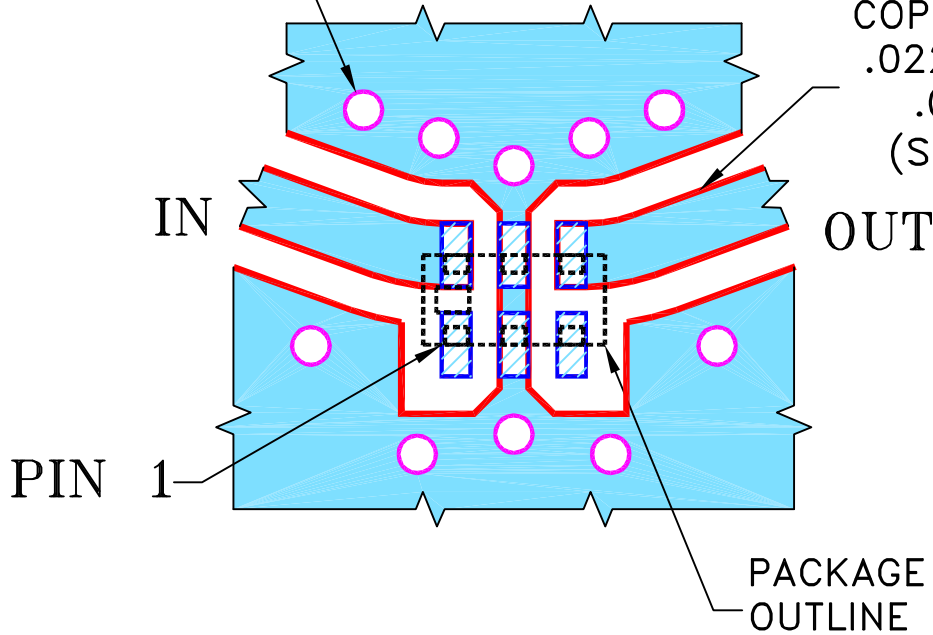

NOTES:

1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DRAWN	GF	10/01/14
CHECKED	IL	10/02/14
APPROVED	MY	10/02/14



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, 06FL07, JC0603C, TB-797+


DIMENSIONS ARE IN INCHES
TOLERANCES ON:
2 PL DECIMALS ±
3 PL DECIMALS ± .005
ANGLES ±
FRACTIONS ±

Mini-Circuits®


THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-426	OR
FILE:	98PL426	SCALE: 15:1	SHEET: 1 OF 1

Evaluation Board and Circuit

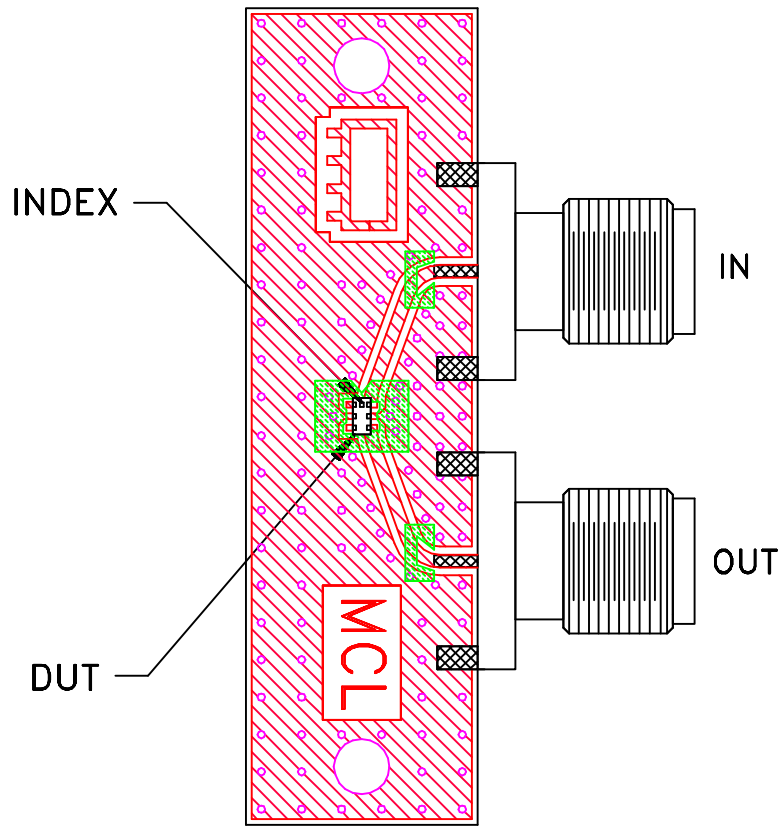


TB-797+

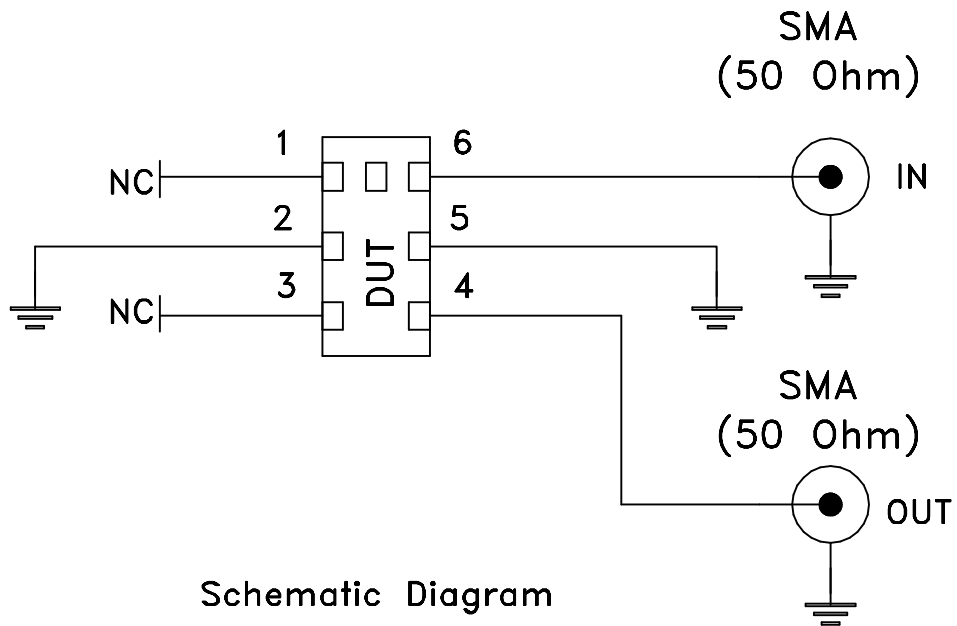

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.010 inch.

 **Mini-Circuits®**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A