

Non-Catalog Model

Power Splitter/Combiner

LPS-109

2 Way-0°

Important Note

This is a non-catalog model and can be manufactured on specific request.
Pricing and delivery information can be supplied upon request.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : BB48

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency		10		500	MHz
Isolation	10 - 100 MHz	25	35		dB
	100 - 250 MHz	25	30		dB
	250 - 500 MHz	25	30		dB
Insertion Loss Above 3.0 dB	10 - 100 MHz		0.30	0.50	dB
	100 - 250 MHz		0.40	0.60	dB
	250 - 500 MHz		0.50	1.10	dB
Phase Unbalance	10 - 100 MHz			2.000	deg.
	100 - 250 MHz			3.000	deg.
	250 - 500 MHz			4.000	deg.
Amplitude Unbalance	10 - 100 MHz		0.093	0.150	dB
	100 - 250 MHz		0.098	0.200	dB
	250 - 500 MHz		0.120	0.300	dB
VSWR	SUM Port		0.13		(:1)
	OUT Ports		1.13		(:1)

Notes: Matched power rating: 1 Watt.
Internal load dissipation: 0.125 Watt.

MAXIMUM RATINGS	
Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C

PIN CONNECTIONS	
SUM PORT	1
PORT 1	4
PORT 2	5
GND EXT	2, 3, 6, 7, 8
CASE GND	2, 3, 6, 7, 8

Functional Diagram



2 Way-0° Power Splitter/Combiner

LPS-109

Typical Performance Data

FREQ. (MHz)	TOTAL LOSS ¹ (dB)		AMP. UNBAL. (dB)	ISOLATION (dB)	FREQ. (MHz)	VSWR (:1)		
	S-1	S-2				S	1	2
10.0	3.19	3.29	0.10	49.87	10.0	1.09	1.12	1.14
34.5	3.16	3.25	0.09	42.08	34.5	1.10	1.11	1.13
59.0	3.19	3.28	0.09	37.67	59.0	1.11	1.11	1.13
83.5	3.20	3.29	0.09	35.19	83.5	1.11	1.11	1.13
108.0	3.21	3.30	0.09	33.43	108.0	1.11	1.11	1.13
132.5	3.22	3.33	0.11	32.10	132.5	1.12	1.11	1.13
157.0	3.24	3.34	0.10	31.06	157.0	1.12	1.11	1.13
206.0	3.27	3.36	0.09	29.55	206.0	1.12	1.10	1.12
255.0	3.28	3.39	0.11	28.67	255.0	1.12	1.10	1.12
304.0	3.31	3.42	0.11	28.29	304.0	1.13	1.11	1.11
353.0	3.34	3.46	0.12	28.41	353.0	1.14	1.12	1.12
402.0	3.36	3.48	0.12	28.79	402.0	1.18	1.15	1.13
426.5	3.36	3.48	0.12	28.93	426.5	1.21	1.17	1.14
451.0	3.40	3.52	0.12	28.84	451.0	1.25	1.20	1.16
500.0	3.49	3.63	0.14	27.07	500.0	1.37	1.26	1.20





¹ Total Loss = Insertion Loss+ 3dB Splitter Loss



2 Way-0° Power Splitter/Combiner

LPS-109

Typical Performance Curves

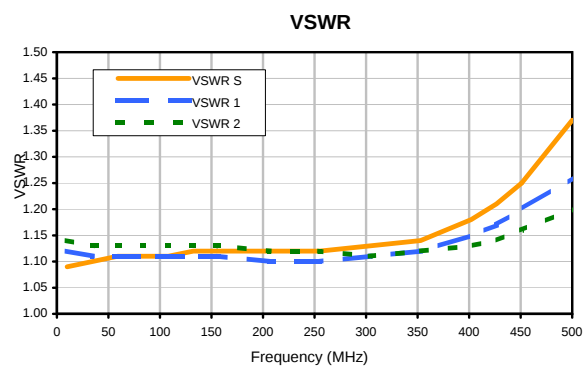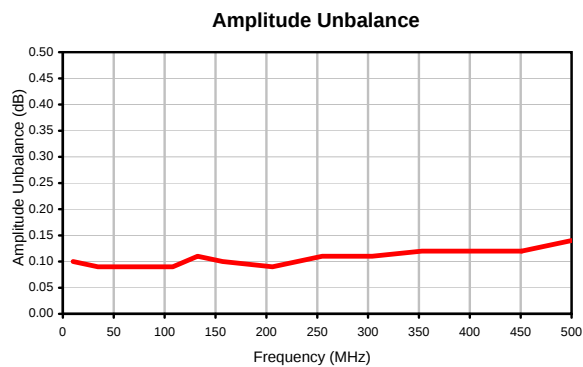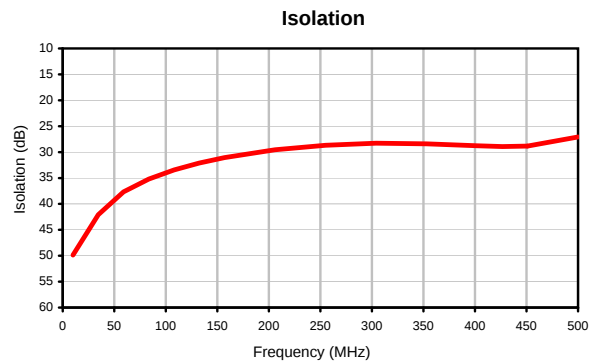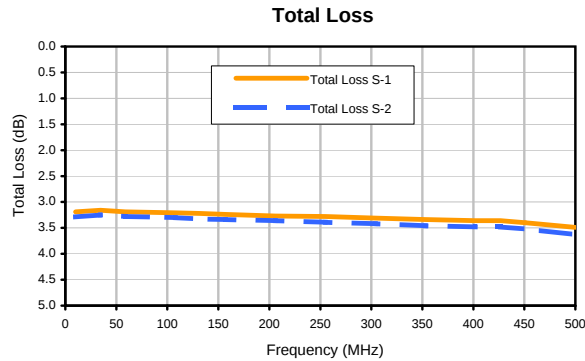


REV. X2
LPS-109
100705
Page 1 of 1



Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




NOTE: PIN NUMBERS DO NOT APPEAR
ON UNIT. FOR REFERENCE ONLY.

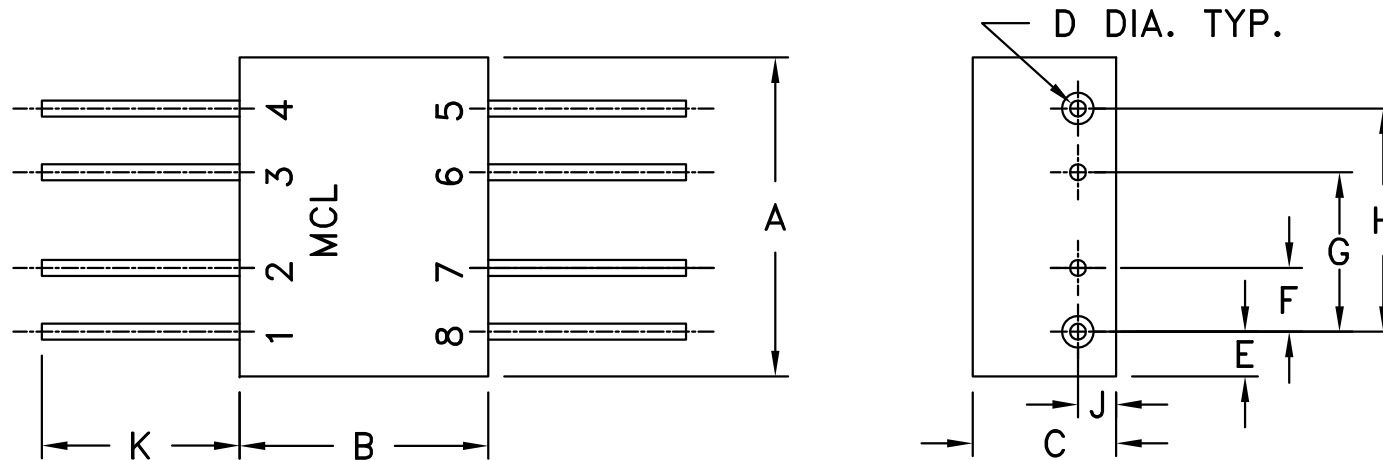

CASE NO.	A	B	C	D	E	F	G	H	J	K	NOTES	WT. GRAMS
BB48	.50 (12.70)	.39 (9.91)	.225 (5.72)	.025 (0.63)	.07 (1.78)	.100 (2.54)	.250 (6.35)	.350 (8.89)	.06 (1.52)	.31 (7.87)	A1,E1	3.0

REFER TO GN-219 FOR TEXT OF NOTES.



OR	M42441	CHANGED PART NO.	PM
REV	ECN No.	DESCRIPTION	DATE DR AUTH
REVISIONS			

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	PM
TOLERANCES ON:	CHECKED	10.16.95
2 PL. DECIMALS ± .03	APPROVED	
3 PL. DECIMALS ± .015		
ANGLES ±		
FRACTIONS ±		

Mini-Circuits

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS LABORATORY. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDOR AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS LABORATORY RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THEREIN. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

BSHEETA1.DWG REV:A DATE:01/12/94

Mini-Circuits		Mini-Circuit Laboratory 13 Neptune Avenue Brooklyn NY 11236	
CATALOG OUTLINE "BB"			
SIZE B	CODE IDENT 15542	DRAWING NO: 98-BB	REV: OR
FILE: 98-BB	SCALE: NONE	SHEET: 1 OF 1	