

Surface Mount Frequency Mixer

Level 7 (LO Power +7dBm) 0.5 to 500 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

LO	1
RF	4
IF	5
GROUND	2,3,6

Outline Drawing

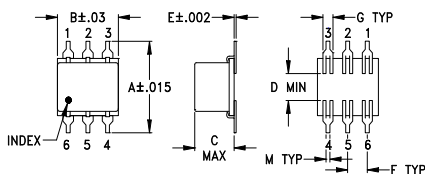

PCB Land Pattern




Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.400	.31	.200	.10	.010	.100	.050
10.16	7.87	5.08	2.54	0.25	2.54	1.27

H	J	K	L	M	wt
.420	.120	.060	.100	.020	grams
10.67	3.05	1.52	2.54	0.51	0.55

Demo Board MCL P/N: TB-44+ Suggested PCB Layout (PL-083)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low conversion loss, 5.94 dB typ.

Applications

- HF/VHF/UHF
- instrumentation
- cellular

LRMS-1+
LRMS-1



Generic photo used for illustration purposes only
CASE STYLE: QQQ130

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel
at no extra cost

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3 at center band (dBm)
LO/RF	IF	Mid-Band		Total	Range	L	M	U	L	M	U	L	M	U				
		$\bar{X}$	σ												Max.	Max.		
f_L f_U		$\bar{X}$	σ	Max.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.		
0.5-500	DC-500	5.94	.05	7.0	8.5	55	50	33	25	27	20	55	45	30	23	24	19	15

1 dB COMP.: +1 dBm typ.


L = low range [f_L to $10 f_L$]
m = mid band [$2 f_L$ to $f_U/2$]

M = mid range [$10 f_L$ to $f_U/2$]
U = upper range [$f_U/2$ to f_U]

Typical Performance Data







Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
0.50	30.50	7.45	89.00	64.40	1.11	2.27
1.00	31.00	6.68	82.65	64.35	1.05	2.27
2.00	32.00	6.15	76.59	63.49	1.02	2.43
5.00	35.00	5.84	68.78	59.68	1.01	2.52
10.00	40.00	5.78	63.45	55.38	1.01	2.50
20.00	50.00	5.84	56.92	48.99	1.02	2.50
50.00	80.00	5.84	48.06	40.83	1.03	2.48
67.10	97.10	5.78	47.33	39.62	1.04	2.43
100.00	70.00	5.74	45.42	36.85	1.04	2.40
117.05	87.05	5.71	45.23	36.32	1.07	2.38
150.35	120.35	5.73	44.09	34.84	1.09	2.29
200.00	170.00	5.78	41.97	32.90	1.11	2.29
216.95	186.95	5.84	40.74	32.23	1.13	2.25
250.00	220.00	5.91	38.62	30.58	1.17	2.28
283.55	253.55	5.81	36.99	29.19	1.19	2.30
333.50	303.50	5.81	34.17	26.96	1.22	2.23
383.45	353.45	6.03	31.17	25.64	1.28	2.29
433.40	403.40	6.34	29.18	23.85	1.31	2.24
466.70	436.70	6.56	27.71	22.78	1.37	2.34
500.00	470.00	6.82	27.09	22.32	1.43	2.31

Electrical Schematic

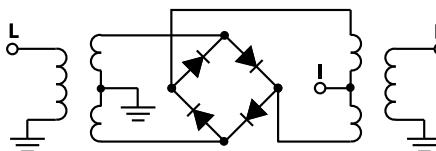

Performance Charts

LRMS-1+ LRMS-1

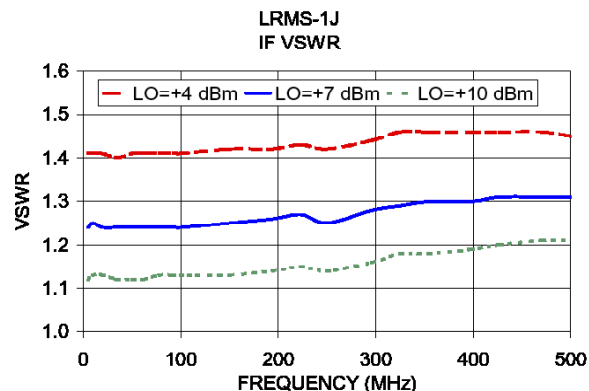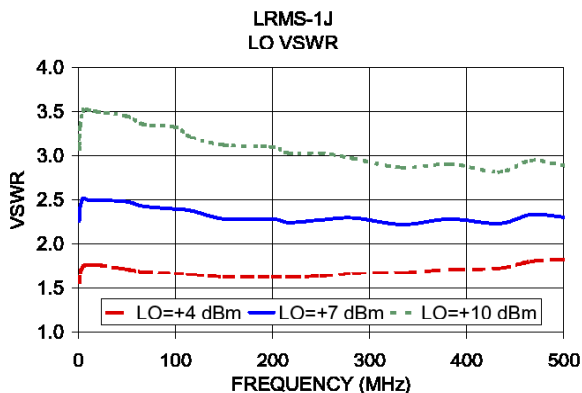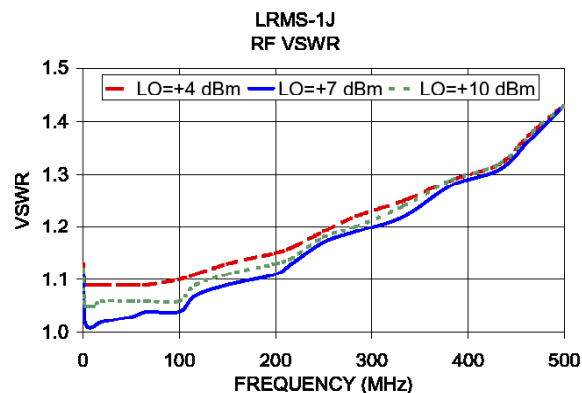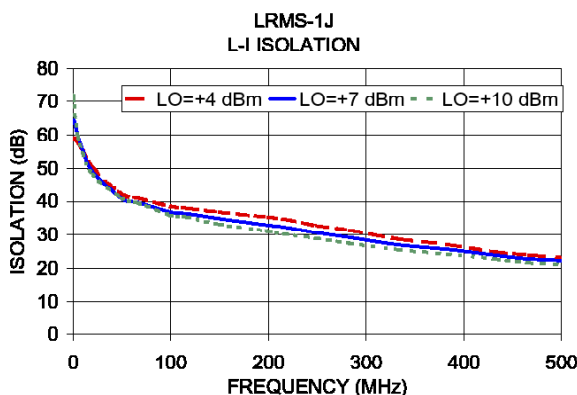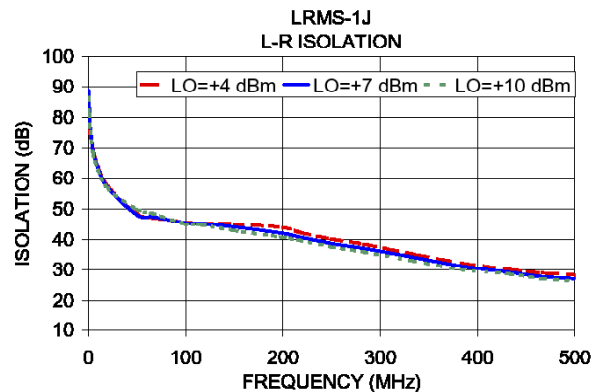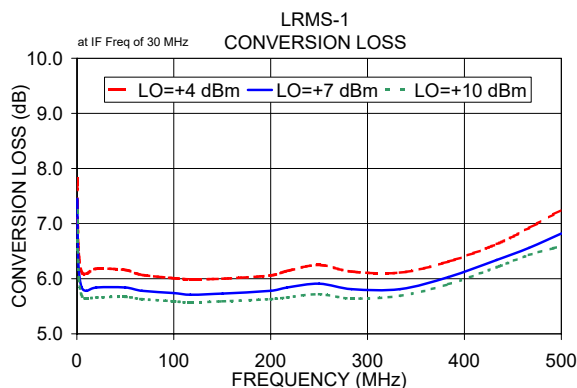

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

LRMS-1+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
+4	+7	+10	+4	+7	+10	+4	+7	+10	+4	+7	+10			
0.5	30.5	7.81	7.45	7.25	10.1	40.1	22.04	23.14	23.11	10.1	40.1	1.08	0.78	0.61
1.0	31.0	7.02	6.68	6.52	50.4	80.4	22.89	24.56	24.10	50.4	80.4	1.03	0.71	0.57
2.0	32.0	6.45	6.15	6.00	90.8	120.8	17.68	19.77	25.87	90.8	120.8	1.17	0.84	0.59
5.0	35.0	6.12	5.84	5.69	110.9	140.9	17.81	21.22	21.69	110.9	140.9	1.12	0.88	0.63
10.0	40.0	6.09	5.78	5.64	151.3	181.3	19.85	18.88	21.86	151.3	181.3	1.00	0.71	0.56
50.4	80.4	6.22	5.89	5.71	171.5	201.5	18.30	25.30	22.58	171.5	201.5	1.01	0.73	0.51
90.8	120.8	6.29	5.94	5.79	211.8	241.8	18.91	18.88	18.47	211.8	241.8	1.01	0.62	0.48
151.3	181.3	6.32	6.03	5.87	232.0	262.0	25.10	20.55	22.92	232.0	262.0	1.09	0.74	0.57
171.5	201.5	6.35	6.05	5.92	272.3	302.3	19.00	18.35	17.77	272.3	302.3	1.08	0.77	0.48
211.8	241.8	6.33	6.06	5.90	292.5	322.5	20.22	19.05	19.20	292.5	322.5	1.07	0.78	0.55
232.0	262.0	6.37	6.11	5.92	332.8	362.8	17.06	17.04	18.99	332.8	362.8	1.05	0.78	0.67
272.3	302.3	6.39	6.15	5.99	353.0	383.0	18.30	18.35	21.00	353.0	383.0	1.06	0.83	0.59
292.5	322.5	6.39	6.12	5.94	393.3	423.3	19.16	18.53	18.84	393.3	423.3	1.12	0.86	0.67
332.8	362.8	6.42	6.16	6.00	413.5	443.5	19.80	17.26	18.98	413.5	443.5	1.18	0.86	0.71
393.3	423.3	6.52	6.24	6.09	453.8	483.8	15.44	19.13	21.84	453.8	483.8	1.24	0.93	0.75
413.5	443.5	6.51	6.22	6.04	474.0	504.0	14.25	15.93	21.41	474.0	504.0	1.26	0.97	0.77
453.8	483.8	6.65	6.33	6.09	514.3	544.3	14.10	13.74	17.39	514.3	544.3	1.24	0.94	0.74
474.0	504.0	6.68	6.33	6.12	534.5	564.5	13.04	13.58	14.78	534.5	564.5	1.38	0.97	0.84
514.3	544.3	6.70	6.39	6.15	574.8	604.8	12.10	13.07	15.31	574.8	604.8	1.38	1.04	0.89
534.5	564.5	6.75	6.40	6.20	595.0	625.0	12.97	13.89	15.61	595.0	625.0	1.38	1.07	0.86
574.8	604.8	6.84	6.45	6.20	635.4	665.4	13.45	15.50	24.30	635.4	665.4	1.63	1.31	1.12
595.0	625.0	6.86	6.49	6.23	655.5	685.5	13.11	17.86	26.02	655.5	685.5	1.63	1.26	1.10
635.4	665.4	7.04	6.56	6.28	695.9	725.9	12.50	20.81	19.39	695.9	725.9	1.52	1.30	0.98
655.5	685.5	7.07	6.55	6.28	716.0	746.0	12.37	19.69	20.98	716.0	746.0	1.45	1.24	1.06
695.9	725.9	7.26	6.69	6.35	756.4	786.4	12.13	16.16	17.68	756.4	786.4	1.47	1.24	1.01
756.4	786.4	7.60	7.01	6.59	776.5	806.5	11.21	15.68	19.99	776.5	806.5	1.46	1.07	1.02
776.5	806.5	7.76	7.18	6.73	816.9	846.9	13.01	18.47	15.99	816.9	846.9	1.43	1.29	1.13
816.9	846.9	7.92	7.36	6.93	837.0	867.0	12.90	18.62	16.95	837.0	867.0	1.25	1.05	0.89
837.0	867.0	8.02	7.45	7.07	877.4	907.4	17.42	21.78	15.60	877.4	907.4	1.32	1.01	0.85
877.4	907.4	8.11	7.62	7.27	897.6	927.6	15.70	22.81	16.92	897.6	927.6	1.19	0.94	0.79
897.6	927.6	8.15	7.71	7.37	937.9	967.9	18.27	15.66	15.89	937.9	967.9	1.31	1.03	0.86
937.9	967.9	8.28	7.89	7.62	958.1	988.1	14.85	14.77	15.58	958.1	988.1	1.28	0.89	0.75
958.1	988.1	8.35	8.00	7.71	998.4	1028.4	12.35	12.49	14.31	998.4	1028.4	1.27	0.94	0.77
998.4	1028.4	8.47	8.10	7.94	1018.6	1048.6	11.89	13.17	13.74	1018.6	1048.6	1.48	1.01	0.84
1018.6	1048.6	8.53	8.18	8.02	1058.9	1088.9	10.62	12.35	13.10	1058.9	1088.9	1.21	0.82	0.76
1058.9	1088.9	8.79	8.44	8.32	1079.1	1109.1	11.32	12.97	12.87	1079.1	1109.1	1.16	0.79	0.68
1079.1	1109.1	8.85	8.59	8.46	1119.4	1149.4	10.89	11.89	13.19	1119.4	1149.4	1.20	0.84	0.75
1139.6	1169.6	9.43	9.16	9.09	1139.6	1169.6	10.78	11.97	13.11	1139.6	1169.6	1.12	0.77	0.72
1179.9	1209.9	9.88	9.63	9.55	1179.9	1209.9	10.03	11.45	11.97	1179.9	1209.9	1.16	0.70	0.65
1200.1	1230.1	10.15	9.85	9.84	1200.1	1230.1	9.24	10.63	12.38	1200.1	1230.1	1.10	0.73	0.75

REV. X2

LRMS-1+

100817

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=250.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=500.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
240.0	10.1	6.12	10.0	20.1	5.72	490.0	10.1	6.33
234.1	16.0	6.11	22.3	32.4	5.62	477.7	22.4	6.32
228.2	21.9	6.10	34.6	44.7	5.60	465.4	34.7	6.30
222.3	27.8	6.10	46.9	57.0	5.59	453.1	47.0	6.30
216.4	33.7	6.09	59.2	69.3	5.64	440.8	59.3	6.32
210.5	39.6	6.07	71.5	81.6	5.62	428.5	71.6	6.28
204.6	45.5	6.06	83.8	93.9	5.61	416.2	83.9	6.23
198.7	51.4	6.04	96.2	106.3	5.63	403.8	96.3	6.20
192.8	57.3	6.03	108.5	118.6	5.66	391.5	108.6	6.20
186.9	63.2	6.02	120.8	130.9	5.60	379.2	120.9	6.20
181.1	69.0	6.03	133.1	143.2	5.68	366.9	133.2	6.18
175.2	74.9	6.03	145.4	155.5	5.67	354.6	145.5	6.18
169.3	80.8	6.01	157.7	167.8	5.72	342.3	157.8	6.18
163.4	86.7	6.00	170.0	180.1	5.70	330.0	170.1	6.19
157.5	92.6	6.01	182.3	192.4	5.73	317.7	182.4	6.18
151.6	98.5	6.00	194.6	204.7	5.73	305.4	194.7	6.17
145.7	104.4	6.00	206.9	217.0	5.74	293.1	207.0	6.17
139.8	110.3	5.99	219.2	229.3	5.73	280.8	219.3	6.16
133.9	116.2	5.99	231.5	241.6	5.76	268.5	231.6	6.16
128.0	122.1	5.98	243.8	253.9	5.76	256.2	243.9	6.19
122.1	128.0	5.97	256.2	266.3	5.79	243.8	256.3	6.14
116.2	133.9	5.97	268.5	278.6	5.80	231.5	268.6	6.10
110.3	139.8	5.98	280.8	290.9	5.84	219.2	280.9	6.10
104.4	145.7	5.98	293.1	303.2	5.86	206.9	293.2	6.19
98.5	151.6	5.98	305.4	315.5	5.81	194.6	305.5	6.19
92.6	157.5	5.99	317.7	327.8	5.87	182.3	317.8	6.20
86.7	163.4	5.99	330.0	340.1	5.93	170.0	330.1	6.20
80.8	169.3	5.97	342.3	352.4	5.86	157.7	342.4	6.17
74.9	175.2	5.98	354.6	364.7	5.92	145.4	354.7	6.22
69.0	181.1	5.96	366.9	377.0	5.99	133.1	367.0	6.22
63.2	186.9	5.96	379.2	389.3	5.97	120.8	379.3	6.21
57.3	192.8	5.95	391.5	401.6	5.98	108.5	391.6	6.22
51.4	198.7	5.98	403.8	413.9	5.92	96.2	403.9	6.22
45.5	204.6	6.01	416.2	426.3	5.96	83.8	416.3	6.21
39.6	210.5	6.00	428.5	438.6	6.01	71.5	428.6	6.23
33.7	216.4	5.99	440.8	450.9	6.03	59.2	440.9	6.23
27.8	222.3	6.00	453.1	463.2	6.05	46.9	453.2	6.23
21.9	228.2	5.98	465.4	475.5	6.06	34.6	465.5	6.26
16.0	234.1	5.98	477.7	487.8	6.03	22.3	477.8	6.26
10.1	240.0	6.02	490.0	500.1	6.07	10.0	490.1	6.42

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
0.5	77.47	89.00	86.40	58.57	64.40	71.90
1.0	76.77	82.65	81.16	59.07	64.35	70.66
2.0	74.40	76.59	75.41	58.90	63.49	66.01
5.0	68.98	68.78	67.98	57.58	59.68	59.61
10.0	63.87	63.45	62.82	55.47	55.38	54.46
50.4	58.65	57.67	57.75	52.36	53.08	52.92
90.8	52.25	52.72	52.84	48.55	48.57	48.65
151.3	48.16	48.51	48.76	44.55	44.86	44.87
171.5	47.09	47.46	47.78	43.86	44.05	43.90
211.8	45.36	45.81	46.05	42.53	42.44	42.05
232.0	44.64	45.13	45.40	41.93	41.56	41.00
272.3	43.32	43.78	44.09	40.47	39.87	39.21
292.5	42.90	43.35	43.64	39.98	39.24	38.56
332.8	42.21	42.79	43.10	38.31	37.56	36.89
393.3	40.08	40.73	41.12	35.62	34.94	34.45
413.5	39.41	40.12	40.61	34.54	33.85	33.40
453.8	38.33	39.03	39.53	32.91	32.10	31.60
474.0	37.88	38.57	39.11	32.43	31.55	30.96
514.3	37.72	38.32	38.79	31.28	30.41	29.73
534.5	37.55	37.97	38.21	30.70	29.87	29.21
574.8	37.61	37.74	37.65	29.49	28.78	28.16
595.0	37.72	37.77	37.62	28.73	28.04	27.42
635.4	37.32	37.01	36.51	27.08	26.51	25.94
655.5	37.02	36.68	36.11	26.41	25.90	25.35
695.9	36.13	35.79	35.17	24.89	24.49	24.02
756.4	34.70	34.53	33.98	22.81	22.56	22.16
776.5	34.24	34.19	33.80	22.17	21.95	21.54
816.9	33.42	33.43	33.21	20.92	20.79	20.43
837.0	33.13	33.13	32.98	20.36	20.28	19.94
877.4	32.80	32.88	32.90	19.47	19.50	19.22
897.6	32.69	32.78	32.84	18.80	18.88	18.64
937.9	32.75	32.99	33.21	17.89	18.06	17.82
958.1	33.18	33.52	33.76	17.38	17.57	17.32
998.4	34.33	34.84	34.88	16.46	16.69	16.42
1018.6	35.20	35.38	34.84	15.93	16.16	15.87
1058.9	37.64	37.32	35.41	15.17	15.42	15.14
1079.1	40.37	39.11	35.69	14.62	14.91	14.68
1139.6	50.65	36.45	32.12	13.48	13.74	13.50
1179.9	38.27	33.17	29.84	12.79	13.07	12.89
1200.1	34.78	31.01	28.35	12.48	12.73	12.53

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	48.96	47.99	40.63
50.4	80.4	34.53	34.30	34.31
90.8	120.8	29.75	29.89	29.95
110.9	140.9	28.42	28.67	28.74
151.3	181.3	26.30	26.51	26.73
171.5	201.5	25.60	25.91	26.03
211.8	241.8	24.56	24.85	25.03
232.0	262.0	24.13	24.46	24.66
272.3	302.3	23.82	24.20	24.47
292.5	322.5	23.75	24.13	24.48
332.8	362.8	23.56	24.02	24.42
353.0	383.0	23.60	24.07	24.46
393.3	423.3	24.02	24.58	25.05
413.5	443.5	24.18	24.93	25.48
453.8	483.8	24.49	25.38	26.00
474.0	504.0	24.21	24.99	25.58
514.3	544.3	22.70	23.09	23.35
534.5	564.5	21.62	21.82	21.91
574.8	604.8	19.53	19.47	19.35
595.0	625.0	18.64	18.49	18.35
635.4	665.4	17.17	16.94	16.78
655.5	685.5	16.55	16.33	16.17
695.9	725.9	15.61	15.42	15.29
716.0	746.0	15.24	15.07	14.96
756.4	786.4	14.60	14.46	14.38
776.5	806.5	14.35	14.23	14.17
816.9	846.9	13.82	13.76	13.77
837.0	867.0	13.61	13.57	13.60
877.4	907.4	13.20	13.23	13.33
897.6	927.6	13.01	13.06	13.17
937.9	967.9	12.65	12.74	12.83
958.1	988.1	12.42	12.49	12.56
998.4	1028.4	12.00	12.03	12.01
1018.6	1048.6	11.79	11.78	11.71
1058.9	1088.9	11.24	11.16	11.00
1079.1	1109.1	10.91	10.78	10.58
1119.4	1149.4	10.20	10.02	9.77
1139.6	1169.6	9.80	9.61	9.35
1179.9	1209.9	9.02	8.78	8.53
1200.1	1230.1	8.67	8.42	8.19

Frequency Mixer

LRMS-1+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=500.1MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+4	+7	+10		+4	+7	+10		+4	+7	+10
5.0	35.0	1.13	1.11	1.12	5.0	1.58	2.27	3.21	5.0	1.41	1.24	1.12
10.0	40.0	1.10	1.05	1.07	10.0	1.57	2.27	3.08	10.0	1.41	1.25	1.13
50.4	80.4	1.04	1.08	1.17	50.4	1.75	2.50	3.48	22.1	1.72	1.53	1.36
90.8	120.8	1.06	1.06	1.10	90.8	1.73	2.47	3.40	34.1	1.62	1.45	1.29
151.3	181.3	1.05	1.08	1.12	151.3	1.73	2.48	3.40	46.1	1.54	1.37	1.26
171.5	201.5	1.02	1.05	1.10	171.5	1.74	2.49	3.40	58.1	1.52	1.36	1.21
211.8	241.8	1.05	1.11	1.16	211.8	1.74	2.46	3.35	70.1	1.51	1.35	1.21
232.0	262.0	1.06	1.11	1.16	232.0	1.79	2.54	3.46	82.1	1.56	1.39	1.25
272.3	302.3	1.04	1.10	1.14	272.3	1.83	2.57	3.48	94.1	1.59	1.40	1.26
292.5	322.5	1.06	1.12	1.17	292.5	1.81	2.53	3.40	106.1	1.60	1.42	1.27
332.8	362.8	1.09	1.14	1.19	332.8	1.87	2.62	3.51	130.1	1.63	1.44	1.29
393.3	423.3	1.14	1.19	1.23	393.3	1.91	2.64	3.50	142.1	1.60	1.41	1.27
413.5	443.5	1.14	1.19	1.23	413.5	1.98	2.72	3.62	154.1	1.56	1.38	1.25
453.8	483.8	1.15	1.20	1.25	453.8	2.08	2.84	3.76	166.1	1.54	1.36	1.23
474.0	504.0	1.18	1.23	1.28	474.0	2.08	2.81	3.69	178.1	1.55	1.37	1.24
514.3	544.3	1.18	1.22	1.26	514.3	2.12	2.86	3.75	190.1	1.58	1.41	1.27
534.5	564.5	1.21	1.25	1.30	534.5	2.15	2.90	3.79	202.1	1.63	1.44	1.31
574.8	604.8	1.25	1.29	1.33	574.8	2.19	2.91	3.76	214.1	1.65	1.47	1.32
595.0	625.0	1.26	1.29	1.33	595.0	2.26	3.00	3.88	226.1	1.66	1.47	1.32
635.4	665.4	1.34	1.38	1.42	635.4	2.36	3.11	3.99	238.1	1.64	1.45	1.30
655.5	685.5	1.39	1.42	1.46	655.5	2.40	3.12	3.97	250.1	1.59	1.42	1.28
695.9	725.9	1.47	1.49	1.53	695.9	2.50	3.22	4.08	274.1	1.56	1.39	1.26
756.4	786.4	1.72	1.72	1.74	756.4	2.62	3.35	4.19	286.1	1.59	1.41	1.28
776.5	806.5	1.76	1.77	1.78	776.5	2.68	3.43	4.27	298.1	1.61	1.43	1.30
816.9	846.9	2.00	1.99	2.01	816.9	2.79	3.54	4.39	310.1	1.63	1.45	1.32
837.0	867.0	2.08	2.07	2.08	837.0	2.84	3.58	4.42	322.1	1.63	1.45	1.31
877.4	907.4	2.20	2.20	2.22	877.4	2.89	3.61	4.42	334.1	1.61	1.43	1.30
897.6	927.6	2.35	2.36	2.37	897.6	2.89	3.60	4.41	346.1	1.58	1.41	1.28
937.9	967.9	2.46	2.47	2.48	937.9	3.00	3.70	4.48	358.1	1.55	1.39	1.27
958.1	988.1	2.51	2.52	2.54	958.1	3.04	3.73	4.51	370.1	1.55	1.39	1.27
998.4	1028.4	2.78	2.78	2.80	998.4	3.10	3.76	4.50	382.1	1.57	1.41	1.30
1018.6	1048.6	2.82	2.82	2.82	1018.6	3.17	3.81	4.53	394.1	1.61	1.45	1.34
1058.9	1088.9	2.99	2.99	2.99	1058.9	3.20	3.79	4.47	418.1	1.66	1.50	1.37
1079.1	1109.1	3.14	3.13	3.12	1079.1	3.19	3.74	4.39	430.1	1.64	1.47	1.35
1119.4	1149.4	3.21	3.20	3.18	1119.4	3.31	3.83	4.44	442.1	1.60	1.44	1.32
1139.6	1169.6	3.48	3.44	3.41	1139.6	3.38	3.89	4.47	454.1	1.57	1.41	1.30
1179.9	1209.9	3.42	3.37	3.34	1179.9	3.37	3.81	4.34	478.1	1.60	1.45	1.35
1200.1	1230.1	3.37	3.32	3.29	1200.1	3.43	3.85	4.35	490.1	1.65	1.50	1.40

REV. X2

LRMS-1+

100817

Page 4 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	13	24	19	34	15	33	21	40	24	48
1	-	18	0	28	12	34	19	37	32	47	41	45
2	114	69	51	69	52	70	52	76	52	68	57	71
3	108	71	74	74	68	74	59	94	63	80	67	79
4	110	95	83	89	83	97	89	100	86	100	89	95
5	115	105	107	108	91	89	87	89	89	111	89	98
6	115	104	100	104	99	103	81	92	92	99	98	104
7	120	106	105	101	100	92	98	77	85	91	99	108
8	110	104	108	114	107	106	95	85	87	94	86	91
9	119	107	98	103	112	102	96	101	105	43	92	94
10	108	104	115	100	98	107	103	99	99	87	68	99
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 250.1 MHz; -14.00 dBm.

LO IN: 280.01 MHz; +7.00 dBm

IF OUT: 29.91 MHz; -20.64 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	22	34	31	45	27	45	32	53	37	58
1	-	18	0	28	12	35	19	39	32	50	41	50
2	102	67	46	70	47	66	47	74	46	59	50	65
3	123	52	53	55	64	64	48	58	51	66	57	67
4	108	75	64	74	63	78	64	76	62	87	63	77
5	120	74	73	66	61	66	58	64	55	73	56	72
6	125	86	81	89	80	97	83	94	86	99	84	96
7	109	91	77	89	74	87	78	88	79	84	81	84
8	111	102	90	102	93	107	96	100	83	104	99	101
9	108	97	97	98	92	97	88	103	106	53	100	95
10	115	118	107	108	105	103	121	102	106	100	83	96
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 250.1 MHz; -4.00 dBm.

LO IN: 280.01 MHz; +7.00 dBm

IF OUT: 29.91 MHz; -11.12 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



REV. X2

LRMS-1+

100817


Page 5 of 5

Frequency Mixer


LRMS-1+

Typical Performance Curves


Conversion Loss @ IF=30MHz

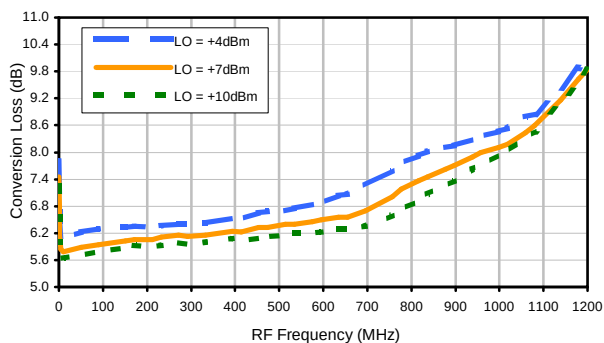


Conversion Loss vs. IF @ RF=250.1MHz

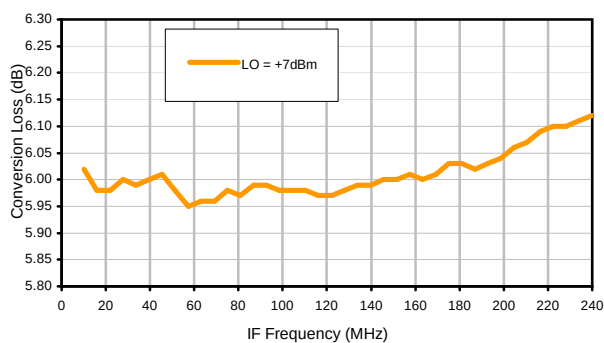


Conversion Loss vs. IF @ RF=10.1MHz

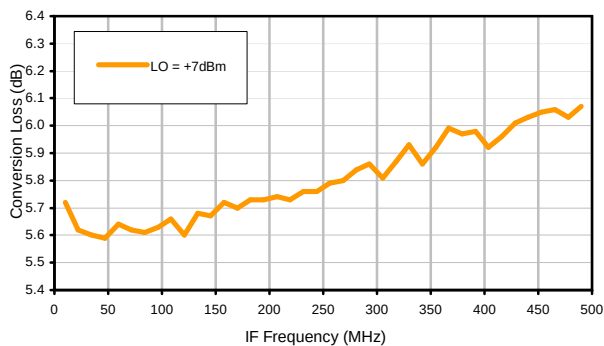


Conversion Loss vs. IF @ RF=500.1MHz

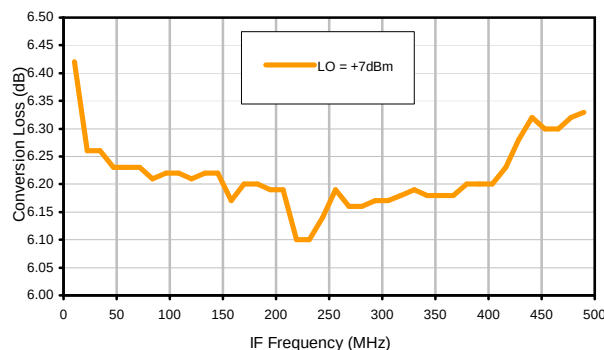

IP3 Input

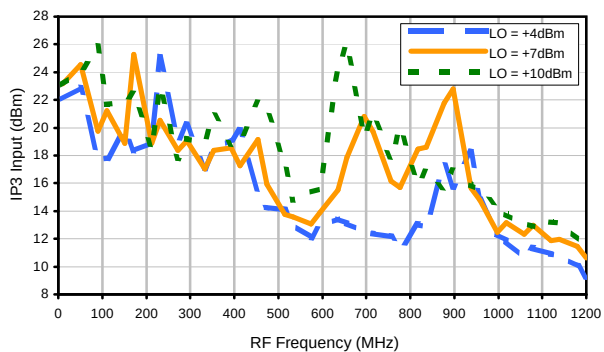

Compression @ RF IN=+1dBm

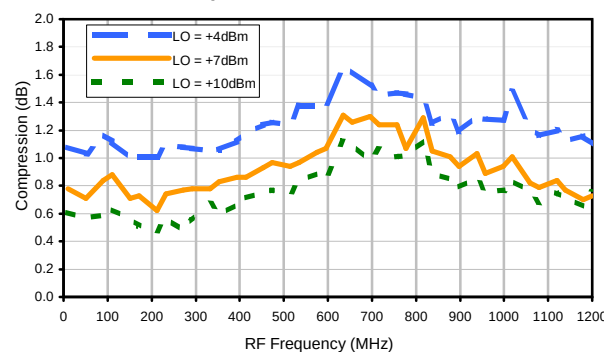

REV. X2
LRMS-1+
100817
Page 1 of 3

Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Frequency Mixer


LRMS-1+

Typical Performance Curves


LO-RF Isolation

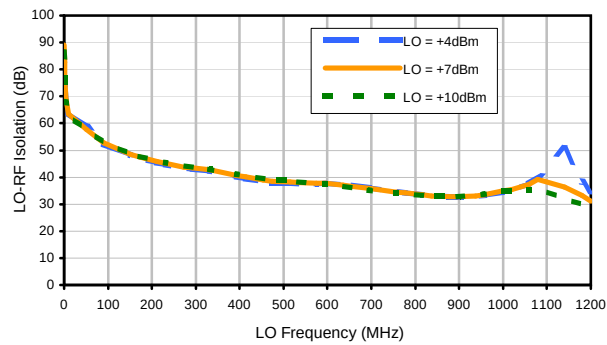


LO-IF Isolation

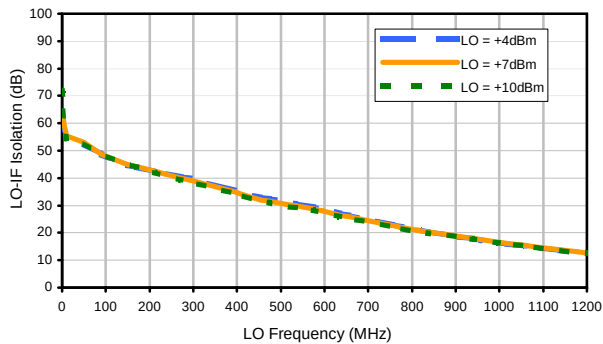


RF-IF Isolation

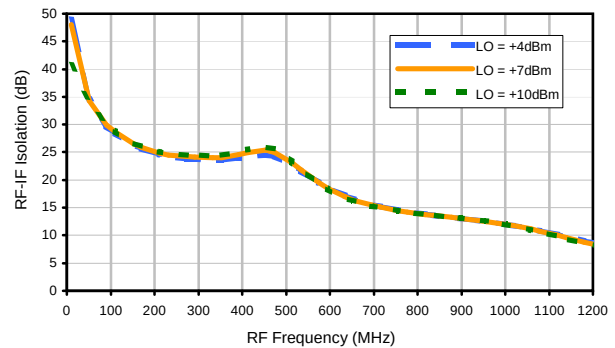


RF VSWR

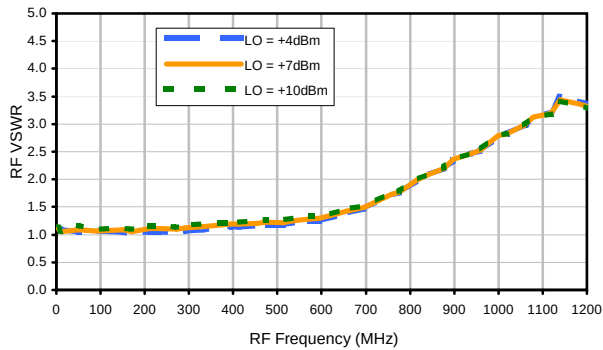

LO VSWR

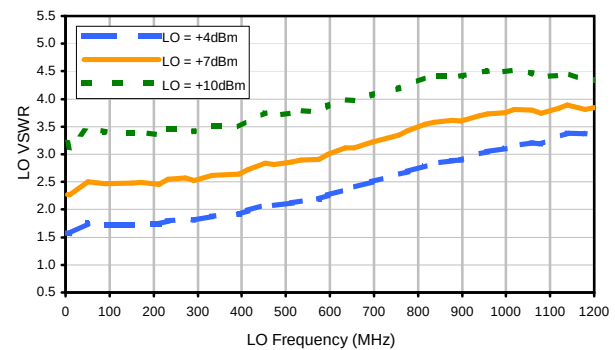

IF VSWR

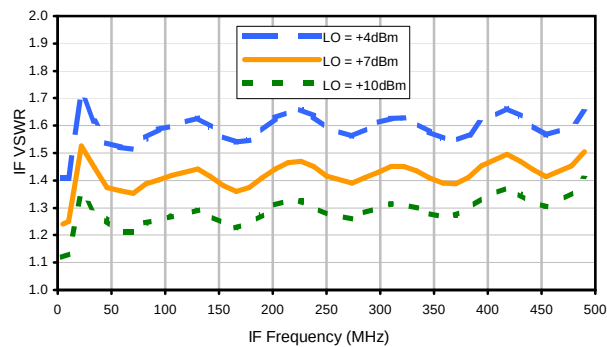

REV. X2

LRMS-1+

100817

Page 2 of 3

Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	13	24	19	34	15	33	21	40	24	48
1	-	18	0	28	12	34	19	37	32	47	41	45
2	114	69	51	69	52	70	52	76	52	68	57	71
3	108	71	74	74	68	74	59	94	63	80	67	79
4	110	95	83	89	83	97	89	100	86	100	89	95
5	115	105	107	108	91	89	87	89	89	111	89	98
6	115	104	100	104	99	103	81	92	92	99	98	104
7	120	106	105	101	100	92	98	77	85	91	99	108
8	110	104	108	114	107	106	95	85	87	94	86	91
9	119	107	98	103	112	102	96	101	105	43	92	94
10	108	104	115	100	98	107	103	99	99	87	68	99
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 250.1 MHz; -14.00 dBm.
LO IN: 280.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -20.64 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	22	34	31	45	27	45	32	53	37	58
1	-	18	0	28	12	35	19	39	32	50	41	50
2	102	67	46	70	47	66	47	74	46	59	50	65
3	123	52	53	55	64	64	48	58	51	66	57	67
4	108	75	64	74	63	78	64	76	62	87	63	77
5	120	74	73	66	61	66	58	64	55	73	56	72
6	125	86	81	89	80	97	83	94	86	99	84	96
7	109	91	77	89	74	87	78	88	79	84	81	84
8	111	102	90	102	93	107	96	100	83	104	99	101
9	108	97	97	98	92	97	88	103	106	53	100	95
10	115	118	107	108	105	103	121	102	106	100	83	96
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 250.1 MHz; -4.00 dBm.
LO IN: 280.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -11.12 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



REV. X2
LRMS-1+
100817
Page 3 of 3


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M82272	NEW RELEASE	08/02/02	AV	DJ
A	M102713	UPDATED NOTES	01/14/06	GF	IL

SUGGESTED MOUNTING CONFIGURATION FOR QQQ569 CASE STYLE, "w" PIN CONNECTION

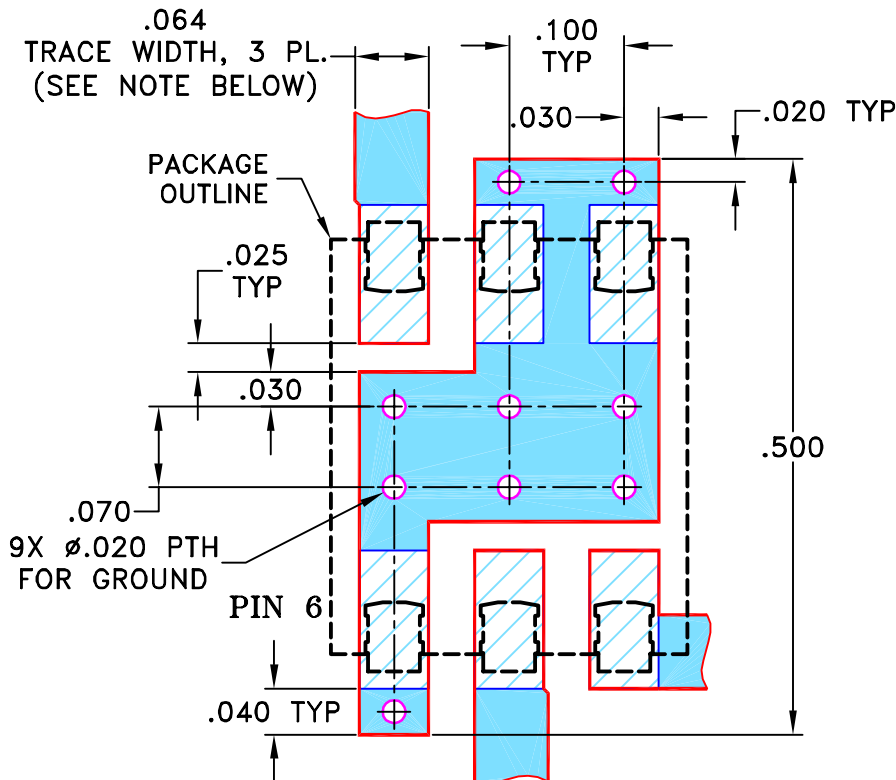

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" $\pm$ 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

AV

07/19/02

TOLERANCES ON:

CHECKED

WL

08/02/02

2 PL DECIMALS $\pm$.005

APPROVED

DJ

08/02/02

ANGLES $\pm$

FRACTIONS $\pm$

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, w, QQQ569, LRMS-J, TB-44

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-083

REV:

A

FILE: 98PL083


SCALE:

6:1


SHEET:

1 OF 1

Evaluation Board and Circuit

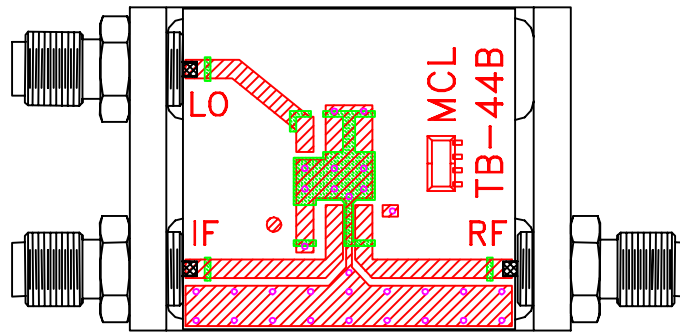


TB-44+

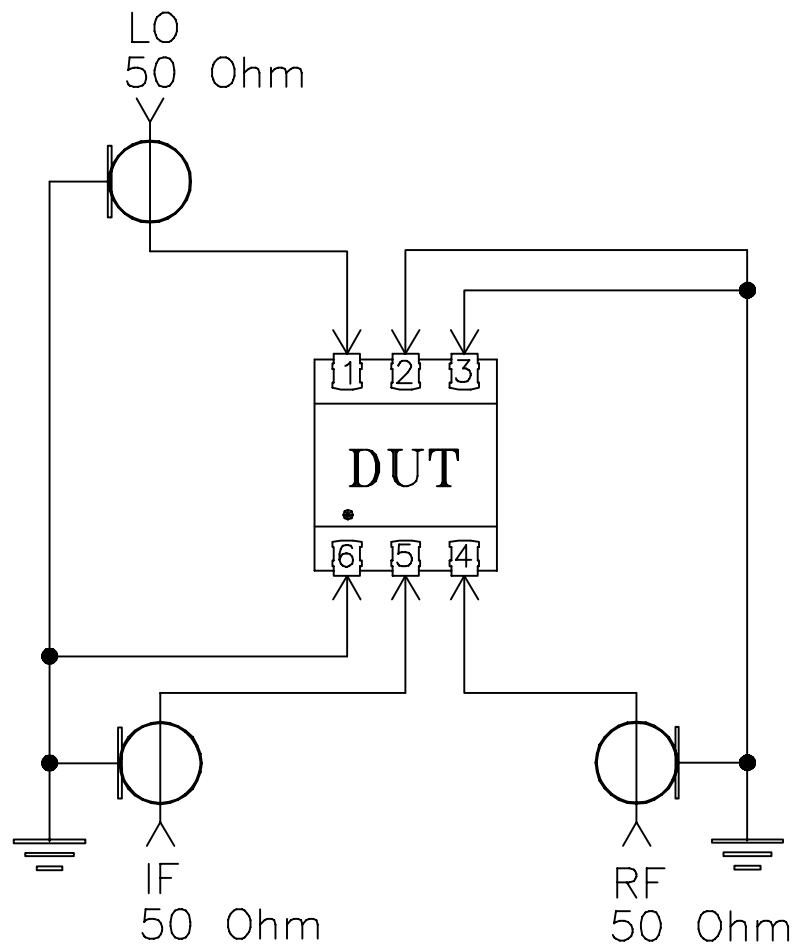

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 Mini-Circuits®