

Surface Mount Frequency Mixer

Level 13 (LO Power +13dBm) 5 to 1000 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

LO	1
RF	4
IF	5
GROUND	2,3,6

Outline Drawing

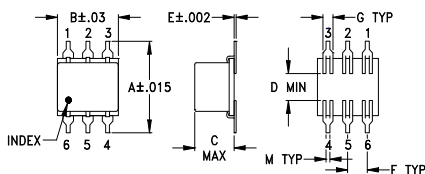

PCB Land Pattern




Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.400	.31	.200	.10	.010	.100	.050
10.16	7.87	5.08	2.54	0.25	2.54	1.27

H	J	K	L	M	wt
.420	.120	.060	.100	.020	grams
10.67	3.05	1.52	2.54	0.51	0.55

Demo Board MCL P/N: TB-44+ Suggested PCB Layout (PL-083)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low conversion loss, 6.72 dB typ.
- good L-R isolation, 39 dB typ.

Applications

- HF/VHF/UHF
- instrumentation
- cellular



Generic photo used for illustration purposes only
CASE STYLE: QQQ130

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel
at no extra cost

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
LO/RF		Mid-Band		Total		L		M		U		L		M		U	
f_L - f_U		$\bar{X}$	σ	Max.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.
5-1000	DC-1000	6.72	.08	8.5	9.5	55	40	39	20	22	16	52	35	30	17	18	12


1 dB COMP.: +9 dBm typ.

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]
m = mid band [$2 f_L$ to $f_U/2$]







Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
		LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm
5.00	35.00	6.87	67.46	60.42	1.26	2.23
10.00	40.00	6.71	61.14	54.89	1.16	2.14
20.00	50.00	6.81	55.36	49.28	1.12	2.06
35.15	65.15	6.82	50.90	44.75	1.13	2.13
50.00	80.00	6.86	48.33	42.38	1.13	2.09
65.30	95.30	6.76	46.42	40.39	1.13	2.04
100.00	70.00	6.73	44.03	37.91	1.14	2.02
155.76	125.76	6.54	43.58	37.14	1.15	1.97
200.00	170.00	6.54	42.48	36.16	1.16	1.95
246.21	216.21	6.62	40.92	34.54	1.19	1.98
306.52	276.52	6.76	38.19	31.82	1.23	1.93
366.82	336.82	6.79	34.91	28.84	1.29	2.04
427.12	397.12	6.59	32.18	26.69	1.35	2.09
500.00	470.00	6.52	29.15	24.87	1.44	2.11
577.88	547.88	6.74	26.48	22.60	1.54	2.15
668.33	638.33	7.07	24.41	20.55	1.68	2.21
758.79	728.79	7.37	22.47	18.54	1.82	2.31
849.24	819.24	7.86	20.85	16.52	1.98	2.47
909.55	879.55	8.30	19.83	15.54	2.18	2.56
1030.00	970.00	8.73	19.01	14.41	2.43	2.61

Electrical Schematic

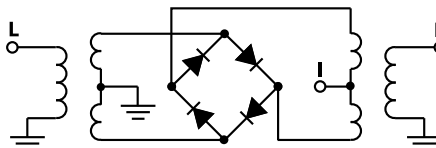

Performance Charts

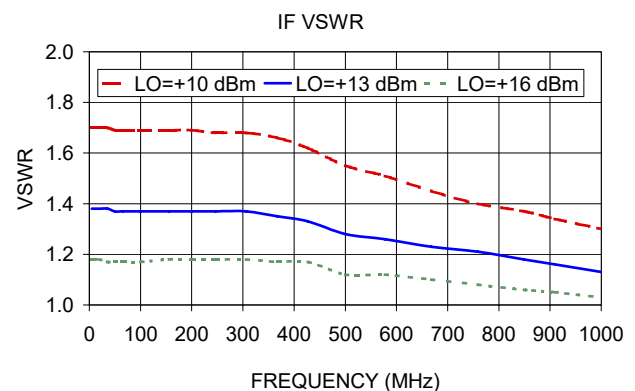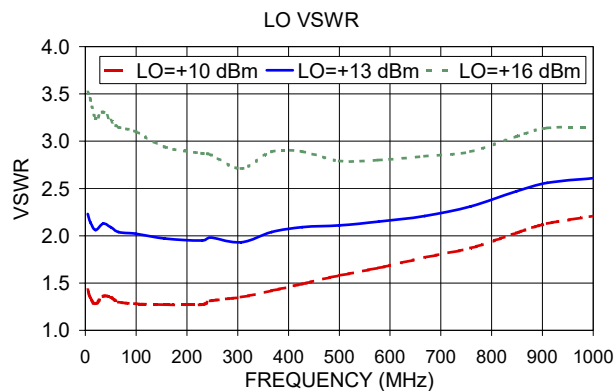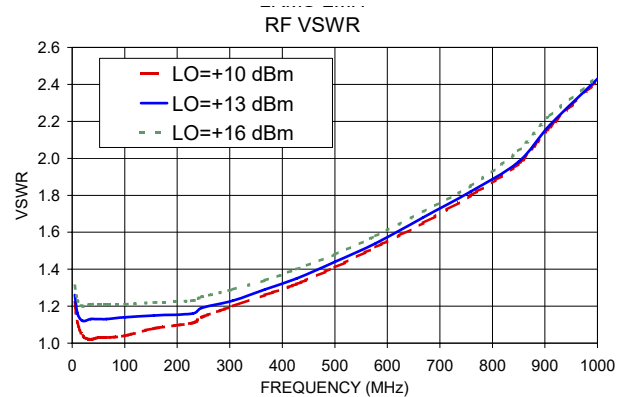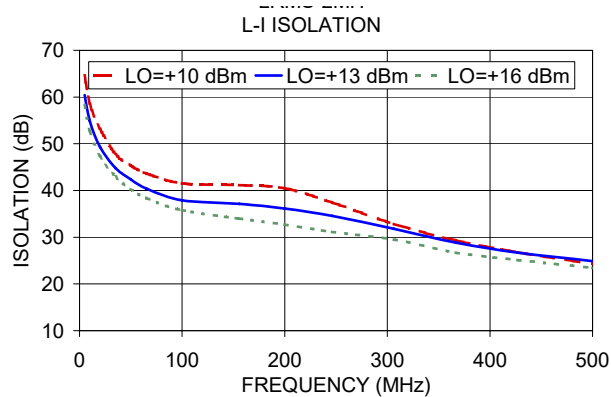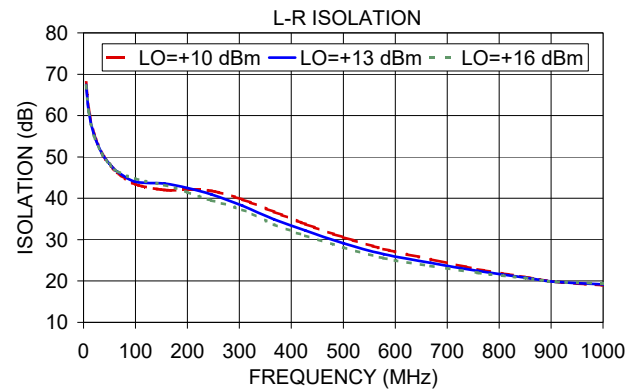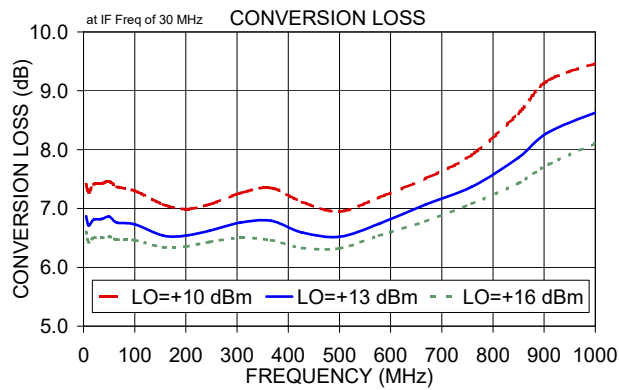

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

LRMS-2MH+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+10	+13	+16
5.0	35.0	7.41	6.87	6.60
10.0	40.0	7.27	6.71	6.43
50.4	80.4	7.19	6.70	6.49
90.7	120.7	7.20	6.68	6.45
131.0	161.0	7.02	6.62	6.46
171.3	201.3	7.07	6.68	6.48
211.5	241.5	6.99	6.65	6.50
251.8	281.8	7.04	6.70	6.53
292.1	322.1	7.03	6.70	6.52
332.4	362.4	7.07	6.75	6.56
372.7	402.7	7.10	6.77	6.56
413.0	443.0	7.13	6.76	6.56
453.3	483.3	7.18	6.78	6.57
493.6	523.6	7.17	6.75	6.52
533.9	563.9	7.25	6.86	6.57
574.2	604.2	7.26	6.89	6.61
614.4	644.4	7.32	6.96	6.69
654.7	684.7	7.38	6.95	6.69
695.0	725.0	7.44	6.97	6.69
735.3	765.3	7.66	7.03	6.74
775.6	805.6	7.80	7.08	6.73
815.9	845.9	8.09	7.27	6.82
856.2	886.2	8.28	7.47	6.93
896.5	926.5	8.48	7.73	7.13
916.6	946.6	8.53	7.86	7.25
956.9	986.9	8.61	8.02	7.46
977.1	1007.1	8.61	8.08	7.57
1017.3	1047.3	8.69	8.24	7.83
1077.8	1107.8	8.72	8.31	8.04
1097.9	1127.9	8.74	8.35	8.11
1138.2	1168.2	8.79	8.44	8.27
1158.4	1188.4	8.88	8.54	8.35
1198.7	1228.7	9.03	8.72	8.58
1218.8	1248.8	9.09	8.83	8.66
1259.1	1289.1	9.29	9.05	8.88
1279.2	1309.2	9.39	9.15	9.03
1319.5	1349.5	9.62	9.41	9.31
1339.7	1369.7	9.76	9.55	9.49
1380.0	1410.0	10.25	9.97	9.90
1400.1	1430.1	10.47	10.11	10.07

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+10	+13	+16
10.1	40.1	21.12	24.69	27.08
50.4	80.4	20.54	24.19	24.98
90.7	120.7	20.11	22.61	24.83
131.0	161.0	21.09	23.08	27.86
171.3	201.3	19.96	22.88	27.73
211.5	241.5	20.02	23.71	29.05
251.8	281.8	20.66	25.57	27.23
292.1	322.1	21.33	25.28	27.90
332.4	362.4	21.79	25.50	26.96
372.7	402.7	21.55	25.23	26.88
413.0	443.0	22.32	24.39	26.41
453.3	483.3	21.28	22.95	25.74
493.6	523.6	21.30	21.89	23.74
533.9	563.9	20.65	23.98	24.45
574.2	604.2	21.64	23.64	28.95
614.4	644.4	21.80	22.85	24.91
654.7	684.7	22.74	26.33	30.34
695.0	725.0	21.30	25.22	27.96
735.3	765.3	21.38	22.43	23.76
775.6	805.6	20.42	21.64	21.44
815.9	845.9	17.60	22.49	21.46
856.2	886.2	16.63	22.63	21.25
896.5	926.5	16.55	20.98	21.75
916.6	946.6	16.82	20.78	20.75
956.9	986.9	17.89	20.88	21.22
977.1	1007.1	18.15	21.23	22.15
1017.3	1047.3	19.87	25.39	24.88
1037.5	1067.5	21.39	26.56	25.73
1077.8	1107.8	24.05	21.86	22.15
1097.9	1127.9	20.67	20.47	21.44
1138.2	1168.2	18.18	19.54	21.39
1158.4	1188.4	17.80	19.73	21.86
1198.7	1228.7	17.33	19.96	21.56
1218.8	1248.8	17.35	19.85	21.39
1259.1	1289.1	17.50	20.11	21.46
1279.2	1309.2	17.28	20.00	20.84
1319.5	1349.5	17.53	20.44	20.47
1339.7	1369.7	17.24	20.05	20.77
1380.0	1410.0	16.87	19.29	19.35
1400.1	1430.1	16.66	19.09	19.34

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+9dBm (dB)		
		@LO (dBm)		
		+10	+13	+16
10.1	40.1	0.89	0.70	0.56
50.4	80.4	0.85	0.66	0.54
90.7	120.7	0.83	0.66	0.54
131.0	161.0	0.92	0.69	0.52
171.3	201.3	0.80	0.63	0.49
211.5	241.5	0.89	0.63	0.51
251.8	281.8	0.91	0.64	0.51
292.1	322.1	0.86	0.63	0.53
332.4	362.4	0.87	0.66	0.55
372.7	402.7	0.88	0.69	0.60
413.0	443.0	0.91	0.73	0.63
453.3	483.3	0.95	0.76	0.65
493.6	523.6	1.03	0.87	0.76
533.9	563.9	1.08	0.90	0.82
574.2	604.2	1.18	0.96	0.88
614.4	644.4	1.27	1.02	0.91
654.7	684.7	1.38	1.11	1.00
695.0	725.0	1.47	1.22	1.09
735.3	765.3	1.42	1.25	1.10
775.6	805.6	1.37	1.31	1.14
815.9	845.9	1.23	1.27	1.16
856.2	886.2	1.19	1.24	1.22
896.5	926.5	1.17	1.20	1.26
916.6	946.6	1.16	1.16	1.21
956.9	986.9	1.13	1.09	1.15
977.1	1007.1	1.19	1.09	1.12
1017.3	1047.3	1.21	1.05	1.02
1037.5	1067.5	1.24	1.05	0.98
1077.8	1107.8	1.32	1.15	1.01
1097.9	1127.9	1.37	1.12	0.96
1138.2	1168.2	1.37	1.08	0.92
1158.4	1188.4	1.39	1.06	0.89
1198.7	1228.7	1.40	1.02	0.90
1218.8	1248.8	1.35	0.98	0.87
1259.1	1289.1	1.38	0.93	0.87
1279.2	1309.2	1.38	0.91	0.87
1319.5	1349.5	1.30	0.84	0.84
1339.7	1369.7	1.31	0.81	0.81
1380.0	1410.0	1.43	0.83	0.79
1400.1	1430.1	1.39	0.81	0.77

Frequency Mixer

LRMS-2MH+

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=500.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1000.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+13			+13			+13
490.0	10.1	6.88	10.0	20.1	6.52	990.0	10.1	8.14
477.7	22.4	6.80	30.0	40.1	6.47	970.0	30.1	8.08
465.4	34.7	6.75	50.0	60.1	6.56	950.0	50.1	7.98
453.1	47.0	6.78	70.0	80.1	6.57	930.0	70.1	8.00
440.8	59.3	6.81	90.0	100.1	6.58	910.0	90.1	8.00
428.5	71.6	6.76	110.0	120.1	6.58	890.0	110.1	7.90
416.2	83.9	6.74	130.0	140.1	6.53	870.0	130.1	7.81
403.8	96.3	6.68	150.0	160.1	6.56	850.0	150.1	7.81
391.5	108.6	6.64	170.0	180.1	6.62	830.0	170.1	7.83
379.2	120.9	6.62	190.0	200.1	6.65	810.0	190.1	7.75
366.9	133.2	6.56	210.0	220.1	6.62	790.0	210.1	7.72
354.6	145.5	6.56	230.0	240.1	6.63	770.0	230.1	7.68
342.3	157.8	6.58	250.0	260.1	6.71	750.0	250.1	7.57
330.0	170.1	6.59	270.0	280.1	6.73	730.0	270.1	7.66
317.7	182.4	6.61	290.0	300.1	6.74	710.0	290.1	7.65
305.4	194.7	6.58	310.0	320.1	6.76	690.0	310.1	7.61
293.1	207.0	6.55	330.0	340.1	6.81	670.0	330.1	7.57
280.8	219.3	6.55	350.0	360.1	6.81	650.0	350.1	7.59
268.5	231.6	6.58	370.0	380.1	6.91	630.0	370.1	7.58
256.2	243.9	6.58	390.0	400.1	6.91	610.0	390.1	7.54
243.8	256.3	6.58	430.0	440.1	6.95	570.0	430.1	7.49
231.5	268.6	6.61	450.0	460.1	6.98	550.0	450.1	7.51
219.2	280.9	6.59	490.0	500.1	6.97	510.0	490.1	7.47
206.9	293.2	6.61	510.0	520.1	7.01	490.0	510.1	7.44
194.6	305.5	6.62	550.0	560.1	7.13	450.0	550.1	7.47
182.3	317.8	6.58	570.0	580.1	7.17	430.0	570.1	7.48
170.0	330.1	6.59	610.0	620.1	7.16	390.0	610.1	7.44
157.7	342.4	6.63	630.0	640.1	7.16	370.0	630.1	7.46
145.4	354.7	6.64	670.0	680.1	7.15	330.0	670.1	7.44
133.1	367.0	6.69	690.0	700.1	7.11	310.0	690.1	7.42
120.8	379.3	6.68	730.0	740.1	7.18	270.0	730.1	7.39
108.5	391.6	6.64	750.0	760.1	7.19	250.0	750.1	7.39
96.2	403.9	6.66	790.0	800.1	7.27	210.0	790.1	7.40
83.8	416.3	6.67	810.0	820.1	7.28	190.0	810.1	7.43
71.5	428.6	6.68	850.0	860.1	7.45	150.0	850.1	7.59
59.2	440.9	6.72	870.0	880.1	7.50	130.0	870.1	7.73
46.9	453.2	6.70	910.0	920.1	7.62	90.0	910.1	7.86
34.6	465.5	6.74	930.0	940.1	7.71	70.0	930.1	7.93
22.3	477.8	6.75	970.0	980.1	7.81	30.0	970.1	8.12
10.0	490.1	6.90	990.0	1000.1	7.79	10.0	990.1	8.39

Frequency Mixer

LRMS-2MH+

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+10	+13	+16	+10	+13	+16
5.0	68.00	67.46	67.25	64.60	60.42	58.26
10.0	61.75	61.14	60.85	58.56	54.89	52.71
50.4	55.33	55.91	56.13	51.88	50.93	50.19
90.7	50.79	51.08	51.07	47.44	46.46	45.24
131.0	47.38	47.98	48.34	44.52	43.39	42.76
171.3	45.33	45.81	46.35	42.67	41.55	40.81
211.5	43.57	44.22	44.61	40.95	40.09	39.23
251.8	42.35	43.05	43.54	40.54	39.23	38.06
292.1	41.11	41.88	42.35	39.44	37.98	36.94
332.4	40.09	40.82	41.25	38.20	36.70	35.56
372.7	39.08	39.84	40.29	37.29	35.51	34.39
413.0	38.11	38.85	39.34	35.37	34.18	33.08
453.3	36.92	37.62	38.11	33.81	32.78	32.06
493.6	36.06	36.77	37.21	32.40	31.06	30.51
533.9	35.15	35.91	36.21	31.31	30.13	29.13
574.2	34.31	35.06	35.49	30.12	29.45	28.61
614.4	33.81	34.33	34.78	28.38	28.04	27.56
654.7	33.21	33.62	33.91	27.06	26.85	26.67
695.0	32.65	32.87	33.12	25.59	25.33	25.20
735.3	32.03	32.22	32.23	24.35	23.80	23.54
775.6	31.45	31.61	31.53	23.58	22.94	22.51
815.9	30.70	31.01	30.86	22.53	22.07	21.57
856.2	29.93	30.41	30.44	21.60	21.34	20.93
896.5	29.54	30.15	30.44	20.55	20.55	20.19
916.6	29.45	30.23	30.86	20.05	20.16	19.83
956.9	29.04	29.87	30.66	19.17	19.47	19.26
977.1	28.85	29.70	30.69	18.81	19.14	19.12
1017.3	28.70	29.75	30.97	17.78	18.27	18.35
1077.8	28.37	29.74	31.24	16.60	17.23	17.50
1097.9	28.63	30.50	32.66	16.15	16.80	17.06
1138.2	28.93	31.45	34.21	15.35	16.11	16.27
1158.4	29.31	32.14	35.10	15.07	15.78	15.98
1198.7	30.27	34.41	39.34	14.24	14.99	15.19
1218.8	30.37	34.80	40.16	13.88	14.72	14.86
1259.1	31.57	38.33	52.26	13.26	14.07	14.20
1279.2	31.66	39.93	52.66	12.97	13.75	13.99
1319.5	31.38	39.32	40.34	12.23	13.07	13.32
1339.7	31.67	38.84	37.55	12.03	12.89	13.12
1380.0	30.05	34.26	33.23	11.46	12.33	12.66
1400.1	29.46	33.14	32.30	11.19	12.09	12.47

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+10	+13	+16
10.1	40.1	54.33	51.69	49.04
50.4	80.4	37.17	37.26	37.19
90.7	120.7	32.63	32.62	32.85
131.0	161.0	29.96	30.07	30.21
171.3	201.3	28.32	28.44	28.38
211.5	241.5	27.12	27.19	27.30
251.8	281.8	26.33	26.48	26.54
292.1	322.1	25.92	26.15	26.21
332.4	362.4	25.55	25.82	26.01
372.7	402.7	25.37	25.74	25.93
413.0	443.0	25.24	25.66	26.02
453.3	483.3	25.22	25.70	26.03
493.6	523.6	25.04	25.54	25.82
533.9	563.9	24.08	24.49	24.67
574.2	604.2	22.37	22.70	22.83
614.4	644.4	20.48	20.50	20.54
654.7	684.7	18.71	18.59	18.59
695.0	725.0	17.42	17.24	17.20
735.3	765.3	16.42	16.22	16.17
775.6	805.6	15.70	15.57	15.51
815.9	845.9	15.08	15.04	15.05
856.2	886.2	14.48	14.56	14.64
896.5	926.5	13.99	14.18	14.38
916.6	946.6	13.83	14.07	14.31
956.9	986.9	13.56	13.89	14.25
977.1	1007.1	13.54	13.94	14.34
1017.3	1047.3	13.43	13.93	14.43
1037.5	1067.5	13.42	13.95	14.45
1077.8	1107.8	13.34	13.89	14.31
1097.9	1127.9	13.26	13.79	14.21
1138.2	1168.2	13.17	13.59	13.90
1158.4	1188.4	13.10	13.43	13.71
1198.7	1228.7	12.89	13.13	13.26
1218.8	1248.8	12.79	12.91	13.03
1259.1	1289.1	12.39	12.53	12.48
1279.2	1309.2	12.15	12.20	12.16
1319.5	1349.5	11.65	11.70	11.56
1339.7	1369.7	11.36	11.38	11.23
1380.0	1410.0	10.69	10.70	10.55
1400.1	1430.1	10.47	10.43	10.26

Frequency Mixer

LRMS-2MH+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)		
		@LO (dBm)		
		+10	+13	+16
5.0	35.0	1.43	2.23	3.52
10.0	40.0	1.34	2.14	3.44
50.4	80.4	1.15	1.24	1.32
90.7	120.7	1.15	1.26	1.34
131.0	161.0	1.18	1.28	1.34
171.3	201.3	1.17	1.28	1.34
211.5	241.5	1.20	1.29	1.35
251.8	281.8	1.20	1.29	1.34
292.1	322.1	1.21	1.29	1.35
332.4	362.4	1.22	1.30	1.36
372.7	402.7	1.24	1.31	1.37
413.0	443.0	1.26	1.33	1.39
453.3	483.3	1.29	1.36	1.42
493.6	523.6	1.34	1.42	1.48
533.9	563.9	1.37	1.44	1.51
574.2	604.2	1.42	1.48	1.55
614.4	644.4	1.48	1.54	1.59
654.7	684.7	1.53	1.59	1.66
695.0	725.0	1.60	1.66	1.73
735.3	765.3	1.67	1.74	1.81
775.6	805.6	1.77	1.84	1.91
815.9	845.9	1.92	1.96	2.03
856.2	886.2	2.08	2.11	2.16
896.5	926.5	2.27	2.28	2.31
916.6	946.6	2.37	2.38	2.41
956.9	986.9	2.59	2.61	2.63
977.1	1007.1	2.72	2.75	2.77
1017.3	1047.3	2.95	3.00	3.03
1037.5	1067.5	3.07	3.13	3.17
1077.8	1107.8	3.27	3.34	3.40
1097.9	1127.9	3.36	3.43	3.48
1138.2	1168.2	3.58	3.65	3.72
1158.4	1188.4	3.66	3.73	3.79
1198.7	1228.7	3.86	3.95	4.00
1218.8	1248.8	3.99	4.07	4.11
1259.1	1289.1	4.09	4.16	4.20
1279.2	1309.2	4.16	4.23	4.27
1319.5	1349.5	4.24	4.30	4.33
1339.7	1369.7	4.28	4.33	4.36
1380.0	1410.0	4.36	4.39	4.43
1400.1	1430.1	4.37	4.40	4.42

LO (MHz)	LO VSWR (:1)		
	@LO (dBm)		
	+10	+13	+16
5.0	1.22	1.26	1.31
10.0	1.11	1.16	1.23
50.4	1.71	2.62	3.82
90.7	1.61	2.37	3.38
131.0	1.68	2.55	3.70
171.3	1.62	2.41	3.45
211.5	1.67	2.50	3.58
251.8	1.69	2.53	3.60
292.1	1.70	2.51	3.54
332.4	1.80	2.66	3.74
372.7	1.80	2.60	3.62
413.0	1.90	2.75	3.80
453.3	1.95	2.76	3.78
493.6	2.01	2.82	3.82
533.9	2.12	2.95	3.95
574.2	2.15	2.96	3.95
614.4	2.27	3.10	4.10
654.7	2.33	3.10	4.06
695.0	2.44	3.20	4.15
735.3	2.56	3.30	4.21
775.6	2.66	3.40	4.29
815.9	2.80	3.56	4.44
856.2	2.88	3.64	4.51
896.5	2.99	3.76	4.64
916.6	3.03	3.80	4.68
956.9	3.10	3.83	4.70
977.1	3.14	3.86	4.72
1017.3	3.21	3.90	4.75
1037.5	3.24	3.90	4.73
1077.8	3.29	3.90	4.69
1097.9	3.31	3.90	4.66
1138.2	3.38	3.93	4.64
1158.4	3.42	3.93	4.62
1198.7	3.48	3.92	4.55
1218.8	3.53	3.94	4.54
1259.1	3.63	3.97	4.53
1279.2	3.69	3.98	4.50
1319.5	3.79	4.01	4.48
1339.7	3.86	4.06	4.52
1380.0	3.95	4.10	4.48
1400.1	3.99	4.10	4.46

IF (OUT) (MHz)	IF VSWR @LO=1000.1MHz (:1)		
	@LO (dBm)		
	+10	+13	+16
5.0	1.70	1.38	1.18
10.0	1.70	1.38	1.18
30.2	2.50	2.04	1.67
50.4	2.39	1.97	1.59
70.6	2.35	1.95	1.59
90.8	2.39	1.98	1.61
111.0	2.45	2.02	1.64
131.2	2.44	2.01	1.64
151.4	2.37	1.96	1.61
171.6	2.33	1.93	1.58
191.8	2.36	1.97	1.62
212.0	2.40	2.00	1.65
232.2	2.39	1.99	1.64
252.4	2.38	1.99	1.64
272.7	2.40	2.01	1.66
292.9	2.38	2.00	1.66
313.1	2.34	1.96	1.64
333.3	2.32	1.95	1.64
353.5	2.34	1.98	1.68
373.7	2.33	1.98	1.68
393.9	2.30	1.95	1.65
434.3	2.21	1.91	1.65
454.5	2.22	1.92	1.68
494.9	2.26	1.96	1.71
515.1	2.18	1.90	1.68
555.5	2.17	1.91	1.71
575.7	2.19	1.95	1.75
616.1	2.14	1.90	1.71
636.3	2.10	1.87	1.70
676.7	2.09	1.88	1.73
696.9	2.11	1.90	1.75
737.3	2.00	1.81	1.67
757.6	1.95	1.78	1.66
798.0	1.93	1.78	1.68
818.2	1.92	1.78	1.68
858.6	1.84	1.70	1.62
878.8	1.79	1.66	1.59
919.2	1.78	1.68	1.63
939.4	1.78	1.67	1.62
979.8	1.69	1.60	1.56
1000.0	1.75	1.85	2.04

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	4	21	9	41	23	26	19	32	35	43
1	-	18	+0	32	13	32	28	37	40	37	65	43
2	>100	58	44	60	45	58	47	74	57	65	54	54
3	>100	69	78	69	64	67	60	69	71	72	63	85
4	>100	>87	87	>87	86	>87	81	85	>87	>87	85	>87
5	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
6	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
7	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
8	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
9	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
10	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 500.1 MHz; -6.00 dBm.

LO IN: 530.01 MHz; +13.00 dBm

IF OUT: 29.91 MHz; -12.86 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	14	32	21	57	35	38	33	51	50	74
1	-	19	+0	30	13	36	29	43	41	42	57	51
2	>100	50	37	50	36	55	40	60	52	65	46	53
3	>100	50	48	65	48	53	45	52	58	54	51	54
4	>100	78	62	74	59	67	63	61	56	78	69	64
5	>100	91	75	77	57	63	54	62	53	63	62	72
6	>100	93	80	97	81	74	71	69	64	68	67	77
7	>100	78	83	86	81	78	75	82	75	93	95	86
8	>100	94	>97	>97	>97	>97	92	89	87	88	82	81
9	>100	>97	>97	>97	>97	95	91	86	83	88	83	92
10	>100	>97	>97	>97	>97	>97	>97	>97	94	>97	91	95
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 500.1 MHz; 4.00 dBm.

LO IN: 530.01 MHz; +13.00 dBm

IF OUT: 29.91 MHz; -2.79 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2

LRMS-2MH+

100817

Page 5 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Frequency Mixer


LRMS-2MH+

Typical Performance Curves


Conversion Loss @ IF=30MHz

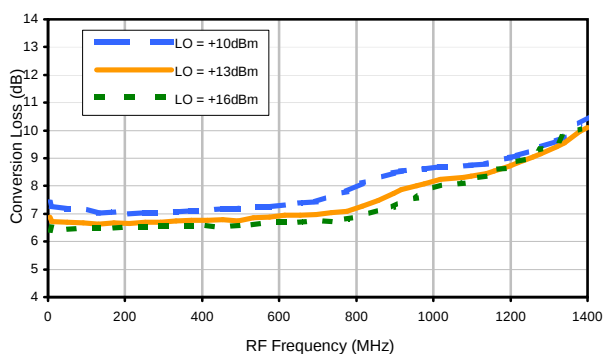


Conversion Loss vs. IF @ RF=500.1MHz

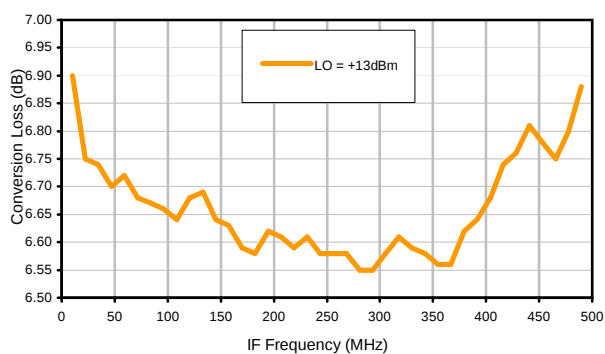


Conversion Loss vs. IF @ RF=10.1MHz

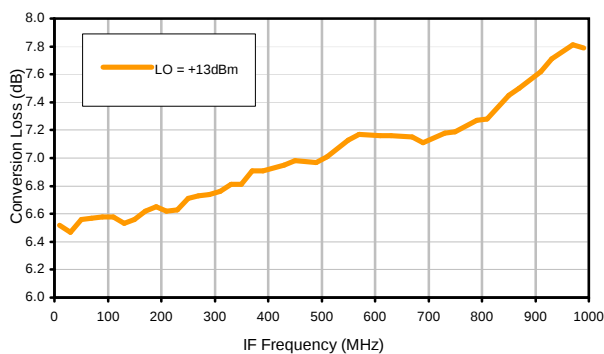


Conversion Loss vs. IF @ RF=1000.1MHz

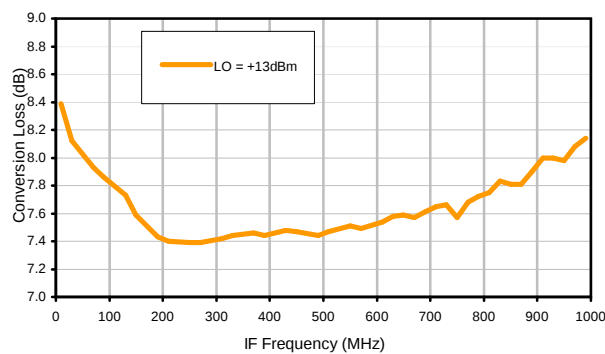

IP3 Input

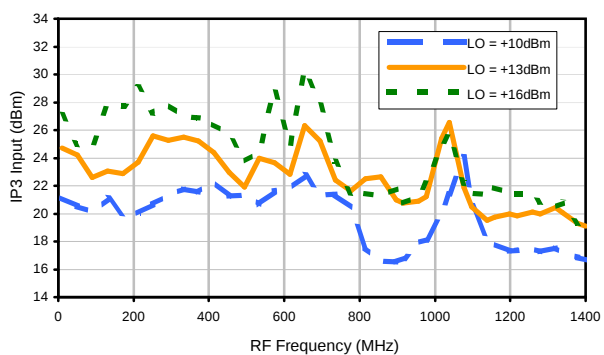

Compression @ RF IN=+9dBm

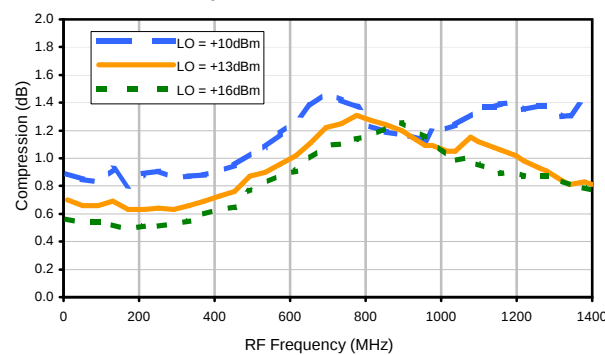


Frequency Mixer


LRMS-2MH+

Typical Performance Curves


LO-RF Isolation

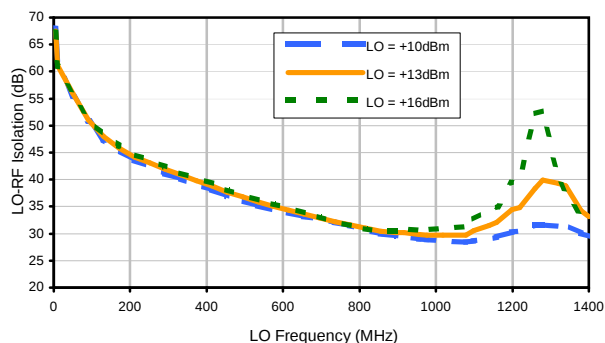


LO-IF Isolation

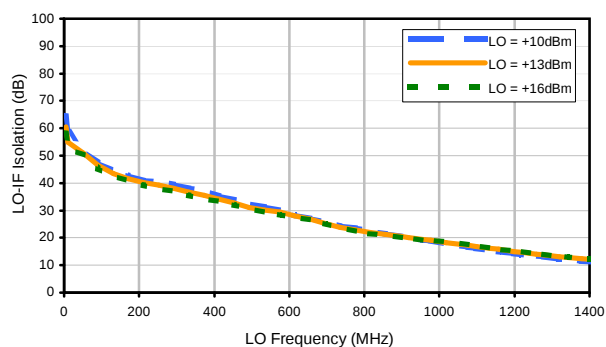


RF-IF Isolation

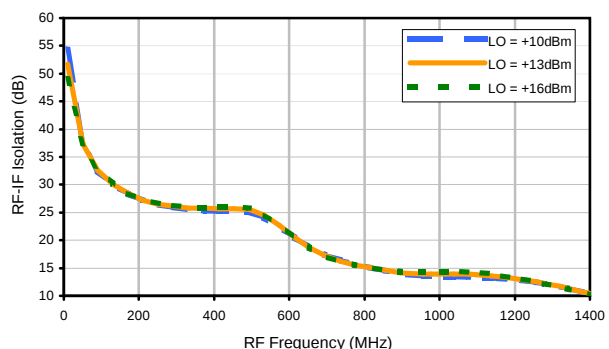


RF VSWR

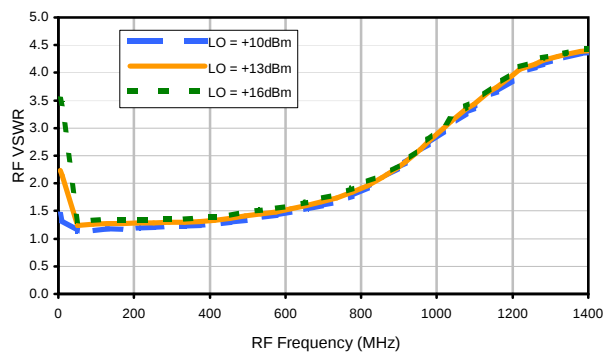

LO VSWR

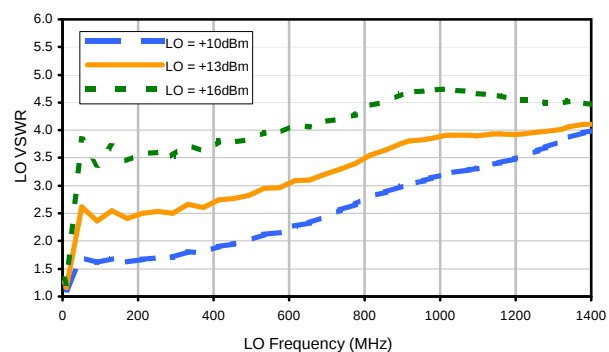

IF VSWR

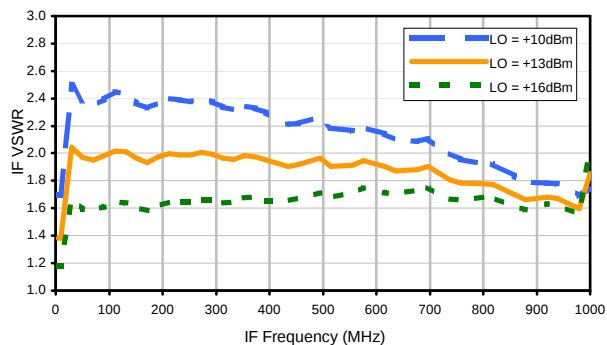

REV. X2
LRMS-2MH+
100817
Page 2 of 3

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	4	21	9	41	23	26	19	32	35	43
1	-	18	+0	32	13	32	28	37	40	37	65	43
2	>100	58	44	60	45	58	47	74	57	65	54	54
3	>100	69	78	69	64	67	60	69	71	72	63	85
4	>100	>87	87	>87	86	>87	81	85	>87	>87	85	>87
5	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
6	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
7	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
8	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
9	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
10	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 500.1 MHz; -6.00 dBm.

LO IN: 530.01 MHz; +13.00 dBm

IF OUT: 29.91 MHz; -12.86 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	14	32	21	57	35	38	33	51	50	74
1	-	19	+0	30	13	36	29	43	41	42	57	51
2	>100	50	37	50	36	55	40	60	52	65	46	53
3	>100	50	48	65	48	53	45	52	58	54	51	54
4	>100	78	62	74	59	67	63	61	56	78	69	64
5	>100	91	75	77	57	63	54	62	53	63	62	72
6	>100	93	80	97	81	74	71	69	64	68	67	77
7	>100	78	83	86	81	78	75	82	75	93	95	86
8	>100	94	>97	>97	>97	>97	92	89	87	88	82	81
9	>100	>97	>97	>97	>97	95	91	86	83	88	83	92
10	>100	>97	>97	>97	>97	>97	>97	>97	94	>97	91	95
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 500.1 MHz; 4.00 dBm.

LO IN: 530.01 MHz; +13.00 dBm

IF OUT: 29.91 MHz; -2.79 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2

LRMS-2MH+

100817

Page 3 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M82272	NEW RELEASE	08/02/02	AV	DJ
A	M102713	UPDATED NOTES	01/14/06	GF	IL

SUGGESTED MOUNTING CONFIGURATION FOR QQQ569 CASE STYLE, "w" PIN CONNECTION

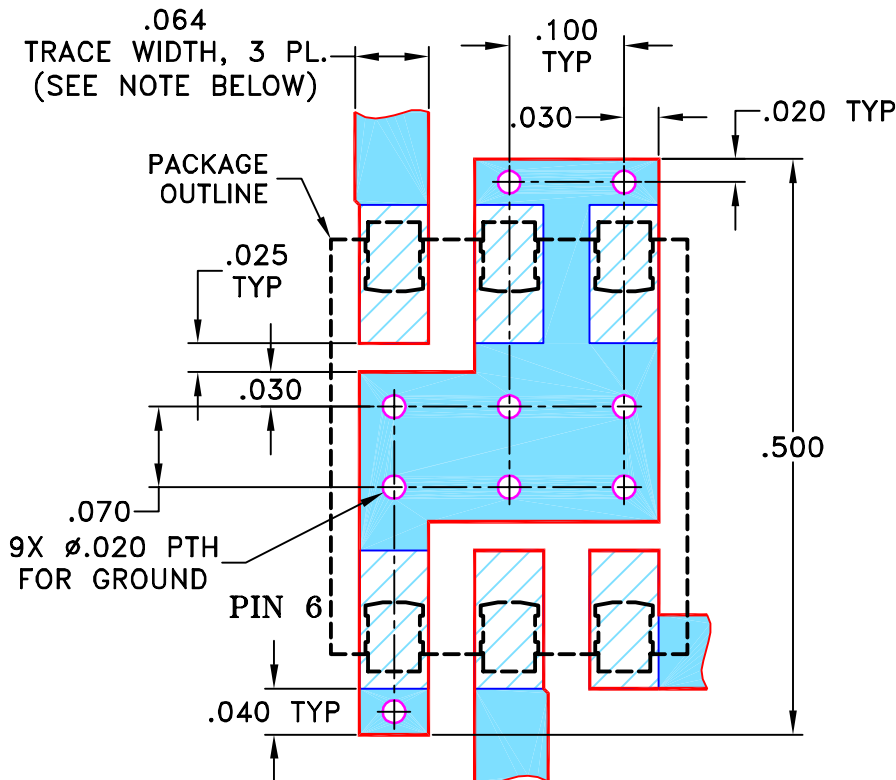

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" $\pm$ 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

AV

07/19/02

TOLERANCES ON:

CHECKED

WL

08/02/02

2 PL DECIMALS $\pm$.005

APPROVED

DJ

08/02/02

ANGLES $\pm$

FRACTIONS $\pm$

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, w, QQQ569, LRMS-J, TB-44

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-083

REV:

A

FILE:

98PL083


SCALE:

6:1


SHEET:

1 OF 1

Evaluation Board and Circuit

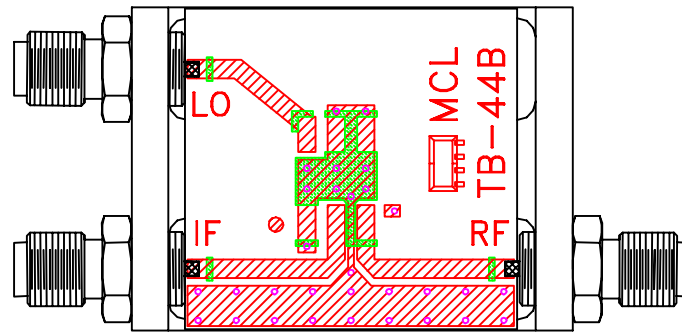

TB-44+

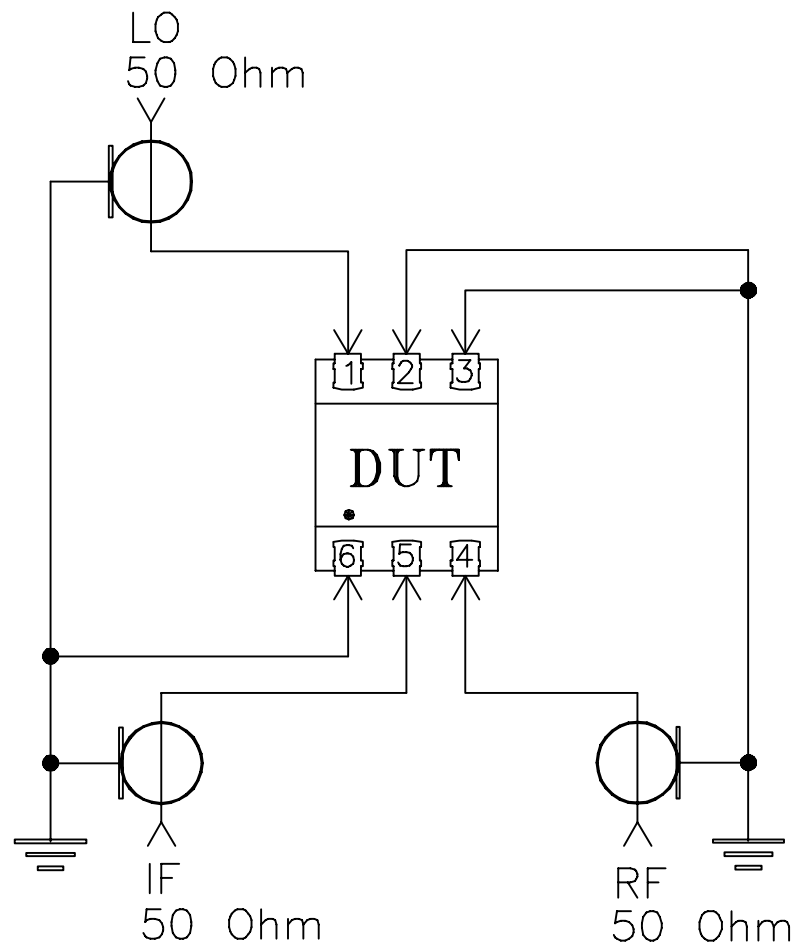

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 Mini-Circuits®