

Frequency Mixer

LRMS-ED6331

Level 7 (LO Power +7 dBm)

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : QQQ569

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (f _L to f _U)	10		1155	MHz
	RF (f _L to f _U)	10		1155	MHz
	IF	0.2		990	MHz
Conversion Loss	mid band		7.0		dB
	Total Range		7.3		dB
LO-RF Isolation	Low Range		55		dB
	Mid Range		44		dB
	Upper Range		33		dB
LO-IF Isolation	Low Range		55		dB
	Mid Range		42		dB
	Upper Range		31		dB

Note: Low Range = [f_L to 10f_L] Mid Range = [10f_L to f_U/2] Upper Range = [f_U/2 to f_U]
mid band = [2f_L to f_U/2]

MAXIMUM RATINGS	
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

PIN CONNECTIONS	
LO	1
RF	4
IF	5
GROUND	2, 3, 6

Frequency Mixer

LRMS-ED6331

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	7.26	6.80	6.65
50.1	80.1	7.32	6.93	6.68
90.1	120.1	7.30	6.92	6.71
130.1	160.1	7.26	6.86	6.66
170.1	200.1	7.25	6.86	6.66
210.1	240.1	7.20	6.83	6.64
250.1	280.1	7.21	6.84	6.66
290.1	320.1	7.13	6.81	6.66
330.1	360.1	7.15	6.82	6.65
370.1	400.1	7.14	6.83	6.67
410.1	440.1	7.15	6.86	6.70
450.1	480.1	7.10	6.80	6.64
490.1	520.1	7.12	6.81	6.65
530.1	560.1	7.15	6.85	6.68
570.1	600.1	7.16	6.86	6.69
610.1	640.1	7.17	6.86	6.69
650.1	680.1	7.21	6.91	6.73
690.1	720.1	7.25	6.95	6.78
730.1	760.1	7.32	7.02	6.85
770.1	800.1	7.36	7.06	6.90
810.1	840.1	7.44	7.13	6.96
850.1	880.1	7.55	7.25	7.06
890.1	920.1	7.66	7.36	7.16
930.1	960.1	7.77	7.47	7.27
970.1	1000.1	7.86	7.55	7.35
1010.1	1040.1	7.96	7.63	7.43
1050.1	1080.1	8.04	7.67	7.46
1090.1	1120.1	8.18	7.74	7.50
1130.1	1160.1	8.25	7.75	7.49
1170.1	1200.1	8.41	7.82	7.54
1210.1	1240.1	8.62	7.96	7.61
1250.1	1280.1	8.85	8.14	7.72
1290.1	1320.1	9.13	8.40	7.91
1330.1	1360.1	9.33	8.56	8.07
1370.1	1400.1	9.63	8.85	8.34
1410.1	1440.1	9.95	9.15	8.62
1450.1	1480.1	10.26	9.46	8.88
1490.1	1520.1	10.71	9.89	9.25
1530.1	1560.1	10.99	10.25	9.55
1550.1	1580.1	11.18	10.51	9.81

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	17.38	19.55	20.68
50.1	80.1	18.35	18.23	18.54
90.1	120.1	16.35	16.35	17.66
130.1	160.1	14.26	15.42	19.60
170.1	200.1	14.98	18.83	20.67
210.1	240.1	14.92	18.27	20.68
250.1	280.1	15.96	19.81	20.67
290.1	320.1	19.13	20.59	20.67
330.1	360.1	20.43	20.59	20.67
370.1	400.1	19.82	20.58	20.67
410.1	440.1	20.43	20.57	20.65
450.1	480.1	20.45	20.60	20.68
490.1	520.1	19.34	20.59	20.67
530.1	560.1	19.19	19.89	20.66
570.1	600.1	20.42	20.57	20.65
610.1	640.1	20.41	20.57	20.28
650.1	680.1	20.40	20.54	19.19
690.1	720.1	20.38	20.53	20.61
730.1	760.1	19.29	20.49	20.57
770.1	800.1	17.95	20.15	20.55
810.1	840.1	15.82	20.02	20.52
850.1	880.1	14.36	18.96	20.47
890.1	920.1	12.23	15.27	20.42
930.1	960.1	11.14	13.76	17.97
970.1	1000.1	10.82	13.15	16.27
1010.1	1040.1	10.83	13.42	16.56
1050.1	1080.1	11.30	14.60	18.98
1090.1	1120.1	11.98	17.50	20.25
1130.1	1160.1	12.69	20.13	18.72
1170.1	1200.1	13.30	20.09	17.54
1210.1	1240.1	12.95	20.02	19.49
1250.1	1280.1	11.79	19.93	18.79
1290.1	1320.1	10.84	18.20	16.85
1330.1	1360.1	11.19	16.57	16.50
1370.1	1400.1	11.19	15.84	16.22
1410.1	1440.1	10.75	14.50	15.91
1450.1	1480.1	9.78	13.02	15.74
1490.1	1520.1	9.00	11.74	15.05
1530.1	1560.1	8.49	10.44	13.64
1550.1	1580.1	8.12	9.47	12.39

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	0.43	0.40	0.14
50.1	80.1	0.57	0.41	0.25
90.1	120.1	0.62	0.38	0.23
130.1	160.1	0.54	0.37	0.25
170.1	200.1	0.58	0.39	0.26
210.1	240.1	0.58	0.38	0.24
250.1	280.1	0.59	0.39	0.24
290.1	320.1	0.58	0.36	0.22
330.1	360.1	0.61	0.38	0.25
370.1	400.1	0.59	0.36	0.25
410.1	440.1	0.57	0.35	0.22
450.1	480.1	0.61	0.39	0.27
490.1	520.1	0.59	0.38	0.27
530.1	560.1	0.58	0.37	0.26
570.1	600.1	0.59	0.39	0.28
610.1	640.1	0.59	0.39	0.29
650.1	680.1	0.62	0.41	0.30
690.1	720.1	0.67	0.44	0.31
730.1	760.1	0.72	0.47	0.33
770.1	800.1	0.76	0.51	0.35
810.1	840.1	0.77	0.51	0.36
850.1	880.1	0.81	0.56	0.38
890.1	920.1	0.87	0.60	0.44
930.1	960.1	0.92	0.64	0.48
970.1	1000.1	0.94	0.66	0.50
1010.1	1040.1	0.97	0.68	0.51
1050.1	1080.1	1.02	0.74	0.56
1090.1	1120.1	1.08	0.80	0.59
1130.1	1160.1	1.13	0.87	0.65
1170.1	1200.1	1.14	0.90	0.68
1210.1	1240.1	1.07	0.89	0.66
1250.1	1280.1	0.99	0.86	0.65
1290.1	1320.1	0.91	0.79	0.62
1330.1	1360.1	0.82	0.72	0.57
1370.1	1400.1	0.73	0.66	0.53
1410.1	1440.1	0.62	0.60	0.49
1450.1	1480.1	0.53	0.55	0.48
1490.1	1520.1	0.37	0.40	0.41
1530.1	1560.1	0.32	0.32	0.35
1550.1	1580.1	0.28	0.27	0.31

Frequency Mixer

LRMS-ED6331

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=590.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1165.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
570.1	20.0	7.02	10.1	20.1	6.97	1155.1	10.0	8.45
560.1	30.0	6.96	70.1	80.1	6.85	1125.1	40.0	8.34
550.1	40.0	6.93	130.1	140.1	6.89	1095.1	70.0	8.31
540.1	50.0	6.91	190.1	200.1	6.90	1065.1	100.0	8.28
530.1	60.0	6.96	250.1	260.1	6.95	1035.1	130.0	8.20
520.1	70.0	6.93	310.1	320.1	7.01	1005.1	160.0	8.14
500.1	90.0	6.93	370.1	380.1	6.93	975.1	190.0	8.12
490.1	100.0	6.87	430.1	440.1	6.93	945.1	220.0	8.12
470.1	120.0	6.80	490.1	500.1	7.14	915.1	250.0	8.10
460.1	130.0	6.74	550.1	560.1	7.21	885.1	280.0	8.04
440.1	150.0	6.76	610.1	620.1	7.22	855.1	310.0	8.05
430.1	160.0	6.73	670.1	680.1	7.25	825.1	340.0	8.06
410.1	180.0	6.70	730.1	740.1	7.33	795.1	370.0	8.04
400.1	190.0	6.75	790.1	800.1	7.33	765.1	400.0	8.00
380.1	210.0	6.72	850.1	860.1	7.47	735.1	430.0	8.03
370.1	220.0	6.69	910.1	920.1	7.41	705.1	460.0	8.02
350.1	240.0	6.69	970.1	980.1	7.25	675.1	490.0	7.99
340.1	250.0	6.70	1030.1	1040.1	7.45	645.1	520.0	7.98
320.1	270.0	6.71	1090.1	1100.1	7.13	615.1	550.0	8.00
310.1	280.0	6.70	1150.1	1160.1	7.01	585.1	580.0	7.93
290.1	300.0	6.72	1230.1	1240.1	7.23	555.1	610.0	7.97
280.1	310.0	6.72	1290.1	1300.1	7.33	525.1	640.0	7.98
260.1	330.0	6.71	1370.1	1380.1	7.28	495.1	670.0	7.97
250.1	340.0	6.74	1430.1	1440.1	7.24	465.1	700.0	7.93
230.1	360.0	6.74	1510.1	1520.1	7.34	435.1	730.0	7.93
220.1	370.0	6.73	1570.1	1580.1	7.20	405.1	760.0	7.92
200.1	390.0	6.76	1650.1	1660.1	7.36	375.1	790.0	7.88
190.1	400.0	6.76	1710.1	1720.1	7.50	345.1	820.0	7.89
170.1	420.0	6.74	1790.1	1800.1	7.47	315.1	850.0	7.89
160.1	430.0	6.74	1850.1	1860.1	7.61	285.1	880.0	7.89
140.1	450.0	6.77	1930.1	1940.1	7.94	255.1	910.0	7.92
130.1	460.0	6.76	1990.1	2000.1	7.86	230.1	935.0	7.93
110.1	480.0	6.78	2070.1	2080.1	8.47	200.1	965.0	7.93
100.1	490.0	6.80	2130.1	2140.1	8.42	175.1	990.0	7.92
80.1	510.0	6.79	2210.1	2220.1	8.95	145.1	1020.0	7.95
70.1	520.0	6.78	2270.1	2280.1	9.43	120.1	1045.0	7.91
50.1	540.0	6.81	2350.1	2360.1	9.62	90.1	1075.0	7.87
40.1	550.0	6.83	2410.1	2420.1	10.02	65.1	1100.0	7.89
20.1	570.0	6.90	2490.1	2500.1	10.46	35.1	1130.0	7.83
10.1	580.0	6.95	2550.1	2560.1	10.62	10.1	1155.0	7.91

REV. X3

LRMS-ED6331

101012

Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350186, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4861



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
40.1	66.37	63.19	62.12	57.97	55.05	53.27
80.1	63.02	60.74	59.47	53.52	50.46	48.76
120.1	61.38	58.31	56.51	50.46	47.11	45.43
160.1	60.70	57.17	55.06	48.67	45.48	43.71
200.1	59.81	55.90	53.53	47.36	44.29	42.57
240.1	58.44	54.64	52.34	45.61	42.88	41.05
280.1	55.94	53.05	51.01	44.80	42.16	40.27
320.1	53.30	51.00	49.51	43.90	40.99	39.25
360.1	51.07	49.56	48.27	42.99	40.52	38.59
400.1	49.06	47.93	46.91	41.59	39.47	37.77
440.1	47.22	46.56	45.90	40.21	38.63	37.00
480.1	45.53	45.15	44.50	39.14	37.81	36.37
520.1	43.77	43.53	43.17	37.60	36.56	35.27
560.1	42.46	42.34	42.23	36.13	35.62	34.69
600.1	41.29	41.24	41.12	34.84	34.47	33.93
640.1	40.48	40.52	40.40	33.77	33.43	32.77
680.1	39.65	39.74	39.70	32.80	32.72	32.05
720.1	38.93	39.02	39.01	31.82	32.00	31.51
760.1	38.38	38.41	38.41	30.84	31.23	31.19
800.1	37.99	38.02	37.83	30.22	30.53	30.54
840.1	37.45	37.53	37.49	29.30	29.41	29.50
880.1	37.03	37.29	37.19	28.93	29.00	28.80
920.1	36.46	36.90	36.88	28.34	28.47	28.14
960.1	35.91	36.50	36.74	27.86	28.04	27.80
1000.1	35.53	36.27	36.68	27.65	28.04	27.77
1040.1	35.01	35.88	36.44	26.99	27.67	27.48
1080.1	34.77	35.71	36.42	26.77	27.74	27.84
1120.1	34.40	35.39	36.17	26.24	27.45	27.71
1160.1	34.21	35.21	36.00	25.69	27.11	27.62
1200.1	34.18	35.09	35.83	25.42	26.86	27.62
1240.1	34.12	35.04	35.60	24.85	26.27	27.15
1280.1	34.18	35.11	35.56	24.56	26.00	27.12
1320.1	34.29	35.28	35.68	24.23	25.59	26.79
1360.1	34.41	35.33	35.82	23.99	25.18	26.43
1400.1	34.49	35.43	35.91	23.92	25.04	26.22
1440.1	34.57	35.45	35.89	23.80	24.87	25.98
1480.1	34.50	35.30	35.69	23.72	24.79	25.79
1520.1	34.54	35.01	35.29	23.98	25.12	26.03
1560.1	34.26	34.55	34.63	23.86	25.21	26.05
1580.1	34.31	34.43	34.43	23.89	25.39	26.30

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	50.43	48.09	47.58
50.1	80.1	36.28	35.45	36.05
90.1	120.1	31.60	31.70	31.26
130.1	160.1	28.87	28.40	28.46
170.1	200.1	27.22	26.92	26.87
210.1	240.1	25.94	25.72	25.52
250.1	280.1	24.74	24.78	24.82
290.1	320.1	24.23	24.04	23.89
330.1	360.1	23.77	23.77	23.65
370.1	400.1	23.75	23.62	23.45
410.1	440.1	23.47	23.51	23.48
450.1	480.1	23.31	23.45	23.36
490.1	520.1	23.16	23.20	23.26
530.1	560.1	22.92	22.97	22.86
570.1	600.1	22.56	22.56	22.52
610.1	640.1	21.99	22.02	22.02
650.1	680.1	21.11	21.31	21.37
690.1	720.1	19.78	20.11	20.42
730.1	760.1	18.49	18.73	18.97
770.1	800.1	17.20	17.42	17.59
810.1	840.1	16.13	16.26	16.36
850.1	880.1	15.25	15.30	15.35
890.1	920.1	14.54	14.45	14.50
930.1	960.1	13.84	13.79	13.78
970.1	1000.1	13.31	13.24	13.23
1010.1	1040.1	12.82	12.81	12.82
1050.1	1080.1	12.51	12.46	12.49
1090.1	1120.1	12.22	12.28	12.41
1130.1	1160.1	11.98	12.08	12.28
1170.1	1200.1	11.72	11.96	12.20
1210.1	1240.1	11.50	11.82	12.08
1250.1	1280.1	11.36	11.61	11.95
1290.1	1320.1	11.20	11.47	11.80
1330.1	1360.1	11.14	11.42	11.72
1370.1	1400.1	11.15	11.42	11.68
1410.1	1440.1	11.21	11.48	11.74
1450.1	1480.1	11.29	11.59	11.88
1490.1	1520.1	11.31	11.71	12.00
1530.1	1560.1	11.33	11.79	12.04
1550.1	1580.1	11.29	11.76	12.08

Frequency Mixer

LRMS-ED6331

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1155MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+4	+7	+10		+4	+7	+10		+4	+7	+10
10.1	40.1	1.08	1.33	1.18	40.1	1.96	2.82	3.95	10.0	1.78	1.52	1.37
50.1	80.1	1.20	1.30	1.36	80.1	1.80	2.52	3.45	30.0	1.77	1.51	1.37
90.1	120.1	1.22	1.29	1.36	120.1	1.88	2.66	3.65	50.0	1.78	1.52	1.37
130.1	160.1	1.21	1.30	1.36	160.1	1.84	2.58	3.54	70.0	1.78	1.52	1.38
170.1	200.1	1.22	1.30	1.37	200.1	1.81	2.53	3.46	90.0	1.79	1.53	1.39
210.1	240.1	1.20	1.28	1.35	240.1	1.86	2.62	3.59	110.0	1.79	1.54	1.40
250.1	280.1	1.21	1.30	1.36	280.1	1.81	2.51	3.41	150.0	1.78	1.53	1.41
290.1	320.1	1.23	1.32	1.37	320.1	1.85	2.60	3.54	170.0	1.80	1.55	1.42
330.1	360.1	1.24	1.33	1.39	360.1	1.83	2.55	3.46	210.0	1.81	1.57	1.46
370.1	400.1	1.28	1.37	1.43	400.1	1.86	2.58	3.50	230.0	1.80	1.57	1.46
410.1	440.1	1.32	1.41	1.47	440.1	1.90	2.63	3.55	270.0	1.82	1.60	1.50
450.1	480.1	1.34	1.42	1.49	480.1	1.88	2.59	3.48	290.0	1.83	1.62	1.52
490.1	520.1	1.36	1.45	1.51	520.1	1.93	2.67	3.58	330.0	1.83	1.63	1.54
530.1	560.1	1.39	1.46	1.52	560.1	1.93	2.63	3.51	350.0	1.84	1.64	1.57
570.1	600.1	1.43	1.50	1.56	600.1	1.97	2.69	3.58	390.0	1.87	1.69	1.62
610.1	640.1	1.46	1.54	1.60	640.1	1.99	2.70	3.57	410.0	1.86	1.69	1.62
650.1	680.1	1.51	1.58	1.64	680.1	2.01	2.71	3.57	450.0	1.86	1.70	1.65
690.1	720.1	1.55	1.62	1.68	720.1	2.06	2.77	3.63	470.0	1.88	1.73	1.68
730.1	760.1	1.57	1.65	1.71	760.1	2.07	2.75	3.58	510.0	1.90	1.75	1.72
770.1	800.1	1.61	1.69	1.76	800.1	2.12	2.81	3.65	530.0	1.88	1.75	1.72
810.1	840.1	1.64	1.73	1.79	840.1	2.14	2.82	3.64	570.0	1.90	1.77	1.76
850.1	880.1	1.65	1.72	1.78	880.1	2.17	2.84	3.65	590.0	1.91	1.79	1.78
890.1	920.1	1.65	1.71	1.77	920.1	2.20	2.87	3.68	630.0	1.89	1.78	1.78
930.1	960.1	1.67	1.73	1.78	960.1	2.24	2.89	3.69	650.0	1.90	1.79	1.79
970.1	1000.1	1.68	1.73	1.77	1000.1	2.26	2.91	3.69	690.0	1.92	1.82	1.83
1010.1	1040.1	1.73	1.77	1.82	1040.1	2.29	2.92	3.70	710.0	1.89	1.80	1.82
1050.1	1080.1	1.79	1.83	1.87	1080.1	2.33	2.94	3.69	750.0	1.88	1.79	1.81
1090.1	1120.1	1.83	1.87	1.91	1120.1	2.36	2.95	3.68	770.0	1.90	1.83	1.85
1130.1	1160.1	1.94	1.98	2.03	1160.1	2.41	3.00	3.72	810.0	1.89	1.80	1.83
1170.1	1200.1	2.03	2.07	2.12	1200.1	2.44	3.01	3.71	830.0	1.87	1.78	1.81
1210.1	1240.1	2.17	2.20	2.25	1240.1	2.50	3.08	3.78	870.0	1.86	1.78	1.81
1250.1	1280.1	2.32	2.33	2.37	1280.1	2.53	3.11	3.79	890.0	1.86	1.78	1.82
1290.1	1320.1	2.46	2.46	2.48	1320.1	2.55	3.13	3.82	930.0	1.83	1.75	1.78
1330.1	1360.1	2.70	2.68	2.69	1360.1	2.60	3.18	3.86	950.0	1.83	1.75	1.78
1370.1	1400.1	2.86	2.82	2.81	1400.1	2.61	3.17	3.84	990.0	1.82	1.74	1.77
1410.1	1440.1	3.09	3.05	3.02	1440.1	2.66	3.22	3.90	1010.0	1.79	1.71	1.74
1450.1	1480.1	3.40	3.34	3.29	1480.1	2.68	3.22	3.88	1050.0	1.77	1.68	1.71
1490.1	1520.1	3.55	3.49	3.42	1520.1	2.72	3.26	3.91	1070.0	1.79	1.70	1.72
1530.1	1560.1	3.80	3.76	3.68	1560.1	2.76	3.29	3.93	1110.0	1.77	1.67	1.69
1550.1	1580.1	3.96	3.93	3.84	1580.1	2.76	3.27	3.91	1130.0	1.74	1.64	1.65

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	6	17	12	22	21	30	31	35	30	60
1	-	15	+0	28	12	29	19	42	43	48	49	45
2	>90	66	51	58	50	69	49	59	56	69	66	65
3	>90	>69	>69	68	>69	>69	66	>69	>69	>69	>69	>69
4	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
5	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
6	>90	>69	>69	>69	>69	>69	>69	>69	66	>69	>69	>69
7	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
8	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
9	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
10	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 582.5 MHz; -14.00 dBm.
LO IN: 612.5 MHz; +7.00 dBm
IF OUT: 30 MHz; -20.95 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	16	27	23	33	34	43	43	50	44	69
1	-	15	+0	28	12	31	20	44	44	52	54	50
2	70	54	42	52	41	63	42	52	50	58	57	58
3	>90	53	55	57	53	55	46	52	48	65	65	64
4	>90	65	74	61	65	62	66	64	56	62	65	76
5	>90	75	73	73	62	71	59	70	59	74	64	>79
6	>90	>79	>79	>79	>79	77	77	>79	74	>79	>79	>79
7	>90	>79	>79	>79	78	>79	>79	>79	>79	>79	>79	>79
8	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
9	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
10	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 582.5 MHz; -4.00 dBm.
LO IN: 612.5 MHz; +7.00 dBm
IF OUT: 30 MHz; -11.02 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Frequency Mixer


LRMS-ED6331

Typical Performance Curves


Conversion Loss @ IF=30MHz

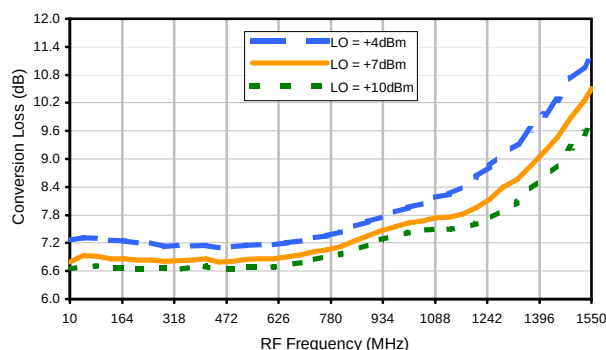


Conversion Loss vs. IF @ RF=590.1MHz

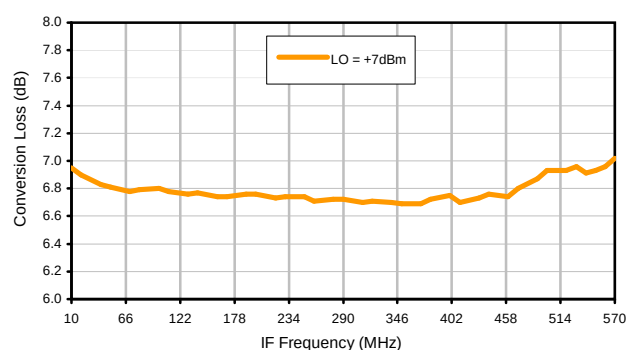


Conversion Loss vs. IF @ RF=10MHz

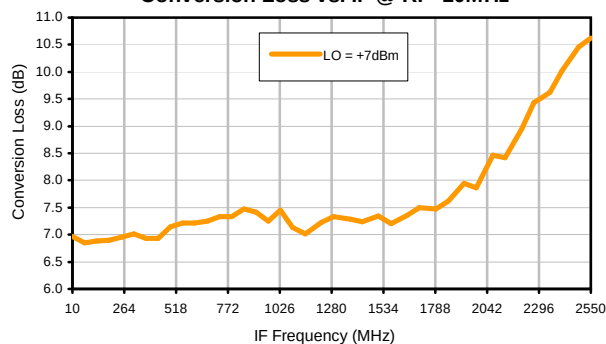


Conversion Loss vs. IF @ RF=1165.1MHz

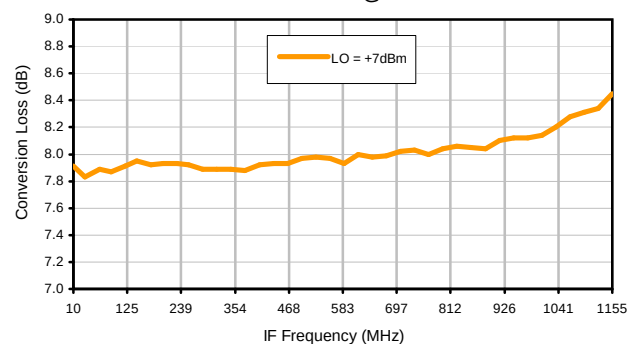

IP3 Input

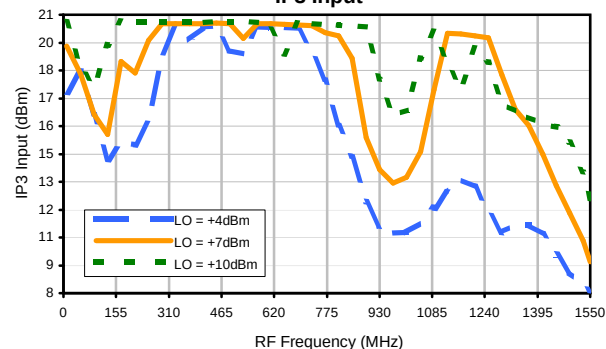


Compression @ RF IN=+1dBm

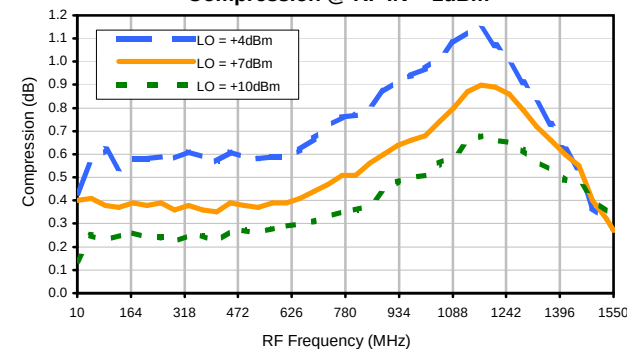


Typical Performance Curves


LO-RF Isolation

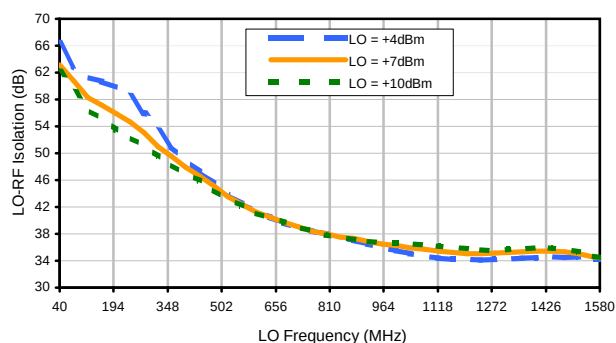


LO-IF Isolation

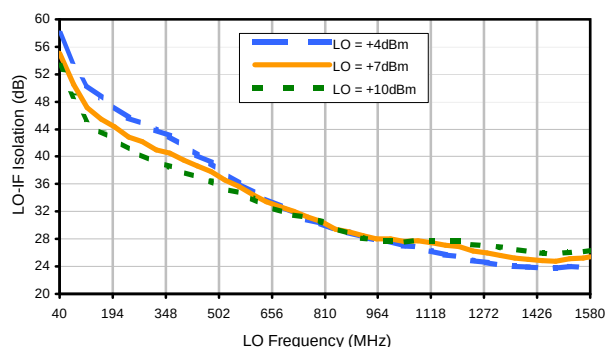


RF-IF Isolation

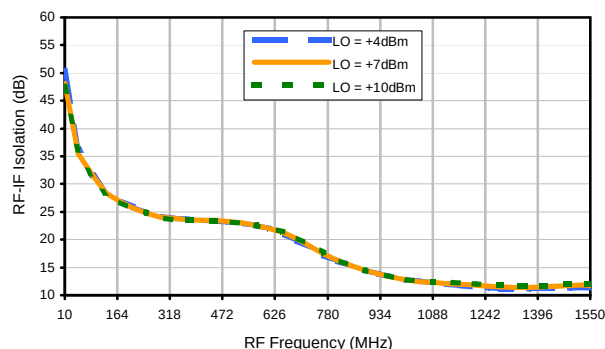


RF VSWR

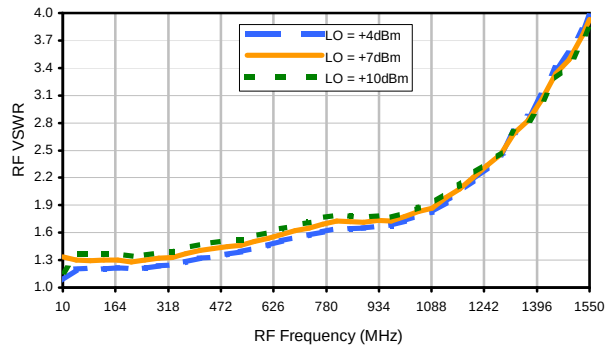

LO VSWR

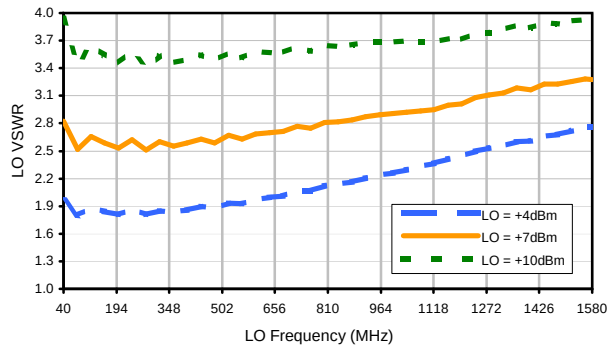

IF VSWR

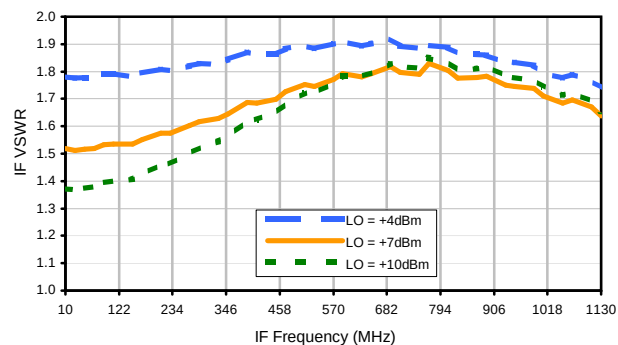

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	6	17	12	22	21	30	31	35	30	60
1	-	15	+0	28	12	29	19	42	43	48	49	45
2	>90	66	51	58	50	69	49	59	56	69	66	65
3	>90	>69	>69	68	>69	>69	66	>69	>69	>69	>69	>69
4	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
5	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
6	>90	>69	>69	>69	>69	>69	>69	>69	66	>69	>69	>69
7	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
8	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
9	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
10	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 582.5 MHz; -14.00 dBm.
LO IN: 612.5 MHz; +7.00 dBm
IF OUT: 30 MHz; -20.95 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	16	27	23	33	34	43	43	50	44	69
1	-	15	+0	28	12	31	20	44	44	52	54	50
2	70	54	42	52	41	63	42	52	50	58	57	58
3	>90	53	55	57	53	55	46	52	48	65	65	64
4	>90	65	74	61	65	62	66	64	56	62	65	76
5	>90	75	73	73	62	71	59	70	59	74	64	>79
6	>90	>79	>79	>79	>79	77	77	>79	74	>79	>79	>79
7	>90	>79	>79	>79	78	>79	>79	>79	>79	>79	>79	>79
8	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
9	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
10	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 582.5 MHz; -4.00 dBm.
LO IN: 612.5 MHz; +7.00 dBm
IF OUT: 30 MHz; -11.02 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Case Style


QQQ

QQQ569 (waterproof)

Outline Dimensions

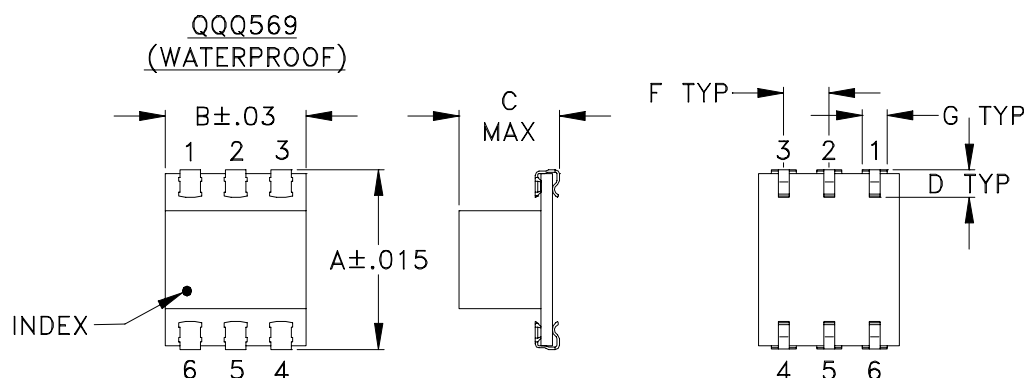

PCB Land Pattern

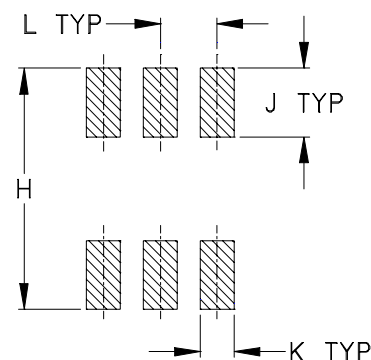

Suggested Layout,
Tolerance to be within $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	WT, GRAM
QQQ569	.390 (9.90)	.31 (7.87)	.225 (5.72)	.060 (1.52)	-	.100 (2.54)	.045 (1.14)	.420 (10.67)	.120 (3.05)	.060 (1.52)	.100 (2.54)	-	.50

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Ceramic.
- Termination finish:
 - For RoHS Case Styles: Tin plate over Nickel plate.
 - For RoHS-5 Case Styles: Tin-Lead plate.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F5

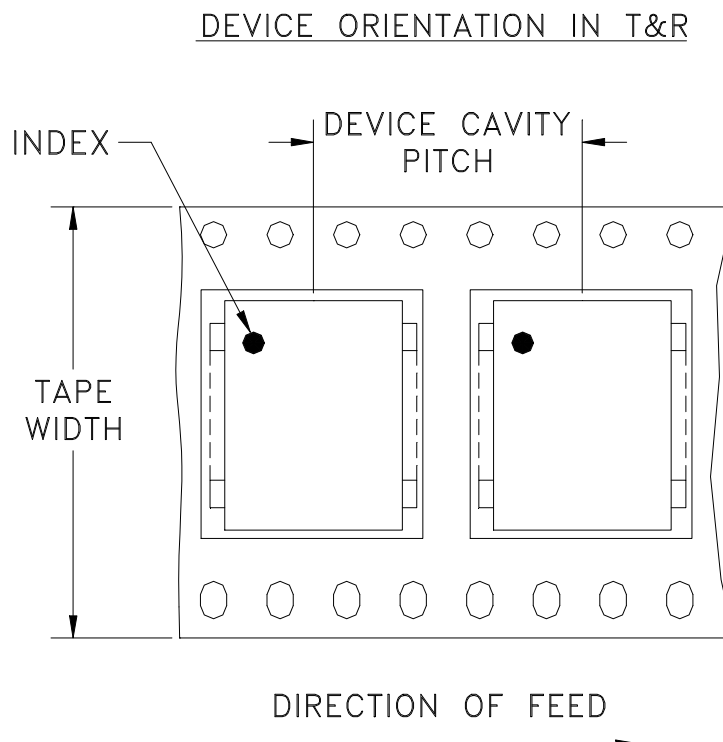

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
32	16	13	500

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M82272	NEW RELEASE	08/02/02	AV	DJ
A	M102713	UPDATED NOTES	01/14/06	GF	IL

SUGGESTED MOUNTING CONFIGURATION FOR QQQ569 CASE STYLE, "w" PIN CONNECTION

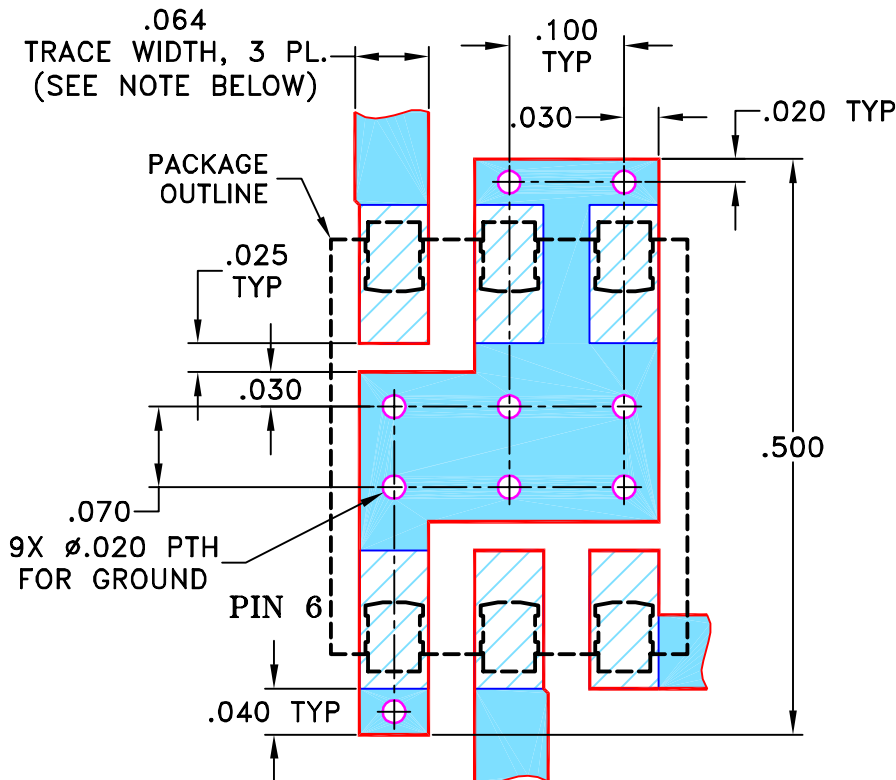

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" $\pm$ 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

AV

07/19/02

TOLERANCES ON:

CHECKED

WL

08/02/02

2 PL DECIMALS $\pm$

APPROVED

DJ

08/02/02

3 PL DECIMALS $\pm$.005

ANGLES $\pm$

FRACTIONS $\pm$

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, w, QQQ569, LRMS-J, TB-44

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-083

REV:

A

FILE:

98PL083


SCALE:

6:1


SHEET:

1 OF 1

Evaluation Board and Circuit

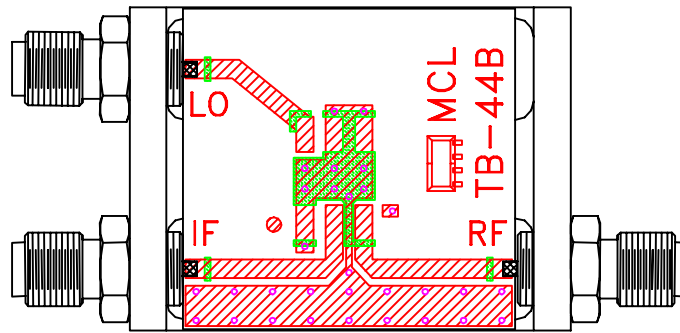


TB-44+

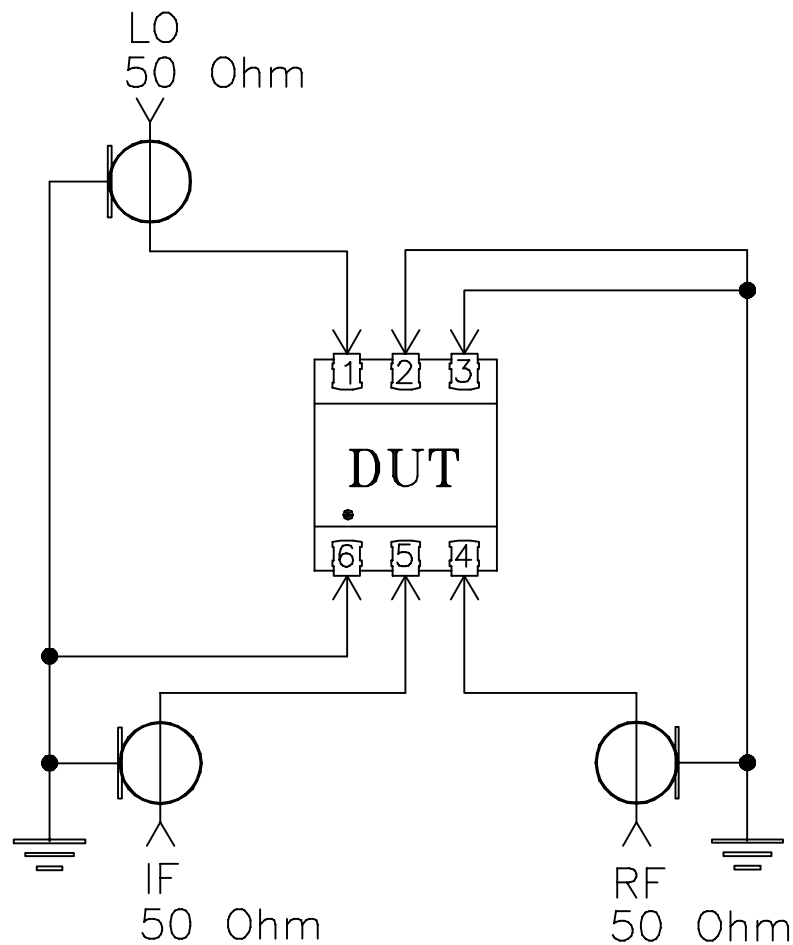

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215