

Engineering Development Model

Frequency Mixer

LRMS-ED9925/1

Level 13 (LO Power +13 dBm)

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability.

At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : 99-01-615

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (f _L to f _U)	200		1000	MHz
	RF (f _L to f _U)	200		1000	MHz
	IF	45		178	MHz
Conversion Loss	mid band		7.3		dB
	Total Range		7.5		dB
LO-RF Isolation			30		dB
LO-IF Isolation			33		dB
IP3 Input			+22		dBm

Note: mid band = $[2f_L \text{ to } f_U/2]$

MAXIMUM RATINGS	
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

PIN CONNECTIONS	
LO	6
RF	2
IF	3
GROUND	1, 4, 5

Frequency Mixer

LRMS-ED9925/1

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=167MHz (dB)		
		@LO (dBm)		
		+10	+13	+16
10.0	177.0	7.96	6.98	6.55
50.0	217.0	8.03	7.21	6.75
90.0	257.0	7.78	7.12	6.60
130.0	297.0	8.19	7.34	6.70
170.0	337.0	8.31	7.37	6.75
210.0	377.0	8.55	7.25	6.74
250.0	417.0	8.60	7.12	6.84
290.0	457.0	7.58	6.89	6.70
330.0	497.0	7.60	7.13	6.94
370.0	537.0	7.55	7.13	6.91
410.0	577.0	7.69	7.25	7.02
450.0	617.0	7.87	7.32	7.10
490.0	657.0	7.98	7.39	7.08
530.0	697.0	8.22	7.56	7.20
570.0	737.0	8.19	7.64	7.33
590.0	757.0	8.31	7.74	7.45
630.0	797.0	8.16	7.52	7.24
650.0	817.0	8.23	7.58	7.31
690.0	857.0	8.20	7.45	7.19
710.0	877.0	8.32	7.48	7.22
750.0	917.0	8.23	7.38	7.07
770.0	937.0	8.37	7.45	7.04
810.0	977.0	8.36	7.58	7.10
830.0	997.0	8.32	7.67	7.22
870.0	1037.0	8.31	7.62	7.34
890.0	1057.0	8.39	7.53	7.26
930.0	1097.0	8.72	7.55	7.30
950.0	1117.0	8.65	7.48	7.24
990.0	1157.0	9.05	7.70	7.37
1010.0	1177.0	9.17	7.67	7.33
1050.0	1217.0	9.56	7.91	7.39
1070.0	1237.0	9.70	7.95	7.44
1110.0	1277.0	9.97	8.09	7.58
1130.0	1297.0	10.39	8.24	7.61
1170.0	1337.0	10.83	8.46	7.67
1190.0	1357.0	11.04	8.64	7.80
1230.0	1397.0	12.51	9.03	7.92
1250.0	1417.0	13.63	9.41	8.16
1290.0	1457.0	14.53	9.66	8.49
1310.0	1477.0	16.27	10.14	8.81

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+10	+13	+16
10.0	177.0	11.23	12.50	15.02
50.0	217.0	10.15	12.21	14.48
90.0	257.0	10.17	13.27	15.78
130.0	297.0	9.47	12.29	16.22
170.0	337.0	9.68	12.22	16.57
210.0	377.0	10.69	14.22	20.09
250.0	417.0	11.11	16.70	20.28
290.0	457.0	15.19	21.58	23.97
330.0	497.0	16.94	21.04	24.26
370.0	537.0	17.27	20.20	22.92
410.0	577.0	19.51	20.57	22.46
450.0	617.0	18.34	19.31	20.91
490.0	657.0	17.44	20.02	20.28
530.0	697.0	15.93	18.45	20.94
570.0	737.0	16.08	16.88	18.62
590.0	757.0	16.87	16.89	18.29
630.0	797.0	16.31	17.15	18.27
650.0	817.0	15.93	16.99	18.22
690.0	857.0	15.90	17.40	18.34
710.0	877.0	15.64	18.07	18.82
750.0	917.0	15.43	17.45	18.71
770.0	937.0	15.12	17.62	18.89
810.0	977.0	15.15	15.88	18.32
830.0	997.0	15.09	15.23	17.39
870.0	1037.0	15.24	15.03	16.49
890.0	1057.0	17.38	15.41	16.97
930.0	1097.0	15.70	16.49	17.58
950.0	1117.0	15.76	16.34	17.84
990.0	1157.0	13.93	17.27	18.16
1010.0	1177.0	13.73	17.84	18.40
1050.0	1217.0	11.99	20.32	18.00
1070.0	1237.0	11.98	21.27	17.84
1110.0	1277.0	11.01	20.95	25.74
1130.0	1297.0	10.16	20.59	20.76
1170.0	1337.0	8.71	18.26	19.74
1190.0	1357.0	8.64	18.49	20.54
1230.0	1397.0	5.82	14.69	21.13
1250.0	1417.0	4.27	12.30	19.30
1290.0	1457.0	3.72	11.93	22.19
1310.0	1477.0	1.91	9.85	20.68

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+9dBm (dB)		
		@LO (dBm)		
		+10	+13	+16
10.0	177.0	1.04	0.66	0.46
50.0	217.0	0.72	0.18	0.17
90.0	257.0	0.98	0.54	0.51
130.0	297.0	0.18	0.20	0.34
170.0	337.0	0.00	0.18	0.40
210.0	377.0	-0.20	0.31	0.38
250.0	417.0	0.02	0.54	0.46
290.0	457.0	1.15	0.82	0.68
330.0	497.0	1.05	0.68	0.58
370.0	537.0	1.19	0.94	0.82
410.0	577.0	1.16	0.88	0.75
450.0	617.0	1.28	1.00	0.81
490.0	657.0	1.30	1.01	0.88
530.0	697.0	1.22	0.92	0.87
570.0	737.0	1.34	0.91	0.81
590.0	757.0	1.20	0.82	0.71
630.0	797.0	1.34	0.98	0.87
650.0	817.0	1.32	0.97	0.83
690.0	857.0	1.30	1.04	0.86
710.0	877.0	1.04	0.98	0.83
750.0	917.0	1.05	1.05	0.93
770.0	937.0	1.01	1.00	0.99
810.0	977.0	1.02	0.82	0.94
830.0	997.0	0.84	0.59	0.75
870.0	1037.0	0.81	0.55	0.55
890.0	1057.0	0.90	0.69	0.60
930.0	1097.0	0.66	0.73	0.60
950.0	1117.0	0.57	0.73	0.61
990.0	1157.0	0.26	0.61	0.55
1010.0	1177.0	0.31	0.67	0.59
1050.0	1217.0	-0.02	0.49	0.57
1070.0	1237.0	-0.19	0.47	0.56
1110.0	1277.0	-0.33	0.50	0.52
1130.0	1297.0	-0.44	0.48	0.54
1170.0	1337.0	-0.62	0.46	0.64
1190.0	1357.0	-0.83	0.40	0.70
1230.0	1397.0	-1.66	0.31	0.81
1250.0	1417.0	-2.28	0.18	0.71
1290.0	1457.0	-2.63	0.26	0.62
1310.0	1477.0	-3.77	0.18	0.54

REV. X2

LRMS-ED9925/1

101012

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

LRMS-ED9925/1

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=600MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=189.9MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1010.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+13			+13			+13
529.9	70.1	10.78	10.1	200.0	7.96	930.1	80.0	10.89
501.0	99.0	8.51	50.1	240.0	7.54	909.7	100.4	9.61
472.1	127.9	8.14	90.1	280.0	7.32	889.2	120.9	9.17
443.3	156.8	8.33	130.1	320.0	7.10	868.8	141.3	9.15
414.4	185.6	8.21	170.1	360.0	7.27	848.3	161.8	8.94
385.5	214.5	8.19	210.1	400.0	7.07	827.9	182.2	8.93
356.6	243.4	8.28	250.1	440.0	6.88	807.4	202.7	8.66
327.7	272.3	8.42	290.1	480.0	6.80	787.0	223.1	8.67
298.8	301.2	8.61	330.1	520.0	6.90	766.5	243.6	8.64
270.0	330.1	8.04	370.1	560.0	7.05	746.1	264.0	8.59
241.1	358.9	8.04	410.1	600.0	7.07	725.7	284.4	8.59
212.2	387.8	7.90	430.1	620.0	6.88	705.2	304.9	8.38
183.3	416.7	7.54	470.1	660.0	7.11	684.8	325.3	8.50
154.4	445.6	7.51	490.1	680.0	7.06	664.3	345.8	8.25
125.5	474.5	7.33	530.1	720.0	7.17	643.9	366.2	8.34
96.7	503.4	7.41	550.1	740.0	7.32	623.4	386.7	8.16
67.8	532.2	7.44	590.1	780.0	7.28	603.0	407.1	7.82
38.9	561.1	7.38	610.1	800.0	7.36	582.5	427.6	7.91
10.0	590.0	7.93	650.1	840.0	7.36	562.1	448.0	7.68
35.6	635.6	7.48	670.1	860.0	7.30	541.7	468.4	7.70
86.7	686.7	7.50	710.1	900.0	7.43	521.2	488.9	7.63
137.8	737.8	7.65	730.1	920.0	7.44	500.8	509.3	7.60
188.9	788.9	7.62	770.1	960.0	7.60	480.3	529.8	7.67
240.0	840.0	7.50	790.1	980.0	7.70	459.9	550.2	7.50
291.1	891.1	7.51	830.1	1020.0	7.87	439.4	570.7	7.55
342.3	942.3	7.43	850.1	1040.0	7.95	419.0	591.1	7.33
393.4	993.4	7.62	890.1	1080.0	8.01	398.5	611.6	7.49
444.5	1044.5	7.58	910.1	1100.0	8.18	378.1	632.0	7.38
495.6	1095.6	7.48	950.1	1140.0	8.42	337.2	672.9	7.50
546.7	1146.7	7.53	970.1	1160.0	8.38	316.8	693.3	7.41
597.8	1197.8	7.45	1010.1	1200.0	8.28	275.9	734.2	7.33
623.4	1223.4	7.46	1030.1	1220.0	8.40	255.4	754.7	7.49
674.5	1274.5	7.59	1070.1	1260.0	8.66	214.5	795.6	7.51
700.1	1300.1	7.85	1090.1	1280.0	8.87	194.1	816.0	7.39
751.2	1351.2	8.25	1130.1	1320.0	9.35	153.2	856.9	7.45
776.7	1376.8	8.41	1150.1	1340.0	9.50	132.8	877.3	7.36
827.9	1427.9	8.67	1190.1	1380.0	9.90	91.9	918.2	7.43
853.4	1453.4	8.71	1210.1	1400.0	10.13	71.4	938.7	7.64
904.5	1504.5	9.84	1250.1	1440.0	10.53	30.5	979.6	7.70
930.1	1530.1	10.25	1270.1	1460.0	10.78	10.1	1000.0	8.11

REV. X2

LRMS-ED9925/1

101012

Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+10	+13	+16	+10	+13	+16
177.0	40.59	40.46	40.25	47.13	47.82	48.80
217.0	40.02	40.08	40.23	44.71	45.65	47.18
257.0	38.92	39.15	39.10	42.46	43.65	45.78
297.0	38.74	39.54	39.68	40.83	41.98	43.92
337.0	37.81	39.19	38.78	39.60	41.00	42.81
377.0	37.65	38.65	37.85	38.43	40.61	42.23
417.0	36.81	36.72	36.10	37.75	40.19	41.42
457.0	34.88	34.90	34.98	37.05	38.62	39.66
497.0	34.29	34.65	34.69	35.76	37.35	38.48
537.0	32.79	33.25	33.70	34.58	36.11	37.21
577.0	32.26	32.40	32.78	33.74	35.15	36.12
617.0	31.31	31.67	32.17	32.96	34.43	35.35
657.0	30.22	30.86	31.35	32.24	33.56	34.22
697.0	30.16	31.06	32.09	31.34	32.52	33.15
737.0	28.13	28.88	29.85	30.13	31.17	31.68
757.0	28.35	29.29	30.19	29.87	31.01	31.34
797.0	26.44	27.48	28.77	28.97	30.01	30.34
817.0	26.40	27.51	28.89	28.77	29.66	29.93
857.0	25.61	26.87	28.42	28.32	29.08	29.11
877.0	25.21	26.49	28.17	27.88	28.61	28.62
917.0	24.05	25.65	27.54	27.44	28.06	27.85
937.0	24.12	25.68	27.63	27.27	27.62	27.42
977.0	23.08	24.76	26.82	26.65	26.81	26.44
997.0	22.55	24.22	26.29	26.35	26.37	25.97
1037.0	22.49	24.45	26.60	26.18	25.97	25.42
1057.0	21.75	23.70	25.80	25.93	25.81	25.08
1097.0	21.40	23.37	25.32	25.92	25.87	24.87
1117.0	20.68	22.63	24.40	25.63	25.62	24.64
1157.0	20.57	22.39	23.91	25.81	25.36	24.33
1177.0	20.05	21.74	23.24	25.89	25.04	24.14
1217.0	19.65	21.21	22.66	26.21	25.12	24.22
1237.0	19.45	20.88	22.33	26.44	25.10	24.04
1277.0	18.85	20.16	21.40	26.77	25.24	24.18
1297.0	18.60	19.94	21.18	27.29	25.64	24.36
1337.0	18.19	19.28	20.43	28.22	26.07	24.78
1357.0	18.21	19.41	20.59	29.11	26.58	25.24
1397.0	17.76	18.58	19.97	30.94	27.55	25.80
1417.0	17.59	18.40	19.79	32.77	28.73	26.57
1457.0	17.07	17.74	19.09	34.33	29.20	27.01
1477.0	16.92	17.50	18.84	37.24	30.93	27.86

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+10	+13	+16
10.0	177.0	54.58	56.04	57.31
50.0	217.0	44.06	45.16	46.77
90.0	257.0	38.78	40.55	43.18
130.0	297.0	35.81	37.80	40.81
170.0	337.0	32.97	34.95	37.52
210.0	377.0	31.28	33.84	35.37
250.0	417.0	29.98	32.32	32.91
290.0	457.0	29.88	31.09	31.40
330.0	497.0	29.39	30.14	30.48
370.0	537.0	28.97	29.72	30.02
410.0	577.0	28.17	28.88	29.11
450.0	617.0	27.34	28.25	28.69
490.0	657.0	27.12	27.81	28.27
530.0	697.0	27.14	27.88	28.10
570.0	737.0	27.25	27.86	27.86
590.0	757.0	26.90	27.46	27.37
630.0	797.0	26.46	26.64	26.26
650.0	817.0	26.73	26.79	26.26
690.0	857.0	25.98	25.69	25.27
710.0	877.0	25.76	25.18	24.77
750.0	917.0	25.00	24.09	23.57
770.0	937.0	24.54	23.40	22.74
810.0	977.0	23.69	22.48	21.69
830.0	997.0	23.12	21.96	21.15
870.0	1037.0	21.96	20.73	20.12
890.0	1057.0	21.51	19.97	19.34
930.0	1097.0	20.55	18.57	17.93
950.0	1117.0	19.87	17.98	17.28
990.0	1157.0	19.04	17.45	16.64
1010.0	1177.0	19.14	17.49	16.70
1050.0	1217.0	18.90	17.44	16.48
1070.0	1237.0	18.57	17.14	16.18
1110.0	1277.0	17.91	16.59	15.84
1130.0	1297.0	17.55	16.20	15.51
1170.0	1337.0	16.85	15.65	14.93
1190.0	1357.0	16.49	15.30	14.61
1230.0	1397.0	16.14	14.98	14.09
1250.0	1417.0	16.05	14.77	13.82
1290.0	1457.0	15.56	14.21	13.45
1310.0	1477.0	15.74	14.07	13.36

Frequency Mixer

LRMS-ED9925/1

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1000MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+10	+13	+16		+10	+13	+16		+10	+13	+16
10.0	177.0	1.43	1.04	1.24	177.0	3.06	2.30	2.51	10.1	1.58	1.47	1.40
50.0	217.0	1.23	1.05	1.25	217.0	2.28	1.96	2.44	30.1	1.54	1.41	1.33
90.0	257.0	1.28	1.07	1.26	257.0	1.96	1.76	2.25	50.1	1.55	1.42	1.34
130.0	297.0	1.35	1.10	1.18	297.0	1.67	1.64	2.16	70.1	1.56	1.43	1.35
170.0	337.0	1.48	1.16	1.13	337.0	1.58	1.61	2.14	90.1	1.51	1.38	1.30
210.0	377.0	1.53	1.12	1.09	377.0	1.52	1.57	2.05	110.1	1.49	1.36	1.28
250.0	417.0	1.54	1.08	1.06	417.0	1.56	1.48	2.00	130.1	1.55	1.42	1.34
290.0	457.0	1.30	1.07	1.01	457.0	1.58	1.33	1.89	150.1	1.53	1.41	1.33
330.0	497.0	1.29	1.12	1.04	497.0	1.51	1.22	1.86	170.1	1.46	1.34	1.27
370.0	537.0	1.34	1.20	1.10	537.0	1.50	1.16	1.80	190.1	1.47	1.35	1.28
410.0	577.0	1.42	1.27	1.19	577.0	1.56	1.13	1.74	210.1	1.51	1.39	1.33
450.0	617.0	1.51	1.32	1.25	617.0	1.65	1.15	1.70	230.1	1.47	1.36	1.30
490.0	657.0	1.62	1.43	1.33	657.0	1.74	1.18	1.64	250.1	1.45	1.33	1.27
530.0	697.0	1.73	1.52	1.41	697.0	1.90	1.20	1.60	270.1	1.46	1.35	1.30
570.0	737.0	1.77	1.61	1.51	737.0	1.98	1.22	1.51	290.1	1.44	1.34	1.31
590.0	757.0	1.83	1.64	1.56	757.0	2.08	1.24	1.47	310.1	1.42	1.32	1.28
630.0	797.0	1.85	1.68	1.62	797.0	2.26	1.28	1.40	330.1	1.43	1.33	1.29
650.0	817.0	1.87	1.70	1.66	817.0	2.32	1.30	1.35	350.1	1.42	1.34	1.31
690.0	857.0	1.92	1.74	1.72	857.0	2.53	1.37	1.27	370.1	1.37	1.29	1.27
710.0	877.0	1.94	1.74	1.73	877.0	2.68	1.40	1.22	390.1	1.37	1.29	1.28
750.0	917.0	1.97	1.77	1.75	917.0	2.82	1.46	1.13	430.1	1.36	1.31	1.31
770.0	937.0	1.99	1.80	1.74	937.0	2.93	1.50	1.09	450.1	1.32	1.26	1.27
810.0	977.0	1.99	1.87	1.78	977.0	3.26	1.60	1.06	490.1	1.35	1.33	1.36
830.0	997.0	1.95	1.89	1.82	997.0	3.40	1.66	1.11	510.1	1.30	1.29	1.32
870.0	1037.0	1.94	1.90	1.91	1037.0	3.78	1.84	1.29	550.1	1.31	1.32	1.36
890.0	1057.0	1.94	1.88	1.93	1057.0	3.97	1.93	1.38	570.1	1.30	1.34	1.40
930.0	1097.0	1.99	1.84	1.94	1097.0	4.46	2.12	1.56	610.1	1.29	1.34	1.39
950.0	1117.0	1.99	1.82	1.93	1117.0	4.73	2.22	1.68	630.1	1.28	1.36	1.43
990.0	1157.0	2.04	1.79	1.90	1157.0	5.36	2.51	1.98	670.1	1.28	1.38	1.45
1010.0	1177.0	2.10	1.80	1.90	1177.0	5.74	2.67	2.16	690.1	1.31	1.43	1.50
1050.0	1217.0	2.14	1.79	1.87	1217.0	7.28	3.22	2.58	730.1	1.29	1.42	1.50
1070.0	1237.0	2.15	1.79	1.85	1237.0	7.76	3.50	2.83	750.1	1.35	1.49	1.57
1110.0	1277.0	2.14	1.78	1.78	1277.0	9.28	4.28	3.48	790.1	1.38	1.53	1.61
1130.0	1297.0	2.22	1.80	1.75	1297.0	11.03	4.87	3.89	810.1	1.39	1.54	1.62
1170.0	1337.0	2.24	1.81	1.71	1337.0	13.39	6.11	4.87	850.1	1.50	1.66	1.75
1190.0	1357.0	2.26	1.82	1.70	1357.0	14.15	6.71	5.41	870.1	1.51	1.67	1.76
1230.0	1397.0	2.57	1.86	1.70	1397.0	17.57	8.77	6.58	910.1	1.62	1.78	1.87
1250.0	1417.0	2.86	1.89	1.71	1417.0	18.90	10.02	7.28	930.1	1.65	1.82	1.90
1290.0	1457.0	2.92	1.88	1.76	1457.0	19.32	11.61	8.68	970.1	1.78	1.95	2.04
1310.0	1477.0	3.37	1.91	1.79	1477.0	19.76	13.39	9.43	990.1	1.78	1.93	2.01

REV. X2

LRMS-ED9925/1

101012

Page 4 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+2	10	18	30	19	35	16	41	25	60
1	-	15	+0	25	11	34	44	35	39	42	47	48
2	73	58	55	62	57	63	64	>76	61	69	56	64
3	>90	68	67	67	65	69	71	>76	>76	>76	73	>76
4	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
5	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
6	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
7	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
8	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
9	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
10	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 800 MHz; -6.00 dBm.
LO IN: 967 MHz; +13.00 dBm
IF OUT: 167 MHz; -14.01 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	8	20	29	41	31	44	28	53	38	62
1	-	15	+0	25	11	36	44	39	43	45	50	51
2	54	55	44	51	45	48	52	66	50	60	46	59
3	82	48	45	46	45	49	49	55	65	51	53	61
4	>90	77	69	66	69	69	74	65	85	81	75	76
5	>90	74	78	72	64	68	65	74	68	79	75	74
6	>90	>86	>86	>86	>86	81	86	77	76	86	>86	>86
7	>90	>86	>86	>86	>86	86	82	82	76	79	>86	>86
8	>90	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
9	>90	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
10	>90	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER


Test conditions:

RF IN: 800 MHz; 4.00 dBm.
LO IN: 967 MHz; +13.00 dBm
IF OUT: 167 MHz; -3.99 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Typical Performance Curves


Conversion Loss @ IF=167MHz

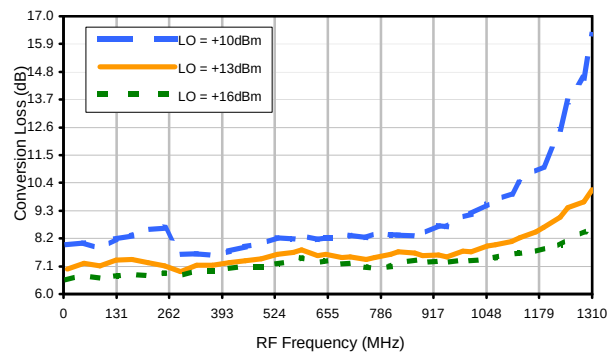


Conversion Loss vs. LO @ RF=600MHz

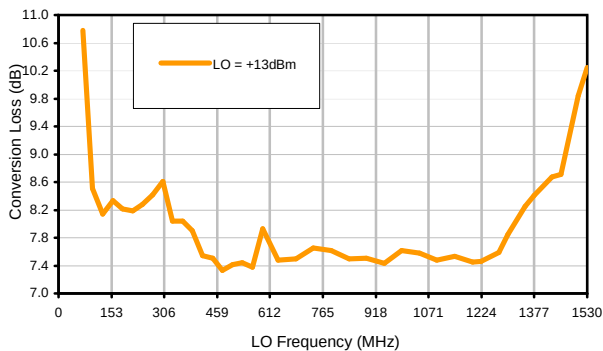


Conversion Loss vs. IF @ RF=600MHz

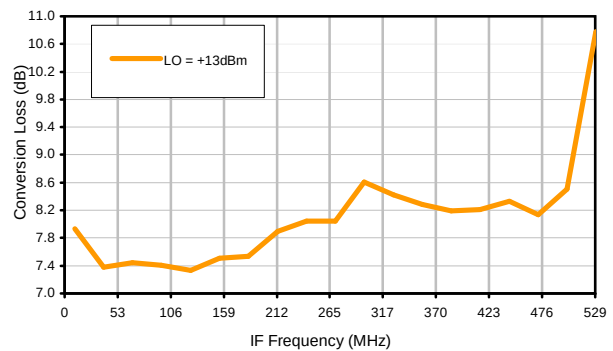


Conversion Loss vs. IF @ RF=189.9MHz

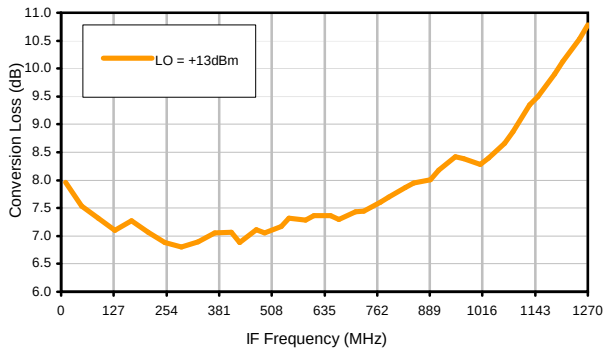


Conversion Loss vs. IF @ RF=1010.1MHz

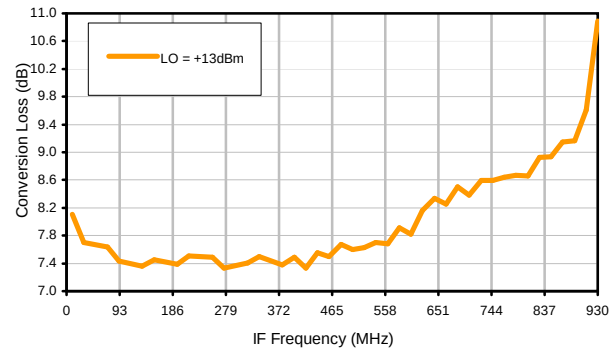

IP3 Input

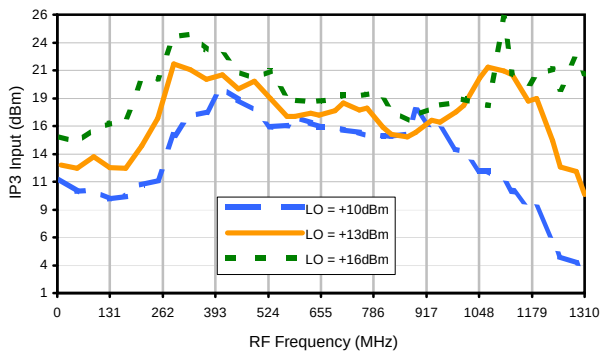


Compression @ RF IN=+9dBm

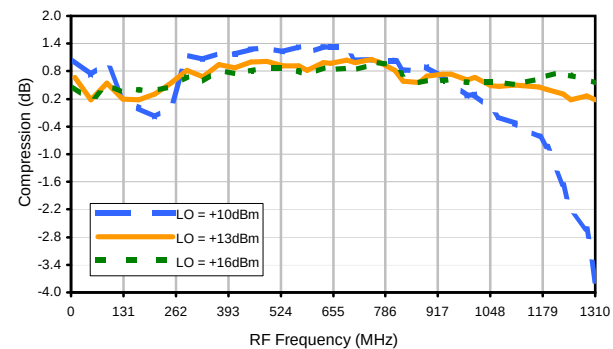


Typical Performance Curves


LO-RF Isolation

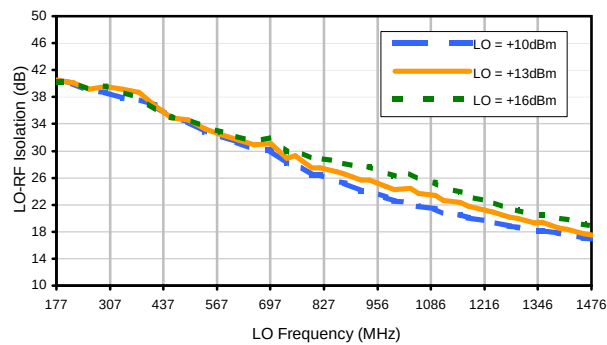


LO-IF Isolation

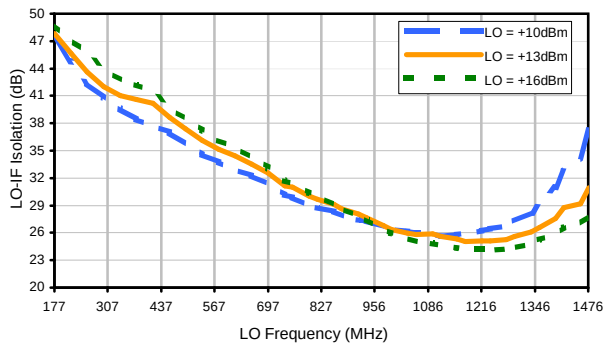


RF-IF Isolation

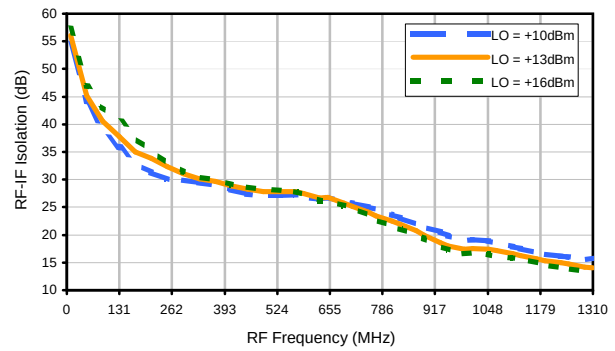


RF VSWR

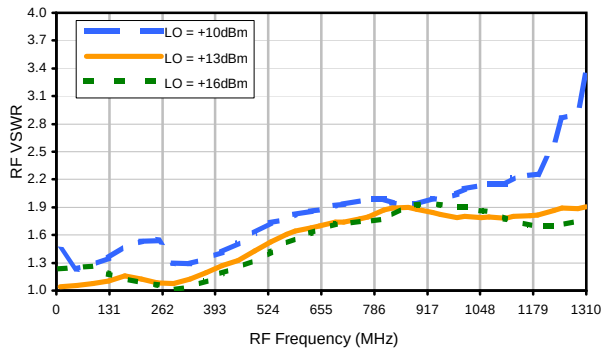

LO VSWR

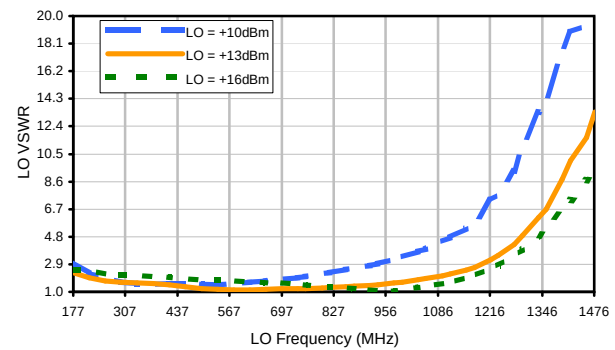

IF VSWR

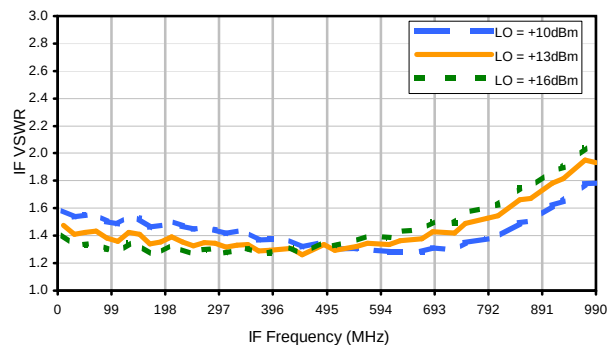

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+2	10	18	30	19	35	16	41	25	60
1	-	15	+0	25	11	34	44	35	39	42	47	48
2	73	58	55	62	57	63	64	>76	61	69	56	64
3	>90	68	67	67	65	69	71	>76	>76	>76	73	>76
4	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
5	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
6	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
7	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
8	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
9	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
10	>90	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76	>76
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 800 MHz; -6.00 dBm.
LO IN: 967 MHz; +13.00 dBm
IF OUT: 167 MHz; -14.01 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	8	20	29	41	31	44	28	53	38	62
1	-	15	+0	25	11	36	44	39	43	45	50	51
2	54	55	44	51	45	48	52	66	50	60	46	59
3	82	48	45	46	45	49	49	55	65	51	53	61
4	>90	77	69	66	69	69	74	65	85	81	75	76
5	>90	74	78	72	64	68	65	74	68	79	75	74
6	>90	>86	>86	>86	>86	81	86	77	76	86	>86	>86
7	>90	>86	>86	>86	>86	86	82	82	76	79	>86	>86
8	>90	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
9	>90	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
10	>90	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
	RF CAL	0	1	2	3	4	5	6	7	8	9	10


LO HARMONICS ORDER

Test conditions: RF IN: 800 MHz; 4.00 dBm.
LO IN: 967 MHz; +13.00 dBm
IF OUT: 167 MHz; -3.99 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
LRMS-ED9925/1
101012
Page 3 of 3


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M82272	NEW RELEASE	08/02/02	AV	DJ
A	M102713	UPDATED NOTES	01/14/06	GF	IL

SUGGESTED MOUNTING CONFIGURATION FOR QQQ569 CASE STYLE, "w" PIN CONNECTION

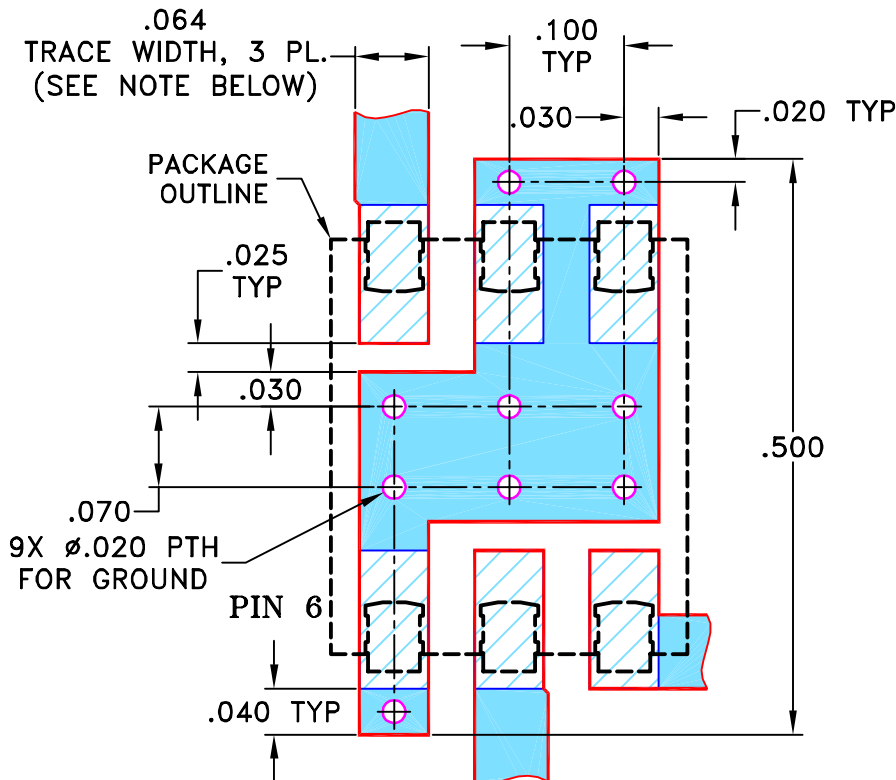

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" $\pm$ 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

AV

07/19/02

TOLERANCES ON:

CHECKED

WL

08/02/02

2 PL DECIMALS $\pm$.005

APPROVED

DJ

08/02/02

ANGLES $\pm$

FRACTIONS $\pm$

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VEEDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, w, QQQ569, LRMS-J, TB-44

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-083

REV:

A

FILE:

98PL083


SCALE:

6:1


SHEET:

1 OF 1

Evaluation Board and Circuit

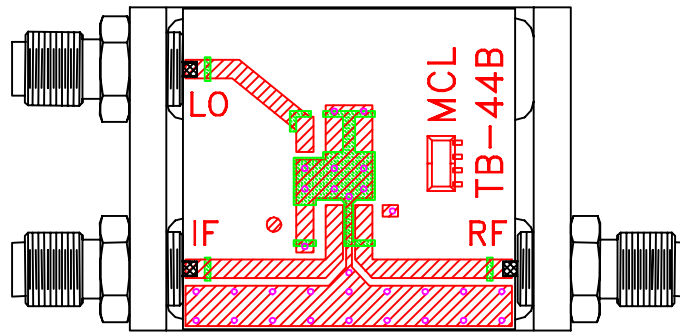


TB-44+

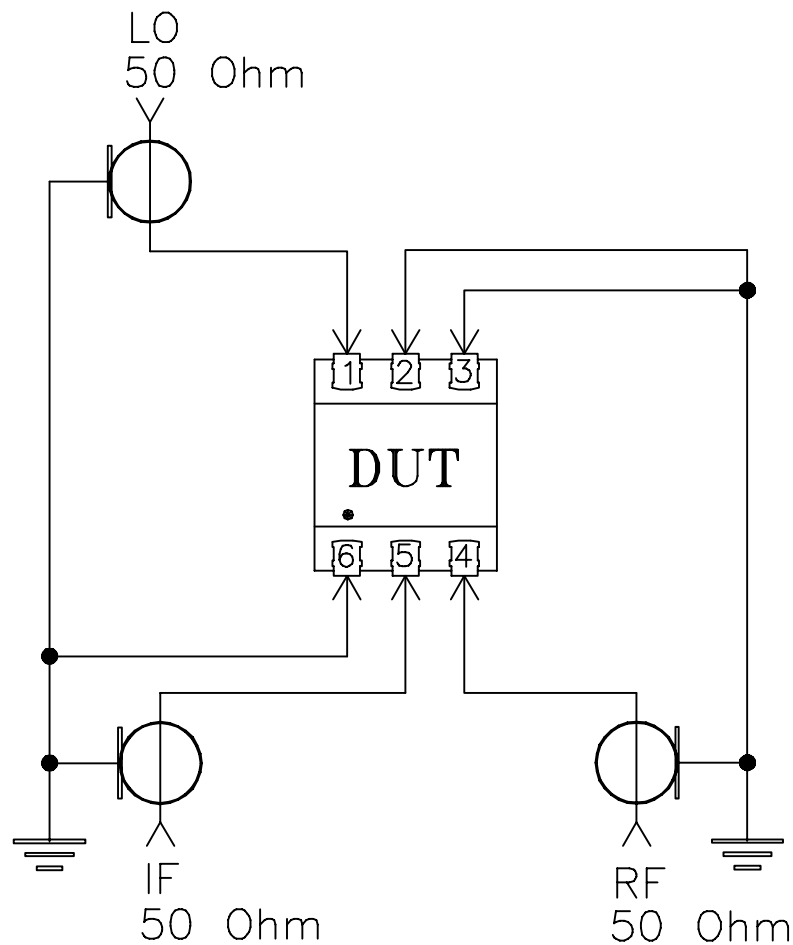

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215