Ceramic

Active Mixer

MACA-63H+

Level 0 (LO Power 0 dBm) 2000 to 6000 MHz



Generic photo used for illustration purposes only

CASE STYLE: DZ1034

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500,1000

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	100mW
IF Current	40mA
LO Power	10mW

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	10
RF	5
IF	3
DC	7
GROUND	1,2,4,6,8,9

Outline Drawing

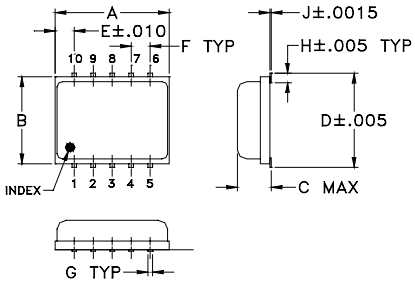

PCB Land Pattern



Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G
.30	.250	.105	.266	.050	.050	.012
7.62	6.35	2.67	6.76	1.27	1.27	0.30
H	J	K	L	M		wt
.029	.004	.085	.296	.030		grams
0.74	0.10	2.16	7.52	0.76		0.3

Demo Board MCL P/N: TB-404
Suggested PCB Layout (PL-283)

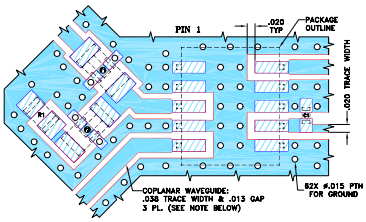

CAPACITOR C1: 1000 pF, 0402 SIZE
RESISTOR R1: 49.9 Ohm, 0805 SIZE
FILTER F1: LFCN-1400+, FV1206 CASE STYLE
FILTER F2: HFCN-1810+, FV1206 CASE STYLE

NOTE: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low conversion loss, 6.9 dB typ.
- wide bandwidth, 2000 to 6000 MHz
- LTCC double balanced mixer with LO amplifier
- aqueous washable
- low profile
- low cost
- protected by US patent 7,027,795

Applications

- PCN
- defense & weather radar
- WCDMA
- defense communications

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS* (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		DC POWER		IP3 at center band (dBm)
LO/RF f_L-f_U	IF	$\bar{X}$	σ	Max.	Typ.	Min.	Typ.	Min.	Volt	Current (mA) Max.	Typ.
2000-3500	DC-1000	6.9	0.1	8.9	16	10	35	23	5	110	20
3500-6000	DC-1000	6.9	0.1	8.9**	8	3	35	27	5	110	19

1 dB Compr. +10 dBm typ.
* Conversion loss at 30 MHz IF.
* 9.6 dB over at 3500-4500 MHz

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO 0dBm	LO 0dBm	LO 0dBm	LO 0dBm	LO 0dBm
2005.10	1975.10	6.41	22.93	35.96	2.40	5.17
2205.10	2175.10	6.50	20.61	45.55	2.42	5.83
2405.10	2375.10	5.80	21.34	33.28	2.11	3.80
2605.10	2575.10	5.89	18.60	33.35	1.87	3.21
2805.10	2775.10	6.96	17.66	35.62	3.43	3.09
3005.10	2975.10	6.65	14.13	36.97	2.95	3.10
3205.10	3175.10	7.25	12.80	36.60	3.12	3.17
3405.10	3375.10	7.25	15.03	34.47	3.15	2.97
3605.10	3575.10	7.95	14.75	33.49	3.73	2.39
3805.10	3775.10	7.78	18.55	31.52	3.26	1.82
4005.10	3975.10	7.16	18.19	32.59	2.66	1.44
4405.10	4375.10	6.15	8.68	37.37	1.40	1.48
4605.10	4575.10	6.67	8.24	37.63	1.63	1.56
4805.10	4775.10	7.06	8.76	37.81	1.58	1.62
5005.10	4975.10	6.81	6.77	36.56	1.17	1.67
5205.10	5175.10	6.40	6.01	35.48	1.61	1.60
5405.10	5375.10	6.46	6.05	34.71	1.65	1.47
5605.10	5575.10	6.95	7.12	33.12	2.21	1.36
5805.10	5775.10	7.27	7.91	33.45	2.57	1.35
6005.10	5975.10	7.48	8.62	33.08	2.82	1.43

Electrical Schematic

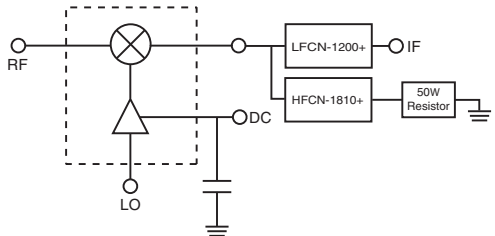

LFCN-1200+ & HFCN-1810+ are added to improve isola-

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

MACA-63H+
CONVERSION LOSS
at IF Freq.=30 MHz

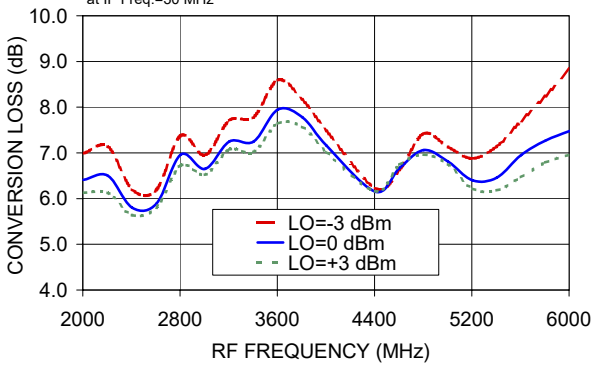

MACA-63H+
CONVERSION LOSS (VARIABLE IF)
RF=6000 MHz

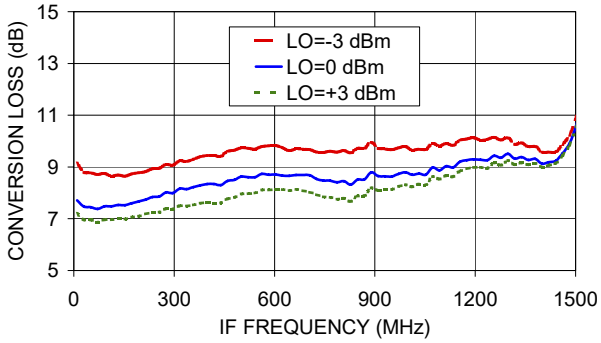

MACA-63H+
L-R ISOLATION

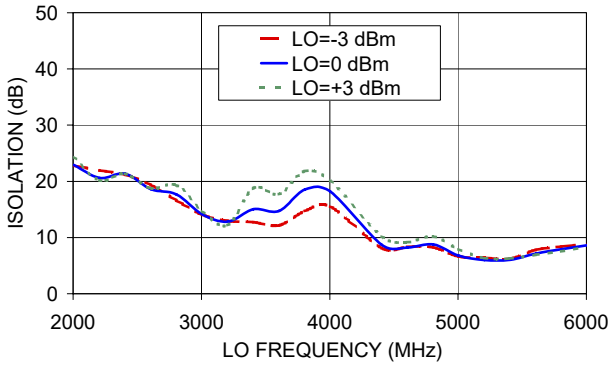

MACA-63H+
L-I ISOLATION

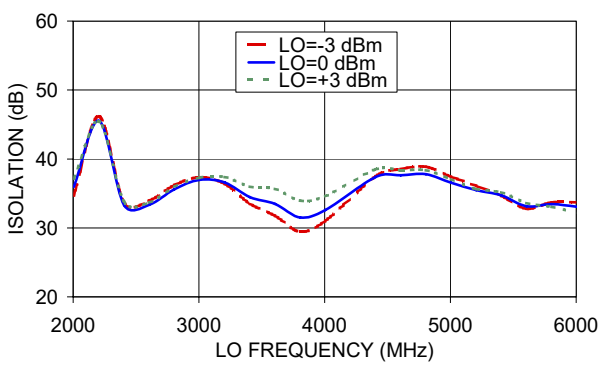

MACA-63H+
RF VSWR

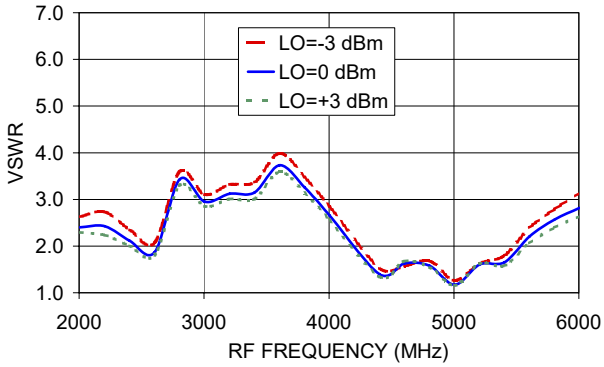

MACA-63H+
LO VSWR

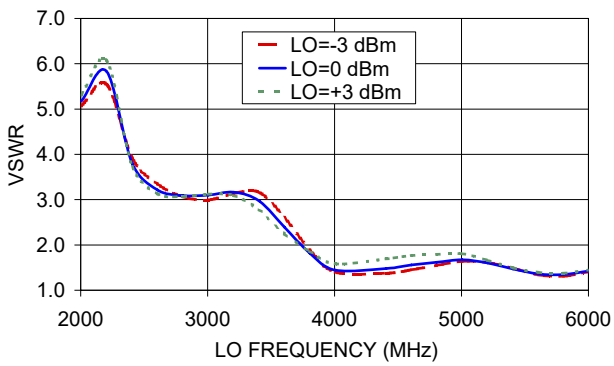

MACA-63H+
IF VSWR

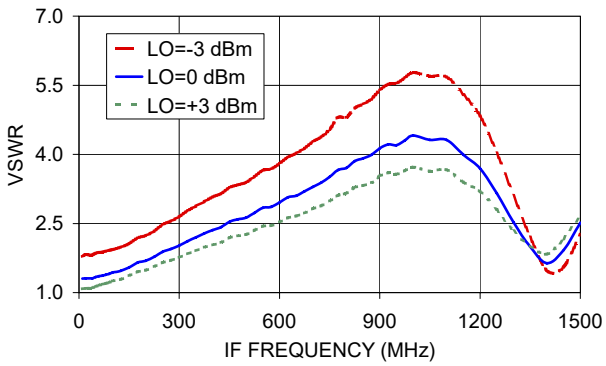

MACA-63H+
IP3

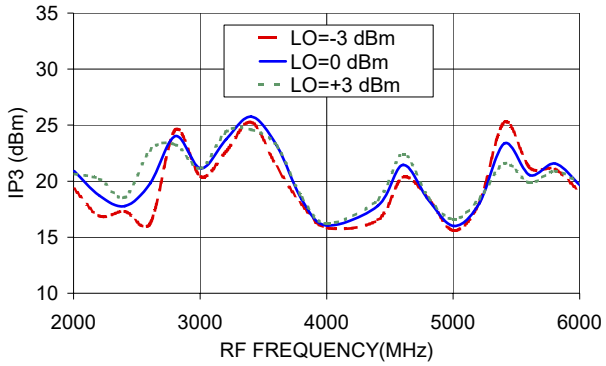

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Frequency Mixer MACA-63H+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB) @LO (dBm)		
		-3	0	+3
1540.1	1510.1	8.10	6.93	6.44
1660.1	1630.1	7.87	7.28	7.00
1780.1	1750.1	7.66	7.00	6.61
1900.1	1870.1	7.12	6.43	6.07
2020.1	1990.1	6.99	6.28	5.98
2140.1	2110.1	7.36	6.56	6.13
2260.1	2230.1	6.86	6.19	5.88
2380.1	2350.1	6.25	5.80	5.64
2500.1	2470.1	6.10	5.73	5.65
2620.1	2590.1	6.18	5.92	5.83
2740.1	2710.1	7.20	6.78	6.58
2860.1	2830.1	7.59	7.10	6.86
2980.1	2950.1	6.93	6.60	6.44
3100.1	3070.1	6.74	6.43	6.32
3220.1	3190.1	7.66	7.17	6.95
3340.1	3310.1	7.43	6.99	6.80
3460.1	3430.1	8.16	7.38	7.07
3580.1	3550.1	8.83	8.05	7.67
3700.1	3670.1	8.70	8.08	7.78
3820.1	3790.1	8.26	7.78	7.52
3940.1	3910.1	7.64	7.29	7.10
4060.1	4030.1	7.04	6.71	6.58
4180.1	4150.1	6.51	6.33	6.28
4300.1	4270.1	6.07	5.94	5.90
4420.1	4390.1	5.95	5.83	5.81
4540.1	4510.1	6.05	6.00	6.01
4660.1	4630.1	7.07	6.90	6.88
4780.1	4750.1	7.59	6.99	6.85
4900.1	4870.1	7.12	6.62	6.51
5040.1	5010.1	7.08	6.48	6.28
5160.1	5130.1	6.97	6.33	6.06
5300.1	5270.1	7.07	6.38	6.09
5420.1	5390.1	7.33	6.44	6.03
5560.1	5530.1	7.49	6.60	6.17
5680.1	5650.1	7.89	6.99	6.48
5820.1	5790.1	8.06	7.03	6.53
5940.1	5910.1	8.54	7.18	6.64
6080.1	6050.1	9.36	7.43	6.82
6200.1	6170.1	11.46	7.98	7.02
6340.1	6310.1	19.54	12.58	8.82

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm) @LO (dBm)		
		-3	0	+3
1540.1	1510.1	17.30	17.74	17.53
1660.1	1630.1	15.35	17.28	18.11
1780.1	1750.1	17.57	18.29	20.20
1900.1	1870.1	19.34	24.15	20.96
2020.1	1990.1	15.31	19.93	22.33
2140.1	2110.1	15.81	17.65	17.90
2260.1	2230.1	17.88	20.84	23.09
2380.1	2350.1	18.67	18.01	18.00
2500.1	2470.1	16.07	16.65	19.01
2620.1	2590.1	18.00	23.63	27.44
2740.1	2710.1	21.33	21.06	21.66
2860.1	2830.1	24.53	24.03	23.29
2980.1	2950.1	20.84	21.37	21.29
3100.1	3070.1	20.04	20.77	21.22
3220.1	3190.1	20.84	21.76	23.11
3340.1	3310.1	21.55	23.44	23.32
3460.1	3430.1	24.19	22.70	20.89
3580.1	3550.1	19.22	22.39	23.62
3700.1	3670.1	17.69	19.45	20.28
3820.1	3790.1	16.78	18.08	18.79
3940.1	3910.1	15.78	15.98	16.33
4060.1	4030.1	16.06	17.52	17.80
4180.1	4150.1	17.47	17.86	17.64
4300.1	4270.1	16.22	17.14	17.23
4420.1	4390.1	15.67	17.50	18.21
4540.1	4510.1	17.09	18.90	20.00
4660.1	4630.1	17.07	28.06	26.02
4780.1	4750.1	18.35	20.49	20.05
4900.1	4870.1	15.22	15.92	16.43
5040.1	5010.1	15.95	16.32	16.60
5160.1	5130.1	17.84	17.83	17.98
5300.1	5270.1	21.82	19.89	18.62
5420.1	5390.1	20.20	20.97	19.88
5560.1	5530.1	21.53	21.35	22.32
5680.1	5650.1	23.88	22.65	21.08
5820.1	5790.1	21.20	21.66	21.50
5940.1	5910.1	20.32	20.26	20.66
6080.1	6050.1	16.83	18.58	19.94
6200.1	6170.1	11.32	16.69	18.71
6340.1	6310.1	3.92	10.52	18.64

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+10dBm (dB) @LO (dBm)		
		-3	0	+3
1540.1	1510.1	2.36	2.20	2.06
1660.1	1630.1	1.77	1.51	1.34
1780.1	1750.1	1.31	1.10	1.01
1900.1	1870.1	1.54	1.26	1.12
2020.1	1990.1	1.91	1.53	1.29
2140.1	2110.1	2.39	1.74	1.51
2260.1	2230.1	2.09	1.36	0.99
2380.1	2350.1	1.41	0.99	0.77
2500.1	2470.1	1.17	0.77	0.56
2620.1	2590.1	1.14	0.74	0.62
2740.1	2710.1	1.33	1.06	0.86
2860.1	2830.1	0.94	0.71	0.59
2980.1	2950.1	0.89	0.66	0.57
3100.1	3070.1	0.64	0.36	0.25
3220.1	3190.1	0.67	0.41	0.29
3340.1	3310.1	0.84	0.49	0.35
3460.1	3430.1	0.64	0.60	0.54
3580.1	3550.1	0.35	0.43	0.46
3700.1	3670.1	0.29	0.36	0.39
3820.1	3790.1	0.44	0.43	0.46
3940.1	3910.1	0.79	0.70	0.68
4060.1	4030.1	0.98	0.80	0.70
4180.1	4150.1	0.94	0.72	0.65
4300.1	4270.1	0.97	0.71	0.65
4420.1	4390.1	0.78	0.47	0.39
4540.1	4510.1	0.65	0.31	0.21
4660.1	4630.1	0.82	0.63	0.52
4780.1	4750.1	1.05	1.11	1.03
4900.1	4870.1	1.30	1.25	1.12
5040.1	5010.1	1.23	1.08	0.96
5160.1	5130.1	1.25	1.04	0.91
5300.1	5270.1	1.04	0.86	0.71
5420.1	5390.1	0.93	0.76	0.64
5560.1	5530.1	1.12	0.83	0.72
5680.1	5650.1	1.07	0.73	0.65
5820.1	5790.1	1.28	0.77	0.64
5940.1	5910.1	1.17	0.79	0.63
6080.1	6050.1	0.96	0.90	0.71
6200.1	6170.1	0.04	1.38	1.09
6340.1	6310.1	-5.15	-0.90	0.86

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=4000.1001MHz (dB)
		@LO (dBm)
		0
1090.0	2910.1	11.51
1038.6	2961.5	11.31
987.1	3013.0	11.11
935.7	3064.4	11.05
884.3	3115.8	10.84
832.9	3167.2	10.33
781.4	3218.7	10.30
730.0	3270.1	9.67
678.6	3321.5	9.27
627.1	3373.0	8.61
575.7	3424.4	8.28
524.3	3475.8	8.00
472.9	3527.2	7.85
421.4	3578.7	7.81
370.0	3630.1	7.85
318.6	3681.5	7.35
267.1	3733.0	7.21
215.7	3784.4	7.11
164.3	3835.8	7.07
112.9	3887.2	7.00
44.3	3955.8	7.02
10.0	4010.1	7.48
101.4	4101.5	6.80
170.0	4170.1	6.95
261.4	4261.5	7.12
330.0	4330.1	7.05
421.4	4421.5	6.86
490.0	4490.1	7.08
581.4	4581.5	7.40
650.0	4650.1	7.46
741.4	4741.5	7.44
810.0	4810.1	7.58
901.4	4901.5	7.94
970.0	4970.1	8.16
1061.4	5061.5	8.44
1130.0	5130.1	8.63
1221.4	5221.5	8.66
1290.0	5290.1	9.16
1381.4	5381.5	10.52
1450.0	5450.1	11.69

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2000.1MHz (dB)
		@LO (dBm)
		0
10.0	2010.1	6.78
50.0	2050.1	6.56
90.0	2090.1	6.48
130.0	2130.1	6.80
170.0	2170.1	6.59
210.0	2210.1	6.29
250.0	2250.1	6.11
290.0	2290.1	6.00
330.0	2330.1	6.07
370.0	2370.1	6.10
410.0	2410.1	6.17
450.0	2450.1	6.24
490.0	2490.1	6.17
530.0	2530.1	6.17
570.0	2570.1	6.22
610.0	2610.1	6.35
650.0	2650.1	6.50
690.0	2690.1	6.84
730.0	2730.1	7.04
770.0	2770.1	7.13
810.0	2810.1	7.36
850.0	2850.1	7.51
890.0	2890.1	7.75
930.0	2930.1	7.59
970.0	2970.1	7.66
1010.0	3010.1	7.72
1050.0	3050.1	7.92
1090.0	3090.1	8.14
1130.0	3130.1	8.11
1170.0	3170.1	8.37
1210.0	3210.1	8.63
1250.0	3250.1	9.06
1290.0	3290.1	9.29
1330.0	3330.1	9.44
1370.0	3370.1	9.56
1390.0	3390.1	9.71
1430.0	3430.1	10.08
1450.0	3450.1	10.36
1490.0	3490.1	11.51
1510.0	3510.1	12.39

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=6000.1001MHz (dB)
		@LO (dBm)
		0
1530.0	4470.1	12.61
1490.0	4510.1	10.32
1450.0	4550.1	9.48
1410.0	4590.1	9.27
1370.0	4630.1	9.34
1330.0	4670.1	9.29
1290.0	4710.1	9.33
1250.0	4750.1	9.22
1210.0	4790.1	9.21
1170.0	4830.1	9.29
1130.0	4870.1	9.06
1090.0	4910.1	9.07
1050.0	4950.1	8.91
1010.0	4990.1	8.91
970.0	5030.1	8.93
930.0	5070.1	8.85
890.0	5110.1	8.95
850.0	5150.1	8.69
810.0	5190.1	8.63
770.0	5230.1	8.69
730.0	5270.1	8.74
690.0	5310.1	8.93
650.0	5350.1	8.80
610.0	5390.1	8.81
570.0	5430.1	8.77
530.0	5470.1	8.69
490.0	5510.1	8.64
450.0	5550.1	8.54
410.0	5590.1	8.47
370.0	5630.1	8.37
330.0	5670.1	8.18
290.0	5710.1	8.01
250.0	5750.1	7.76
210.0	5790.1	7.67
170.0	5830.1	7.52
130.0	5870.1	7.44
90.0	5910.1	7.33
70.0	5930.1	7.28
30.0	5970.1	7.33
10.0	5990.1	7.57

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB) @LO (dBm)			LO-IF ISOLATION (dB) @LO (dBm)		
	-3	0	+3	-3	0	+3
1510.1	9.30	8.53	9.33	1.24	1.26	4.02
1630.1	11.06	12.21	13.55	13.09	14.32	15.85
1750.1	17.69	18.69	21.10	12.93	14.25	15.68
1870.1	21.28	22.64	26.61	21.96	23.34	24.95
1990.1	21.41	21.98	23.94	37.31	38.49	39.74
2110.1	21.33	21.19	21.54	47.48	47.78	48.44
2230.1	21.56	23.08	23.38	39.72	39.81	40.25
2350.1	20.17	20.78	20.53	34.65	34.50	34.99
2470.1	21.55	22.65	22.60	33.74	33.48	33.92
2590.1	18.22	18.16	18.75	34.78	34.17	34.61
2710.1	17.39	18.36	19.69	36.28	35.58	35.94
2830.1	16.17	17.18	18.77	37.70	37.11	37.46
2950.1	14.99	15.38	16.30	38.32	38.02	38.38
3070.1	14.46	14.13	13.84	38.26	38.29	38.81
3190.1	13.61	13.75	13.82	37.44	37.97	39.04
3310.1	13.49	15.05	17.68	36.35	37.32	38.77
3430.1	13.06	15.26	18.30	35.38	36.83	38.85
3550.1	12.59	15.24	18.21	34.70	36.60	38.99
3670.1	13.06	16.20	19.21	33.20	35.40	38.01
3790.1	16.65	21.05	24.75	31.65	33.88	36.48
3910.1	20.49	24.47	26.57	32.10	34.00	36.31
4030.1	13.90	15.90	18.12	33.42	34.92	36.95
4150.1	10.91	12.44	14.38	35.63	36.91	38.56
4270.1	9.66	10.75	12.47	37.37	38.04	39.34
4390.1	9.15	9.87	11.53	38.60	38.66	39.82
4510.1	9.20	9.47	10.75	38.91	38.47	39.40
4630.1	9.91	10.59	12.03	39.23	38.49	39.19
4750.1	8.96	9.64	11.28	38.83	38.03	38.64
4870.1	8.38	8.88	10.44	38.15	37.35	37.89
5010.1	7.91	7.90	8.97	37.56	36.79	37.15
5130.1	7.59	7.55	8.13	36.79	36.47	36.70
5270.1	7.24	7.14	7.38	35.65	35.51	35.78
5390.1	7.60	7.20	7.35	33.43	34.01	34.95
5530.1	9.13	8.43	8.24	32.40	33.37	34.50
5650.1	9.17	8.71	8.48	33.67	34.17	34.76
5790.1	8.95	8.79	8.70	35.21	34.96	34.80
5910.1	9.09	9.11	9.08	35.52	34.88	34.29
6050.1	9.75	9.89	9.79	34.72	33.96	32.98
6170.1	11.45	11.74	12.30	32.90	32.62	31.91
6310.1	13.47	13.77	13.51	29.51	29.56	29.41

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB) @LO (dBm)		
		-3	0	+3
1540.1	1510.1	19.31	18.56	18.22
1660.1	1630.1	29.56	26.93	25.57
1780.1	1750.1	34.55	32.45	31.11
1900.1	1870.1	46.45	45.43	44.45
2020.1	1990.1	53.33	54.01	54.63
2140.1	2110.1	53.90	54.67	55.29
2260.1	2230.1	54.69	54.58	54.25
2380.1	2350.1	54.15	52.80	51.72
2500.1	2470.1	53.03	51.80	50.99
2620.1	2590.1	52.72	52.21	51.83
2740.1	2710.1	55.85	55.64	55.26
2860.1	2830.1	61.50	60.72	60.13
2980.1	2950.1	59.42	58.85	58.78
3100.1	3070.1	57.81	57.31	57.21
3220.1	3190.1	60.33	60.14	60.67
3340.1	3310.1	60.46	60.72	60.45
3460.1	3430.1	56.17	56.33	56.23
3580.1	3550.1	52.70	52.87	53.08
3700.1	3670.1	51.06	51.46	51.68
3820.1	3790.1	52.52	53.06	53.22
3940.1	3910.1	57.35	58.13	58.61
4060.1	4030.1	56.60	57.05	57.19
4180.1	4150.1	53.60	53.62	53.63
4300.1	4270.1	52.63	52.52	52.58
4420.1	4390.1	50.86	50.61	50.48
4540.1	4510.1	48.99	48.40	48.14
4660.1	4630.1	47.23	46.57	46.40
4780.1	4750.1	48.47	47.41	46.96
4900.1	4870.1	47.51	46.23	45.71
5040.1	5010.1	45.49	44.28	43.74
5160.1	5130.1	43.70	42.92	42.56
5300.1	5270.1	41.96	41.36	40.98
5420.1	5390.1	44.15	44.03	43.73
5560.1	5530.1	43.27	43.56	43.62
5680.1	5650.1	40.64	41.10	41.47
5820.1	5790.1	38.93	39.31	39.63
5940.1	5910.1	37.39	37.80	38.08
6080.1	6050.1	35.85	36.47	36.81
6200.1	6170.1	34.49	35.94	36.79
6340.1	6310.1	33.08	34.94	37.96

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1) @LO (dBm)		
		-3	0	+3
1540.1	1510.1	2.20	1.85	1.69
1660.1	1630.1	2.53	2.19	2.04
1780.1	1750.1	2.83	2.53	2.36
1900.1	1870.1	2.85	2.53	2.37
2020.1	1990.1	2.90	2.49	2.31
2140.1	2110.1	3.15	2.72	2.44
2260.1	2230.1	2.67	2.31	2.14
2380.1	2350.1	2.58	2.27	2.13
2500.1	2470.1	2.33	2.00	1.89
2620.1	2590.1	2.13	1.93	1.86
2740.1	2710.1	3.13	2.93	2.83
2860.1	2830.1	4.03	3.81	3.67
2980.1	2950.1	3.48	3.30	3.19
3100.1	3070.1	2.92	2.68	2.52
3220.1	3190.1	3.52	3.26	3.13
3340.1	3310.1	3.27	2.98	2.78
3460.1	3430.1	3.95	3.67	3.50
3580.1	3550.1	4.03	3.72	3.57
3700.1	3670.1	3.95	3.63	3.48
3820.1	3790.1	3.71	3.47	3.33
3940.1	3910.1	3.46	3.25	3.13
4060.1	4030.1	2.72	2.48	2.37
4180.1	4150.1	2.26	2.11	2.04
4300.1	4270.1	1.84	1.70	1.63
4420.1	4390.1	1.52	1.38	1.34
4540.1	4510.1	1.44	1.42	1.44
4660.1	4630.1	1.93	1.94	1.95
4780.1	4750.1	1.89	1.73	1.69
4900.1	4870.1	1.51	1.33	1.25
5040.1	5010.1	1.43	1.28	1.23
5160.1	5130.1	1.56	1.47	1.46
5300.1	5270.1	1.73	1.62	1.59
5420.1	5390.1	1.92	1.74	1.65
5560.1	5530.1	2.27	2.07	1.95
5680.1	5650.1	2.54	2.33	2.19
5820.1	5790.1	2.78	2.54	2.38
5940.1	5910.1	3.08	2.72	2.54
6080.1	6050.1	3.26	2.77	2.57
6200.1	6170.1	3.53	2.75	2.46
6340.1	6310.1	3.82	3.10	2.61

LO (MHz)	LO VSWR (:1) @LO (dBm)		
	-3	0	+3
1510.1	3.54	3.65	3.82
1630.1	3.56	3.55	3.60
1750.1	4.00	3.91	3.93
1870.1	4.47	4.44	4.48
1990.1	4.92	5.02	5.17
2110.1	5.27	5.51	5.72
2230.1	4.60	4.83	4.98
2350.1	3.73	3.65	3.61
2470.1	3.31	3.17	3.10
2590.1	3.11	2.99	2.93
2710.1	2.90	2.88	2.86
2830.1	2.75	2.81	2.82
2950.1	2.69	2.78	2.82
3070.1	2.70	2.77	2.78
3190.1	2.79	2.78	2.71
3310.1	2.83	2.72	2.61
3430.1	2.66	2.46	2.33
3550.1	2.35	2.17	2.08
3670.1	2.03	1.91	1.92
3790.1	1.67	1.64	1.75
3910.1	1.39	1.44	1.59
4030.1	1.34	1.41	1.60
4150.1	1.36	1.45	1.64
4270.1	1.37	1.47	1.67
4390.1	1.38	1.51	1.74
4510.1	1.45	1.58	1.81
4630.1	1.52	1.64	1.86
4750.1	1.59	1.68	1.88
4870.1	1.67	1.73	1.90
5010.1	1.73	1.78	1.93
5130.1	1.72	1.74	1.85
5270.1	1.64	1.63	1.69
5390.1	1.56	1.55	1.59
5530.1	1.41	1.42	1.48
5650.1	1.32	1.36	1.40
5790.1	1.33	1.36	1.40
5910.1	1.40	1.42	1.44
6050.1	1.48	1.49	1.50
6170.1	1.51	1.50	1.52
6310.1	1.55	1.50	1.43

IF (OUT) (MHz)	IF VSWR @LO=6000MHz (:1) @LO (dBm)		
	-3	0	+3
10.0	2.12	1.43	1.17
50.0	2.15	1.46	1.22
90.0	2.22	1.53	1.30
130.0	2.31	1.62	1.38
170.0	2.49	1.76	1.52
210.0	2.63	1.88	1.62
250.0	2.84	2.04	1.76
290.0	3.00	2.16	1.86
330.0	3.22	2.33	2.01
370.0	3.45	2.50	2.14
410.0	3.58	2.60	2.22
470.0	3.89	2.84	2.43
510.0	3.98	2.93	2.50
570.0	4.26	3.16	2.69
610.0	4.40	3.28	2.80
670.0	4.68	3.47	2.98
710.0	4.88	3.65	3.14
770.0	5.14	3.86	3.31
810.0	5.39	4.05	3.50
870.0	5.58	4.22	3.63
910.0	5.79	4.42	3.82
970.0	5.93	4.51	3.89
1010.0	6.07	4.67	4.03
1070.0	5.93	4.53	3.90
1110.0	5.87	4.53	3.91
1170.0	5.34	4.13	3.60
1210.0	4.84	3.78	3.31
1270.0	3.92	3.14	2.83
1310.0	3.13	2.57	2.38
1370.0	2.01	1.87	1.90
1410.0	1.42	1.60	1.77
1470.0	1.70	2.00	2.20
1510.0	2.33	2.53	2.66
1570.0	2.90	2.96	3.00
1610.0	3.91	3.91	3.91
1670.0	6.56	6.46	6.42
1710.0	8.47	8.31	8.23
1770.0	11.61	11.46	11.46
1810.0	13.60	13.49	13.49
1870.0	16.56	16.56	16.56

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	23	43	25	47	60	52	---	---	---	---
1	-	51	+0	58	52	50	70	70	58	---	---	---
2	76	72	77	46	76	>78	64	>78	>78	71	---	---
3	>90	74	>78	>78	53	>78	>78	>78	>78	>78	>78	---
4	>90	>78	>78	>78	>78	71	>78	>78	>78	>78	>78	>78
5	>90	>78	>78	>78	>78	>78	>78	>78	>78	>78	>78	>78
6	---	---	>78	>78	>78	>78	>78	>78	>78	>78	>78	>78
7	---	---	---	>78	>78	>78	>78	>78	>78	>78	>78	>78
8	---	---	---	---	>78	>78	>78	>78	>78	>78	>78	>78
9	---	---	---	---	---	>78	>78	>78	>78	>78	>78	>78
10	---	---	---	---	---	---	>78	>78	>78	>78	>78	>78
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 4000.1 MHz; -5.00 dBm.
LO IN: 3970.1 MHz; +0.00 dBm
IF OUT: 30 MHz; -12.15 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	33	54	37	58	75	60	---	---	---	---
1	-	52	+0	60	49	57	69	68	70	---	---	---
2	57	65	70	53	71	72	59	79	>88	74	---	---
3	80	54	64	77	36	81	75	68	84	>88	77	---
4	>90	>88	77	83	>88	67	>88	>88	76	>88	>88	88
5	>90	>88	>88	79	80	>88	49	>88	85	78	>88	>88
6	---	---	>88	>88	>88	>88	>88	66	>88	>88	85	>88
7	---	---	---	>88	>88	>88	>88	>88	61	>88	>88	87
8	---	---	---	---	>88	>88	>88	>88	>88	71	>88	>88
9	---	---	---	---	---	>88	>88	>88	>88	>88	72	>88
10	---	---	---	---	---	---	>88	>88	>88	>88	>88	77
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 4000.1 MHz; 5.00 dBm.
LO IN: 3970.1 MHz; +0.00 dBm
IF OUT: 30 MHz; -2.24 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Curves

Conversion Loss @ IF=30MHz

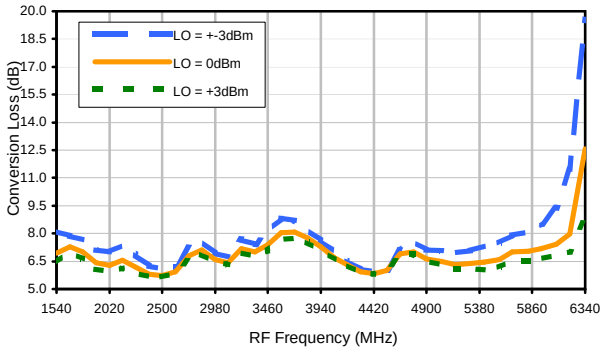

Conversion Loss vs. LO @ RF=4000.1001MHz

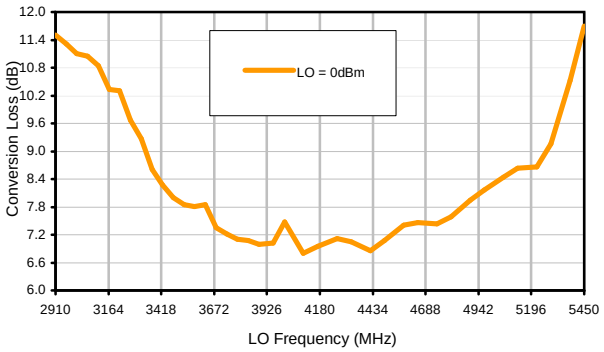

Conversion Loss vs. IF @ RF=4000.1001MHz

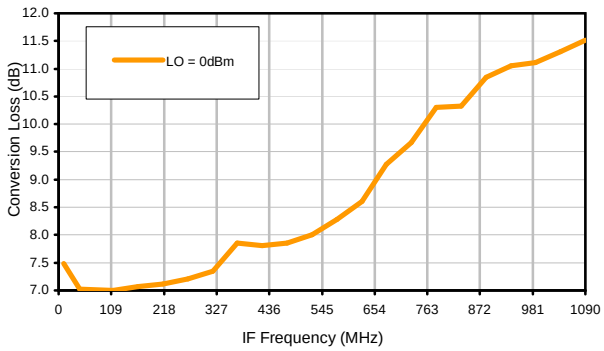

Conversion Loss vs. IF @ RF=2000.1MHz

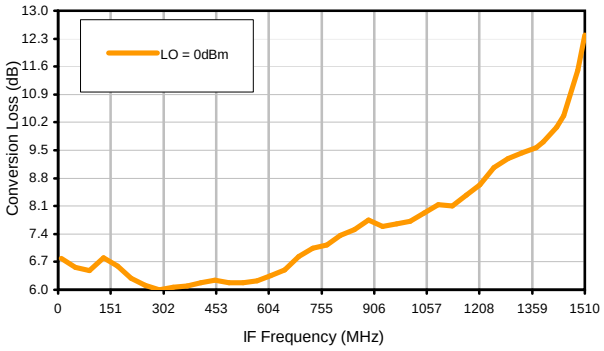

Conversion Loss vs. IF @ RF=6000.1001MHz

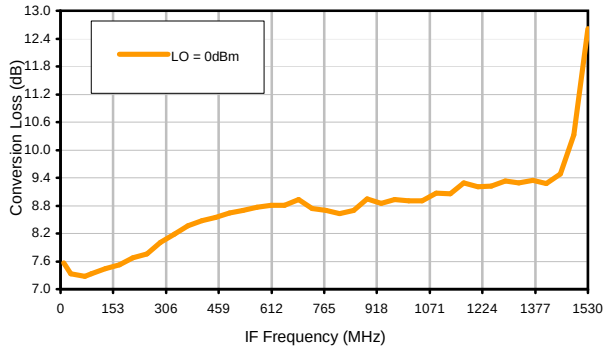

IP3 Input

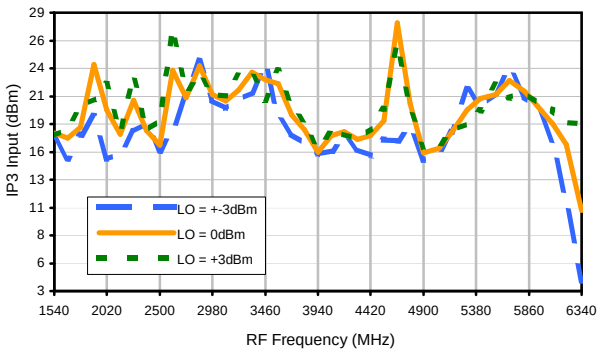

Compression @ RF IN=+10dBm

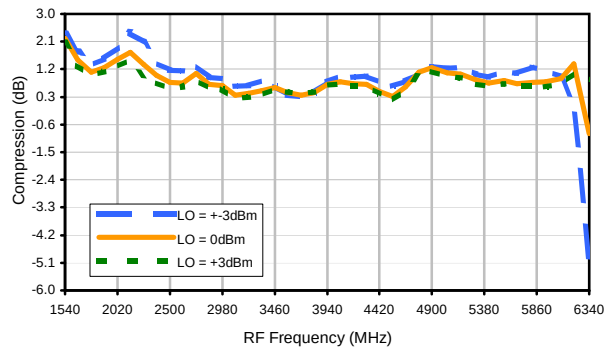

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Curves

LO-RF Isolation

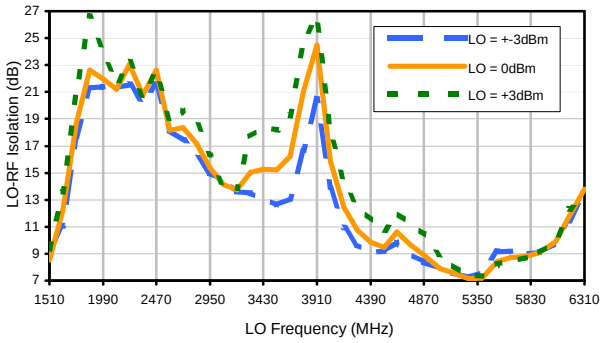

LO-IF Isolation

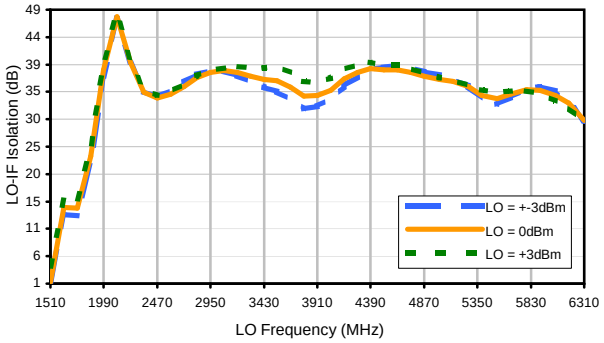

RF-IF Isolation

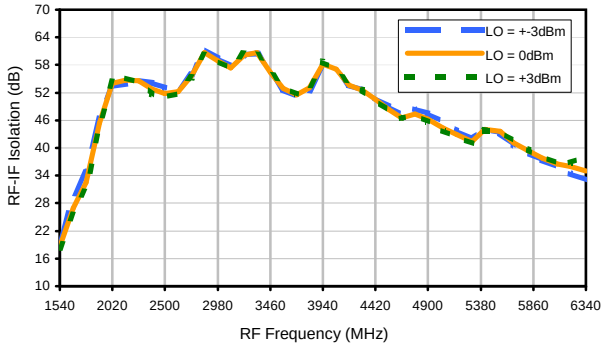

RF VSWR

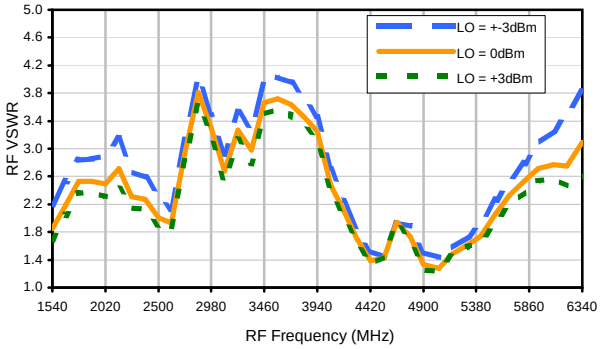

LO VSWR

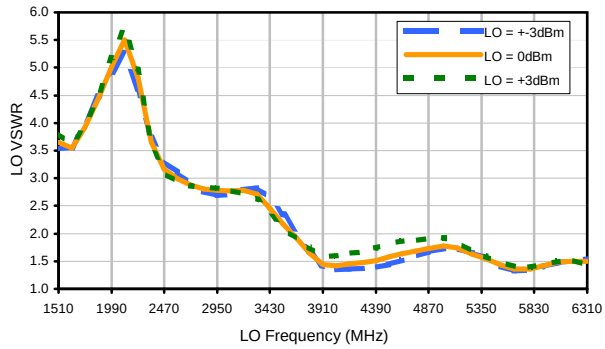

IF VSWR

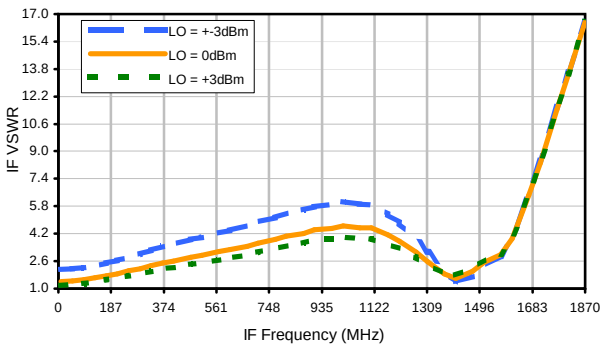

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Harmonics Tables

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	23	43	25	47	60	52	---	---	---	---
1	-	51	+0	58	52	50	70	70	58	---	---	---
2	76	72	77	46	76	>78	64	>78	>78	71	---	---
3	>90	74	>78	>78	53	>78	>78	>78	>78	>78	>78	---
4	>90	>78	>78	>78	>78	71	>78	>78	>78	>78	>78	>78
5	>90	>78	>78	>78	>78	>78	>78	>78	>78	>78	>78	>78
6	---	---	>78	>78	>78	>78	>78	>78	>78	>78	>78	>78
7	---	---	---	>78	>78	>78	>78	>78	>78	>78	>78	>78
8	---	---	---	---	>78	>78	>78	>78	>78	>78	>78	>78
9	---	---	---	---	---	>78	>78	>78	>78	>78	>78	>78
10	---	---	---	---	---	---	>78	>78	>78	>78	>78	>78
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 4000.1 MHz; -5.00 dBm.
LO IN: 3970.1 MHz; +0.00 dBm
IF OUT: 30 MHz; -12.15 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	33	54	37	58	75	60	---	---	---	---
1	-	52	+0	60	49	57	69	68	70	---	---	---
2	57	65	70	53	71	72	59	79	>88	74	---	---
3	80	54	64	77	36	81	75	68	84	>88	77	---
4	>90	>88	77	83	>88	67	>88	>88	76	>88	>88	88
5	>90	>88	>88	79	80	>88	49	>88	85	78	>88	>88
6	---	---	>88	>88	>88	>88	>88	66	>88	>88	85	>88
7	---	---	---	>88	>88	>88	>88	>88	61	>88	>88	87
8	---	---	---	---	>88	>88	>88	>88	>88	71	>88	>88
9	---	---	---	---	---	>88	>88	>88	>88	>88	72	>88
10	---	---	---	---	---	---	>88	>88	>88	>88	>88	77
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 4000.1 MHz; 5.00 dBm.
LO IN: 3970.1 MHz; +0.00 dBm
IF OUT: 30 MHz; -2.24 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Case Style DZ

DZ885
DZ1034

Outline Dimensions

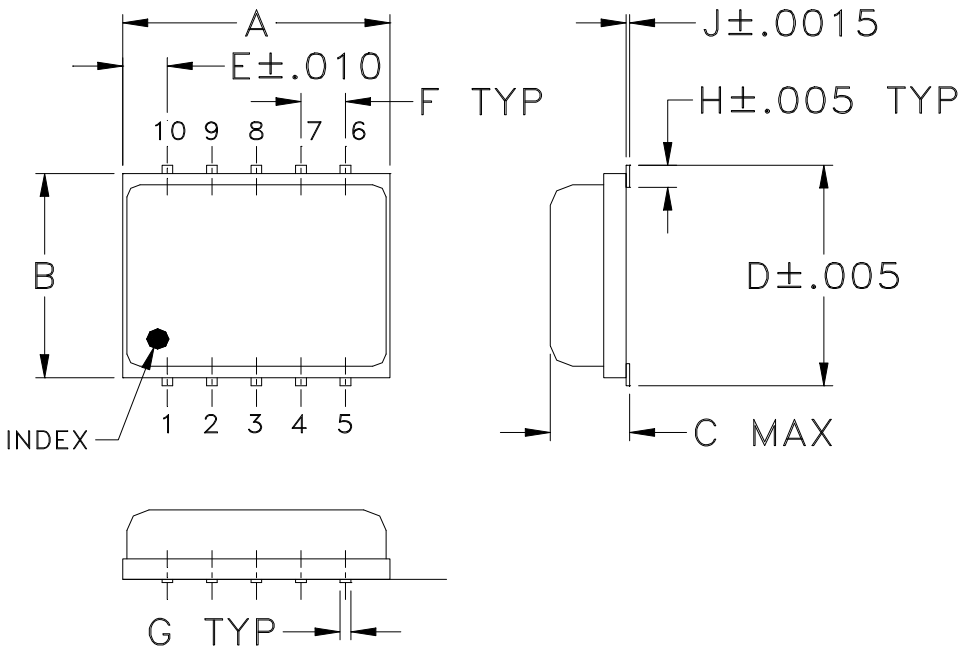

PCB Land Pattern

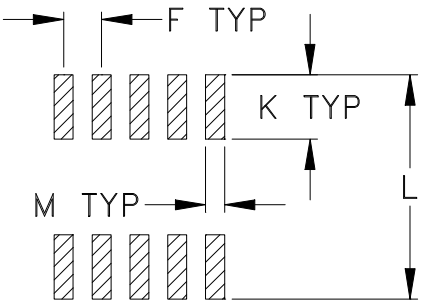

Suggested Layout,
Tolerance to be within ±.002

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	WT. GRAMS
DZ885	.30 (7.62)	.250 (6.35)	.085 (2.16)	.266 (6.76)	.050 (1.27)	.050 (1.27)	.012 (0.30)	.029 (0.74)	.004 (0.10)	.085 (2.16)	.296 (7.52)	.030 (0.76)	0.25
DZ1034			.105 (2.67)										0.3

Dimensions are in inches (mm). Tolerances: 2Pl. ± .01; 3Pl. ± .005

Notes:

1. Case material: Plastic encapsulation on Ceramic base.
2. Termination finish:
   For RoHS Case Styles: Tin plate. All models, (+) suffix.
   For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits.

Tape & Reel Packaging TR-F34

DEVICE ORIENTATION IN T&R

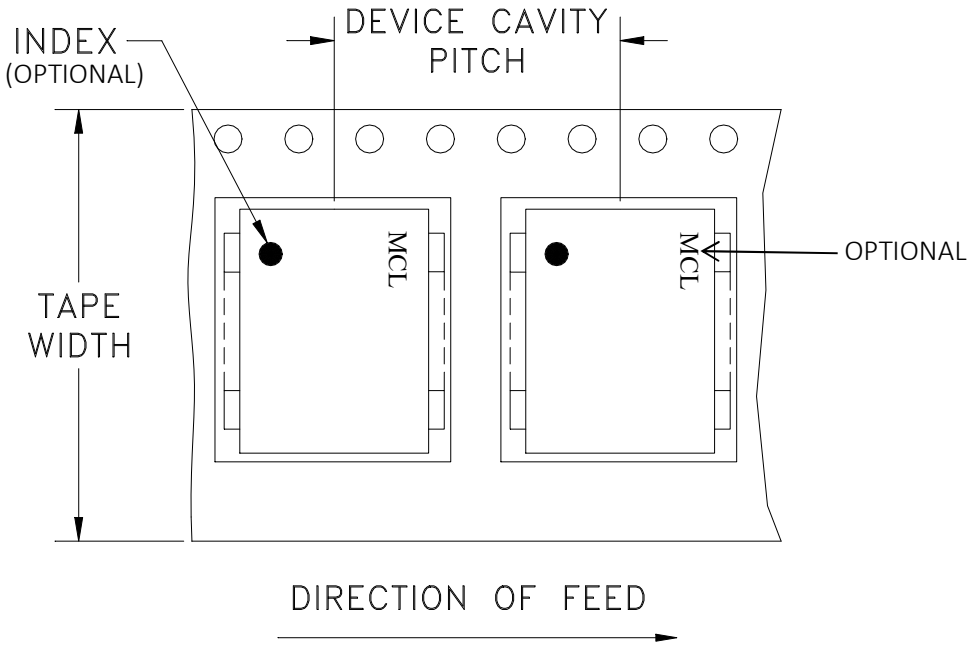

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits.

THIRD ANGLE PROJECTION

REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M115195	NEW RELEASE	12/24/07	AV	DJ

SUGGESTED MOUNTING CONFIGURATION FOR DZ1034 CASE STYLE, "10MA01" PIN CODE

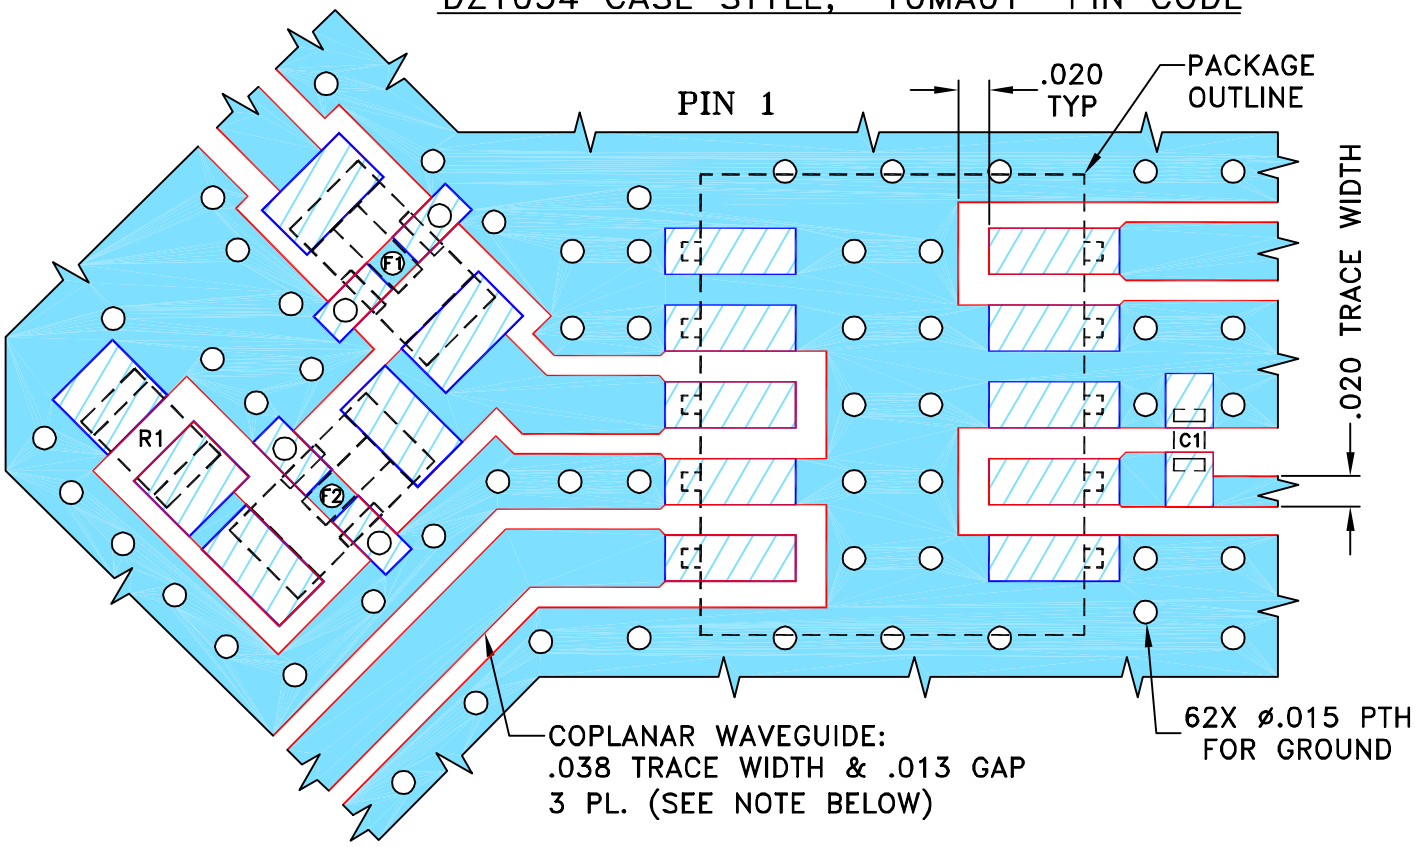

CAPACITOR C1: 1000 pF, 0402 SIZE
RESISTOR R1: 49.9 Ohm, 0805 SIZE
FILTER F1: LFCN-1400+, FV1206 CASE STYLE
FILTER F2: HFCN-1810+, FV1206 CASE STYLE

NOTE: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	AV	12/24/07
TOLERANCES ON:	CHECKED	PW	12/24/07
2 PL DECIMALS ±	APPROVED	DJ	12/24/07
3 PL DECIMALS ± .005			
ANGLES ±			
FRACTIONS ±			

Mini-Circuits®
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235

PL, 10MA01, DZ1034, MACA-63H+, TB-404

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-283	OR
FILE: 98PL283	SCALE: 8:1	SHEET: 1 OF 1	

Evaluation Board and Circuit

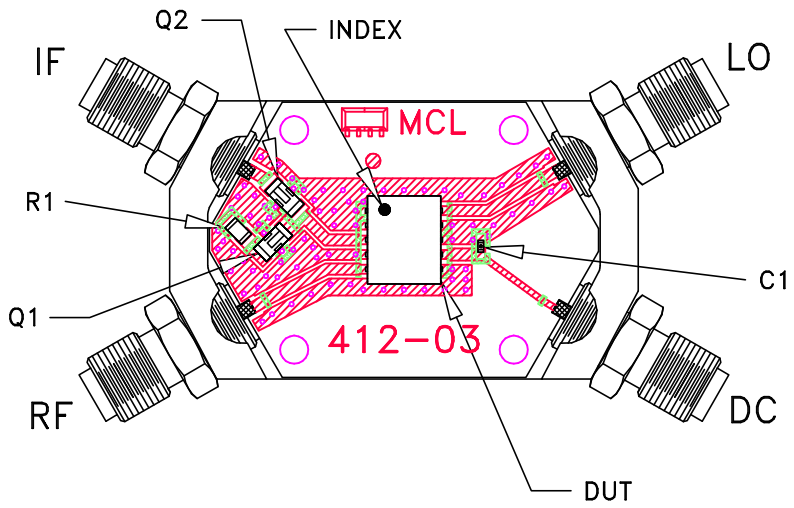

TB-404

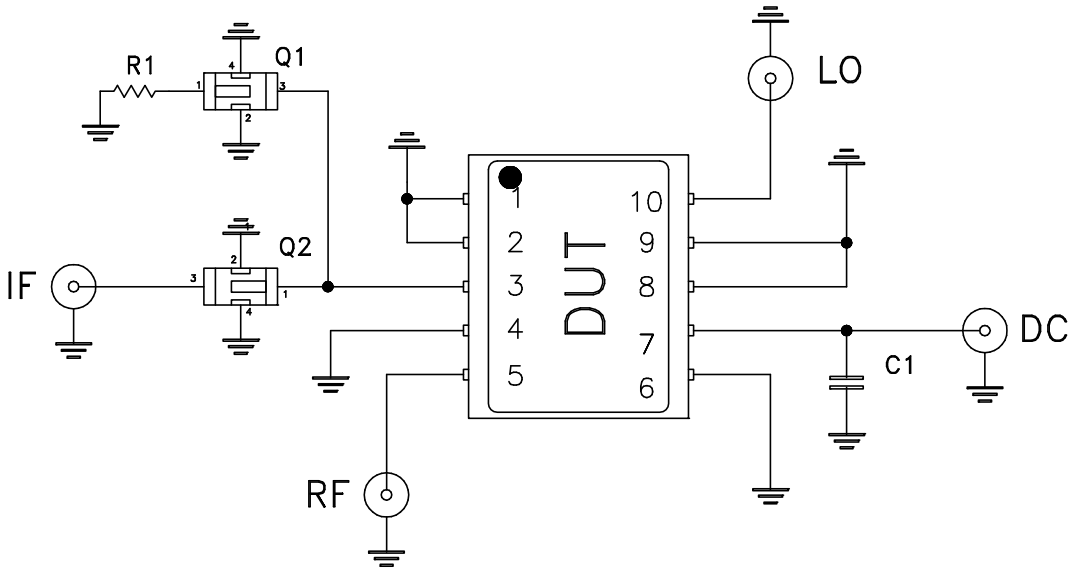

COMPONENT	VALUE	SIZE
DUT	MACA-63H+	7.62X6.35 mm
C1	Capacitor 0.001 uF	0402
R1	Resistor 49.9 Ohm	0805
Q1	MCL High Pass Filter HFCN-1810+	3.20X1.60 mm
Q2	MCL Low Pass Filter LFCN-1200+	

SCHEMATIC DIAGRAM

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers RO4350 or equivalent, Dielectric Constant=3.5, Thickness=.020 inch.

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.

Mini-Circuits

Environmental Specifications ENV10

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102-C, Condition C
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutectic Process: 225°C peak Pb-Free Process: 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215

This document and its contents are the property of Mini-Circuits.