

# Engineering Development Model

## Frequency Mixer

## MCA-ED12676/2

Level 17 (LO Power + 17 dBm)

### Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.



Please click "Back", and then click "Contact Us" for Applications support.


**CASE STYLE : DZ883**

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
<b>Frequency</b>	<b>LO</b> (fL to fU)	1075		3655	MHz
	<b>RF</b> (fL to fU)	1075		3655	MHz
	<b>IF</b>	175		654	MHz
<b>Conversion Loss</b>	<b>Total Range</b>		7.9		dB
<b>LO-RF Isolation</b>			37		dB
<b>LO-IF Isolation</b>			31		dB
<b>Input IP3</b>			+26		dBm
<b>1 dB Compression</b>			+15		dBm

MAXIMUM RATINGS	
<b>Operating Temperature</b>	-55°C to +100°C
<b>Storage Temperature</b>	-55°C to +100°C

PIN CONNECTIONS	
<b>LO</b>	10
<b>RF</b>	5
<b>IF</b>	3
<b>GROUND</b>	1,2,4,6,7,8,9

### Electrical Schematics

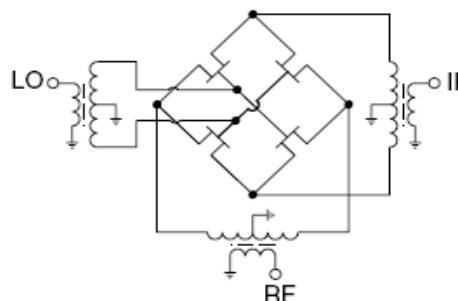

# Frequency Mixer

# MCA-ED12676/2

## Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=250MHz (dB)		
		@LO (dBm)		
		+14	+17	+20
675.0	425.0	13.90	11.75	12.20
775.0	525.0	11.19	8.96	9.14
875.0	625.0	8.22	6.53	7.34
975.0	725.0	9.02	8.34	9.34
1075.0	825.0	7.26	6.61	7.01
1175.0	925.0	6.41	6.09	6.19
1275.0	1025.0	6.77	6.63	6.85
1375.0	1125.0	6.36	6.23	6.45
1475.0	1225.0	7.11	7.03	7.16
1575.0	1325.0	6.91	6.62	6.85
1675.0	1425.0	7.07	6.77	6.96
1775.0	1525.0	7.36	7.05	7.24
1875.0	1625.0	7.45	7.11	7.33
1975.0	1725.0	7.59	7.23	7.47
2075.0	1825.0	8.06	7.70	7.90
2175.0	1925.0	7.77	7.31	7.58
2275.0	2025.0	7.82	7.63	7.99
2375.0	2125.0	7.79	7.56	7.99
2475.0	2225.0	7.66	7.36	7.89
2575.0	2325.0	7.64	7.33	7.84
2655.0	2405.0	7.71	7.43	7.89
2755.0	2505.0	7.88	7.70	8.10
2835.0	2585.0	7.94	7.84	8.22
2935.0	2685.0	7.89	7.68	8.00
3015.0	2765.0	7.89	7.68	7.95
3115.0	2865.0	7.69	7.66	7.95
3195.0	2945.0	7.49	7.46	7.82
3295.0	3045.0	7.47	7.50	7.85
3375.0	3125.0	7.46	7.47	7.84
3475.0	3225.0	7.56	7.57	7.92
3555.0	3305.0	7.80	7.76	8.04
3655.0	3405.0	8.31	8.33	8.63
3735.0	3485.0	9.11	9.22	9.63
3835.0	3585.0	9.23	9.26	9.69
3915.0	3665.0	9.46	9.38	9.80
4015.0	3765.0	9.88	9.63	10.04
4095.0	3845.0	10.37	9.98	10.40
4195.0	3945.0	11.04	10.51	10.89
4275.0	4025.0	11.67	11.06	11.31
4375.0	4125.0	12.26	11.59	11.72

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+14	+17	+20
675.0	425.0	11.18	11.18	10.87
775.0	525.0	20.05	16.23	15.07
875.0	625.0	13.97	14.39	15.97
975.0	725.0	15.97	28.93	23.70
1075.0	825.0	17.76	18.90	23.69
1175.0	925.0	21.57	23.79	25.84
1275.0	1025.0	19.96	23.94	25.80
1375.0	1125.0	21.94	23.97	21.85
1475.0	1225.0	27.85	29.30	30.77
1575.0	1325.0	24.58	25.46	30.73
1675.0	1425.0	28.88	26.91	26.85
1775.0	1525.0	28.30	31.74	29.68
1875.0	1625.0	25.69	27.98	30.59
1975.0	1725.0	21.22	23.61	29.53
2075.0	1825.0	18.86	23.81	27.84
2175.0	1925.0	21.66	24.25	27.13
2275.0	2025.0	23.30	26.29	30.02
2375.0	2125.0	21.13	23.95	26.47
2475.0	2225.0	20.97	24.21	21.82
2575.0	2325.0	21.82	25.64	24.73
2655.0	2405.0	21.66	25.66	29.12
2755.0	2505.0	21.76	26.24	25.40
2835.0	2585.0	21.79	26.97	26.51
2935.0	2685.0	21.24	25.07	25.58
3015.0	2765.0	22.00	25.70	25.35
3115.0	2865.0	23.00	27.15	25.28
3195.0	2945.0	21.63	26.81	24.91
3295.0	3045.0	23.55	29.36	26.56
3375.0	3125.0	23.90	29.62	28.66
3475.0	3225.0	23.11	27.88	30.75
3555.0	3305.0	23.06	26.97	30.44
3655.0	3405.0	24.90	27.22	28.77
3735.0	3485.0	26.01	30.21	29.01
3835.0	3585.0	25.60	32.29	27.75
3915.0	3665.0	25.42	32.61	28.77
4015.0	3765.0	24.28	29.30	27.94
4095.0	3845.0	24.02	29.34	27.72
4195.0	3945.0	22.25	26.76	29.31
4275.0	4025.0	21.19	25.73	30.79
4375.0	4125.0	20.45	25.11	30.54

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+15dBm (dB)		
		@LO (dBm)		
		+14	+17	+20
675.0	425.0	6.81	6.44	4.27
775.0	525.0	3.28	3.40	1.91
875.0	625.0	4.27	4.00	2.50
975.0	725.0	1.33	0.64	-0.70
1075.0	825.0	2.17	1.71	0.82
1175.0	925.0	1.39	0.84	0.33
1275.0	1025.0	3.15	1.50	0.38
1375.0	1125.0	0.89	0.60	0.46
1475.0	1225.0	0.71	0.34	0.19
1575.0	1325.0	0.91	0.53	0.14
1675.0	1425.0	0.97	0.50	0.13
1775.0	1525.0	1.07	0.54	0.16
1875.0	1625.0	1.22	0.62	0.22
1975.0	1725.0	1.54	0.97	0.35
2075.0	1825.0	1.68	1.17	0.49
2175.0	1925.0	1.26	0.94	0.41
2275.0	2025.0	1.25	0.82	0.21
2375.0	2125.0	1.26	0.90	0.27
2475.0	2225.0	1.05	0.73	0.09
2575.0	2325.0	1.00	0.75	0.13
2655.0	2405.0	1.97	1.39	0.22
2755.0	2505.0	0.82	0.65	0.21
2835.0	2585.0	0.73	0.54	0.15
2935.0	2685.0	0.64	0.54	0.15
3015.0	2765.0	0.61	0.42	0.12
3115.0	2865.0	0.61	0.26	0.08
3195.0	2945.0	0.72	0.30	0.06
3295.0	3045.0	0.60	0.23	0.02
3375.0	3125.0	0.61	0.24	0.01
3475.0	3225.0	0.61	0.25	0.03
3555.0	3305.0	0.46	0.18	0.03
3655.0	3405.0	0.42	0.17	0.05
3735.0	3485.0	0.36	0.14	-0.01
3835.0	3585.0	0.42	0.17	-0.05
3915.0	3665.0	0.39	0.20	-0.02
4015.0	3765.0	0.33	0.22	0.00
4095.0	3845.0	0.32	0.26	0.02
4195.0	3945.0	0.30	0.36	0.08
4275.0	4025.0	0.18	0.32	0.11
4375.0	4125.0	-0.03	0.16	0.06



# Frequency Mixer

# MCA-ED12676/2

## Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=3850MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=3764.89MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=3935.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+17			+17			+17
1700.0	2150.0	10.45	10.1	3775.0	26.33	1760.1	2175.0	10.73
1607.8	2242.2	10.38	25.5	3790.4	18.72	1719.9	2215.2	10.56
1515.6	2334.4	10.22	40.9	3805.8	15.20	1679.6	2255.5	10.59
1423.5	2426.5	10.21	56.3	3821.2	13.10	1639.4	2295.7	10.47
1331.3	2518.7	10.22	71.6	3836.5	11.87	1599.2	2335.9	10.44
1239.1	2610.9	10.23	87.0	3851.9	11.08	1559.0	2376.1	10.42
1146.9	2703.1	10.20	102.4	3867.3	10.48	1518.7	2416.4	10.30
1054.7	2795.3	10.15	117.8	3882.7	10.08	1478.5	2456.6	10.45
962.5	2887.5	9.91	133.2	3898.1	9.78	1438.3	2496.8	10.30
870.4	2979.6	9.74	148.6	3913.5	9.57	1398.0	2537.1	10.46
778.2	3071.8	9.66	163.9	3928.8	9.46	1357.8	2577.3	10.42
686.0	3164.0	9.59	179.3	3944.2	9.37	1317.6	2617.5	10.55
593.8	3256.2	9.29	194.7	3959.6	9.31	1277.3	2657.8	10.59
501.6	3348.4	9.08	210.1	3975.0	9.27	1237.1	2698.0	10.48
409.5	3440.5	9.46	225.5	3990.4	9.24	1196.9	2738.2	10.54
317.3	3532.7	9.44	240.9	4005.8	9.23	1156.7	2778.4	10.44
225.1	3624.9	9.18	256.3	4021.2	9.25	1116.4	2818.7	10.44
132.9	3717.1	9.74	271.6	4036.5	9.25	1076.2	2858.9	10.42
40.7	3809.3	15.46	287.0	4051.9	9.27	1036.0	2899.1	10.24
19.6	3869.6	21.18	302.4	4067.3	9.28	995.7	2939.4	10.25
48.5	3898.5	14.43	317.8	4082.7	9.27	955.5	2979.6	10.11
77.5	3927.5	11.96	333.2	4098.1	9.29	915.3	3019.8	10.10
106.4	3956.4	10.84	348.6	4113.5	9.30	875.0	3060.1	10.08
135.3	3985.3	10.24	363.9	4128.8	9.30	814.7	3120.4	10.01
164.2	4014.2	9.94	379.3	4144.2	9.32	774.5	3160.6	9.99
193.1	4043.1	9.82	394.7	4159.6	9.33	714.1	3221.0	9.81
222.0	4072.0	9.74	410.1	4175.0	9.33	673.9	3261.2	9.69
250.9	4100.9	9.69	425.5	4190.4	9.28	613.5	3321.6	9.56
270.2	4120.2	9.66	440.9	4205.8	9.28	573.3	3361.8	9.49
299.1	4149.1	9.67	456.3	4221.2	9.36	513.0	3422.1	9.73
318.4	4168.4	9.66	471.6	4236.5	9.39	472.7	3462.4	9.99
347.3	4197.3	9.65	487.0	4251.9	9.43	412.4	3522.7	9.87
366.5	4216.5	9.64	502.4	4267.3	9.47	372.2	3562.9	9.74
395.5	4245.5	9.68	517.8	4282.7	9.45	311.8	3623.3	9.46
414.7	4264.7	9.68	533.2	4298.1	9.49	271.6	3663.5	9.33
443.6	4293.6	9.68	548.6	4313.5	9.53	211.2	3723.9	9.41
462.9	4312.9	9.76	563.9	4328.8	9.59	171.0	3764.1	9.62
491.8	4341.8	9.87	579.3	4344.2	9.65	110.7	3824.4	10.64
511.1	4361.1	9.89	594.7	4359.6	9.69	70.4	3864.7	12.58
540.0	4390.0	9.88	610.1	4375.0	9.66	10.1	3925.0	26.97

REV. X3

MCA-ED12676/2

101028

Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



# Frequency Mixer

MCA-ED12676/2

## Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+14	+17	+20	+14	+17	+20
425.0	60.91	58.04	60.76	50.97	51.10	51.50
525.0	51.88	49.00	51.80	62.07	54.91	57.04
625.0	44.23	42.81	45.08	43.81	41.89	41.90
725.0	41.55	40.44	41.03	40.31	41.47	41.00
825.0	35.94	35.31	35.65	36.72	38.02	37.50
925.0	30.44	29.91	30.08	31.91	32.86	32.85
1025.0	23.35	22.71	21.24	29.52	30.83	31.54
1125.0	22.96	22.32	21.54	22.43	23.08	23.60
1225.0	25.92	25.24	25.12	24.10	24.71	25.32
1325.0	32.65	31.99	31.87	29.67	30.46	30.36
1425.0	46.75	47.20	45.01	29.37	30.44	30.19
1525.0	44.16	45.66	46.64	30.34	31.43	31.28
1625.0	43.55	44.67	46.89	30.01	30.96	31.13
1725.0	44.00	44.18	45.06	30.04	30.98	31.09
1825.0	44.30	44.00	45.64	30.70	31.70	31.88
1925.0	44.25	43.01	45.09	32.02	33.05	33.43
2025.0	35.53	34.42	35.22	33.22	33.53	34.63
2125.0	31.40	30.39	29.59	32.92	33.16	32.96
2225.0	33.47	32.45	31.61	33.39	33.61	33.39
2325.0	34.93	34.27	33.26	33.92	34.00	33.75
2405.0	36.11	35.81	34.61	34.39	33.89	34.07
2505.0	35.98	36.07	34.89	32.29	31.38	31.72
2585.0	35.13	35.44	34.62	30.86	30.34	30.61
2685.0	35.90	36.62	35.23	30.69	30.31	30.65
2765.0	36.92	37.62	36.36	31.05	30.28	31.32
2865.0	34.02	34.31	34.44	32.09	32.17	33.60
2945.0	34.76	35.97	36.08	33.38	34.72	36.46
3045.0	40.08	41.34	40.76	32.91	32.62	33.39
3125.0	48.91	51.75	46.80	32.19	31.56	32.30
3225.0	50.61	54.83	48.09	32.12	31.67	32.31
3305.0	41.98	42.60	41.46	32.26	31.98	32.74
3405.0	32.66	32.56	31.75	36.96	37.32	38.91
3485.0	36.34	36.44	35.08	41.99	41.86	44.50
3585.0	40.91	40.65	38.46	35.13	34.80	36.33
3665.0	41.94	42.67	39.84	34.05	33.93	35.44
3765.0	41.18	42.16	39.95	34.18	33.90	35.83
3845.0	39.74	40.30	39.09	34.48	33.93	35.97
3945.0	38.07	38.01	37.73	35.45	34.68	37.46
4025.0	37.55	37.19	37.90	37.07	36.13	39.48
4125.0	39.13	38.89	39.66	38.75	38.36	38.96

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+14	+17	+20
675.0	425.0	16.70	18.06	17.39
775.0	525.0	21.35	22.44	20.10
875.0	625.0	23.76	25.21	20.17
975.0	725.0	26.90	30.97	17.74
1075.0	825.0	26.75	26.06	17.79
1175.0	925.0	25.97	25.37	20.80
1275.0	1025.0	23.66	24.62	25.46
1375.0	1125.0	23.81	23.27	21.31
1475.0	1225.0	20.76	20.34	21.09
1575.0	1325.0	22.65	24.03	18.84
1675.0	1425.0	24.13	24.83	19.14
1775.0	1525.0	25.16	25.53	18.99
1875.0	1625.0	25.10	25.25	18.92
1975.0	1725.0	24.09	24.18	18.85
2075.0	1825.0	24.92	24.00	18.94
2175.0	1925.0	23.69	23.76	19.36
2275.0	2025.0	22.81	22.60	18.08
2375.0	2125.0	28.55	28.15	19.76
2475.0	2225.0	23.65	24.34	17.85
2575.0	2325.0	21.96	22.62	16.92
2655.0	2405.0	21.60	22.28	16.68
2755.0	2505.0	21.06	21.72	16.40
2835.0	2585.0	21.22	21.91	16.59
2935.0	2685.0	22.91	23.60	17.95
3015.0	2765.0	20.86	20.42	17.18
3115.0	2865.0	20.48	19.89	17.16
3195.0	2945.0	22.65	22.44	18.37
3295.0	3045.0	22.28	22.71	18.52
3375.0	3125.0	20.88	21.30	17.95
3475.0	3225.0	20.01	20.35	17.94
3555.0	3305.0	19.64	19.89	17.78
3655.0	3405.0	19.66	19.65	17.37
3735.0	3485.0	19.98	20.13	17.30
3835.0	3585.0	21.57	21.89	18.33
3915.0	3665.0	22.80	23.15	19.35
4015.0	3765.0	24.44	24.62	20.70
4095.0	3845.0	26.23	25.80	22.13
4195.0	3945.0	28.86	27.14	24.12
4275.0	4025.0	30.32	27.95	26.60
4375.0	4125.0	29.52	27.77	31.39



# Frequency Mixer

# MCA-ED12676/2

## Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=3925MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+14	+17	+20		+14	+17	+20		+14	+17	+20
675.0	425.0	3.14	2.86	2.86	425.0	4.08	4.07	4.07	10.0	49.64	48.26	46.96
775.0	525.0	2.52	2.09	2.09	525.0	3.98	3.97	3.96	90.6	4.36	4.04	4.05
875.0	625.0	2.18	1.79	1.85	625.0	3.92	3.91	3.90	171.1	1.94	1.90	1.92
975.0	725.0	1.86	1.47	1.51	725.0	3.86	3.86	3.85	251.7	1.29	1.38	1.40
1075.0	825.0	1.74	1.52	1.55	825.0	3.88	3.88	3.86	332.3	1.13	1.32	1.30
1175.0	925.0	1.75	1.62	1.62	925.0	3.98	3.97	3.92	412.8	1.34	1.46	1.43
1275.0	1025.0	1.84	1.80	1.74	1025.0	3.99	3.95	3.59	493.4	1.59	1.65	1.62
1375.0	1125.0	1.92	1.86	1.80	1125.0	3.89	3.74	3.24	574.0	1.83	1.84	1.80
1475.0	1225.0	1.98	1.86	1.81	1225.0	3.34	3.29	3.22	654.5	2.06	2.00	1.97
1575.0	1325.0	2.14	1.98	2.01	1325.0	3.56	3.55	3.53	735.1	2.18	2.08	2.07
1675.0	1425.0	2.14	1.98	1.97	1425.0	3.42	3.41	3.38	815.7	2.30	2.14	2.15
1775.0	1525.0	2.12	1.94	1.95	1525.0	3.35	3.35	3.31	876.1	2.33	2.13	2.15
1875.0	1625.0	2.11	1.90	1.95	1625.0	3.31	3.31	3.27	956.7	2.35	2.12	2.16
1975.0	1725.0	2.06	1.86	1.91	1725.0	3.29	3.29	3.25	1017.1	2.41	2.16	2.19
2075.0	1825.0	1.88	1.71	1.75	1825.0	3.27	3.27	3.24	1097.7	2.43	2.14	2.17
2175.0	1925.0	2.34	2.15	2.16	1925.0	3.26	3.24	3.21	1158.1	2.40	2.09	2.12
2275.0	2025.0	2.26	1.99	2.02	2025.0	3.28	3.29	3.27	1238.7	2.30	1.98	2.01
2375.0	2125.0	1.96	1.74	1.80	2125.0	3.32	3.34	3.30	1299.1	2.24	1.92	1.99
2475.0	2225.0	1.86	1.65	1.69	2225.0	3.52	3.54	3.49	1379.6	2.22	1.89	1.95
2575.0	2325.0	1.79	1.57	1.59	2325.0	3.75	3.76	3.70	1440.1	2.15	1.82	1.87
2655.0	2405.0	1.70	1.48	1.52	2405.0	3.97	3.97	3.92	1520.6	2.03	1.70	1.76
2755.0	2505.0	1.59	1.39	1.42	2505.0	4.30	4.31	4.23	1581.1	1.93	1.63	1.68
2835.0	2585.0	1.50	1.31	1.34	2585.0	4.66	4.68	4.56	1661.6	1.81	1.54	1.58
2935.0	2685.0	1.56	1.36	1.40	2685.0	5.33	5.38	5.22	1722.1	1.70	1.46	1.49
3015.0	2765.0	1.63	1.47	1.50	2765.0	5.74	5.74	5.51	1802.6	1.56	1.37	1.36
3115.0	2865.0	1.54	1.47	1.49	2865.0	6.15	6.05	5.83	1863.0	1.47	1.28	1.27
3195.0	2945.0	1.49	1.46	1.44	2945.0	6.49	6.42	5.99	1943.6	1.30	1.13	1.12
3295.0	3045.0	1.50	1.52	1.51	3045.0	7.47	7.44	6.91	2004.0	1.19	1.07	1.09
3375.0	3125.0	1.56	1.60	1.60	3125.0	7.53	7.31	6.66	2084.6	1.20	1.20	1.23
3475.0	3225.0	1.80	1.83	1.83	3225.0	6.66	6.39	5.87	2145.0	1.34	1.38	1.40
3555.0	3305.0	2.09	2.12	2.11	3305.0	5.39	5.13	4.70	2225.6	1.57	1.65	1.65
3655.0	3405.0	2.42	2.46	2.44	3405.0	3.79	3.59	3.33	2286.0	1.71	1.82	1.82
3735.0	3485.0	2.61	2.68	2.66	3485.0	3.65	3.52	3.32	2366.6	1.90	2.02	2.03
3835.0	3585.0	2.95	2.99	2.96	3585.0	3.55	3.45	3.27	2427.0	2.04	2.16	2.18
3915.0	3665.0	3.24	3.21	3.19	3665.0	3.39	3.33	3.19	2507.6	2.19	2.27	2.31
4015.0	3765.0	3.70	3.57	3.56	3765.0	3.31	3.25	3.13	2568.0	2.35	2.38	2.44
4095.0	3845.0	4.14	3.91	3.92	3845.0	3.37	3.34	3.25	2648.6	2.72	2.69	2.73
4195.0	3945.0	4.80	4.45	4.42	3945.0	3.49	3.46	3.38	2709.0	2.96	2.88	2.91
4275.0	4025.0	5.23	4.80	4.69	4025.0	3.68	3.67	3.63	2789.6	3.30	3.16	3.18
4375.0	4125.0	5.77	5.27	5.03	4125.0	3.96	3.96	3.90	2850.0	3.62	3.45	3.44

## Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	4	5	14	27	28	36	---	---	---	---
1	-	+7	+0	7	10	28	28	44	44	---	---	---
2	64	40	38	41	32	41	46	55	59	64	---	---
3	>90	51	49	47	45	45	56	58	60	63	>70	---
4	>90	>70	>70	65	66	60	55	65	>70	>70	>70	>70
5	>90	>70	>70	>70	>70	68	>70	>70	>70	>70	>70	>70
6	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
7	---	---	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
8	---	---	---	>70	>70	>70	>70	>70	>70	>70	>70	>70
9	---	---	---	---	>70	>70	>70	>70	>70	>70	>70	>70
10	---	---	---	---	---	>70	>70	>70	>70	>70	>70	>70
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

Test conditions: RF IN: 3850 MHz; 0.00 dBm.  
 LO IN: 3880 MHz; +17.00 dBm  
 IF OUT: 30 MHz; -20.36 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	13	13	25	37	39	48	---	---	---	---
1	-	+7	+0	10	12	36	31	50	53	---	---	---
2	45	26	41	38	31	45	47	51	56	62	---	---
3	65	50	32	37	29	56	52	47	48	58	65	---
4	90	59	55	57	51	46	53	57	57	66	75	74
5	>90	65	56	62	62	50	49	43	53	66	64	77
6	>90	73	70	65	60	72	66	59	60	62	69	>80
7	---	---	77	70	71	74	67	60	58	73	67	72
8	---	---	---	>80	>80	72	72	>80	70	67	68	73
9	---	---	---	---	>80	77	>80	>80	74	77	74	66
10	---	---	---	---	---	>80	>80	>80	>80	>80	>80	>80
	RF CAL	0	1	2	3	4	5	6	7	8	9	10


### LO HARMONICS ORDER

Test conditions: RF IN: 3850 MHz; 10.00 dBm.  
 LO IN: 3880 MHz; +17.00 dBm  
 IF OUT: 30 MHz; -10.29 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.  
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.  
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

## Typical Performance Curves


Conversion Loss @ IF=250MHz

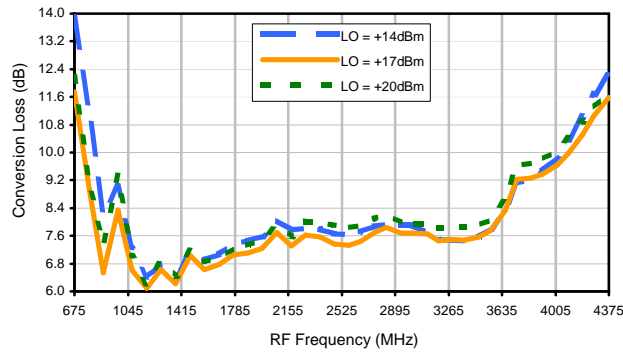


Conversion Loss vs. LO @ RF=3850MHz

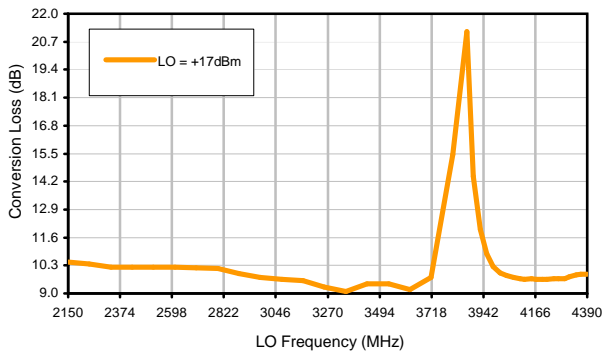


Conversion Loss vs. IF @ RF=3850MHz

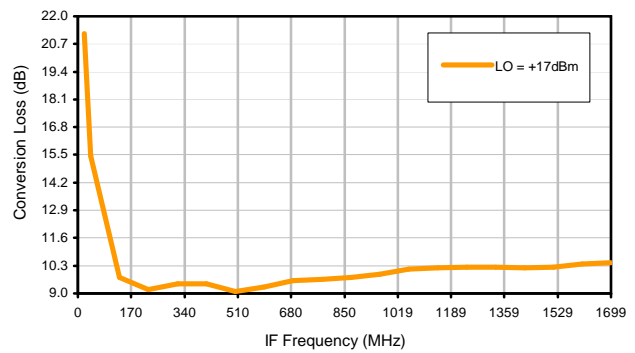


Conversion Loss vs. IF @ RF=3764.89MHz

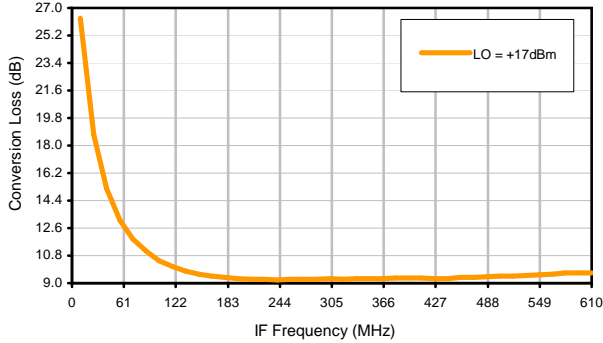


Conversion Loss vs. IF @ RF=3935.1MHz

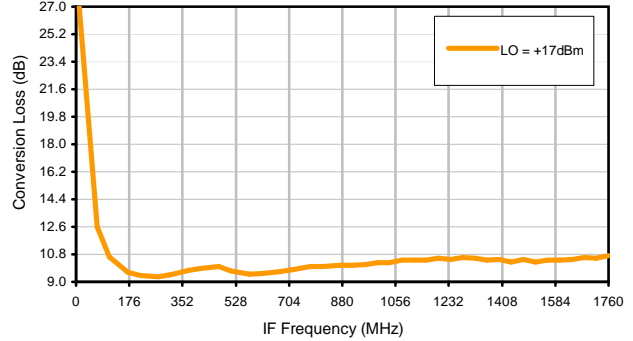

IP3 Input

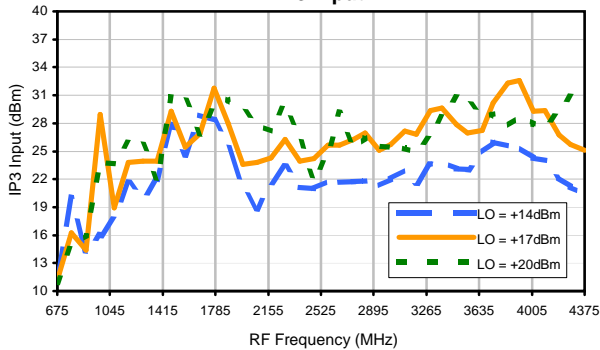


Compression @ RF IN=+15dBm

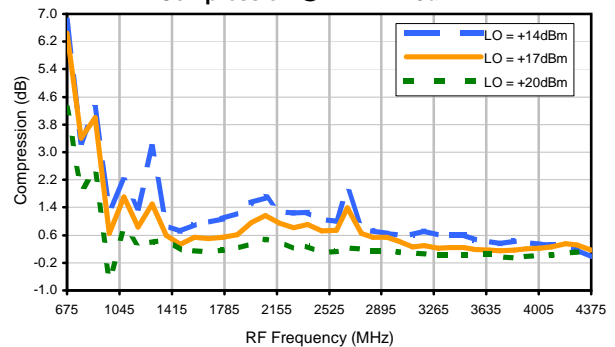


## Typical Performance Curves


LO-RF Isolation

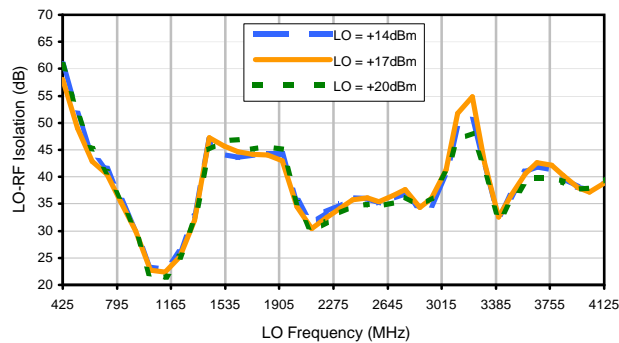


LO-IF Isolation

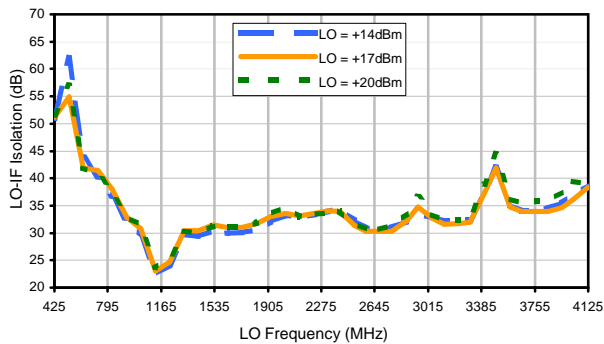


RF-IF Isolation

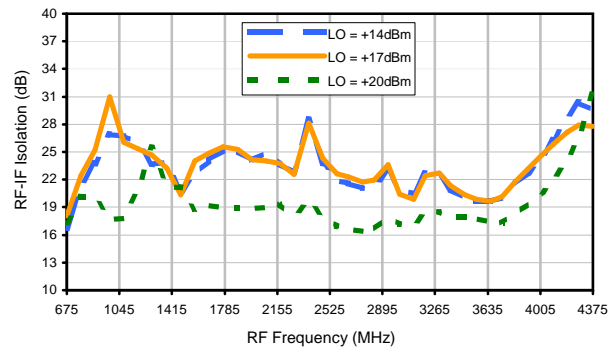


RF VSWR

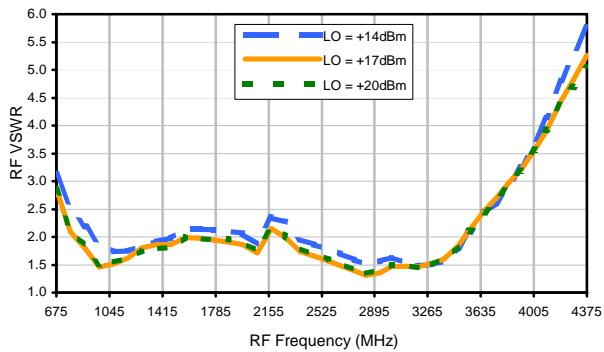

LO VSWR

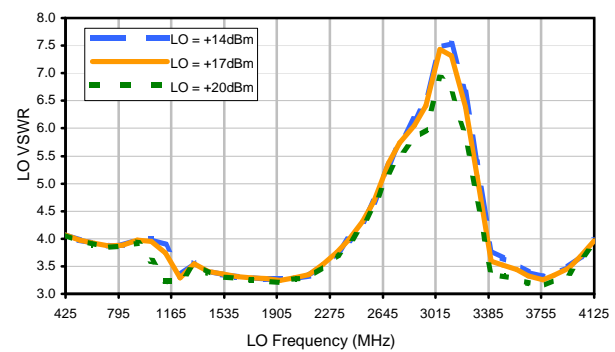

IF VSWR

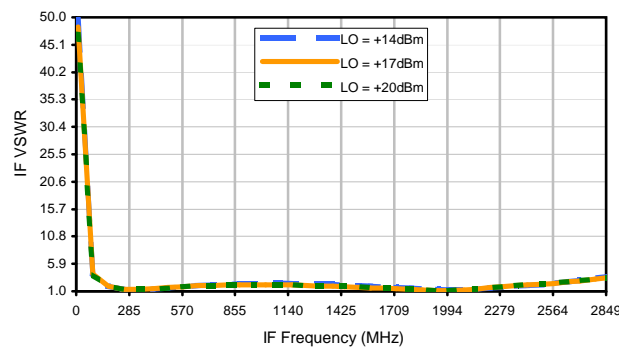

## Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	4	5	14	27	28	36	---	---	---	---
1	-	+7	+0	7	10	28	28	44	44	---	---	---
2	64	40	38	41	32	41	46	55	59	64	---	---
3	>90	51	49	47	45	45	56	58	60	63	>70	---
4	>90	>70	>70	65	66	60	55	65	>70	>70	>70	>70
5	>90	>70	>70	>70	>70	68	>70	>70	>70	>70	>70	>70
6	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
7	---	---	>70	>70	>70	>70	>70	>70	>70	>70	>70	>70
8	---	---	---	>70	>70	>70	>70	>70	>70	>70	>70	>70
9	---	---	---	---	>70	>70	>70	>70	>70	>70	>70	>70
10	---	---	---	---	---	>70	>70	>70	>70	>70	>70	>70
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

Test conditions: RF IN: 3850 MHz; 0.00 dBm.  
 LO IN: 3880 MHz; +17.00 dBm  
 IF OUT: 30 MHz; -20.36 dBm

RF HARMONICS ORDER


	(-dBm)	(-dBc)										
0	-	-	13	13	25	37	39	48	---	---	---	---
1	-	+7	+0	10	12	36	31	50	53	---	---	---
2	45	26	41	38	31	45	47	51	56	62	---	---
3	65	50	32	37	29	56	52	47	48	58	65	---
4	90	59	55	57	51	46	53	57	57	66	75	74
5	>90	65	56	62	62	50	49	43	53	66	64	77
6	>90	73	70	65	60	72	66	59	60	62	69	>80
7	---	---	77	70	71	74	67	60	58	73	67	72
8	---	---	---	>80	>80	72	72	>80	70	67	68	73
9	---	---	---	---	>80	77	>80	>80	74	77	74	66
10	---	---	---	---	---	>80	>80	>80	>80	>80	>80	>80
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER


Test conditions: RF IN: 3850 MHz; 10.00 dBm.  
 LO IN: 3880 MHz; +17.00 dBm  
 IF OUT: 30 MHz; -10.29 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.  
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.  
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

### Outline Dimensions

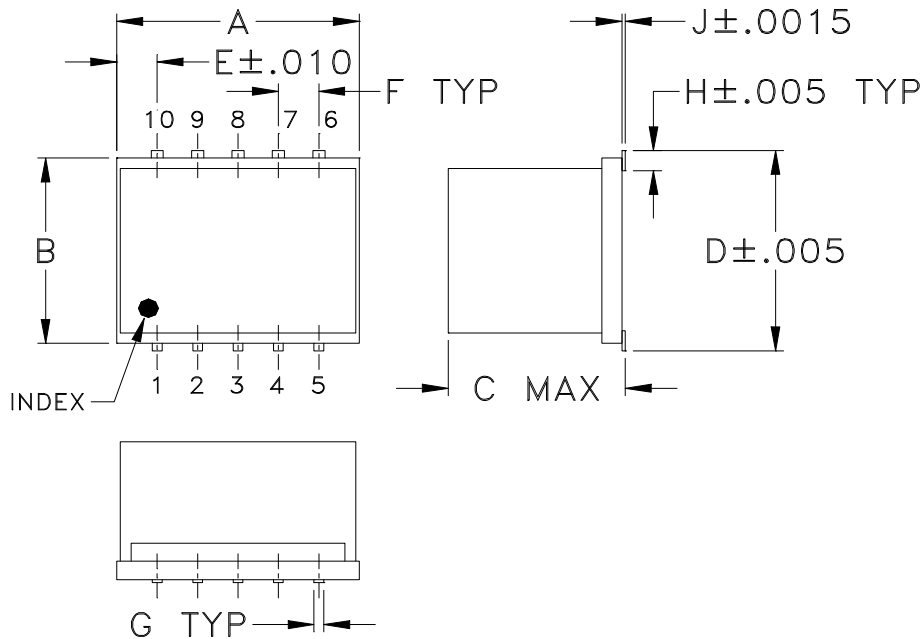

### PCB Land Pattern

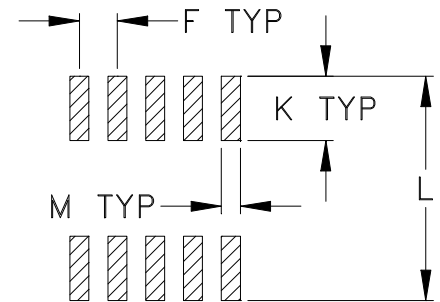

Suggested Layout,  
Tolerance to be within  $\pm.002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	WT. GRAMS
DZ883	.30 (7.62)	.250 (6.35)	.190 (4.83)	.266 (6.76)	.050 (1.27)	.050 (1.27)	.012 (0.30)	.029 (0.74)	.004 (0.10)	.085 (2.16)	.296 (7.52)	.030 (0.76)	0.5

Dimensions are in inches (mm). Tolerances: 2Pl.  $\pm.01$ ; 3Pl.  $\pm.005$

#### Notes:

- Case material: Ceramic.
- Termination finish:
  - For RoHS Case Styles: Tin plate. All models, (+) suffix.
  - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

# Tape & Reel Packaging TR-F34



Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
			100	
			200	
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.  
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M81781	UPDATED PCB LAYOUT	06/07/02	GF	DJ
B	M82377	UPDATED DRAWING	07/31/02	AV	WL
C	M102713	ADDED NOTE 2 & "...WITH SMOBC"	01/17/06	MMG	IL
D	M135488	ADDED DZ1650, CHANGED PIN CONN.	02/02/12	GF	DJ

SUGGESTED MOUNTING CONFIGURATION FOR  
DZ883, DZ885 & DZ1650 CASE STYLES, "10MX01" PIN CONNECTION

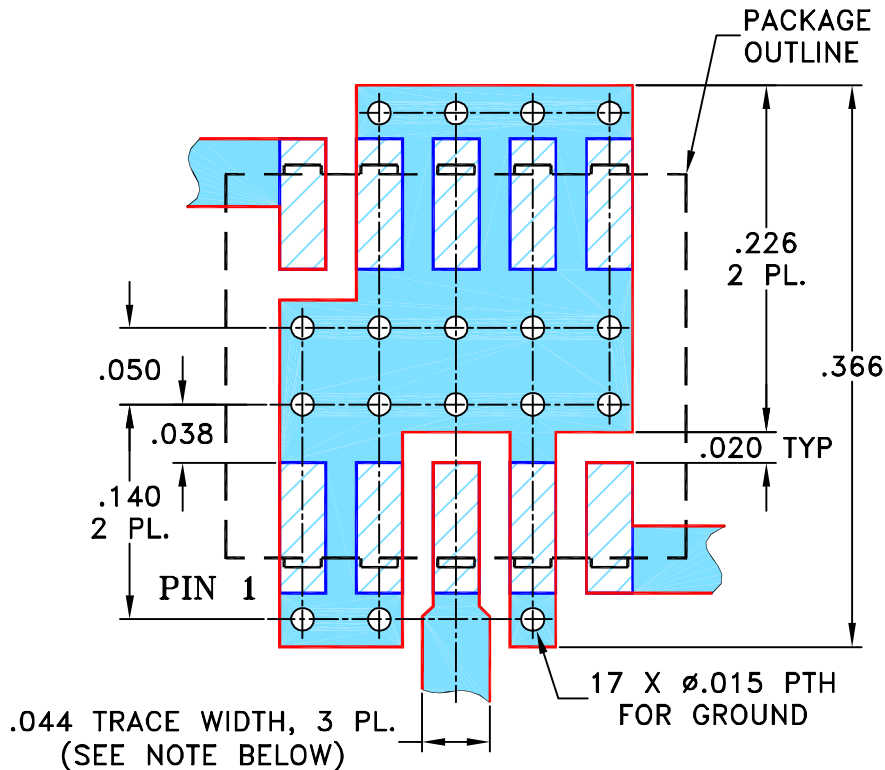

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

AV

05/08/02

TOLERANCES ON:

CHECKED

DB

05/16/02

2 PL DECIMALS ± .005


APPROVED

WL

05/16/02

ANGLES ±

FRACTIONS ±



THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.



Mini-Circuits®

13 Neptune Avenue  
Brooklyn NY 11235

PL, 10MX01, DZ883/885/1650, TB-144

SIZE

CODE IDENT

DRAWING NO:

REV:

A

15542

98-PL-045

D

FILE: 98PL045


SCALE:

8:1


SHEET:

1 OF 1

# Evaluation Board and Circuit

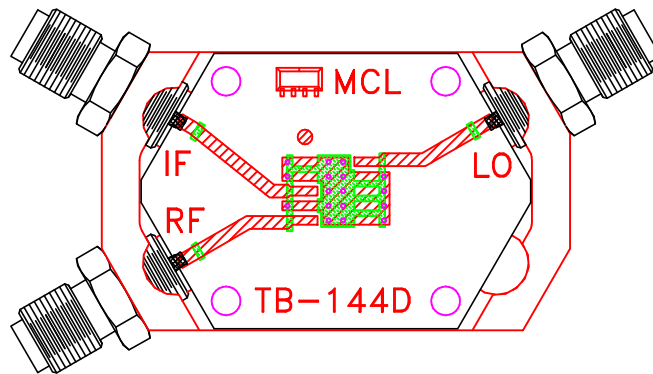


TB-144

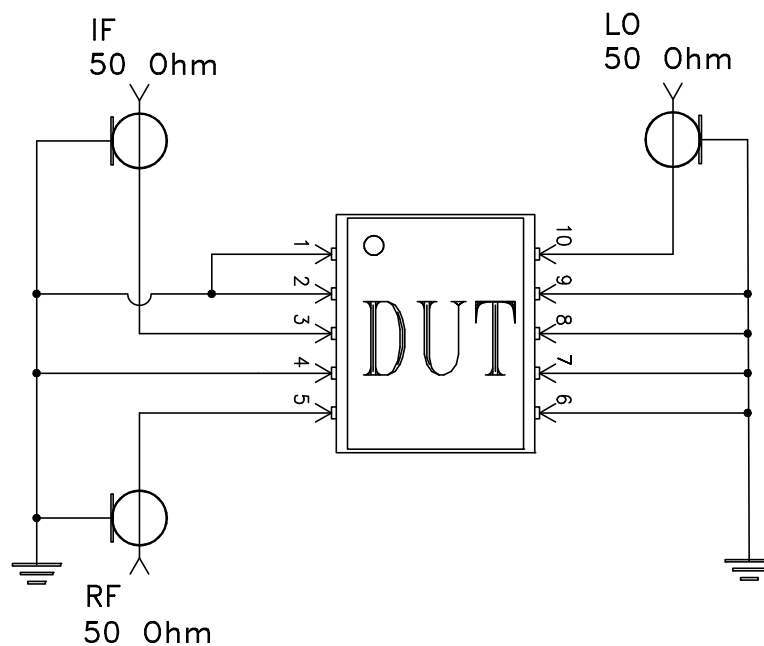

Schematic Diagram

## Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,  
Dielectric Constant=3.5, Thickness=.020 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102-C, Condition C
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutectic Process: 225°C peak Pb-Free Process: 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215