

# Engineering Development Model

## Frequency Mixer MCA1T-ED13539/1 Level 13 (LO Power + 13 dBm)

### Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.



Please click "Back", and then click "Contact Us" for Applications support.


**CASE STYLE : DZ885-2**

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (f <sub>L</sub> to f <sub>U</sub> )	1000		4200	MHz
	RF (f <sub>L</sub> to f <sub>U</sub> )	1000		4200	MHz
	IF	10		1500	MHz
Conversion Loss	Total Range		6.2		dB
LO-RF Isolation			35		dB
LO-IF Isolation			20		dB
Input IP3			+16		dBm
1 dB Compression			+9		dBm

MAXIMUM RATINGS	
Operating Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C

PIN CONNECTIONS	
LO	10
RF	5
IF	3
GROUND	1,2,4,6,7,8,9

### Electrical Schematic

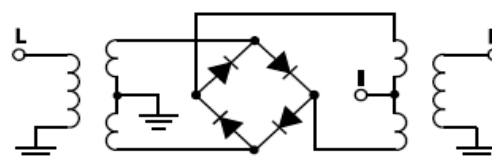

# Frequency Mixer

# MCA1T-ED13539/1

## Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+10	+13	+16
800.0	830.0	10.19	6.91	6.04
825.0	855.0	9.55	6.70	6.07
850.0	880.0	8.49	6.45	5.88
875.0	905.0	7.88	6.36	5.95
900.0	930.0	7.71	6.47	5.97
925.0	955.0	7.30	6.35	5.97
950.0	980.0	7.14	6.21	5.78
1000.0	1030.0	7.10	6.27	5.87
1100.0	1130.0	6.69	6.33	6.14
1200.0	1230.0	6.20	5.96	5.89
1300.0	1330.0	5.99	5.80	5.68
1400.0	1430.0	5.95	5.70	5.63
1500.0	1530.0	6.27	5.89	5.69
1600.0	1630.0	6.44	6.12	5.93
1700.0	1730.0	6.31	6.04	5.89
1800.0	1830.0	6.17	5.98	5.88
1900.0	1930.0	6.21	6.00	5.90
2000.0	2030.0	6.51	6.16	5.98
2100.0	2130.0	6.87	6.39	6.15
2200.0	2230.0	7.26	6.62	6.25
2300.0	2330.0	7.21	6.60	6.23
2400.0	2430.0	6.92	6.19	5.91
2500.0	2530.0	7.31	6.52	6.14
2600.0	2630.0	7.63	6.71	6.24
2700.0	2730.0	7.77	6.85	6.25
2800.0	2830.0	7.56	6.69	6.30
2900.0	2930.0	7.34	6.40	6.02
3000.0	3030.0	7.14	5.70	5.49
3100.0	3130.0	7.41	5.54	5.34
3200.0	3230.0	7.17	5.43	5.21
3300.0	3330.0	6.88	5.37	5.21
3400.0	3430.0	6.60	5.44	5.37
3500.0	3530.0	7.16	6.03	5.70
3600.0	3630.0	6.95	6.02	5.79
3700.0	3730.0	7.47	6.28	5.90
3800.0	3830.0	7.68	6.58	6.20
4000.0	4030.0	8.64	7.39	6.79
4100.0	4130.0	10.14	8.05	7.38
4200.0	4230.0	13.02	8.11	7.77

RF (IN) (MHz)	LO (MHz)	IP-3 INPUT (dBm)		
		@LO (dBm)		
		+10	+13	+16
800.0	830.0	5.27	19.13	18.82
825.0	855.0	6.11	20.53	19.25
850.0	880.0	9.58	20.97	19.40
875.0	905.0	14.90	18.23	20.22
900.0	930.0	16.20	17.51	17.85
925.0	955.0	15.79	16.69	18.22
950.0	980.0	15.89	17.01	16.80
1000.0	1030.0	14.05	15.30	16.42
1100.0	1130.0	15.93	14.47	14.94
1200.0	1230.0	18.57	15.86	15.99
1300.0	1330.0	19.98	19.68	17.85
1400.0	1430.0	18.61	17.50	22.90
1500.0	1530.0	22.54	18.48	16.68
1600.0	1630.0	21.16	17.77	18.60
1700.0	1730.0	21.94	25.27	25.52
1800.0	1830.0	18.72	20.73	22.33
1900.0	1930.0	18.62	19.60	21.26
2000.0	2030.0	18.71	19.65	21.18
2100.0	2130.0	20.10	19.51	20.93
2200.0	2230.0	18.12	19.13	19.36
2300.0	2330.0	17.42	16.53	16.63
2400.0	2430.0	17.55	17.87	20.76
2500.0	2530.0	18.97	17.35	17.57
2600.0	2630.0	21.00	21.19	18.79
2700.0	2730.0	14.71	17.97	18.41
2800.0	2830.0	13.20	15.08	16.07
2900.0	2930.0	11.79	12.88	14.70
3000.0	3030.0	9.17	18.53	21.79
3100.0	3130.0	11.78	16.65	19.42
3200.0	3230.0	14.96	14.88	18.69
3300.0	3330.0	20.92	15.17	19.49
3400.0	3430.0	14.35	17.76	19.56
3500.0	3530.0	12.53	17.64	23.92
3600.0	3630.0	14.75	25.79	23.41
3700.0	3730.0	17.46	23.66	23.47
3800.0	3830.0	17.00	18.91	21.15
4000.0	4030.0	20.33	20.18	20.29
4100.0	4130.0	16.65	20.32	18.91
4200.0	4230.0	7.44	16.98	17.65

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+9dBm (dB)		
		@LO (dBm)		
		+10	+13	+16
800.0	830.0	2.60	3.31	2.89
825.0	855.0	2.70	3.44	2.96
850.0	880.0	3.10	3.48	3.03
875.0	905.0	3.32	3.40	3.04
900.0	930.0	3.30	3.16	2.87
925.0	955.0	3.45	3.19	2.93
950.0	980.0	3.34	3.18	2.92
1000.0	1030.0	2.91	2.86	2.67
1100.0	1130.0	2.41	2.24	2.14
1200.0	1230.0	2.12	1.86	1.74
1300.0	1330.0	1.68	1.42	1.29
1400.0	1430.0	1.45	1.23	1.04
1500.0	1530.0	1.27	1.18	1.07
1600.0	1630.0	1.20	0.98	0.80
1700.0	1730.0	1.25	0.98	0.86
1800.0	1830.0	1.19	0.85	0.70
1900.0	1930.0	1.22	0.91	0.76
2000.0	2030.0	1.33	1.03	0.89
2100.0	2130.0	1.47	1.21	1.06
2200.0	2230.0	1.43	1.26	1.17
2300.0	2330.0	1.61	1.34	1.18
2400.0	2430.0	1.36	1.08	0.92
2500.0	2530.0	1.51	1.25	1.16
2600.0	2630.0	1.33	1.14	1.06
2700.0	2730.0	1.33	1.00	1.10
2800.0	2830.0	1.64	1.11	1.03
2900.0	2930.0	1.82	1.37	1.26
3000.0	3030.0	1.57	1.26	0.89
3100.0	3130.0	1.18	1.16	0.85
3200.0	3230.0	1.37	1.12	0.74
3300.0	3330.0	1.39	1.04	0.56
3400.0	3430.0	1.63	1.33	0.74
3500.0	3530.0	1.69	1.60	1.31
3600.0	3630.0	1.48	1.27	1.03
3700.0	3730.0	1.07	1.25	1.10
3800.0	3830.0	0.98	1.07	1.02
4000.0	4030.0	0.96	0.85	0.89
4100.0	4130.0	0.28	0.61	0.72
4200.0	4230.0	-1.83	0.50	0.58

# Frequency Mixer

# MCA1T-ED13539/1

## Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2600MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1000MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=4200.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+13			+13			+13
1830.0	770.0	12.88	10.0	1010.0	6.49	1810.1	2390.0	13.27
1730.0	870.0	10.49	50.0	1050.0	6.04	1770.1	2430.0	11.87
1650.0	950.0	9.69	110.0	1110.0	6.06	1710.1	2490.0	10.49
1550.0	1050.0	9.14	150.0	1150.0	6.09	1670.1	2530.0	9.94
1450.0	1150.0	8.23	210.0	1210.0	5.85	1630.1	2570.0	9.67
1350.0	1250.0	6.70	250.0	1250.0	5.69	1570.1	2630.0	9.27
1270.0	1330.0	5.87	310.0	1310.0	5.53	1530.1	2670.0	9.01
1170.0	1430.0	6.28	350.0	1350.0	5.46	1490.1	2710.0	8.96
1070.0	1530.0	7.15	410.0	1410.0	5.44	1430.1	2770.0	9.09
990.0	1610.0	7.73	450.0	1450.0	5.31	1390.1	2810.0	9.20
890.0	1710.0	8.23	510.0	1510.0	5.53	1350.1	2850.0	9.38
790.0	1810.0	7.17	550.0	1550.0	5.78	1290.1	2910.0	9.44
690.0	1910.0	6.86	610.0	1610.0	6.10	1250.1	2950.0	9.27
610.0	1990.0	7.03	650.0	1650.0	5.63	1210.1	2990.0	8.83
510.0	2090.0	6.83	690.0	1690.0	5.62	1150.1	3050.0	8.63
410.0	2190.0	6.41	750.0	1750.0	5.69	1110.1	3090.0	8.69
330.0	2270.0	5.92	790.0	1790.0	5.46	1070.1	3130.0	8.80
230.0	2370.0	6.15	850.0	1850.0	5.35	1010.1	3190.0	9.04
130.0	2470.0	6.55	890.0	1890.0	5.33	970.1	3230.0	9.07
30.0	2570.0	6.84	950.0	1950.0	5.47	930.1	3270.0	9.31
10.0	2610.0	7.22	990.0	1990.0	5.56	870.1	3330.0	8.86
110.0	2710.0	6.94	1050.0	2050.0	5.91	830.1	3370.0	8.98
190.0	2790.0	7.19	1090.0	2090.0	5.78	790.1	3410.0	8.82
290.0	2890.0	7.29	1150.0	2150.0	6.10	730.1	3470.0	8.79
390.0	2990.0	6.65	1190.0	2190.0	6.34	690.1	3510.0	8.69
470.0	3070.0	6.45	1250.0	2250.0	6.31	650.1	3550.0	8.73
570.0	3170.0	6.65	1290.0	2290.0	6.29	590.1	3610.0	8.56
670.0	3270.0	6.77	1330.0	2330.0	6.36	550.1	3650.0	8.59
750.0	3350.0	6.68	1390.0	2390.0	6.20	510.1	3690.0	8.39
850.0	3450.0	6.48	1430.0	2430.0	6.21	450.1	3750.0	8.30
950.0	3550.0	6.39	1490.0	2490.0	6.15	410.1	3790.0	8.36
1030.0	3630.0	6.26	1530.0	2530.0	6.29	370.1	3830.0	8.41
1130.0	3730.0	6.23	1590.0	2590.0	6.34	310.1	3890.0	8.12
1230.0	3830.0	6.30	1630.0	2630.0	6.61	270.1	3930.0	8.14
1310.0	3910.0	6.35	1690.0	2690.0	7.09	230.1	3970.0	8.13
1410.0	4010.0	6.56	1730.0	2730.0	7.58	170.1	4030.0	8.26
1510.0	4110.0	7.05	1790.0	2790.0	8.63	130.1	4070.0	8.37
1590.0	4190.0	7.90	1830.0	2830.0	9.67	90.1	4110.0	8.34
1690.0	4290.0	9.61	1890.0	2890.0	11.87	30.1	4170.0	8.41
1790.0	4390.0	11.95	1910.0	2910.0	12.49	10.1	4190.0	8.67



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

# Frequency Mixer

# MCA1T-ED13539/1

## Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)					@LO (dBm)		
	+10	+13	+16	+10	+13	+16			+10	+13	+16
830.0	41.63	36.56	36.96	18.76	19.88	22.13	800.0	830.0	16.82	12.45	11.67
855.0	38.27	35.47	36.10	18.29	19.96	22.46	825.0	855.0	14.91	11.99	11.84
880.0	35.58	35.03	36.11	17.91	20.03	22.34	850.0	880.0	13.22	11.67	11.30
905.0	34.12	34.46	36.02	17.68	20.19	22.67	875.0	905.0	12.71	11.64	11.60
930.0	33.84	34.59	35.84	17.68	20.26	22.67	900.0	930.0	12.69	11.85	11.57
955.0	33.21	34.43	36.16	17.80	20.38	22.69	925.0	955.0	12.83	12.13	11.78
980.0	33.55	34.61	35.85	17.97	20.41	22.70	950.0	980.0	13.18	12.45	12.08
1030.0	35.06	35.48	36.77	18.97	21.77	24.05	1000.0	1030.0	14.74	13.76	13.20
1130.0	42.65	41.95	43.08	20.44	23.58	26.17	1100.0	1130.0	19.42	18.51	17.39
1230.0	48.86	46.13	43.95	22.52	25.51	27.40	1200.0	1230.0	24.11	23.67	22.47
1330.0	45.14	41.33	39.85	24.19	25.39	25.20	1300.0	1330.0	27.51	26.41	25.28
1430.0	40.52	38.10	36.49	24.10	23.69	22.70	1400.0	1430.0	25.96	24.42	22.91
1530.0	38.90	37.48	35.65	23.75	22.77	21.48	1500.0	1530.0	24.22	22.82	21.56
1630.0	35.54	34.80	34.30	25.26	23.23	21.56	1600.0	1630.0	21.44	20.04	19.17
1730.0	37.01	36.34	35.90	22.26	21.15	20.36	1700.0	1730.0	21.23	20.52	20.02
1830.0	38.82	37.94	37.34	21.77	20.92	20.28	1800.0	1830.0	19.83	19.24	19.01
1930.0	38.89	38.42	38.49	21.20	21.13	20.91	1900.0	1930.0	20.38	20.02	19.78
2030.0	38.48	38.25	38.64	20.54	21.50	22.15	2000.0	2030.0	20.78	20.37	20.10
2130.0	38.27	37.54	37.48	20.11	22.00	23.78	2100.0	2130.0	21.89	21.56	21.32
2230.0	38.50	36.67	36.07	20.14	21.54	22.42	2200.0	2230.0	24.93	24.79	24.68
2330.0	39.43	36.68	35.85	20.98	20.53	19.73	2300.0	2330.0	33.36	32.72	32.27
2430.0	39.24	36.52	35.97	21.94	19.83	18.37	2400.0	2430.0	24.67	24.22	24.02
2530.0	40.37	37.68	36.03	22.96	20.18	18.35	2500.0	2530.0	20.35	19.74	19.38
2630.0	40.14	40.07	37.76	23.49	20.33	18.70	2600.0	2630.0	17.77	17.16	16.67
2730.0	41.80	40.97	38.04	24.84	21.61	20.01	2700.0	2730.0	16.63	16.00	15.47
2830.0	42.07	42.45	40.66	25.38	22.38	20.82	2800.0	2830.0	16.33	15.71	15.28
2930.0	42.44	45.02	44.28	26.13	23.37	21.92	2900.0	2930.0	16.33	15.81	15.12
3030.0	41.17	40.62	40.56	27.92	26.19	25.02	3000.0	3030.0	16.53	15.75	15.34
3130.0	39.26	37.55	36.96	28.68	27.71	27.25	3100.0	3130.0	16.76	16.72	16.51
3230.0	37.46	36.01	35.01	28.63	28.29	28.72	3200.0	3230.0	17.96	17.62	17.38
3330.0	35.13	33.80	32.87	28.26	28.47	29.57	3300.0	3330.0	19.49	18.97	18.45
3430.0	33.27	32.11	30.93	27.54	28.53	30.01	3400.0	3430.0	21.37	20.27	19.51
3530.0	32.04	30.92	29.55	26.63	27.74	28.63	3500.0	3530.0	32.19	30.32	31.28
3630.0	29.29	29.16	28.59	24.91	26.20	28.01	3600.0	3630.0	21.13	19.56	19.16
3730.0	27.79	27.46	26.97	22.13	23.95	26.50	3700.0	3730.0	31.98	27.91	25.99
3830.0	27.39	27.11	26.43	21.64	23.87	26.84	3800.0	3830.0	29.40	27.90	26.26
4030.0	28.14	28.56	28.25	17.55	19.31	21.41	4000.0	4030.0	23.26	24.48	25.55
4130.0	28.18	28.96	28.83	15.80	17.25	19.31	4100.0	4130.0	21.55	22.68	23.41
4230.0	28.31	29.51	29.94	14.89	16.02	17.74	4200.0	4230.0	20.13	22.31	23.12



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS

# Frequency Mixer

# MCA1T-ED13539/1

## Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=4200MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+10	+13	+16		+10	+13	+16		+10	+13	+16
800.0	830.0	2.69	1.87	1.66	830.0	18.99	9.60	8.47	10.0	2.61	1.28	1.03
825.0	855.0	2.51	1.76	1.61	855.0	14.42	7.94	7.93	30.0	2.72	1.29	1.04
850.0	880.0	2.30	1.76	1.60	880.0	9.82	6.75	7.18	40.0	2.72	1.30	1.06
875.0	905.0	2.26	1.85	1.74	905.0	7.24	6.01	6.81	60.0	2.76	1.32	1.10
900.0	930.0	2.26	1.92	1.77	930.0	5.79	5.43	6.37	80.0	2.92	1.34	1.14
925.0	955.0	2.35	2.06	1.94	955.0	4.76	4.98	5.99	90.0	2.74	1.32	1.12
950.0	980.0	2.50	2.20	2.05	980.0	4.11	4.59	5.69	150.0	2.87	1.42	1.23
1000.0	1030.0	2.80	2.51	2.36	1030.0	3.24	3.96	5.09	250.0	3.13	1.58	1.39
1100.0	1130.0	3.21	3.08	3.00	1130.0	2.44	3.22	4.27	300.0	3.28	1.66	1.46
1200.0	1230.0	3.15	3.02	2.98	1230.0	1.97	2.73	3.68	400.0	3.65	1.85	1.60
1300.0	1330.0	3.10	2.94	2.82	1330.0	1.72	2.44	3.32	500.0	4.04	2.03	1.74
1400.0	1430.0	3.06	2.84	2.64	1430.0	1.66	2.37	3.19	550.0	4.33	2.17	1.86
1500.0	1530.0	3.12	2.87	2.66	1530.0	1.69	2.39	3.21	650.0	4.84	2.33	1.96
1600.0	1630.0	2.97	2.68	2.47	1630.0	1.73	2.43	3.24	750.0	5.19	2.38	1.97
1700.0	1730.0	2.86	2.66	2.52	1730.0	1.77	2.50	3.37	800.0	5.29	2.39	1.94
1800.0	1830.0	2.54	2.37	2.26	1830.0	1.79	2.54	3.44	900.0	5.26	2.41	1.91
1900.0	1930.0	2.62	2.42	2.27	1930.0	2.16	2.81	3.68	1000.0	5.04	2.36	1.86
2000.0	2030.0	2.95	2.68	2.49	2030.0	2.58	3.12	3.94	1050.0	4.82	2.26	1.78
2100.0	2130.0	3.30	2.98	2.77	2130.0	2.99	3.40	4.14	1150.0	4.29	2.03	1.62
2200.0	2230.0	3.62	3.27	3.00	2230.0	3.48	3.70	4.31	1250.0	3.73	1.97	1.73
2300.0	2330.0	3.65	3.25	2.97	2330.0	3.99	4.03	4.51	1300.0	3.53	2.03	1.87
2400.0	2430.0	3.58	3.04	2.78	2430.0	4.45	4.28	4.68	1400.0	2.71	2.10	2.16
2500.0	2530.0	3.56	3.02	2.69	2530.0	5.04	4.66	4.83	1500.0	2.24	2.31	2.59
2600.0	2630.0	3.97	3.42	2.94	2630.0	5.44	4.67	4.84	1550.0	1.97	2.58	2.99
2700.0	2730.0	3.95	3.46	2.99	2730.0	6.40	5.11	5.15	1750.0	2.72	4.40	5.02
2800.0	2830.0	3.82	3.31	3.05	2830.0	6.85	5.01	4.93	1950.0	6.62	7.30	7.74
2900.0	2930.0	3.54	2.90	2.46	2930.0	7.01	4.37	4.00	2050.0	7.46	7.63	7.78
3000.0	3030.0	2.99	2.15	1.93	3030.0	7.77	4.76	4.17	2250.0	5.47	5.41	5.44
3100.0	3130.0	2.90	2.00	1.76	3130.0	10.01	5.50	4.29	2450.0	6.99	6.59	6.50
3200.0	3230.0	2.68	1.82	1.60	3230.0	9.08	5.17	3.91	2550.0	7.58	6.68	6.40
3300.0	3330.0	2.38	1.59	1.40	3330.0	7.80	4.49	3.27	2750.0	6.80	5.03	4.54
3400.0	3430.0	2.04	1.45	1.22	3430.0	6.26	3.76	2.83	2950.0	5.66	3.86	3.30
3500.0	3530.0	2.15	1.70	1.45	3530.0	4.79	2.96	2.32	3050.0	5.69	3.94	3.43
3600.0	3630.0	2.32	1.91	1.71	3630.0	3.72	2.40	2.01	3250.0	5.36	3.38	2.84
3700.0	3730.0	2.75	2.30	2.08	3730.0	3.10	2.17	1.97	3450.0	4.25	2.49	1.99
3800.0	3830.0	3.13	2.72	2.51	3830.0	3.05	2.31	2.24	3550.0	3.76	2.58	2.33
4000.0	4030.0	4.04	3.55	3.21	4030.0	4.73	3.52	3.27	3950.0	4.01	2.69	2.41
4100.0	4130.0	4.87	4.09	3.73	4130.0	6.49	4.39	3.84	4050.0	3.54	2.40	2.21
4200.0	4230.0	6.28	4.62	4.22	4230.0	8.33	5.37	4.03	4150.0	3.26	2.26	2.16



## Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+3	20	3	29	25	47	36	50	57	---
1	-	11	+0	21	34	27	38	45	44	58	54	66
2	74	45	49	47	70	49	42	58	57	65	63	62
3	>90	53	49	62	63	59	58	73	68	68	73	>77
4	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
5	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
6	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
7	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
8	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
9	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
10	---	---	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 2600 MHz; -6.00 dBm.  
 LO IN: 2630 MHz; +13.00 dBm  
 IF OUT: 30 MHz; -12.79 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	7	33	15	45	41	52	48	60	73	---
1	-	10	+0	25	25	34	49	50	54	66	68	81
2	54	36	39	41	52	42	35	53	53	64	64	62
3	86	32	27	43	40	39	44	50	60	59	65	71
4	>90	67	52	61	62	50	55	59	57	65	68	77
5	>90	59	70	52	45	67	47	61	56	71	67	70
6	>90	84	78	86	76	69	69	69	59	80	69	>87
7	>90	>87	>87	75	>87	68	56	86	58	64	73	71
8	>90	>87	>87	>87	>87	>87	>87	76	77	69	70	78
9	>90	>87	>87	>87	>87	>87	>87	78	66	>87	66	78
10	---	---	>87	>87	>87	>87	>87	>87	>87	87	>87	77
	RF CAL	0	1	2	3	4	5	6	7	8	9	10


### LO HARMONICS ORDER

Test conditions: RF IN: 2600 MHz; 4.00 dBm.  
 LO IN: 2630 MHz; +13.00 dBm  
 IF OUT: 30 MHz; -2.78 dBm


- Notes:
1. All Harmonics are in (dBc) relative to IF OUTPUT
  2. + entry denotes harmonics are in (dBc) above IF OUTPUT
  3. RF Cal represents the Harmonics level of the RF Input Signal to the mixer

## Typical Performance Curves


Conversion Loss @IF=30 MHz

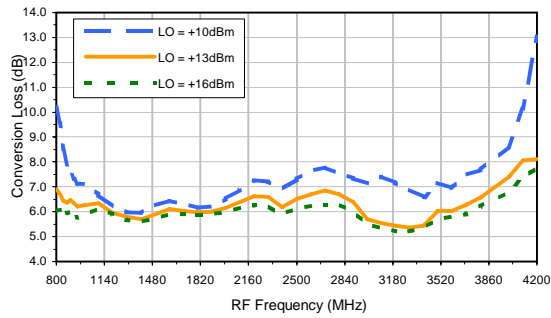


Conversion Loss vs. LO @ RF=2600 MHz

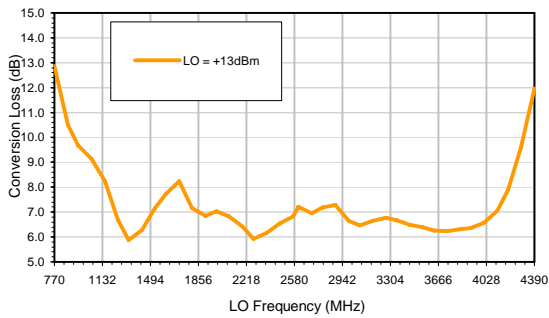


Conversion Loss vs. IF @ RF=2600 MHz

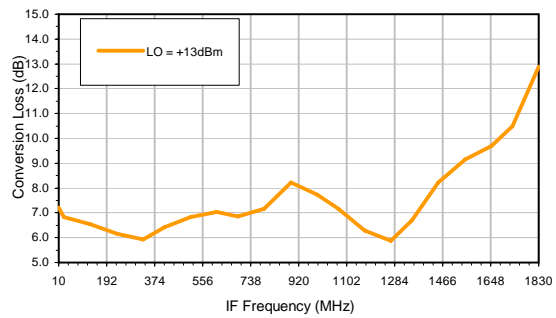


Conversion Loss vs. IF @ RF=1000 MHz

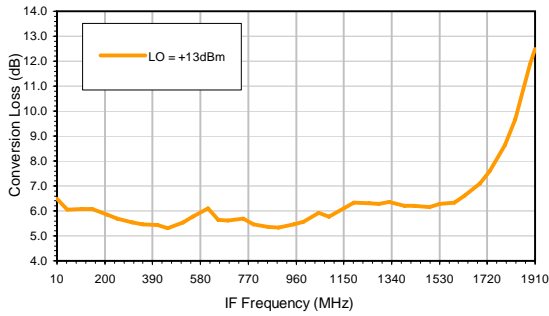


Conversion Loss vs. IF @ RF=4200.1 MHz

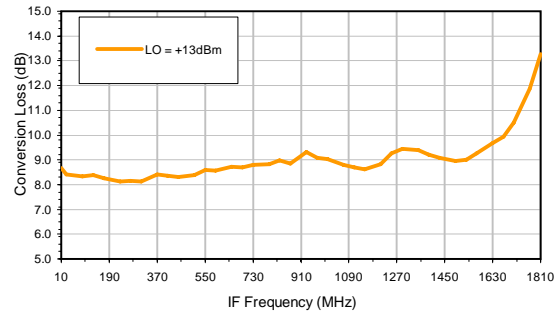

IP-3 Input

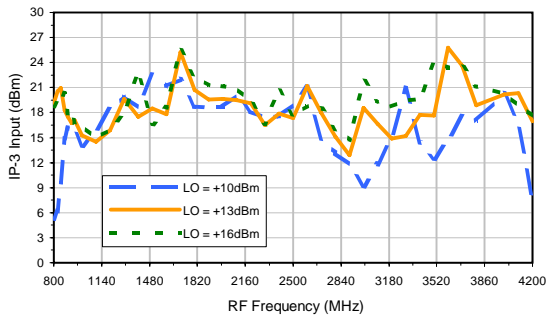


Compression @RF IN=+9 dBm

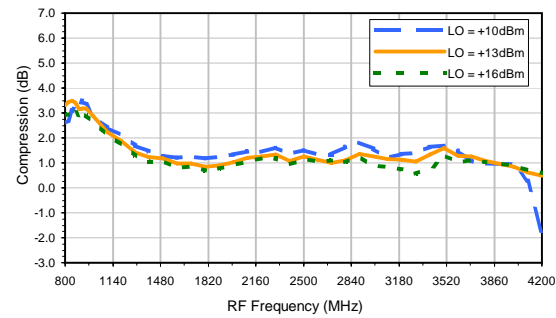


## Typical Performance Curves


LO-RF Isolation

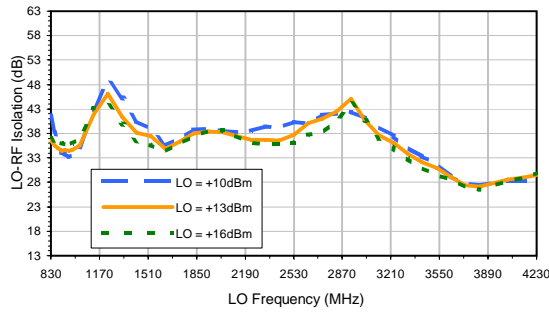


LO-IF Isolation

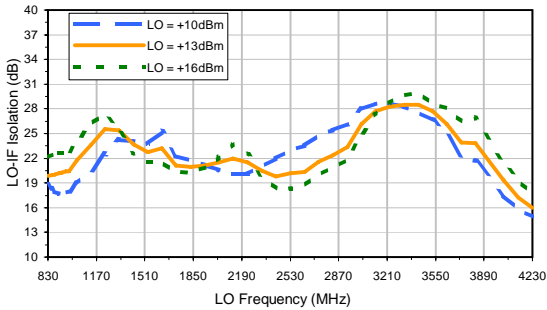


RF-IF Isolation

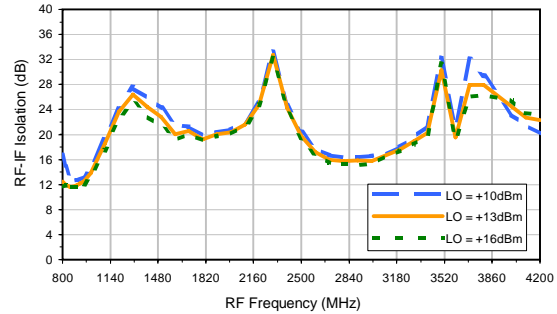


RF VSWR

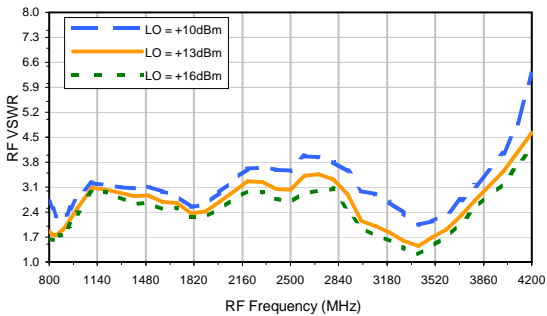

LO VSWR

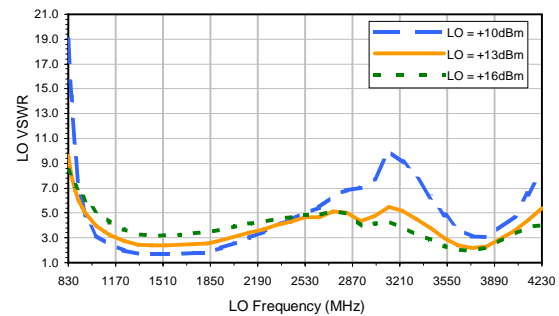

IF VSWR

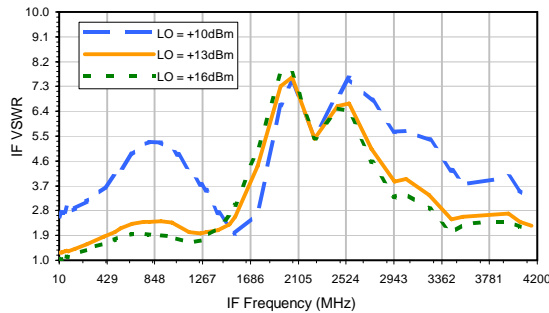

## Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+3	20	3	29	25	47	36	50	57	---
1	-	11	+0	21	34	27	38	45	44	58	54	66
2	74	45	49	47	70	49	42	58	57	65	63	62
3	>90	53	49	62	63	59	58	73	68	68	73	>77
4	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
5	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
6	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
7	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
8	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
9	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
10	---	---	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 2600 MHz; -6.00 dBm.  
 LO IN: 2630 MHz; +13.00 dBm  
 IF OUT: 30 MHz; -12.79 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	7	33	15	45	41	52	48	60	73	---
1	-	10	+0	25	25	34	49	50	54	66	68	81
2	54	36	39	41	52	42	35	53	53	64	64	62
3	86	32	27	43	40	39	44	50	60	59	65	71
4	>90	67	52	61	62	50	55	59	57	65	68	77
5	>90	59	70	52	45	67	47	61	56	71	67	70
6	>90	84	78	86	76	69	69	69	59	80	69	>87
7	>90	>87	>87	75	>87	68	56	86	58	64	73	71
8	>90	>87	>87	>87	>87	>87	>87	76	77	69	70	78
9	>90	>87	>87	>87	>87	>87	>87	78	66	>87	66	78
10	---	---	>87	>87	>87	>87	>87	>87	>87	87	>87	77
	RF CAL	0	1	2	3	4	5	6	7	8	9	10


### LO HARMONICS ORDER

Test conditions: RF IN: 2600 MHz; 4.00 dBm.  
 LO IN: 2630 MHz; +13.00 dBm  
 IF OUT: 30 MHz; -2.78 dBm


- Notes:
1. All Harmonics are in (dBc) relative to IF OUTPUT
  2. + entry denotes harmonics are in (dBc) above IF OUTPUT
  3. RF Cal represents the Harmonics level of the RF Input Signal to the mixer

DZ885-2

## Outline Dimensions

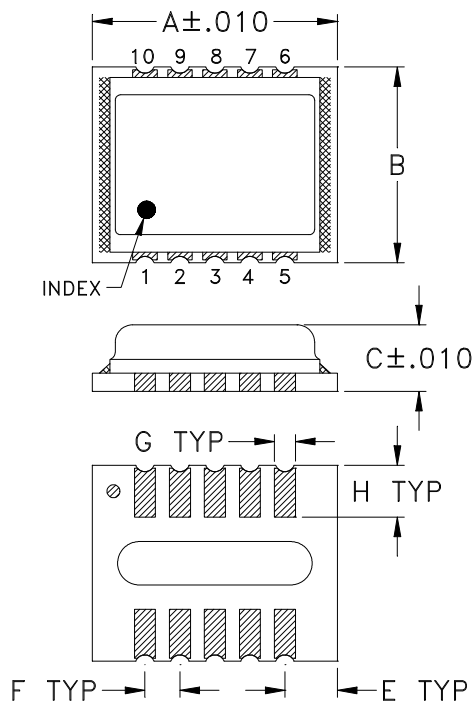

## PCB Land Pattern

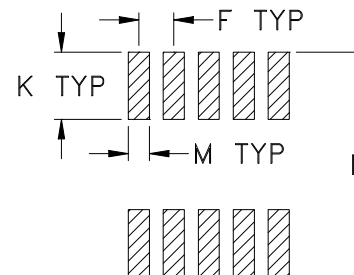

Suggested Layout,  
Tolerance to be within  $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	WT. GRAMS
DZ885-2	.350 (8.89)	.280 (7.11)	.095 (2.41)	-- --	.075 (1.91)	.050 (1.27)	.030 (0.76)	.074 (1.88)	-- --	.096 (2.44)	.321 (8.15)	.030 (0.76)	0.21

Dimensions are in inches (mm). Tolerances: 2Pl.  $\pm .01$ ; 3Pl.  $\pm .005$

### Notes:

- Case material: Plastic encapsulation on Ceramic base, mounted on PCB carrier board.
- Termination finish:  
For RoHS Case Styles: 3-5  $\mu$  inch (.08-.13 microns) Gold over 120-240  $\mu$  inch (3.05-6.10 microns) Nickel plate.  
All models, (+) suffix.

**Mini-Circuits**

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

# Tape & Reel Packaging TR-F34



Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
			100	
			200	
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.  
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M119455	NEW RELEASE	09/08/08	AV	DJ

**SUGGESTED MOUNTING CONFIGURATION FOR  
DZ885-2/DZ1383-2 CASE STYLES  
"10MX01" PIN CODE**

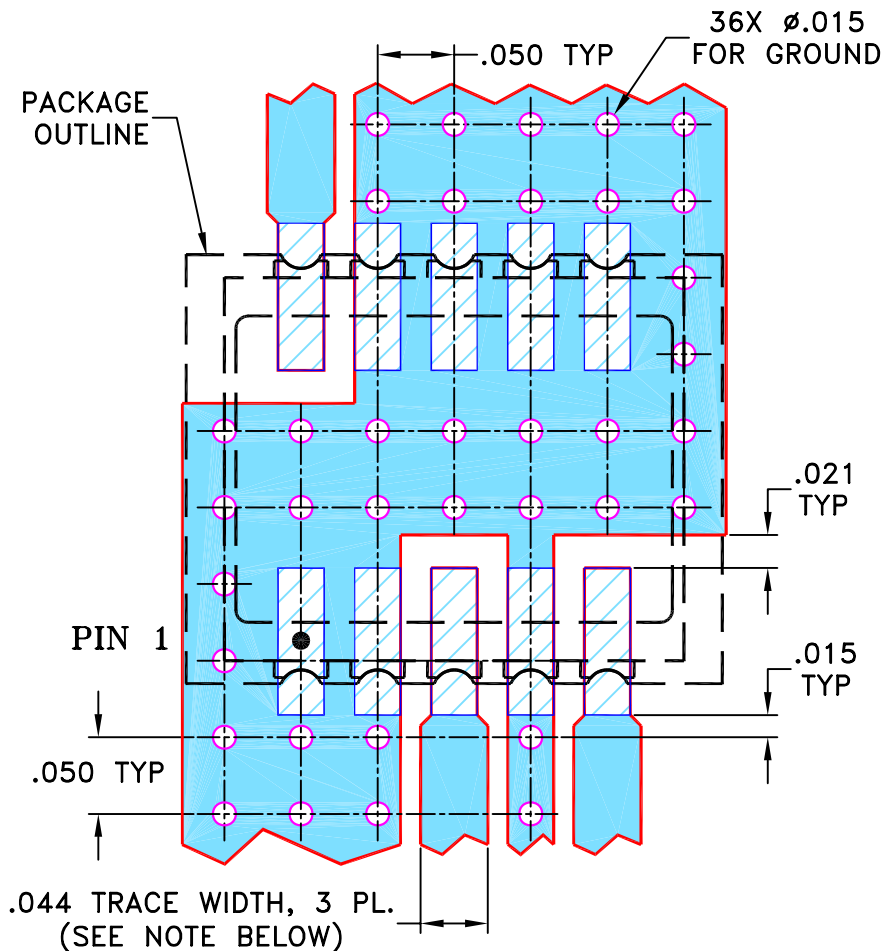

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN AV	09/05/08
TOLERANCES ON:	CHECKED MMG	09/08/08
2 PL DECIMALS ±	APPROVED DJ	09/08/08
3 PL DECIMALS ± .005		
ANGLES ±		
FRACTIONS ±		

**Mini-Circuits®** 13 Neptune Avenue  
Brooklyn NY 11235


**PL, 10MX01, DZ885-2/DZ1383-2, TB-493**

Mini-Circuits®  
 THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.  
 ASHEETA1.DWG REV:A DATE:01/12/95


SIZE <b>A</b>	CODE IDENT <b>15542</b>	DRAWING NO: <b>98-PL-288</b>	REV: <b>OR</b>
FILE: <b>98PL288</b>	SCALE: <b>8:1</b>	SHEET: <b>1 OF 1</b>	

# Evaluation Board and Circuit

For Pin Connections refer to Data Sheet of the DUT

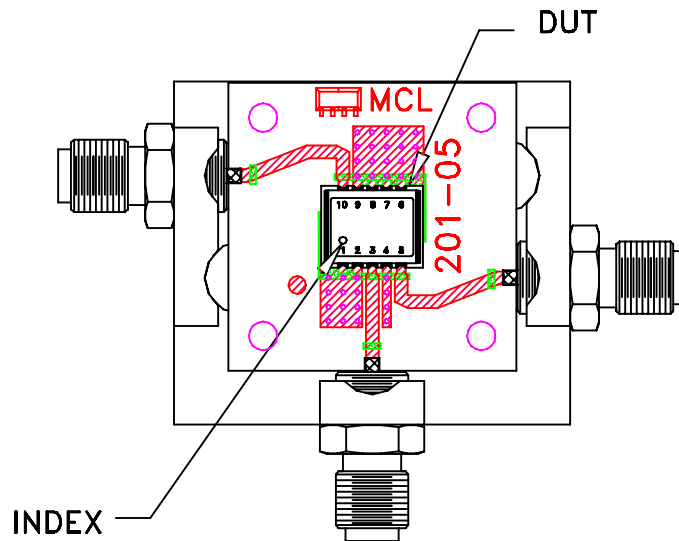


TB-493+

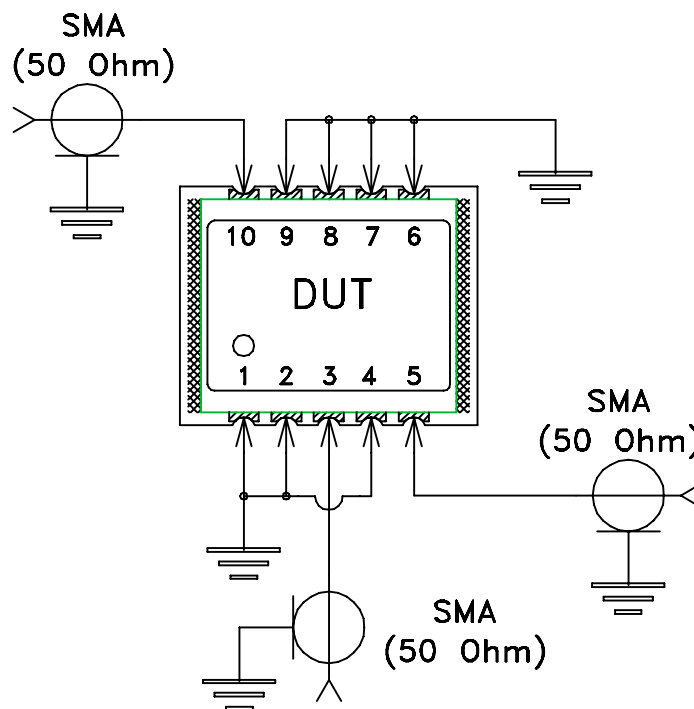

Schematic Diagram

## Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: R04350 or equivalent,  
Dielectric Constant=3.5, Thickness=.020 inch.

 Mini-Circuits®

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C Case Temperature	Individual Model Data Sheet
Storage Temperature	-40° to 85° C Ambient Environment	Individual Model Data Sheet
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102-C, Condition C
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutectic Process: 225°C peak Pb-Free Process: 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215