RF Transformer Die



50 Ω 10 to 24 GHz

The Big Deal

- Wideband, 10 to 24 GHz
- Low insertion loss, 1.0 dB to 20 GHz
- Low unbalance, 0.7 dB, 6°
- Power handling up to +31 dBm

í		
	🛛 ED 18155105–1	

Product Overview

Mini-Circuits' MTY2-243-D+ is a wideband MMIC balun transformer GaAs with an impedance ratio of 2:1 covering a wide range of applications from 10 to 24 GHz. Fabricated using HBT process technology, this model provides outstanding repeatability with low insertion loss, low amplitude unbalance, low phase unbalance, and RF input power handling up to +31 dBm (1.25W).

Key Features

Feature	Advantages
Wideband, 10 to 24 GHz	MTY2-243-D+ supports a broad variety of applications including instrumentation, radar, SATCOM and more.
Low insertion loss • 1.0 dB, 10 to 20 GHz • 1.5 dB, 20 to 24 GHz	Enables excellent signal power transmission from input to output.
Low unbalance • 0.7 dB amplitude unbalance • 6° phase unbalance	Low unbalance can improve a system's electromagnetic compatibility by rejecting unwanted common-mode noise.
Unpackaged Die	Enables the user to integrate the balun directly into hybrids.

MMIC Balun **RF Transformer Die**

50Ω 10 to 24 GHz

Product Features

- Wideband, 10 to 24 GHz
- \bullet Low insertion loss, 1.0 dB to 20 GHz
- \bullet Low unbalance, 0.7 dB, 6°
- Power handling up to +31 dBm

Typical Applications

- Instrumentation
- Test and Measurements
- Radar
- Satcom

|--|

MTY2-243-D+


+RoHS Compliant The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Ordering Information: Refer to Last Page

General Description


Mini-Circuits MTY2-243-D+ is a wideband MMIC balun transformer GaAs with an impedance ratio of 2:1 covering a wide range of applications from 10 to 24 GHz. Fabricated using HBT process technology, this model provides outstanding repeatability with low insertion loss, low amplitude unbalance, low phase unbalance, and RF input power handling up to +31 dBm (1.25W).

Simplified Schematic and Pad description



Pad Number	Description
2	PRIMARY DOT
5	SECONDARY
6	SECONDARY DOT
1,3 & Bottom of Die	GND
4,7	NO CONNECTION

Bonding Pad Position



Die dimensions in µm								
L1	L2	L3	H1	H2	H3	H4	H5	H6
95	699	794	204	229	354	379	504	529
H7	H8	Thickness		Die	size		Pad Size ,3,4,5,6	
654	838	100		794 >	< 838		92 x 92	





Electrical Specifications¹ at 25°C

Parameter	Frequency (MHz)	Min.	Тур.	Max.	Unit	
Impedance Ratio			2			
Frequency Range		10		24	GHz	
	10-12		1.0			
Insertion Loss ²	12-15		1.0		dB	
Insertion Loss-	15-20		1.0			
	20-24		1.5			
Amplitude Unbalance	10-12		0.7			
	12-15		0.3		dB	
	15-20		0.7		ав	
	20-24		0.4			
Phase Unbalance ³	10-12		5.8			
	12-15		6.4		Degree	
Filase Ofibalance	15-20		5.5		Degree	
	20-24		2.9			

1. Measured on Mini-Circuits Characterization test board. Die is packaged in 2x2 mm, 6-lead MCL package and soldered on TB-MTY2-243+.


2. Above 3 dB theoretical 3. Relative to 180°

Absolute Maximum Batings⁴

Operating Case Temperature	-40°C to 85°C		
RF Input Power	31 dBm		

4. Permanent damage may occur if any of these limits are exceeded.

Assembly Diagram



Assembly and Handling Procedure

1. Storage

Dice should be stored in a dry nitrogen purged desiccators or equivalent.

2. ESD

MMIC Balun Transformer dice are susceptible to electrostatic and mechanical damage. Die are supplied in antistatic protected material, which should be opened in clean room conditions at an appropriately grounded anti-static worksta tion. Devices need careful handling using correctly designed collets, vacuum pickup tips or sharp antistatic tweezers to deter ESD damage to dice.

3. Die Attach

The die mounting surface must be clean and flat. Using conductive silver filled epoxy, recommended epoxies are DieMat DM6030HK-PT/H579 or Ablestik 84-1LMISR4. Apply sufficient epoxy to meet required epoxy bond line thickness, epoxy fillet height and epoxy coverage around total die periphery. Parts shall be cured in a nitrogen filled atmosphere per manufacturer's cure condition. It is recommended to use antistatic die pick up tools only.

4. Wire Bonding

Bond pad openings in the surface passivation above the bond pads are provided to allow wire bonding to the dice gold bond pads. Thermosonic bonding is used with minimized ultrasonic content. Bond force, time, ultrasonic power and temperature are all critical parameters. Suggested wire is pure gold, 1 mil diameter. Bonds must be made from the bond pads on the die to the package or substrate. All bond wires should be kept as short as low as reasonable to minimize performance degradation due to undesirable series inductance.





Additional Detailed Technical Information

additional information is available on our dash board.

	Data Table			
Performance Data	Performance Data Swept Graphs S-Parameter (S3P Files) Data Set with and without port extension(.z			
Case Style	Die			
	Quantity, Package	Model No.		
Die Ordering and packaging	Small, Gel - Pak: 5,10,50,100 KGD* Medium [†] , Partial wafer: KGD*<1892 Large [†] , Full Wafer	MTY2-243-DG+ MTY2-243-DP+ MTY2-243-DF+		
	[†] Available upon request contact sales representative			
	Refer to AN-60-067			
Environmental Ratings	ENV80			

*Known Good Dice ("KGD") means that the dice are taken from PCM good wafer and visually inspected. While this is not definitive, it does help to provide a higher degree of confidence that dice are capable of meeting typical RF electrical parameters specified by Mini-Circuits.

ESD Rating**

Human Body Model (HBM): Class 1A (Pass 250V) in accordance with ANSI/ESD STM 5.1 - 2001

** Tested in industry standard 2x2mm, 6-lead MCLP package

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp
- D. Mini-Circuits does not warrant the accuracy or completeness of the information, text, graphics and other items contained within this document and same are provided as an accommodation and on an "As is" basis, with all faults.
- E. Purchasers of this part are solely responsible for proper storing, handling, assembly and processing of Known Good Dice (including, without limitation, proper ESD preventative measures, die preparation, die attach, wire bond ing and related assembly and test activities), and Mini-Circuits assumes no responsibility therefor or for environmental effects on Known Good Dice.
- F. Mini-Circuits and the Mini-Circuits logo are registered trademarks of Scientific Components Corporation d/b/a Mini-Circuits. All other third-party trademarks are the property of their respective owners. A reference to any third-party trademark does not constitute or imply any endorsement, affiliation, sponsorship, or recommendation by any such third-party of Mini-Circuits or its products.

RF Transformer Die

MTY2-243-D+

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT RETURN LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE ⁽¹⁾ (deg.)
6000	5.43	3.48	2.88	0.68
6500	5.43	3.48	2.88	0.68
7000	3.64	5.43	2.50	0.33
7500	3.64	5.43	2.50	0.33
8000	2.82	6.64	1.96	0.83
8500	2.82	6.64	1.96	0.83
9000	2.08	7.78	1.34	2.12
9500	2.08	7.78	1.34	2.12
10000	1.31	11.29	0.80	4.57
10500	1.08	14.19	0.66	6.02
11000	0.98	17.59	0.62	7.07
11500	0.94	19.91	0.63	7.26
12000	0.93	18.68	0.58	6.76
12500	0.94	16.26	0.43	6.05
13000	0.96	14.84	0.22	5.60
13500	0.95	14.87	0.01	5.46
14000	0.90	16.63	0.25	5.51
14500	0.84	20.36	0.44	5.88
15000	0.81	22.11	0.59	6.74
15500	0.83	19.07	0.62	7.25
16000	0.87	17.32	0.61	7.18
16500	0.91	16.92	0.61	6.87
17000	0.95	16.99	0.66	6.42
17500	0.98	16.96	0.68	5.94
18000	1.00	16.60	0.71	5.15
18500	1.04	16.10	0.77	4.58
19000	1.10	15.42	0.84	4.12
19500	1.21	14.39	0.84	3.94
20000	1.32	13.53	0.75	3.49
20500	1.40	13.12	0.67	2.59
21000	1.44	13.13	0.63	1.66
21500	1.45	13.29	0.53	0.74
22000	1.47	13.35	0.44	0.38
22500	1.51	13.14	0.32	1.37
23000	1.57	12.81	0.19	2.39
23500	1.63	12.51	0.06	2.98
24000	1.71	12.43	0.43	4.28
24500	1.79	12.66	0.89	6.49
25000	1.91	13.08	1.40	9.46
26000	2.26	13.16	2.31	18.40

⁽¹⁾ Relative to 180°

Note: Testdata of Die packaged in 2x2 mm, 6-lead MCL package






REV. OR Page 1 of 1


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site 2/17/2020


IF/RF MICROWAVE COMPONENTS


RF Transformer Die


Typical Performance Data

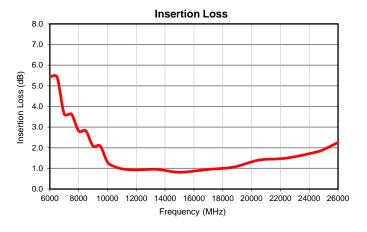



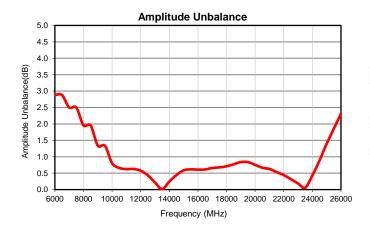









P.O. Box 350166. Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com IF/RF MICROWAVE COMPONENTS

REV. OR MTY2-243-D+ 2/17/2020 Page 1 of 1 ENV80

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C or -40° to 105° C or -55° to 105° C or -45° to 105° C Ambient Environment	Refer to Individual Model Data Sheet
Storage Environment (Die)	-65° to 150°C	Individual Model Data Sheet
Storage Environment(Packaging)	-40° to 70°C and 40 to 60% humidity (In Factory Shipped Package)	

ENV80 Rev: C 06/10/24 DCO-1455 File: ENV80.pdf

This document and its contents are the property of Mini-Circuits.