

RF Transformer

NCS2-33-11+

50Ω 1500 to 3100 MHz 1:2 Ratio

FEATURES

- Wideband, 1500 to 3100 MHz
- Low phase unbalance, 5 deg. and amplitude unbalance, 0.6 dB typ.
- Miniature size, 0.079"x0.049"x0.033"
- LTCC construction
- Low cost
- Aqueous washable

APPLICATIONS

- WLAN
- WIMAX, WIBRO
- MMDS
- WCDMA



Generic photo used for illustration purposes only

CASE STYLE: GE0805C-1

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Parameter Frequency (MHz)		Тур.	Max.	Units
Impedance Ratio (Secondary/Primary)			2		
Frequency Range		1500		3100	MHz
Insertion Loss ¹	1500 - 3100	_	1.0	_	dB
Amplitude Unbalance	1500 - 3100	_	0.6	_	dB
Phase Unbalance ²	1500 - 3100	_	5	_	Degree

^{1.} Insertion Loss is referenced to mid-band loss, 0.6 dB. Reference Demo Board TB-419+


MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power ³	3W at 25°C

3. Derate linearly to 2W at 85°C

Permanent damage may occur if any of these limits are exceeded.

CONFIGURATION J



^{2.} Relative to 180°



RF Transformer

NCS2-33-11+


PAD CONNECTIONS

PRIMARY DOT (Unbalanced Port)	1
PRIMARY (GND)	2
SECONDARY DOT (Balanced)	4
SECONDARY (Balanced)	3
NO CONNECTION*	6
NOT USED (GND Externally)	5

Pads 2,3,4 are DC-connected internally. *Pad 6 must be open (see PL-264)

PRODUCT MARKING: N/A

DEMO BOARD MCL P/N: TB-419+ **SUGGESTED PCB LAYOUT** (PL-264)




NOTES:

- 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

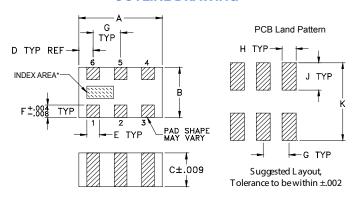

*Shape of index marking may vary

OUTLINE DIMENSIONS (Inches)

F	E	D	С	В	Α
.012	.012	.014	.033	.049	.079
0.30	0.30	0.36	0.84	1.24	2.01
wt		K	J	Н	G
grams		.110	.039	.014	.026
.008		2.80	1.00	0.36	0.66

TAPE & REEL INFORMATION: F74



RF Transformer


NCS2-33-11+


TYPICAL PERFORMANCE DATA³

Frequency (MHz)	Insertion Loss (dB)	Input Return Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (deg)	
1500	0.19	14.72	0.48	1.78	
1600	0.07 18.96 0.44		0.44	1.43	
1800	0.00 27.34		0.31	0.26	
2000	0.02	21.43	0.15	1.58	
2200	0.06	18.94	0.00	3.86	
2400	0.09	0.09 18.46		6.06	
2600	0.11 18.90		0.16	7.72	
2800	0.14	0.14 19.62		8.61	
2900	0.15	19.75	0.21	8.85	
3100	0.19	19.44	0.26	9.20	

^{3.} Measured with Agilent E5071B network analyzer using impedance conversion and port extension.








NOTES


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

GE0805C-1

Outline Dimensions

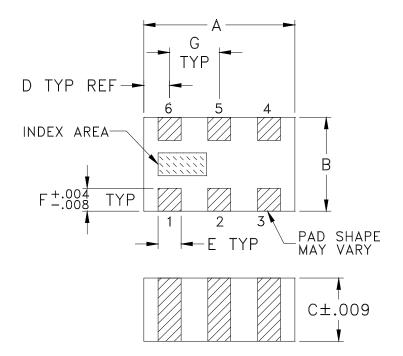

PCB Land Pattern



Suggested Layout, Tolerance to be within $\pm .002$

CASE #	A	В	С	D	Е	F	G	Н	J	K	WT. GRAM
GE0805C-1	.079 (2.00)	.049 (1.25)	.033 (0.84)	.014 (0.35)	.012 (0.30)	.012 (0.30)	.026 (0.65)	.014 (0.35)	.039 (1.00)	.110 (2.80)	.008

Dimensions are in inches (mm). Tolerances: 2Pl. ± .01; 3 Pl. ± .005

Notes:

1. Open style, ceramic base.

2. Termination finish: For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.

For RoHS-5 Case Style: Tin-lead plate. All models, no (+) suffix.






P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F74

DEVICE ORIENTATION IN T&R






ILLUSTRATION 1

Applicable Case Styles
GE0805C-1
GE0805C-1AP
JV1210C-1
GU2939

ILLUSTRATION 2

JV1210C JV1210C-2 JV1210C-3 JV1210C-4
JV1210C-3
IV1210C 4
J V 1210C-4
JV1210C-5
JV1210C-6
JV1210C-11

ILLUSTRATION 3

Tape Width, mm	Device Cavity Pitch, mm	Real Size, inches	Devices	per Reel
8	4	7	Small quantity standards (see note)	20 50 100 200 500 1000
			Standard	2000 4000

Note: Small reel availability varies by model. Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET http://www.minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M109549	NEW RELEASE	01/31/07	PW	DJ

SUGGESTED MOUNTING CONFIGURATION FOR GEO805C-1 CASE STYLE, "ry" PIN CONNECTION.

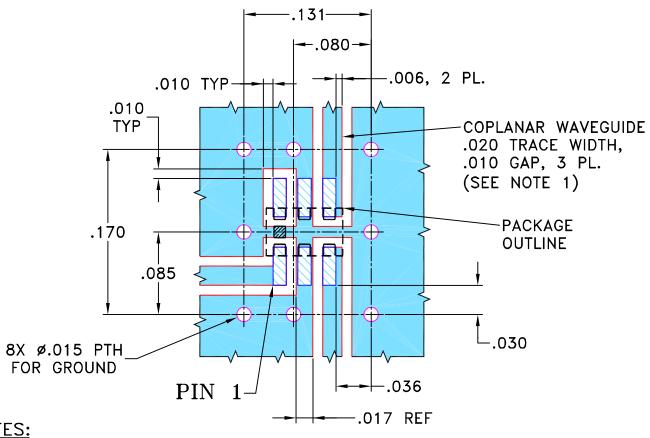

NOTES:

- 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" \pm .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE		¬	. ~		• 4 (R)			
DIMENSIONS ARE IN INCHES	DRAWN	₽₩	01/30/07]	\neg Min:	ı — C	ircu	$1 \mathrm{ts}$	13 Neptu	ne Avenu	ae
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	IL	01/31/07		Τ				Brooklyn	NI IIZ	19
3 PL DECIMALS ± .005	APPROVED	DJ	01/31/07								
ANGLES ± FRACTIONS ±											
Mini−Circuits ®				0 -		•	-				
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE		SIZE A	code ident 15542	DRAWING	NO: 98-PL	-264		REV:	R		
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS. ASHEETA1.DWG REV:A DATE:01/12/95				FILE: C	8PL264	SCALE:	10:1	SHEET:	1	OF	1



Environmental Specifications

ENV06T2

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Test/Inspection Condition	Reference/Spec
-40° to 85° C Ambient Environment	Individual Model Data Sheet
-55° to 100° C Ambient Environment	Individual Model Data Sheet
90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
	-40° to 85° C Ambient Environment -55° to 100° C Ambient Environment 90 to 95% RH, 240 hours, 50°C -55° to 100°C, 100 cycles Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak 10X Magnification 20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36) 50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3

ENV06T2 Rev: A

02/25/11

M130240 File: ENV06T2.pdf

This document and its contents are the property of Mini-Circuits.