



CERAMIC BALUN

# RF Transformer

## NCS4-102+

Mini-Circuits

50Ω 700 to 1000 MHz 1:4 Ratio

### FEATURES

- Wideband, 700 to 1000 MHz
- Low phase unbalance, 5 deg and amplitude unbalance, 0.5 dB typ.
- Miniature size, 0.079"x0.049"x0.033"
- LTCC construction
- Low cost
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: GE0805C-1

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

### APPLICATIONS

- LTE
- Radar
- Cellular

### ELECTRICAL SPECIFICATIONS<sup>1</sup> AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Impedance Ratio (Secondary/Primary)			4		
Frequency Range		700		1000	MHz
Insertion Loss	700 - 1000	—	0.9	1.3	dB
Amplitude Unbalance	700 - 1000	—	0.5	—	dB
Phase Unbalance <sup>2</sup>	700 - 1000	—	5	—	Degree

1. Measured on Demo Board TB-628+


2. Relative to 180°

### ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	2W

Permanent damage may occur if any of these limits are exceeded.

### CONFIGURATION J

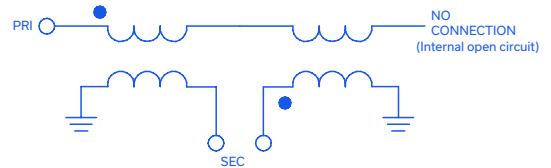

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. E  
ECO-016216  
NCS4-102+  
SL/CP/AM  
221220

PAGE 1 OF 3




### PAD CONNECTIONS

PRIMARY DOT (Unbalanced Port)	1
PRIMARY (GND)	2
SECONDARY DOT (Balanced)	4
SECONDARY (Balanced)	6
NO CONNECTION (Isolate)	3
GND Externally	5

Pads 2,4,5,6 are DC-connected internally.

PRODUCT MARKING: N/A


### DEMO BOARD MCL P/N: TB-628+ SUGGESTED PCB LAYOUT (PL-354)

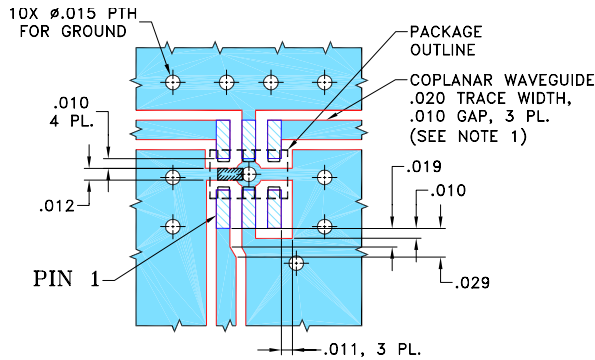

#### NOTES:

- COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

### OUTLINE DRAWING

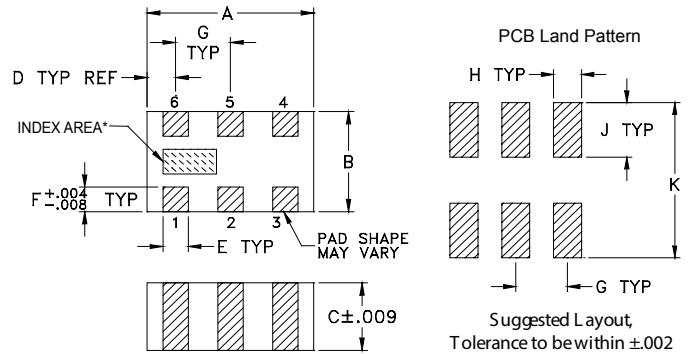

\*Shape of index marking may vary

### OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F	
.079	.049	.033	.014	.012	.012	
2.01	1.24	0.84	0.36	0.30	0.30	
G	H	J	K			wt
.026	.014	.039	.110			grams
0.66	0.36	1.00	2.80			.008

### TAPE & REEL INFORMATION: F74



# CERAMIC BALUN

# RF Transformer

# NCS4-102+




Mini-Circuits

50Ω 700 to 1000 MHz 1:4 Ratio

### TYPICAL PERFORMANCE DATA<sup>3</sup>

Frequency (MHz)	Insertion Loss (dB)	Input Return Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (deg)
700	0.87	13.12	0.40	2.59
730	0.81	14.07	0.33	2.32
760	0.77	14.86	0.25	1.98
790	0.74	15.48	0.17	1.59
820	0.72	15.91	0.09	1.15
850	0.70	16.14	0.00	0.65
880	0.70	16.15	0.09	0.09
910	0.69	16.01	0.17	0.52
940	0.70	15.76	0.26	1.17
1000	0.71	15.04	0.45	2.67

3. Measured with Agilent E5071B network analyzer using impedance conversion and port extension.

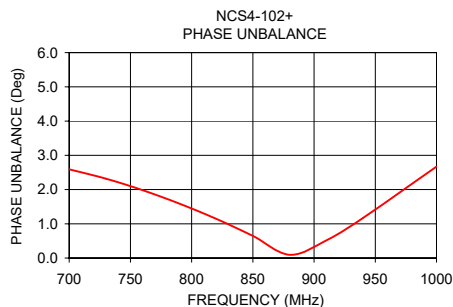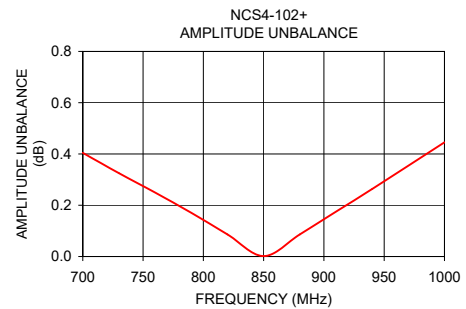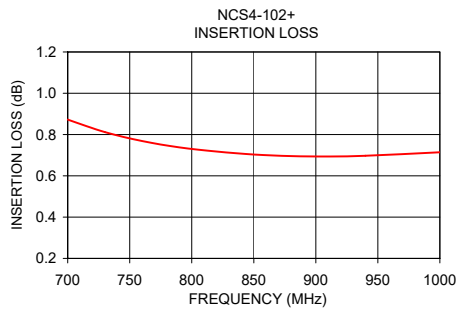

#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)



# RF Transformer

# NCS4-102+





## Typical Performance Data

FREQUENCY MHz	AVERAGE INSERTION LOSS (dB)	INPUT RETURN LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE* (deg.)
700.0	0.87	13.12	0.40	2.59
710.0	0.85	13.46	0.38	2.52
720.0	0.83	13.77	0.35	2.43
730.0	0.81	14.07	0.33	2.32
740.0	0.80	14.36	0.30	2.22
750.0	0.78	14.62	0.28	2.11
760.0	0.77	14.86	0.25	1.98
770.0	0.76	15.09	0.22	1.88
780.0	0.75	15.29	0.20	1.73
790.0	0.74	15.48	0.17	1.59
800.0	0.73	15.64	0.14	1.45
810.0	0.72	15.79	0.12	1.30
820.0	0.72	15.91	0.09	1.15
830.0	0.71	16.01	0.06	1.00
840.0	0.71	16.09	0.03	0.83
850.0	0.70	16.14	0.00	0.65
860.0	0.70	16.17	0.03	0.48
870.0	0.70	16.17	0.06	0.29
880.0	0.70	16.15	0.09	0.09
890.0	0.69	16.12	0.12	0.10
900.0	0.69	16.07	0.14	0.31
910.0	0.69	16.01	0.17	0.52
920.0	0.70	15.94	0.20	0.72
930.0	0.70	15.85	0.23	0.95
940.0	0.70	15.76	0.26	1.17
950.0	0.70	15.66	0.29	1.40
960.0	0.70	15.55	0.32	1.65
970.0	0.70	15.43	0.35	1.90
980.0	0.71	15.30	0.38	2.14
990.0	0.71	15.17	0.41	2.41
1000.0	0.71	15.04	0.45	2.67

\*Phase Unbalance is relative to 180°



## Typical Performance Data

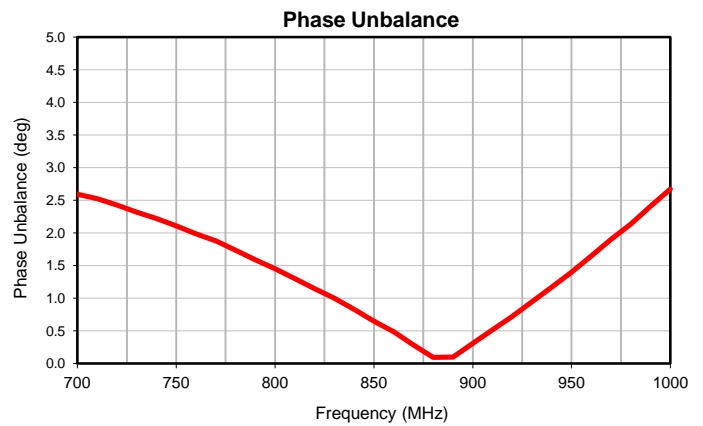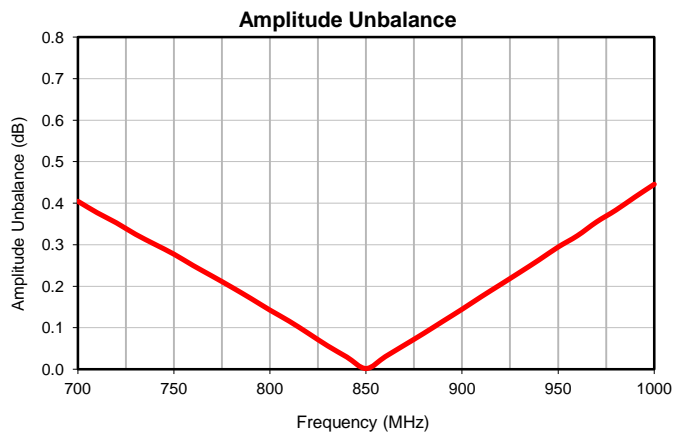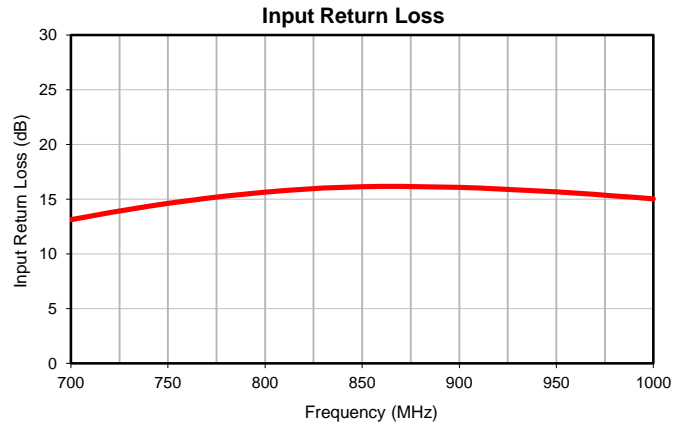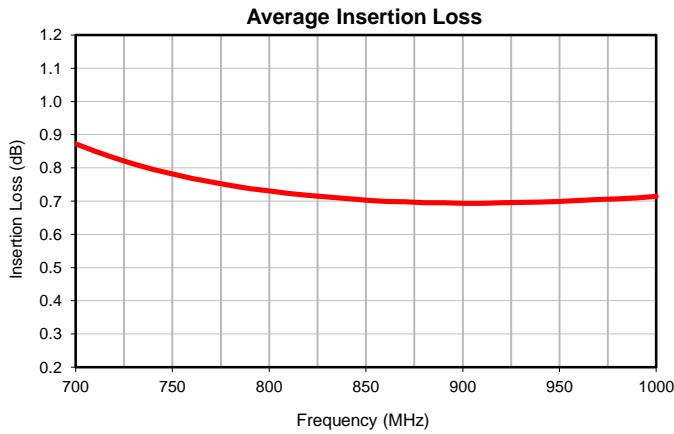

### Outline Dimensions



### PCB Land Pattern



Suggested Layout,  
Tolerance to be within  $\pm 0.002$

CASE #	A	B	C	D	E	F	G	H	J	K	WT. GRAM
GE0805C-1	.079 (2.00)	.049 (1.25)	.033 (0.84)	.014 (0.35)	.012 (0.30)	.012 (0.30)	.026 (0.65)	.014 (0.35)	.039 (1.00)	.110 (2.80)	.008

Dimensions are in inches (mm). Tolerances: 2Pl.  $\pm .01$ ; 3 Pl.  $\pm .005$

### Notes:

- Open style, ceramic base.
- Termination finish: For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.  
For RoHS-5 Case Style: Tin-lead plate. All models, no (+) suffix.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

# Tape & Reel Packaging TR-F74

## DEVICE ORIENTATION IN T&R



**ILLUSTRATION 1**

### Applicable Case Styles

GE0805C-1  
GE0805C-1AP  
JV1210C-1  
GU2939



**ILLUSTRATION 2**

### Applicable Case Styles

JV1210C  
JV1210C-2  
JV1210C-3  
JV1210C-4  
JV1210C-5  
JV1210C-6  
JV1210C-11

**ILLUSTRATION 3**

### Applicable Case Styles

JC0603C-8  
JC0603C-9  
JV1210C-7  
JV1210C-8  
JV1210C-9  
JV1210C-10  
JV1210C-13  
GE0805C-13  
GE0805C-19  
GE0805C-20

Tape Width, mm	Device Cavity Pitch, mm	Real Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
				1000
			Standard	2000
				4000

Note: Small reel availability varies by model. Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)




**Distribution Centers** NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

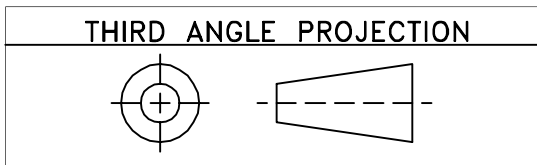

REVISIONS					
REV OR	ECN No.	DESCRIPTION	DATE	DR	AUTH
	M133782	NEW RELEASE	09/30/11	AV	WP

**SUGGESTED MOUNTING CONFIGURATION  
FOR GE0805C-1 CASE STYLE, "06TJ02" PIN CODE**

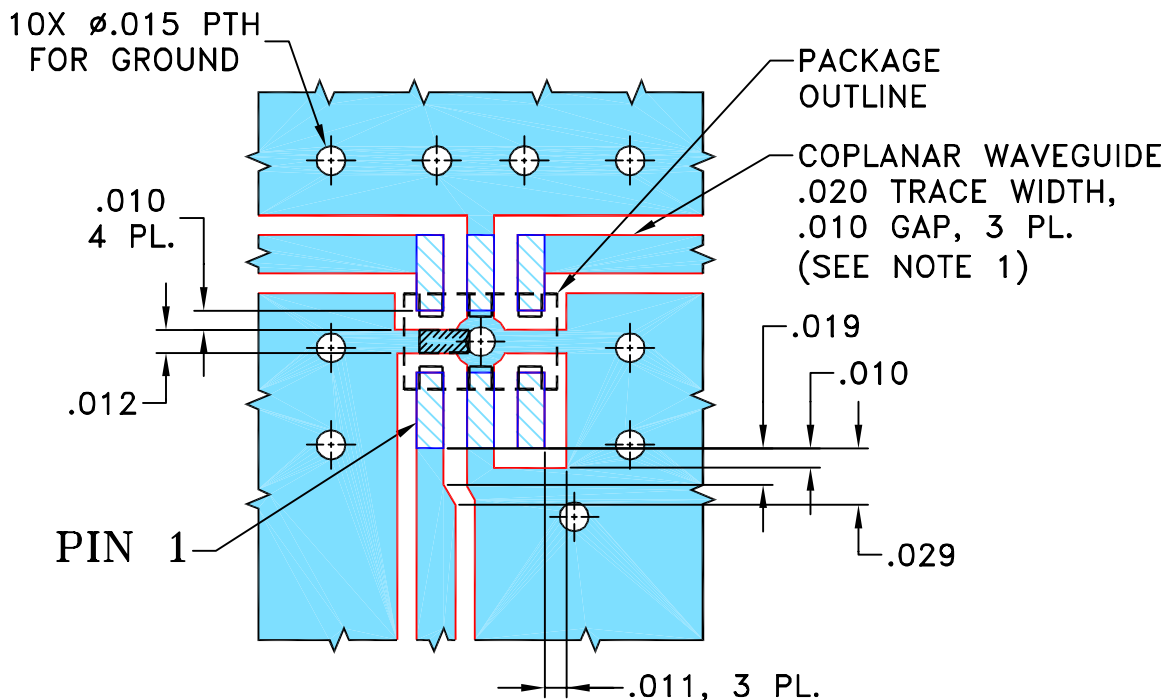


**NOTES:**

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN AV	09/27/11
TOLERANCES ON:	CHECKED PW	09/30/11
2 PL DECIMALS ±	APPROVED WP	09/30/11
3 PL DECIMALS ± .005		
ANGLES ±		
FRACTIONS ±		



**Mini-Circuits®**


13 Neptune Avenue  
Brooklyn NY 11235

**PL, 06TJ02, GE0805C-1, TB-628+**


Mini-Circuits®  
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-354	REV: OR
FILE: 98PL354	SCALE: 10:1	SHEET: 1 OF 1	

# Evaluation Board and Circuit

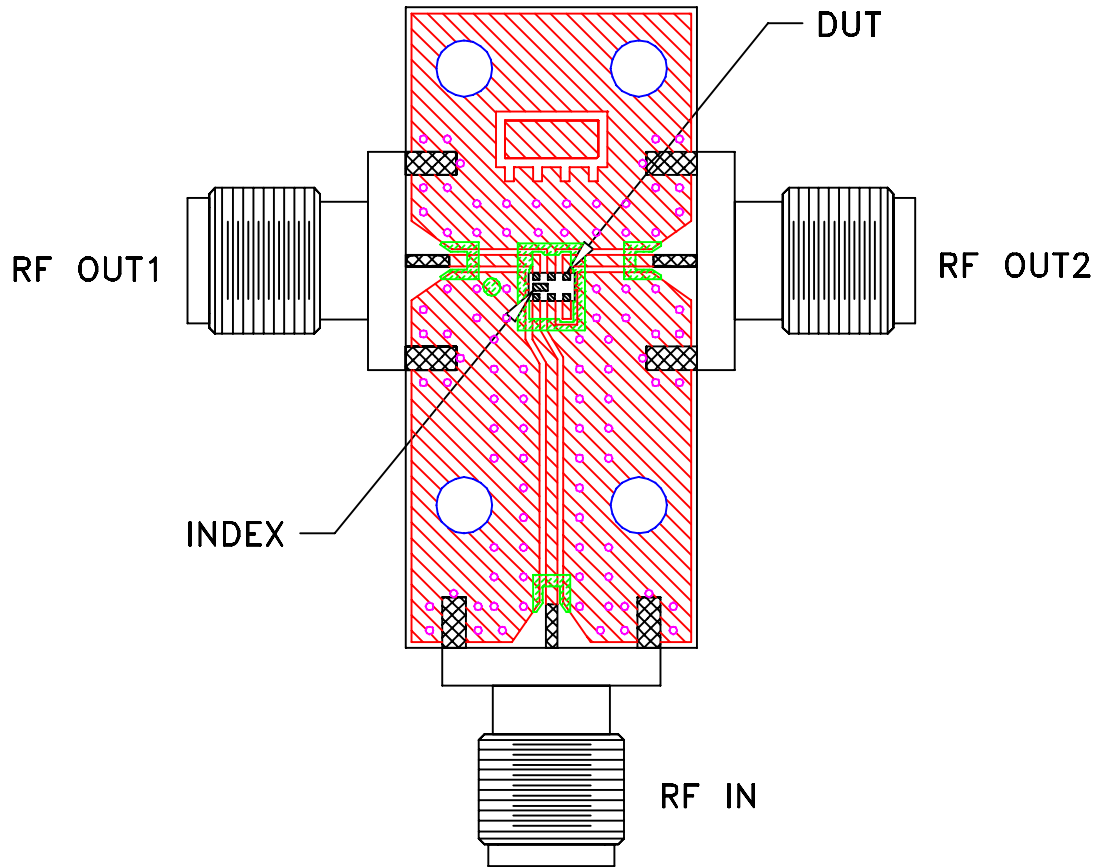


TB-628+

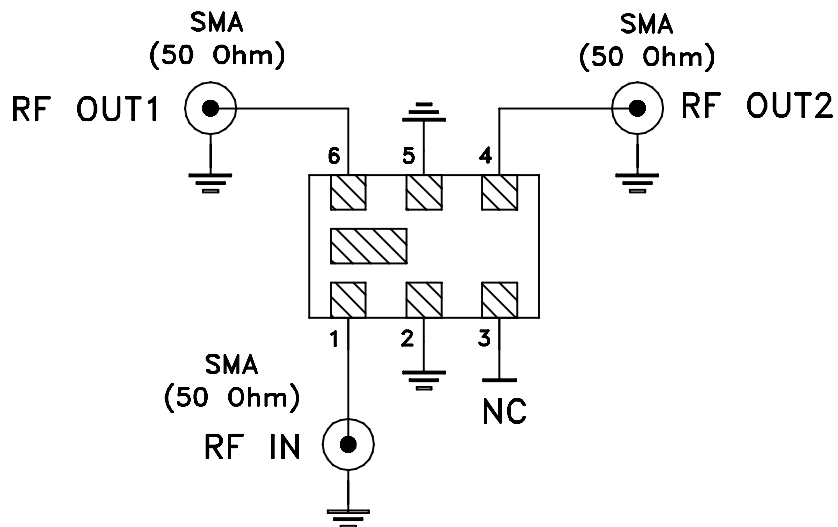

Schematic Diagram

## Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: R04350 or equivalent,  
Dielectric Constant=3.5, Thickness=.010 inch.

 **Mini-Circuits®**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A