


Power Splitter/Combiner

PSCJ-2-2

2 Way-180° 50Ω 0.01 to 20 MHz



CASE STYLE: A01
PRICE: Contact Sales Dept.


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.25W max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

SUM PORT	1
PORT 1	5
PORT 2	6
GROUND	2,3,4,7,8
CASE GROUND	2,3,4,7,8

Outline Drawing

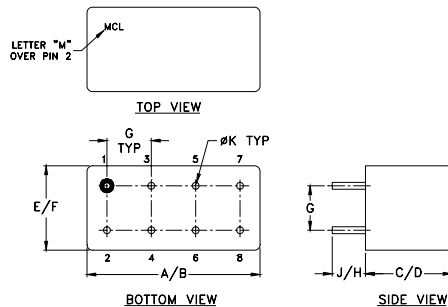

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.770	.800	.385	.400	.370	.400
19.56	20.32	9.78	10.16	9.40	10.16
G	H	J	K	wt	
.200	.20	.14	.031	grams	
5.08	5.08	3.56	0.79	5.2	

Features

- low insertion loss, 0.2 dB typ.
- high isolation, 30 dB typ.
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 1 deg. typ.
- rugged shield case

Applications

- HF
- signal processing
- push-pull amplifiers
- radio communication

Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 3.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L		M		U	
f_L - f_U	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
0.01-20	35	25	30	25	25	18	0.3	0.8	0.2	0.5	0.3	0.6	1*	2	2.5	0.1	0.1	0.2

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]




At low range frequency band (f_L to $10 f_L$), linearly derate maximum input power by 13 dB.

* Phase unbalance is 3 degrees max from f_L to $3 f_L$


Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
0.01	3.58	3.54	0.05	34.00	178.81	1.46	1.46	1.41
0.05	3.17	3.18	0.01	36.69	179.70	1.15	1.14	1.13
0.10	3.15	3.16	0.01	36.90	179.85	1.12	1.10	1.10
0.40	3.13	3.15	0.01	36.95	179.97	1.12	1.09	1.09
0.80	3.13	3.14	0.01	36.93	179.98	1.12	1.08	1.08
0.90	3.13	3.14	0.01	36.92	179.99	1.12	1.08	1.08
1.00	3.13	3.14	0.01	36.79	179.98	1.12	1.08	1.08
5.00	3.17	3.18	0.01	32.82	179.93	1.13	1.06	1.06
8.00	3.21	3.22	0.00	29.80	179.87	1.13	1.05	1.05
10.00	3.24	3.24	0.00	28.12	179.84	1.13	1.04	1.04
12.00	3.26	3.26	0.01	26.61	179.80	1.12	1.03	1.03
14.00	3.29	3.28	0.01	25.27	179.76	1.12	1.02	1.03
16.00	3.32	3.31	0.02	24.05	179.72	1.13	1.03	1.04
18.00	3.36	3.33	0.03	22.92	179.69	1.14	1.04	1.06
20.00	3.40	3.36	0.03	21.87	179.65	1.16	1.07	1.09

1. Total Loss = Insertion Loss + 3dB splitter loss.

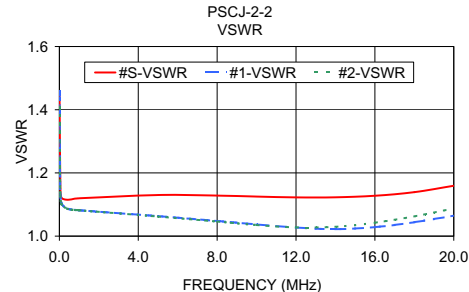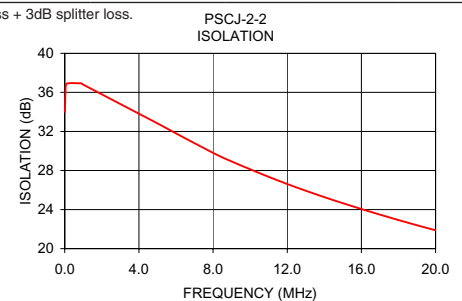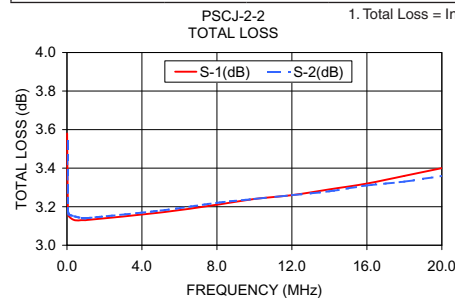

electrical schematic



Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



2 Way-180° Power Splitter/Combiner

PSCJ-2-2

Typical Performance Data

FREQUENCY (MHz)	TOTAL LOSS ¹		AMPLITUDE UNBALANCE (dB)	ISOLATION (dB)	PHASE UNBALANCE (deg.)	FREQUENCY (MHz)	VSWR (:1)		
	S-1	S-2					S	1	2
0.01	3.39	3.36	0.02	31.98	179.30	0.01	1.43	1.44	1.43
0.05	3.12	3.12	0.00	37.15	179.74	0.05	1.12	1.11	1.12
0.10	3.11	3.12	0.01	37.79	179.85	0.10	1.10	1.09	1.10
0.40	3.13	3.14	0.01	37.95	180.04	0.40	1.09	1.09	1.09
0.80	3.13	3.13	0.01	37.77	180.06	0.80	1.09	1.09	1.09
1.20	3.13	3.13	0.01	37.38	180.06	1.20	1.09	1.08	1.09
2.00	3.14	3.14	0.01	36.31	180.10	2.00	1.08	1.08	1.08
3.50	3.16	3.16	0.00	34.01	180.18	3.50	1.07	1.07	1.07
4.50	3.18	3.18	0.00	32.59	180.23	4.50	1.07	1.07	1.07
6.00	3.20	3.20	0.00	30.71	180.31	6.00	1.06	1.06	1.06
9.00	3.23	3.23	0.00	27.76	180.47	9.00	1.04	1.05	1.04
12.00	3.27	3.26	0.01	25.51	180.63	12.00	1.02	1.04	1.02
15.00	3.31	3.29	0.02	23.70	180.79	15.00	1.00	1.03	1.00
18.00	3.35	3.32	0.02	22.19	180.96	18.00	1.02	1.02	1.02
20.00	3.38	3.35	0.03	21.30	181.06	20.00	1.04	1.02	1.04

¹Total Loss = Insertion Loss + 3dB Splitter Loss



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS








REV. X2
PSCJ-2-2
8/4/2010
Page 1 of 1

2 Way-180° Power Splitter/Combiner

PSCJ-2-2

Typical Performance Curves

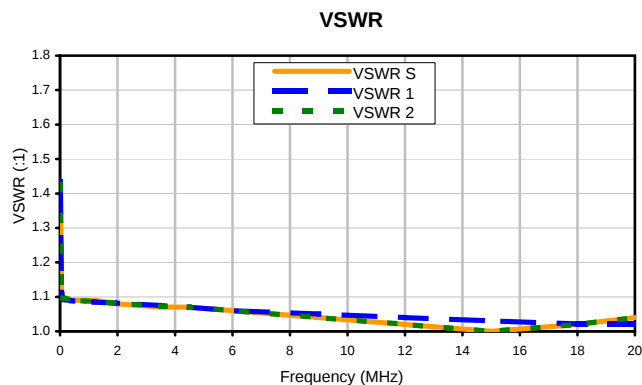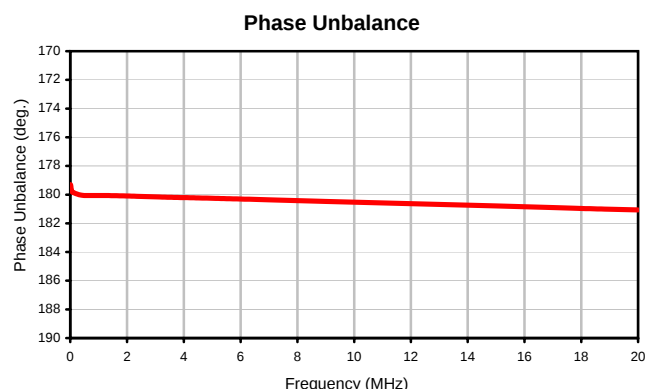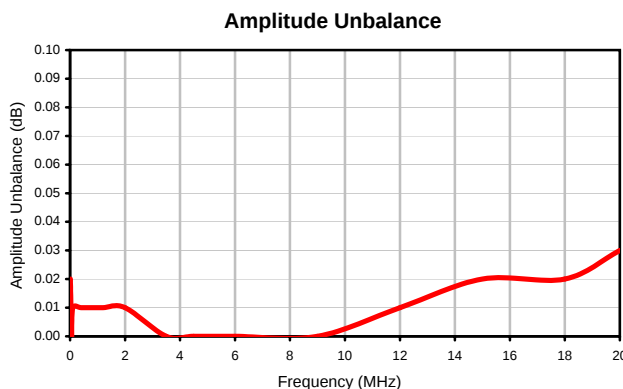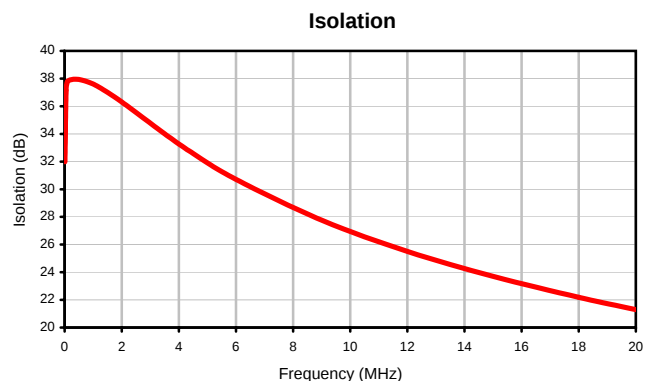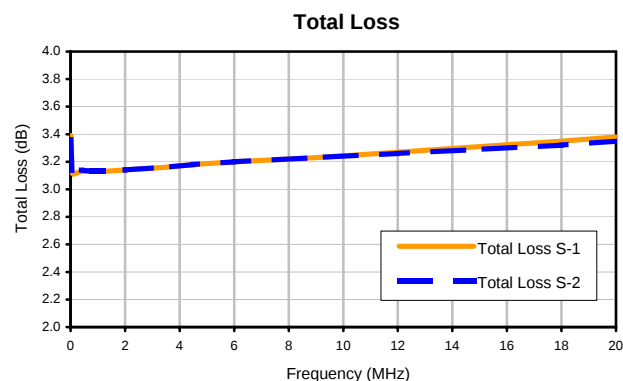

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com




IF/RF MICROWAVE COMPONENTS



REV. X2
PSCJ-2-2
8/4/2010
Page 1 of 1

A01
A04
A05
A06

Outline Dimensions

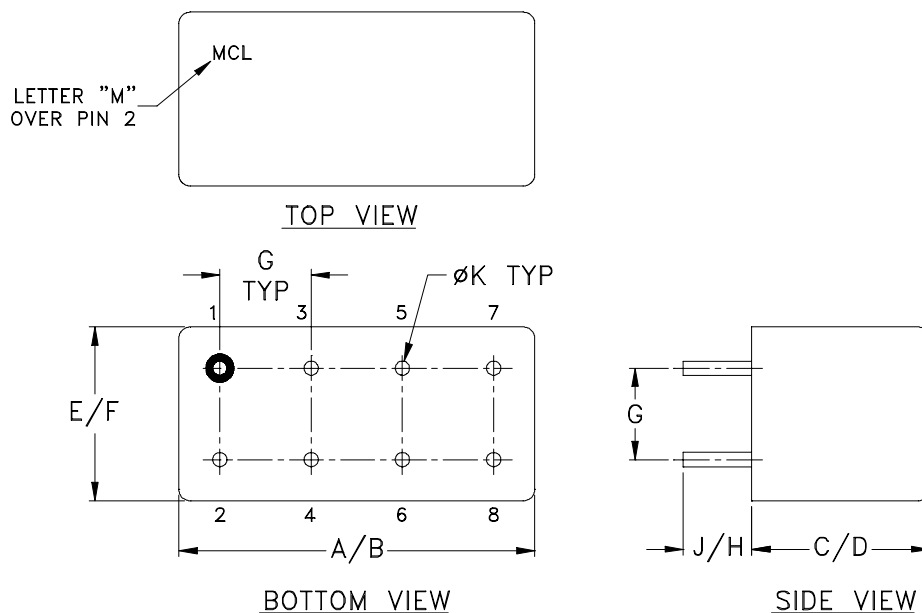

CASE#	A	B	C	D	E	F	G	H	J	K	WT, GRAM
A01	.770 (19.56)	.800 (20.32)	.385 (9.78)	.400 (10.16)	.370 (9.40)	.400 (10.16)	.200 (5.08)	.20 (5.08)	.14 (3.56)	.031 (.79)	5.2
A04			.200 (5.08)	.210 (5.33)							3.7
A05			.240 (6.10)	.250 (6.35)							3.7
A06			.285 (7.24)	.310 (7.87)							5.2

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Header material: C.R.S.
Pin material: #52 alloy.
Cover material: Cupro-Nickel.
- Pin finish: Electro Tin-Silver.
- Insulated spacer available. Request P/N B14-045-01.
- Tolerance on pin diameter $\pm .005$ inch.
- Glass meniscus 0.015 inch max.
- Blue bead indicates Pin 1. Pin numbers do not appear on unit, for reference only.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Moisture Resistance	10 cycles, 24 hours per cycle	MIL-STD-202, Method 106, Condition A, except 50°C and end point electrical test done within 12 hours
Solderability	10X Magnification	J-STD-002, 95% Coverage
Resistance to Solder Heat	260°C for 10 seconds	MIL-STD-202, Method 210, Condition B
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215
Terminal Strength	4 1/2 Pound Pull	MIL-STD-202, Method 211, Condition A



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Gross Leak	125°C Bubble Test	MIL-STD-202, Method 112, Condition D
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D