



Mini-Circuits®

ULTRA-SMALL CERAMIC


Power Splitter/Combiner

QCN-34D+

2 Way-90° 50Ω 2500 to 3400 MHz

FEATURES

- Low insertion loss, 0.4 dB typ.
- High isolation, 32 dB typ.
- Wrap-around terminal for excellent solderability
- Ultra small, 0.12"X0.06"X0.035"
- Patent pending



Generic photo used for illustration purposes only

CASE STYLE: FV1206-1

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Balanced amplifiers
- Modulators
- MMDS
- Defense communications

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		2500		3400	MHz
Average Insertion Loss, above 3.0 dB	2500-2800		0.4	0.6	dB
	2800-3400		0.5	0.7	
Isolation	2500-2800	23	32		dB
	2800-3400	20	26		
Phase Unbalance	2500-2800		1	3	Degree
	2800-3400		1	4	
Amplitude Unbalance	2500-2800		0.4	0.9	dB
	2800-3400		0.5	1.2	
VSWR	2500-2800		1.15		(:1)
	2800-3400		1.15		

1. For applications requiring DC voltage to be applied to the RF ports. DC resistance to ground is 100 Mohms min.


ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
Power Input (as a splitter)	15 W* max.

* Derate linearly to 7 W at +100°C ambient.

Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC (NOTE 1)



Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. M
ECO-024655
QCN-34D+
ED-10885
MCL NY
250718
PAGE 1 OF 3



Mini-Circuits®

ULTRA-SMALL CERAMIC

Power Splitter/Combiner

QCN-34D+


2 Way-90° 50Ω 2500 to 3400 MHz

PIN CONNECTIONS

SUM PORT	1
PORT 1 (0°)	4
PORT 2 (+90°)	6
GROUND	2,5
50 OHM TERM EXTERNAL	3

PRODUCT MARKING: P5

DEMO BOARD MCL P/N: TB-QCN-34D+
SUGGESTED PCB LAYOUT (PL-131)

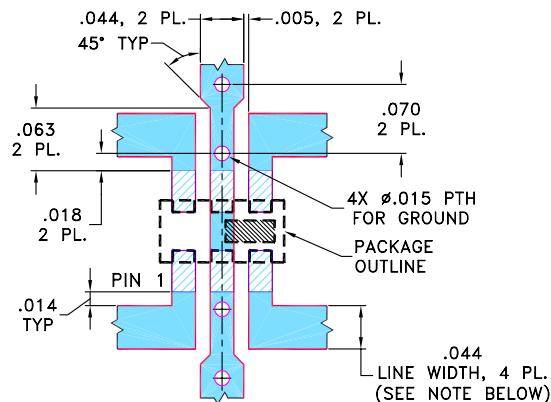


NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS $0.020" \pm 0.0015"$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.


2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
-  DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

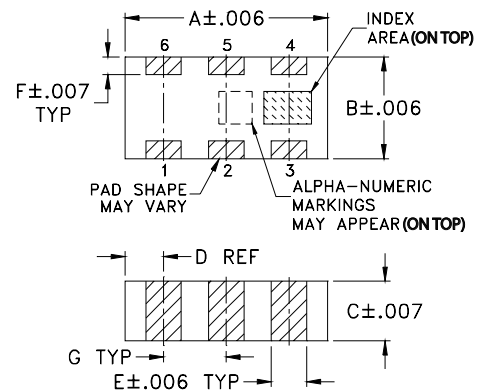

PCB Land Pattern



Suggested Layout,
Tolerance to be within ± 0.002

OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K		wt
.039	.024	.042	.123		grams
0.99	0.61	1.07	3.12		.020

TAPE & REEL INFORMATION: F75

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 2 OF 3



Mini-Circuits

ULTRA-SMALL CERAMIC

Power Splitter/Combiner



QCN-34D+

2 Way-90° 50Ω 2500 to 3400 MHz

TYPICAL PERFORMANCE DATA

Frequency (MHz)	Total Loss ² (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR (:1)		
	S-1	S-2				S	1	2
2500	2.98	3.74	0.76	28.30	89.55	1.07	1.08	1.07
2525	2.99	3.72	0.73	28.62	89.57	1.07	1.08	1.07
2600	3.03	3.68	0.65	29.72	89.61	1.06	1.07	1.05
2650	3.05	3.67	0.61	30.42	89.64	1.05	1.06	1.04
2700	3.07	3.65	0.58	31.14	89.66	1.04	1.06	1.03
2825	3.11	3.63	0.52	32.59	89.71	1.03	1.05	1.02
2850	3.11	3.63	0.52	32.87	89.72	1.03	1.05	1.02
2950	3.12	3.64	0.52	33.11	89.72	1.02	1.04	1.03
3000	3.12	3.65	0.53	33.20	89.76	1.02	1.04	1.03
3075	3.12	3.68	0.56	32.83	89.78	1.02	1.03	1.04
3100	3.11	3.68	0.57	32.62	89.78	1.02	1.03	1.05
3175	3.10	3.72	0.62	32.01	89.80	1.03	1.02	1.05
3275	3.07	3.79	0.72	31.16	89.82	1.04	1.02	1.06
3375	3.03	3.87	0.84	30.26	89.87	1.05	1.01	1.07
3400	3.02	3.90	0.88	29.99	89.87	1.05	1.01	1.08

2. Total Loss = Insertion Loss + 3 dB splitter loss.

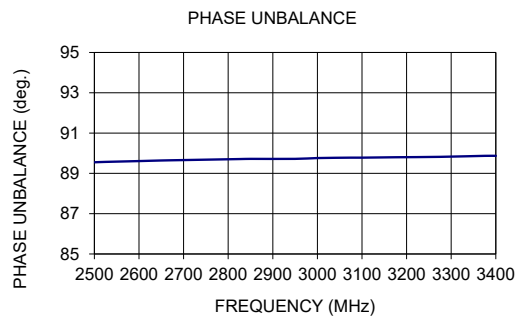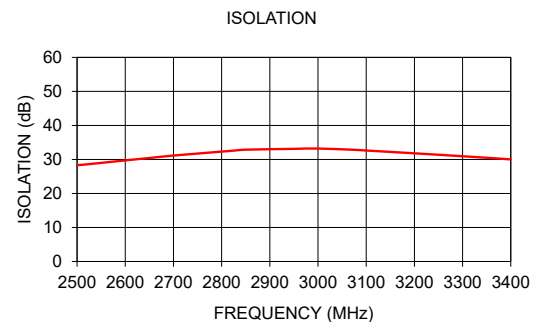

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



2 Way-90° Power Splitter/Combiner

QCN-34D+

Typical Performance Data

TEST CONDITIONS: INPUT POWER = 0dBm @Temperature = +25°C

FREQ. (MHz)	TOTAL LOSS ¹ (dB)		AMP. UNBAL. (dB)	PHASE UNBAL. (deg.)	ISOLATION (dB)	VSWR (:1)		
	S-1	S-2				S	1	2
1300	1.73	5.87	4.13	87.62	19.87	1.18	1.19	1.22
1350	1.81	5.68	3.87	87.60	19.92	1.18	1.19	1.22
1400	1.89	5.51	3.62	87.64	20.02	1.18	1.19	1.22
1450	1.97	5.34	3.38	87.66	20.12	1.18	1.19	1.22
1500	2.04	5.19	3.15	87.70	20.19	1.17	1.19	1.22
1550	2.12	5.05	2.93	87.73	20.35	1.17	1.18	1.22
1600	2.19	4.92	2.73	87.78	20.48	1.17	1.18	1.23
1650	2.26	4.79	2.53	87.80	20.67	1.17	1.18	1.22
1700	2.33	4.67	2.34	87.83	20.87	1.16	1.17	1.22
1750	2.40	4.56	2.17	87.89	21.05	1.16	1.17	1.22
1800	2.46	4.46	2.00	87.92	21.28	1.15	1.16	1.22
1850	2.53	4.37	1.84	88.00	21.56	1.15	1.16	1.22
1900	2.59	4.28	1.69	88.04	21.80	1.14	1.15	1.21
1950	2.65	4.19	1.54	88.12	22.11	1.14	1.15	1.21
2000	2.71	4.12	1.41	88.14	22.45	1.13	1.14	1.21
2050	2.76	4.04	1.28	88.22	22.74	1.13	1.14	1.20
2100	2.82	3.97	1.16	88.25	23.10	1.12	1.13	1.19
2150	2.87	3.91	1.05	88.32	23.51	1.11	1.13	1.19
2200	2.92	3.85	0.93	88.36	23.96	1.11	1.12	1.19
2250	2.96	3.80	0.83	88.44	24.46	1.10	1.12	1.18
2300	3.01	3.75	0.74	88.50	24.92	1.10	1.11	1.18
2350	3.05	3.70	0.65	88.58	25.44	1.09	1.11	1.17
2400	3.09	3.66	0.57	88.60	26.01	1.08	1.10	1.17
2450	3.13	3.62	0.49	88.67	26.57	1.08	1.09	1.16
2500	3.16	3.59	0.43	88.72	27.21	1.07	1.09	1.16
2550	3.20	3.56	0.36	88.77	27.89	1.07	1.09	1.15
2600	3.23	3.53	0.31	88.83	28.54	1.06	1.08	1.15
2650	3.26	3.51	0.26	88.87	29.28	1.06	1.08	1.15
2700	3.28	3.50	0.22	88.92	29.98	1.06	1.08	1.14
2750	3.30	3.48	0.18	88.98	30.73	1.06	1.08	1.14
2800	3.32	3.47	0.15	89.03	31.46	1.06	1.07	1.14
2850	3.33	3.46	0.13	89.07	32.03	1.05	1.07	1.14
2900	3.34	3.46	0.12	89.14	32.72	1.05	1.08	1.13
2950	3.35	3.46	0.11	89.20	33.34	1.05	1.08	1.13
3000	3.36	3.47	0.11	89.26	33.50	1.05	1.08	1.13
3050	3.36	3.47	0.11	89.29	33.40	1.06	1.08	1.13
3100	3.36	3.48	0.12	89.36	33.46	1.06	1.09	1.13
3150	3.36	3.49	0.14	89.39	33.36	1.06	1.09	1.13
3200	3.35	3.51	0.16	89.49	33.06	1.07	1.09	1.13
3250	3.34	3.54	0.19	89.53	32.77	1.07	1.10	1.13
3300	3.33	3.56	0.22	89.62	32.40	1.07	1.10	1.12
3350	3.32	3.59	0.27	89.68	31.98	1.07	1.11	1.12
3400	3.30	3.62	0.32	89.75	31.60	1.08	1.12	1.12
3500	3.26	3.70	0.44	89.91	30.57	1.08	1.13	1.12
3600	3.21	3.79	0.59	90.07	29.72	1.08	1.14	1.12
3700	3.14	3.90	0.76	90.29	29.13	1.09	1.16	1.12
3800	3.06	4.03	0.96	90.48	28.48	1.09	1.17	1.11
3900	2.98	4.18	1.21	90.71	27.97	1.09	1.18	1.11
4000	2.88	4.36	1.48	90.99	27.70	1.10	1.19	1.11
4250	2.61	4.92	2.32	91.73	27.39	1.11	1.21	1.10
4500	2.29	5.71	3.42	92.84	26.87	1.13	1.22	1.10
4750	1.96	6.79	4.82	94.44	26.08	1.17	1.21	1.12
5000	1.67	8.28	6.60	97.16	24.98	1.23	1.22	1.16

¹ Total Loss = Insertion Loss+ 3dB Splitter Loss

2 Way-90° Power Splitter/Combiner

QCN-34D+

Typical Performance Data

TEST CONDITIONS: INPUT POWER = 0dBm @Temperature = -55°C

FREQ. (MHz)	TOTAL LOSS ¹ (dB)		AMP. UNBAL. (dB)	PHASE UNBAL. (deg.)	ISOLATION (dB)	VSWR (:1)		
	S-1	S-2				S	1	2
1300	1.54	5.72	4.18	87.77	19.36	1.21	1.23	1.25
1350	1.62	5.54	3.92	87.71	19.38	1.22	1.23	1.26
1400	1.69	5.36	3.67	87.76	19.44	1.21	1.23	1.27
1450	1.76	5.20	3.44	87.76	19.48	1.22	1.23	1.27
1500	1.83	5.05	3.22	87.79	19.60	1.22	1.23	1.27
1550	1.90	4.90	3.01	87.85	19.74	1.22	1.23	1.27
1600	1.96	4.77	2.81	87.95	20.02	1.20	1.22	1.27
1650	2.02	4.63	2.61	88.02	20.31	1.19	1.22	1.26
1700	2.08	4.51	2.43	88.08	20.52	1.19	1.22	1.26
1750	2.14	4.39	2.26	88.20	20.87	1.18	1.21	1.25
1800	2.19	4.28	2.08	88.27	21.22	1.17	1.20	1.23
1850	2.25	4.17	1.93	88.42	21.69	1.16	1.18	1.22
1900	2.30	4.07	1.77	88.56	22.09	1.15	1.17	1.21
1950	2.35	3.97	1.62	88.68	22.61	1.13	1.16	1.19
2000	2.41	3.88	1.47	88.76	23.30	1.11	1.15	1.18
2050	2.46	3.80	1.34	88.82	23.73	1.11	1.14	1.16
2100	2.51	3.72	1.21	88.90	24.47	1.10	1.13	1.14
2150	2.55	3.64	1.09	89.00	25.50	1.08	1.11	1.12
2200	2.60	3.57	0.97	89.01	26.22	1.07	1.10	1.10
2250	2.65	3.51	0.86	89.10	27.14	1.06	1.09	1.08
2300	2.69	3.44	0.75	89.14	28.24	1.05	1.08	1.07
2350	2.74	3.40	0.66	89.19	29.23	1.04	1.07	1.06
2400	2.78	3.35	0.57	89.18	30.55	1.03	1.07	1.05
2450	2.81	3.30	0.49	89.26	31.30	1.02	1.07	1.06
2500	2.85	3.27	0.42	89.26	31.94	1.02	1.08	1.07
2550	2.88	3.24	0.36	89.24	33.20	1.02	1.09	1.08
2600	2.91	3.21	0.30	89.25	32.51	1.04	1.10	1.09
2650	2.94	3.19	0.25	89.29	31.16	1.05	1.11	1.11
2700	2.97	3.18	0.21	89.33	31.14	1.06	1.12	1.14
2750	2.99	3.16	0.17	89.39	29.97	1.08	1.13	1.16
2800	3.02	3.16	0.14	89.43	28.60	1.10	1.15	1.18
2850	3.04	3.15	0.11	89.44	27.77	1.12	1.17	1.22
2900	3.06	3.15	0.09	89.51	27.08	1.13	1.17	1.25
2950	3.07	3.16	0.08	89.57	26.78	1.14	1.18	1.27
3000	3.09	3.17	0.08	89.64	25.95	1.16	1.19	1.29
3050	3.10	3.17	0.07	89.71	25.23	1.18	1.19	1.33
3100	3.11	3.19	0.08	89.78	24.93	1.19	1.20	1.35
3150	3.12	3.20	0.09	89.77	24.58	1.20	1.19	1.38
3200	3.11	3.22	0.11	89.79	24.58	1.20	1.18	1.40
3250	3.11	3.24	0.14	89.79	24.22	1.21	1.18	1.42
3300	3.11	3.26	0.15	89.83	23.84	1.22	1.19	1.44
3350	3.09	3.28	0.19	89.83	23.98	1.21	1.20	1.43
3400	3.06	3.30	0.24	89.81	24.13	1.20	1.20	1.43
3500	3.00	3.36	0.37	89.86	24.52	1.19	1.19	1.42
3600	2.92	3.43	0.52	89.86	25.22	1.14	1.21	1.38
3700	2.83	3.51	0.68	90.00	25.87	1.10	1.24	1.32
3800	2.71	3.61	0.90	90.08	27.62	1.05	1.23	1.26
3900	2.60	3.74	1.14	90.21	29.22	1.05	1.24	1.20
4000	2.48	3.89	1.41	90.39	32.94	1.09	1.23	1.18
4250	2.18	4.45	2.26	90.93	38.78	1.24	1.16	1.24
4500	1.89	5.27	3.38	91.76	26.90	1.36	1.23	1.34
4750	1.60	6.45	4.84	93.55	23.21	1.46	1.42	1.48
5000	1.42	7.98	6.56	97.44	21.28	1.57	1.59	1.69

¹ Total Loss = Insertion Loss+ 3dB Splitter Loss

2 Way-90° Power Splitter/Combiner

QCN-34D+

Typical Performance Data

TEST CONDITIONS: INPUT POWER = 0dBm @Temperature = +100°C

FREQ. (MHz)	TOTAL LOSS ¹ (dB)		AMP. UNBAL. (dB)	PHASE UNBAL. (deg.)	ISOLATION (dB)	VSWR (:1)		
	S-1	S-2				S	1	2
1300	1.79	5.86	4.08	87.89	20.53	1.14	1.15	1.18
1350	1.87	5.67	3.81	87.85	20.54	1.14	1.15	1.18
1400	1.95	5.50	3.55	87.90	20.66	1.13	1.15	1.17
1450	2.03	5.33	3.30	87.92	20.73	1.13	1.15	1.17
1500	2.11	5.18	3.07	87.95	20.78	1.13	1.14	1.17
1550	2.19	5.04	2.85	88.00	20.93	1.12	1.14	1.17
1600	2.27	4.91	2.64	88.03	21.00	1.12	1.14	1.18
1650	2.35	4.79	2.44	88.02	21.15	1.12	1.13	1.18
1700	2.42	4.67	2.24	88.04	21.31	1.12	1.13	1.18
1750	2.50	4.56	2.06	88.06	21.33	1.12	1.13	1.19
1800	2.58	4.47	1.89	88.06	21.42	1.12	1.13	1.20
1850	2.65	4.38	1.73	88.08	21.56	1.12	1.13	1.21
1900	2.72	4.30	1.58	88.08	21.64	1.13	1.14	1.22
1950	2.79	4.22	1.43	88.09	21.73	1.14	1.13	1.23
2000	2.86	4.16	1.30	88.08	21.80	1.14	1.13	1.24
2050	2.92	4.09	1.17	88.07	21.87	1.15	1.14	1.25
2100	2.98	4.04	1.06	88.11	21.95	1.15	1.14	1.27
2150	3.04	3.99	0.95	88.13	22.01	1.16	1.14	1.28
2200	3.10	3.94	0.85	88.15	22.17	1.16	1.14	1.29
2250	3.15	3.90	0.75	88.18	22.30	1.17	1.14	1.30
2300	3.19	3.86	0.67	88.18	22.44	1.17	1.15	1.31
2350	3.24	3.84	0.59	88.27	22.60	1.18	1.15	1.32
2400	3.28	3.81	0.52	88.30	22.81	1.18	1.15	1.33
2450	3.32	3.78	0.46	88.37	23.04	1.18	1.15	1.33
2500	3.35	3.76	0.41	88.43	23.35	1.18	1.15	1.33
2550	3.38	3.73	0.35	88.52	23.50	1.18	1.15	1.33
2600	3.41	3.71	0.31	88.60	23.64	1.18	1.15	1.32
2650	3.43	3.70	0.27	88.68	24.01	1.17	1.16	1.32
2700	3.45	3.69	0.24	88.79	24.40	1.16	1.16	1.31
2750	3.46	3.67	0.21	88.92	24.82	1.15	1.16	1.30
2800	3.48	3.67	0.19	89.01	25.19	1.15	1.17	1.28
2850	3.48	3.66	0.17	89.11	25.60	1.13	1.17	1.26
2900	3.49	3.65	0.17	89.22	26.25	1.12	1.17	1.24
2950	3.49	3.65	0.16	89.34	26.81	1.10	1.17	1.22
3000	3.50	3.65	0.16	89.43	27.21	1.09	1.17	1.19
3050	3.49	3.65	0.16	89.51	28.02	1.08	1.17	1.17
3100	3.49	3.66	0.17	89.64	28.95	1.07	1.16	1.15
3150	3.49	3.67	0.19	89.69	29.77	1.06	1.16	1.13
3200	3.48	3.69	0.21	89.79	30.79	1.07	1.14	1.12
3250	3.47	3.71	0.24	89.87	31.94	1.08	1.13	1.12
3300	3.46	3.74	0.28	89.97	33.21	1.10	1.12	1.12
3350	3.45	3.77	0.32	90.02	34.36	1.11	1.10	1.12
3400	3.44	3.81	0.38	90.08	34.95	1.13	1.08	1.14
3500	3.40	3.91	0.51	90.21	33.56	1.18	1.05	1.17
3600	3.36	4.04	0.69	90.37	30.65	1.22	1.06	1.20
3700	3.30	4.20	0.89	90.57	28.19	1.26	1.12	1.23
3800	3.24	4.38	1.14	90.84	25.95	1.28	1.19	1.26
3900	3.17	4.59	1.42	91.24	24.52	1.31	1.26	1.28
4000	3.08	4.82	1.74	91.75	23.40	1.32	1.32	1.30
4250	2.88	5.50	2.61	93.46	21.64	1.36	1.44	1.38
4500	2.64	6.31	3.67	95.14	20.66	1.33	1.42	1.50
4750	2.33	7.34	5.01	97.07	20.33	1.21	1.28	1.61
5000	1.99	8.79	6.80	99.65	20.79	1.02	1.19	1.60


¹ Total Loss = Insertion Loss+ 3dB Splitter Loss

2 Way-90° Power Splitter/Combiner


QCN-34D+

Typical Performance Curves


Total Loss

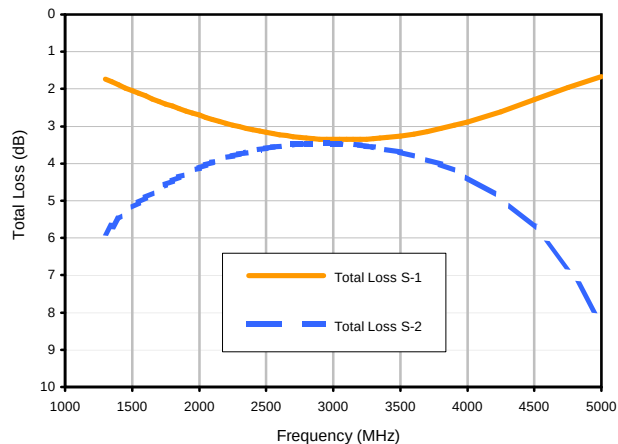


Total Loss S-1 vs. TEMPERATURE

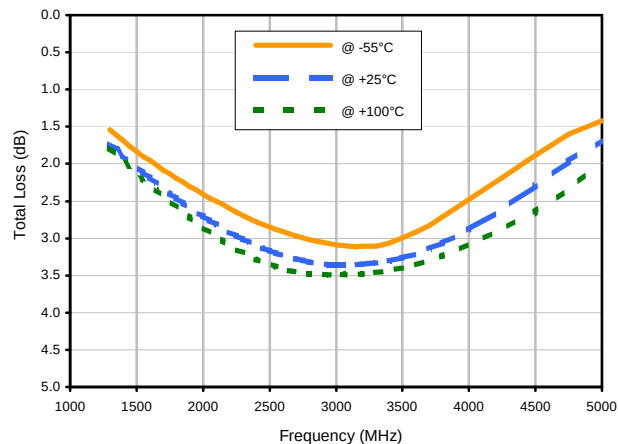


Amplitude Unbalance vs. TEMPERATURE

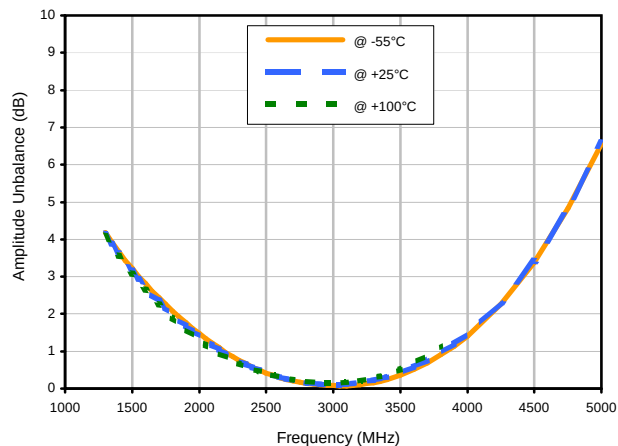

Phase Unbalance vs. TEMPERATURE

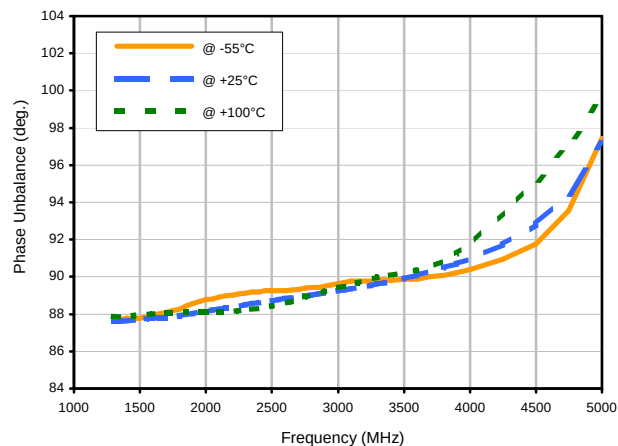

Isolation 1-2 vs. TEMPERATURE



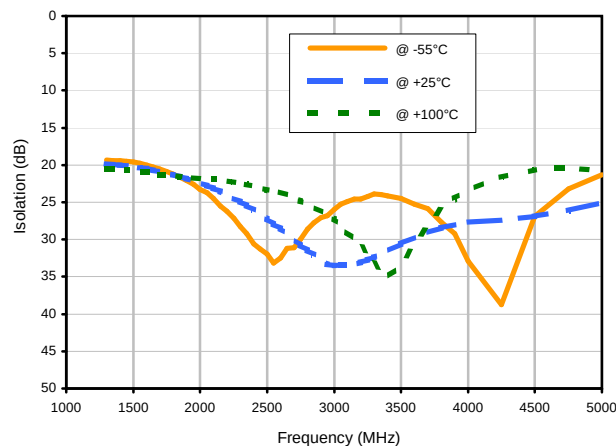


REV. X2
QCN-34D+
100705
Page 1 of 2


2 Way-90° Power Splitter/Combiner

QCN-34D+


Typical Performance Curves

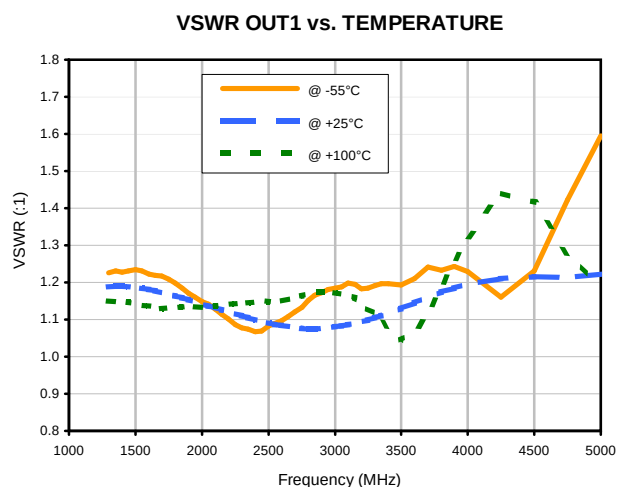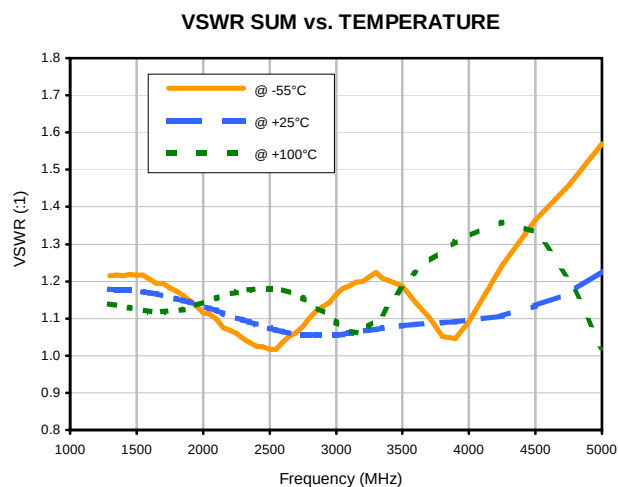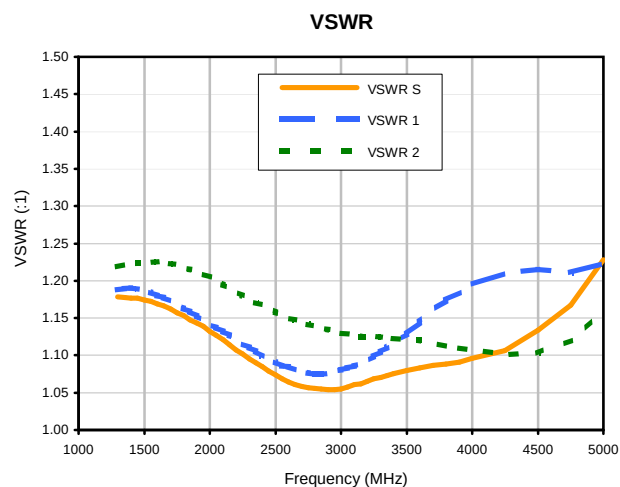

Outline Dimensions

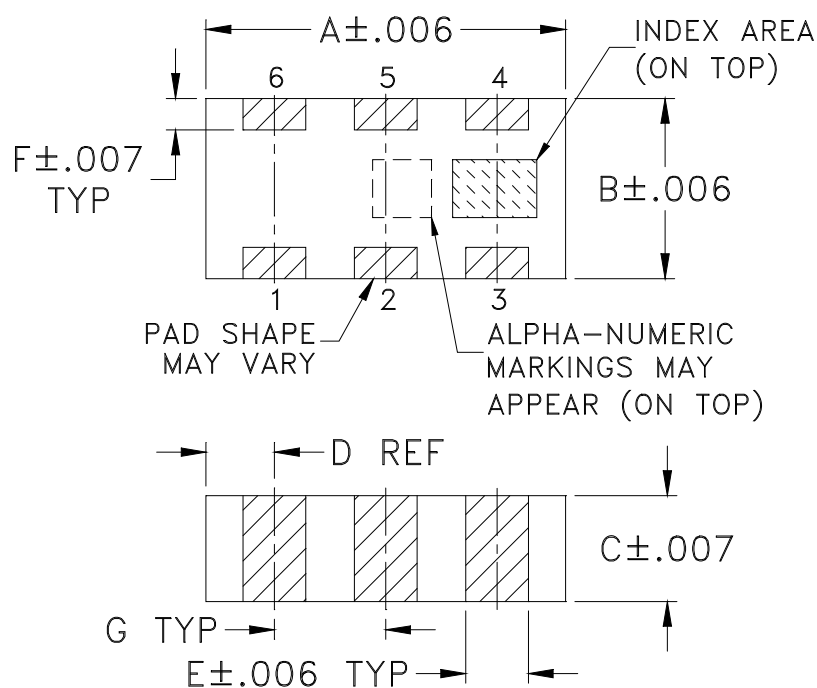

PCB Land Pattern

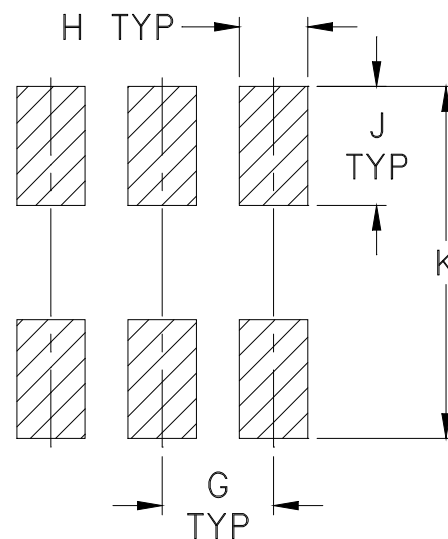

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L	M	N	P	WT. GRAM
FV1206-1	.126 (3.20)	.063 (1.60)	.035 (0.89)	.024 (0.61)	.022 (0.56)	.011 (0.28)	.039 (0.99)	.024 (0.61)	.042 (1.07)	.123 (3.12)	--	--	--	--	.020

Dimensions are in inches (mm). Tolerances: 2 PL. $\pm .01$; 3 PL. $\pm .005$

Notes:

- Open style, ceramic base.
- Termination finish: **as shown below or indicated on Data Sheet.**
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

DEVICE ORIENTATION IN T&R

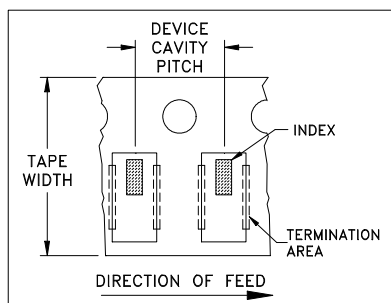


ILLUSTRATION 1

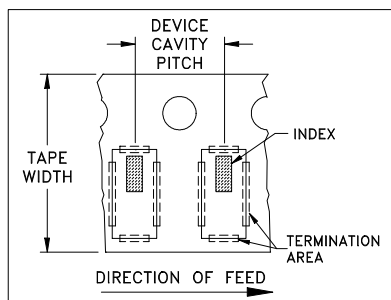


ILLUSTRATION 2

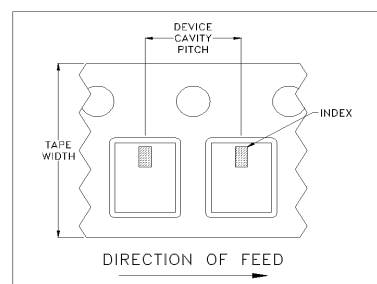


ILLUSTRATION 3

Applicable Case Styles

FV1206-1
FV1206-3

Applicable Case Styles

FV1206-4
FV1206-5
FV1206-6
FV1206-7
FV1206-9

Applicable Case Styles

FV1206-11
FV1206-12
GE0805C-18
NL1008C-6
NL1008C-7
NL1008C-9
NL1008C-10
NL1008C-12

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
				1000
			Standard	3000

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • **EUROPE** 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M87001	NEW RELEASE	05/20/03	MMG	ABD
A	M87231	CORRECTED DWG.	05/28/03	MMG	ABD
B	M91636	ADDED "pn" PIN CONNECTION	04/07/04	AV	ABD
C	M102713	ADDED "...WITH SMOBC"	01/16/06	GF	IL

SUGGESTED MOUNTING CONFIGURATION
FOR FV1206-1 CASE STYLE, "pb/pn" PIN CONNECTIONS

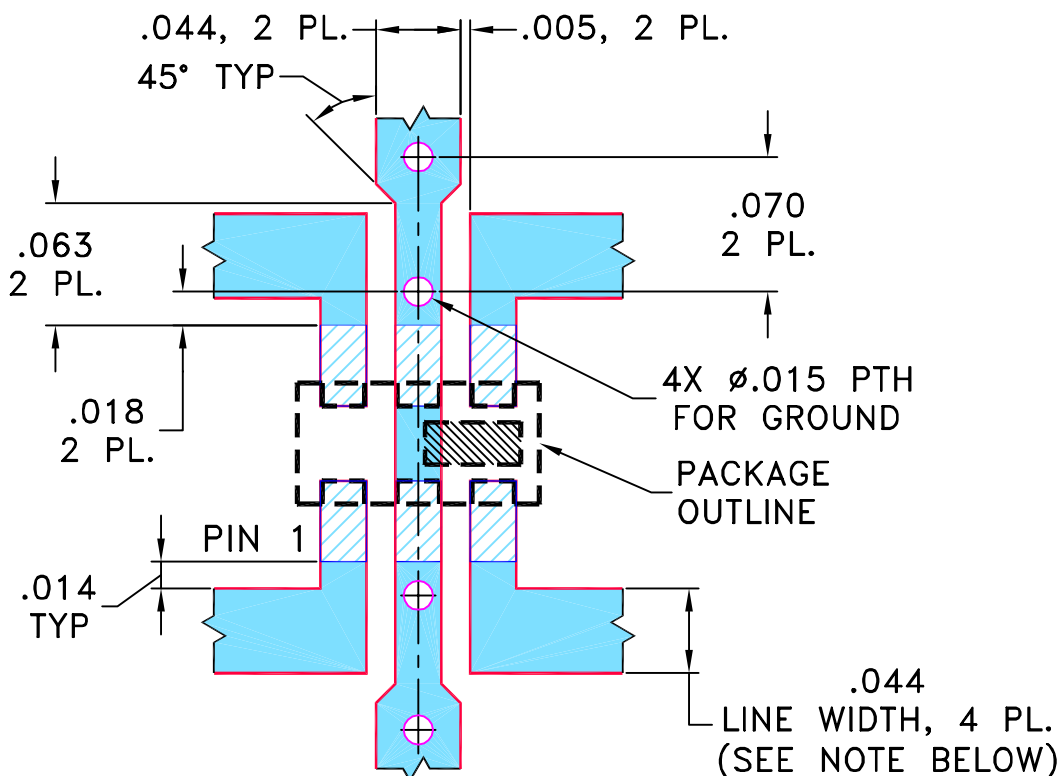


NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" $\pm$ 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK


UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS $\pm$ 3 PL DECIMALS $\pm$.005ANGLES $\pm$ FRACTIONS $\pm$ 

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, pb/pn, FV1206-1, QCN/BDCN, TB-255

SIZE
ACODE IDENT
15542DRAWING NO:
98-PL-131REV:
C



FILE: 98PL131

SCALE: 10:1

SHEET: 1 OF 1

Evaluation Board and Circuit

For Pin Connections refer to Data Sheet of the DUT

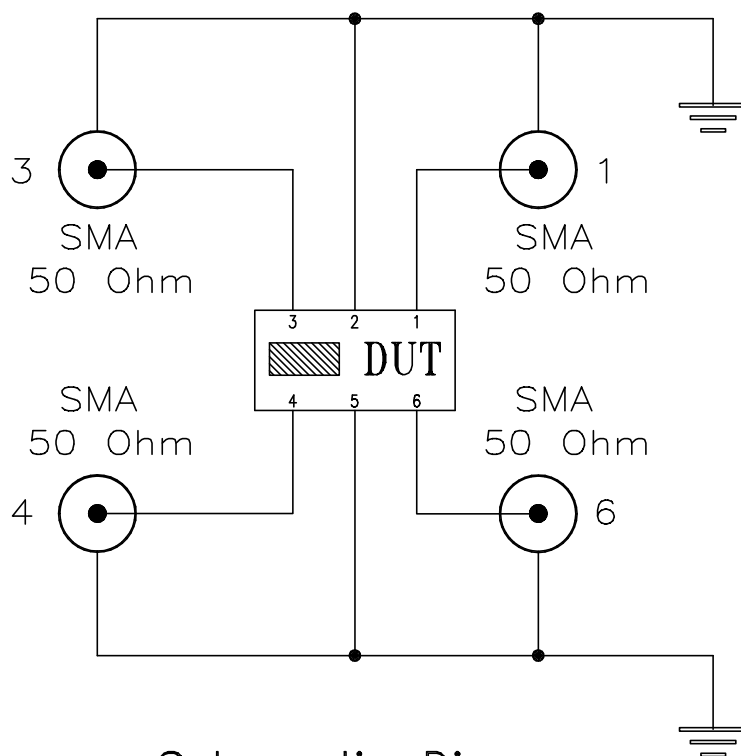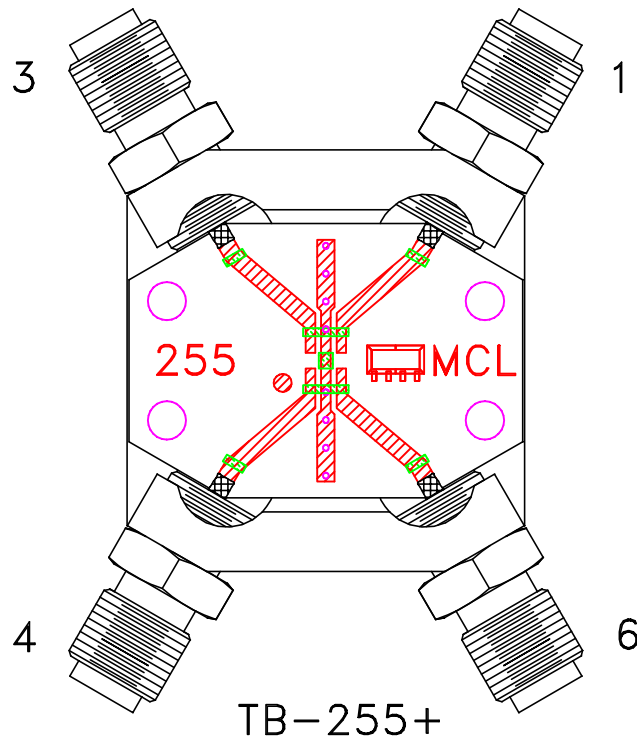

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent, Dielectric Constant=3.5, Thickness=.020 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A