

+5 to +33 dBm

Limiter

RLM-751-2WL+

50Ω Broadband 3 to 750 MHz

The Big Deal

- Wideband, 3 to 750 MHz
- Low Insertion Loss, 0.20dB typical
- Fast Recovery Time, 4nSec
- Excellent VSWR 1.13:1 typical
- Low leakage power, 8dBm typical



CASE STYLE: TT1224

Product Overview

RLM-751-2W+ constitutes a very reliable limiting component. It exhibits typical output leakage powers of 7.2dBm at 30 and 32dBm input powers throughout the 3 to 750 frequency range. It also presents an excellent delta output power versus the delta input power of 0.3dB/dB typical, within its input power limiting range of 12 to 32dBm. Its low insertion loss combined with the excellent return loss, recovery and response time features, makes this component suitable for many applications.

Key Features

Feature	Advantages
Diode Limiting	The special combination of diode technologies allows for fast response and recovery times at the same time as low leakage output powers are obtained
Broad band	Its operational frequency range is suitable for many military and civil applications.
Input & Output matched	Allows for an easy and power efficient integration of the component when it is placed in a cascaded fashion within a complex system.
Low Insertion Loss of 0.20 dB typical at the low drive regime.	Minimizes the impact on the overall system's insertion loss for low drive signals.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



+5 to +33 dBm

Limiter

50Ω Broadband 3 to 750 MHz

RLM-751-2WL+

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	3W

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

INPUT	1
OUTPUT	4
GROUND	2,3,5,6


Outline Drawing

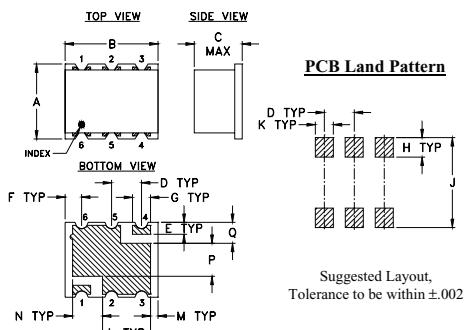

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H
.25	.31	.16	.100	.040	.055	.060	.065
6.35	7.87	4.06	2.54	1.02	1.40	1.52	1.65
J	K	L	M	N	P	Q	wt.
.300	.060	.160	.025	.100	.110	.070	grams
7.62	1.52	4.06	0.64	2.54	2.79	1.78	0.16

Demo Board MCL P/N: TB-393 Suggested PCB Layout (PL-258)

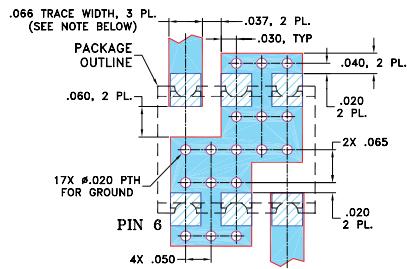

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE.

FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

3. PCB COPPER LAYOUT IS SMOBC (SOLDER MASK OVER BARE COPPER)

4. DENOTES PCB MASK OVER BARE COPPER

5. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, 3 to 750 MHz
- low insertion loss 0.20 dB typ.
- fast recovery time, 4nsec typ.
- excellent VSWR 1.13:1 typ.
- low output power, 8.0 dBm typ.



Generic photo used for illustration purposes only

CASE STYLE: TT1224

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Applications

- military, hi-rel applications
- stabilizing generator outputs
- reducing amplitude variations
- protects low noise amplifiers and other devices from ESD or input power damage

Electrical Specifications







Parameter	Condition	Min.	Typ.	Max.	Units
Frequency Range		3	750	MHz	
Linear Range					
Max Input Power	less than 0.1 dB compression	—	—	-10	dBm
Insertion Loss	less than -10 dBm input power	—	0.20	0.9	dB
VSWR	less than -10 dBm input power	—	1.13	1.6	:1
Limiting Range					
Input Power	>1dB compression filtered signal frequency	+5	—	+33	dBm
Output Power	Input Power Range (dBm)	—	+8.0	—	dBm
	5 to 12	—	0.3	—	
Δ Output/ Δ 1dB Input	12 to 20	—	0.3	—	
	20 to 25	—	0.3	—	
	25 to 30	—	0.13	—	
	30 to 33	—	0.05	—	
Recovery Time	1 watt pulse 50 μsec PW 1kHz duty cycle recovery to within 90% of final value.	—	4	—	nsec
Response Time	-30 to +30 dBm input 50 μsec PW 1 kHz duty cycle	—	7.2	—	nsec

Typical Performance Data

Freq. (MHz)	I. Loss (dB) in Linear Range	VSWR (:1) in Linear Range	Power Output (dBm)						Δ Output / Δ 1dB Input					
			+5 dBm at -10 dBm	+12 dBm Input	+20 dBm Input	+25 dBm Input	+30 dBm Input	+33 dBm Input	+5 to +12 dBm Input	+12 to +20 dBm Input	+20 to +25 dBm Input	+25 to +30 dBm Input	+30 to +33 dBm Input	
4.00	0.10	1.22	-0.25	1.90	4.00	5.77	7.51	9.38	0.31	0.26	0.35	0.35	0.62	
100.00	0.08	1.05	0.52	1.92	4.22	6.08	7.41	8.99	0.20	0.29	0.37	0.27	0.53	
150.00	0.10	1.06	0.53	2.09	4.34	6.12	7.27	8.19	0.22	0.28	0.36	0.23	0.31	
200.00	0.13	1.08	0.5	2.45	4.78	7.04	7.19	8.58	0.28	0.29	0.45	0.03	0.46	
250.00	0.15	1.10	0.48	1.96	4.04	6.08	7.69	7.84	0.21	0.26	0.41	0.32	0.05	
300.00	0.18	1.13	0.52	2.29	4.65	6.43	7.04	7.30	0.25	0.30	0.36	0.12	0.09	
400.00	0.22	1.18	0.46	2.10	4.41	5.70	6.32	6.49	0.23	0.29	0.26	0.12	0.06	
500.00	0.26	1.23	0.45	1.93	4.41	5.17	5.94	6.65	0.21	0.31	0.15	0.15	0.24	
600.00	0.31	1.28	0.37	1.76	4.41	4.68	5.57	8.65	0.20	0.33	0.05	0.58	0.36	
700.00	0.36	1.33	0.37	1.71	4.17	4.36	5.10	5.57	0.19	0.31	0.04	0.15	0.16	
760.00	0.39	1.37	0.36	1.72	3.83	3.98	8.40	8.86	0.19	0.26	0.03	0.88	0.15	

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

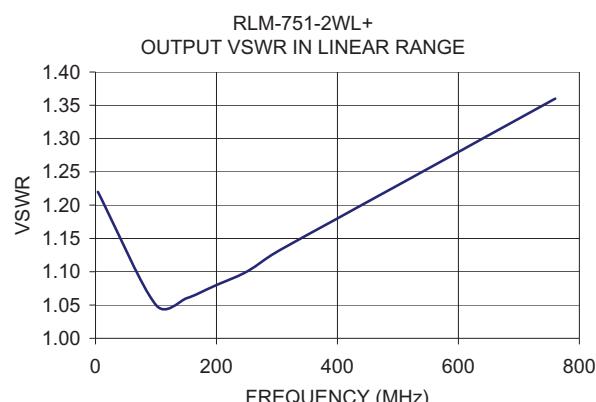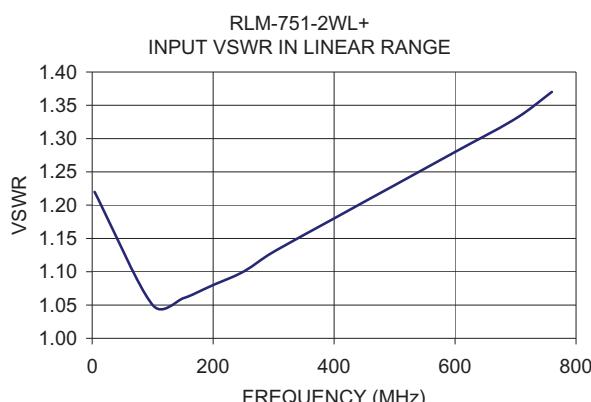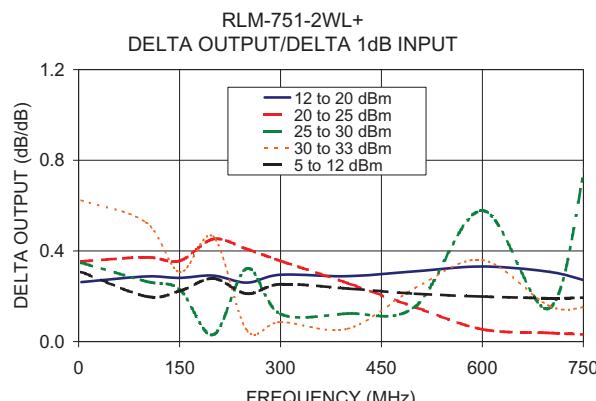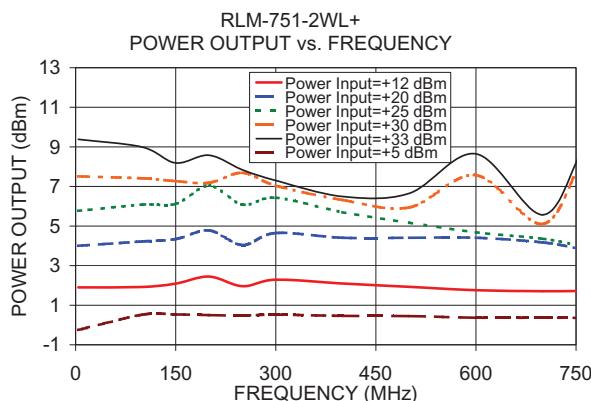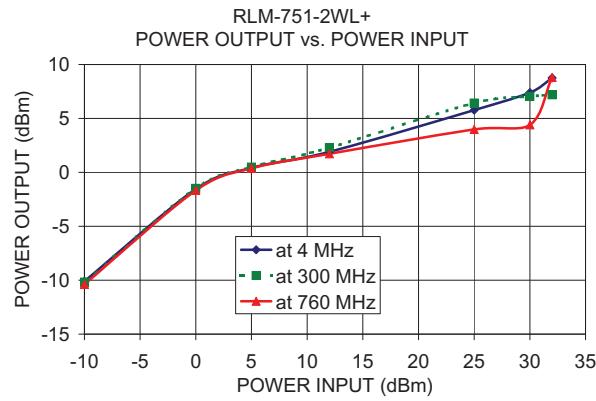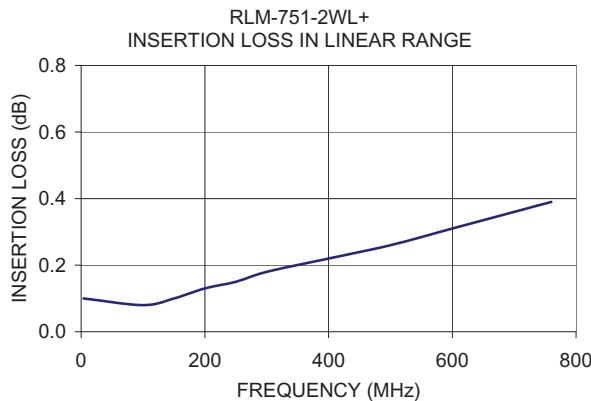

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Surface Mount Limiter

RLM-751-2WL+

Typical Performance Data

FREQUENCY (MHz)	LOW INPUT POWER			POWER OUTPUT (dBm)						DELTA OUTPUT/1dB DELTA INPUT (dB/dB)					
	INSERTION LOSS		VSWR												
	(dB)	Input INPUT	Output (:1)	+5 dBm INPUT	+12 dBm INPUT	+20 dBm INPUT	+25 dBm INPUT	+30 dBm INPUT	+33 dBm INPUT	+5 to +12 dBm INPUT	+12 to +20 dBm INPUT	+20 to +25 dBm INPUT	+25 to +30 dBm INPUT	+30 to +33 dBm INPUT	
4.0	0.10	1.22	1.22	-0.25	1.90	4.00	5.77	7.51	9.38	0.31	0.26	0.35	0.35	0.62	
100.0	0.08	1.05	1.05	0.52	1.92	4.22	6.08	7.41	8.99	0.20	0.29	0.37	0.27	0.53	
150.0	0.10	1.06	1.06	0.53	2.09	4.34	6.12	7.27	8.19	0.22	0.28	0.36	0.23	0.31	
200.0	0.13	1.08	1.08	0.50	2.45	4.78	7.04	7.19	8.58	0.28	0.29	0.45	0.03	0.46	
250.0	0.15	1.10	1.10	0.48	1.96	4.04	6.08	7.69	7.84	0.21	0.26	0.41	0.32	0.05	
300.0	0.18	1.13	1.13	0.52	2.29	4.65	6.43	7.04	7.30	0.25	0.30	0.36	0.12	0.09	
400.0	0.22	1.18	1.18	0.46	2.10	4.41	5.70	6.32	6.49	0.23	0.29	0.26	0.12	0.06	
500.0	0.26	1.23	1.23	0.45	1.93	4.41	5.17	5.94	6.65	0.21	0.31	0.15	0.15	0.24	
600.0	0.31	1.28	1.28	0.37	1.76	4.41	4.68	7.57	8.65	0.20	0.33	0.05	0.58	0.36	
700.0	0.36	1.33	1.33	0.37	1.71	4.17	4.36	5.10	5.57	0.19	0.31	0.04	0.15	0.16	
760.0	0.39	1.37	1.36	0.36	1.72	3.83	3.98	8.40	8.86	0.19	0.26	0.03	0.88	0.15	



ISO 9001 ISO 14001 AS 9100 CERTIFIED



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site REV. OR



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RLM-751-2WL+

9/27/2012

Page 1 of 2

IF/RF MICROWAVE COMPONENTS

Surface Mount Limiter

RLM-751-2WL+

Typical Performance Data

POWER INPUT	POWER OUTPUT	POWER INPUT	POWER OUTPUT	POWER INPUT	POWER OUTPUT
@ 4 MHz					
(dBm)					
-10.0	-10.10	-10.0	-10.18	-10.0	-10.39
0.0	-1.54	0.0	-1.49	0.0	-1.67
5.0	0.42	5.0	0.49	5.0	0.38
12.0	1.90	12.0	2.29	12.0	1.72
25.0	5.77	25.0	6.43	25.0	3.98
30.0	7.40	30.0	7.04	30.0	4.41
33.0	8.76	33.0	7.19	33.0	8.86



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. OR
RLM-751-2WL+







9/27/2012

Page 2 of 2

Surface Mount Limiter

RLM-751-2WL+

Typical Performance Curves

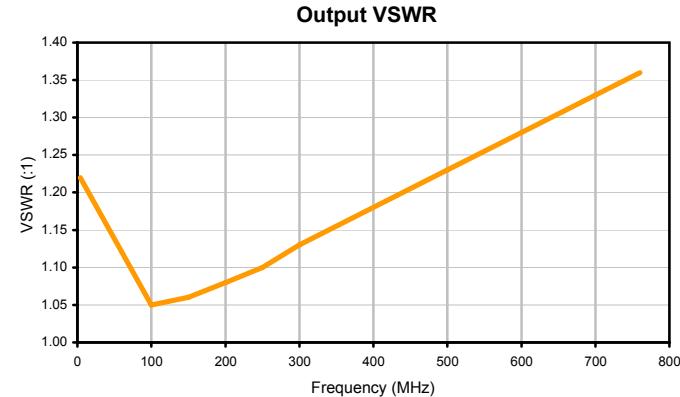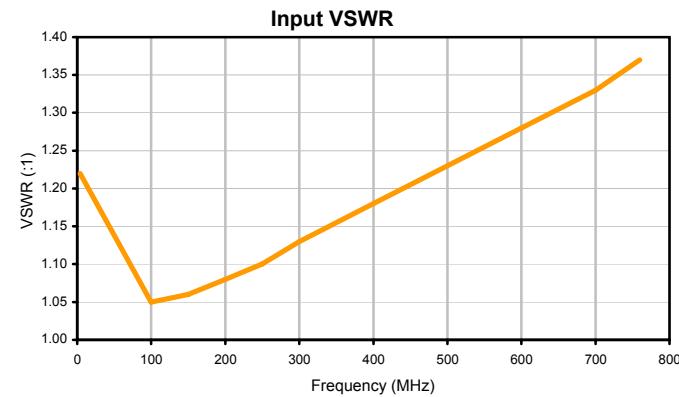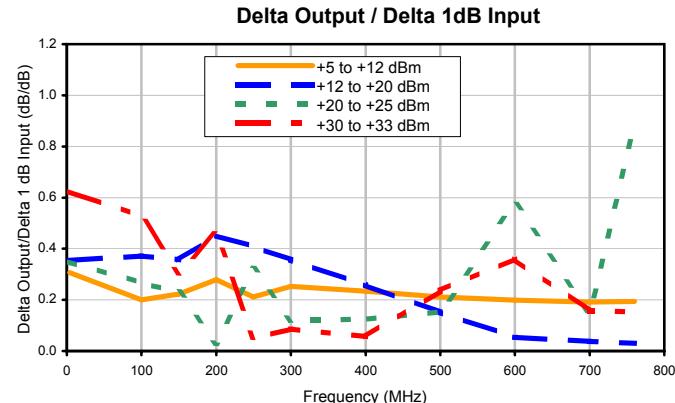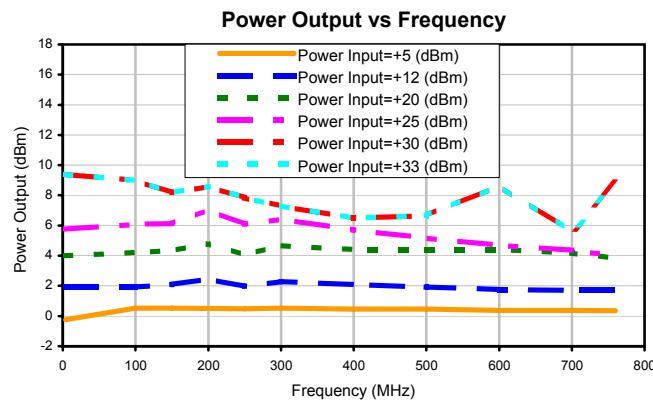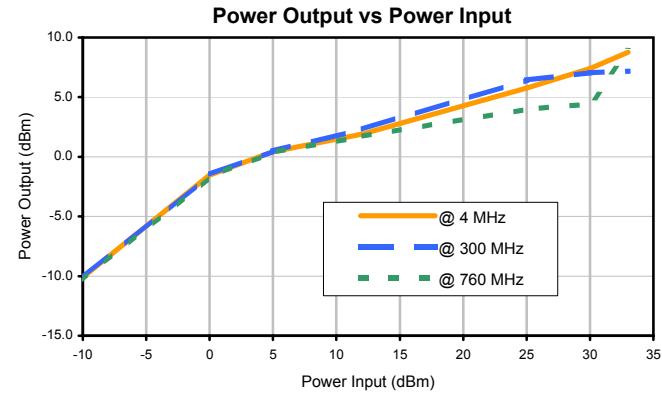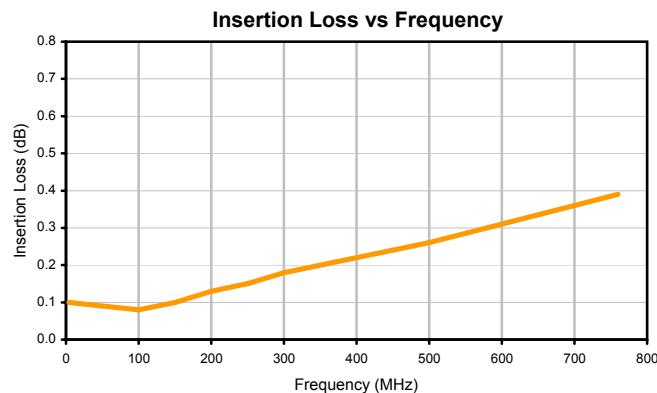

Mini-Circuits®

ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

minicircuits.com

REV. OR

RLM-751-2WL+

9/27/2012


Page 1 of 1

Case Style


TT

TT1224

Outline Dimensions

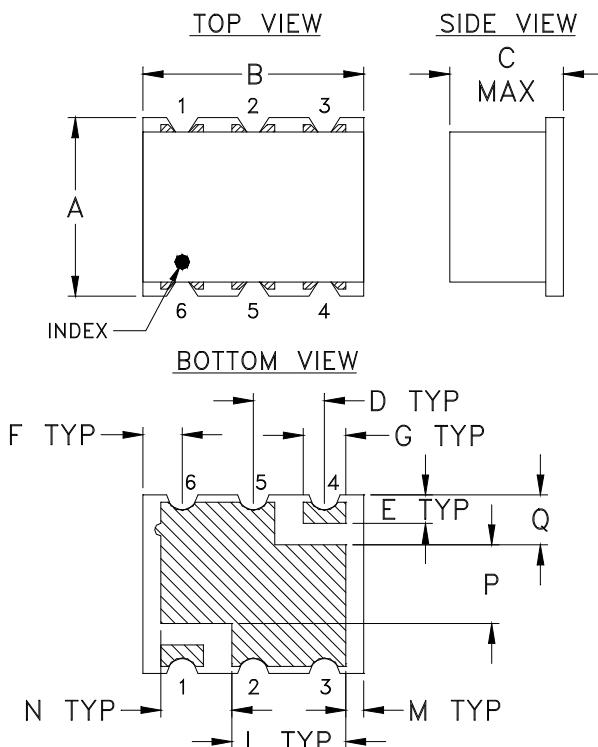

PCB Land Pattern

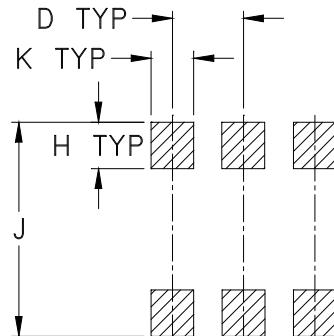

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L
TT1224	.25 (6.35)	.31 (7.87)	.16 (4.06)	.100 (2.54)	.040 (1.02)	.055 (1.40)	.060 (1.52)	.065 (1.65)	.300 (7.62)	.060 (1.52)	.160 (4.06)

CASE #	M	N	P	Q	WT. GRAM
TT1224	.025 (.64)	.100 (2.54)	.110 (2.79)	.070 (1.78)	.16

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

1. Case material: Plastic.
2. Termination: 2-10 μ inch (.05-.25 microns) Gold over 100-300 μ inch (2.54-7.62 microns) Nickel plate

 **Mini-Circuits®**
ISO 9001 ISO 14001 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

ALL NEW
minicircuits.com

Tape & Reel Packaging TR-F2

DEVICE ORIENTATION IN T&R

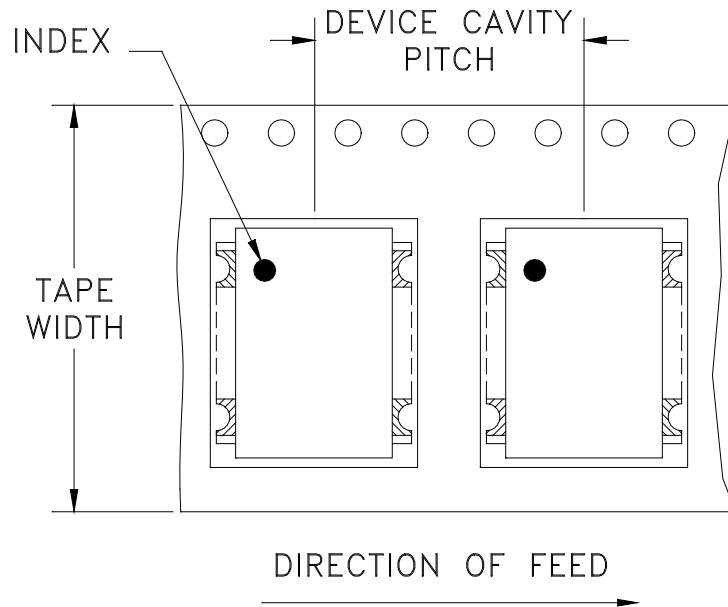

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel See note
16	12	7	10
			20
			50
			100
			200
		13	500
			1000

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV OR	ECN No.	DESCRIPTION	DATE	DR	AUTH
	M108897	NEW RELEASE	01/04/07	AV	DJ


SUGGESTED MOUNTING CONFIGURATION
FOR TT1224 CASE STYLE "rv" PIN CONNECTION

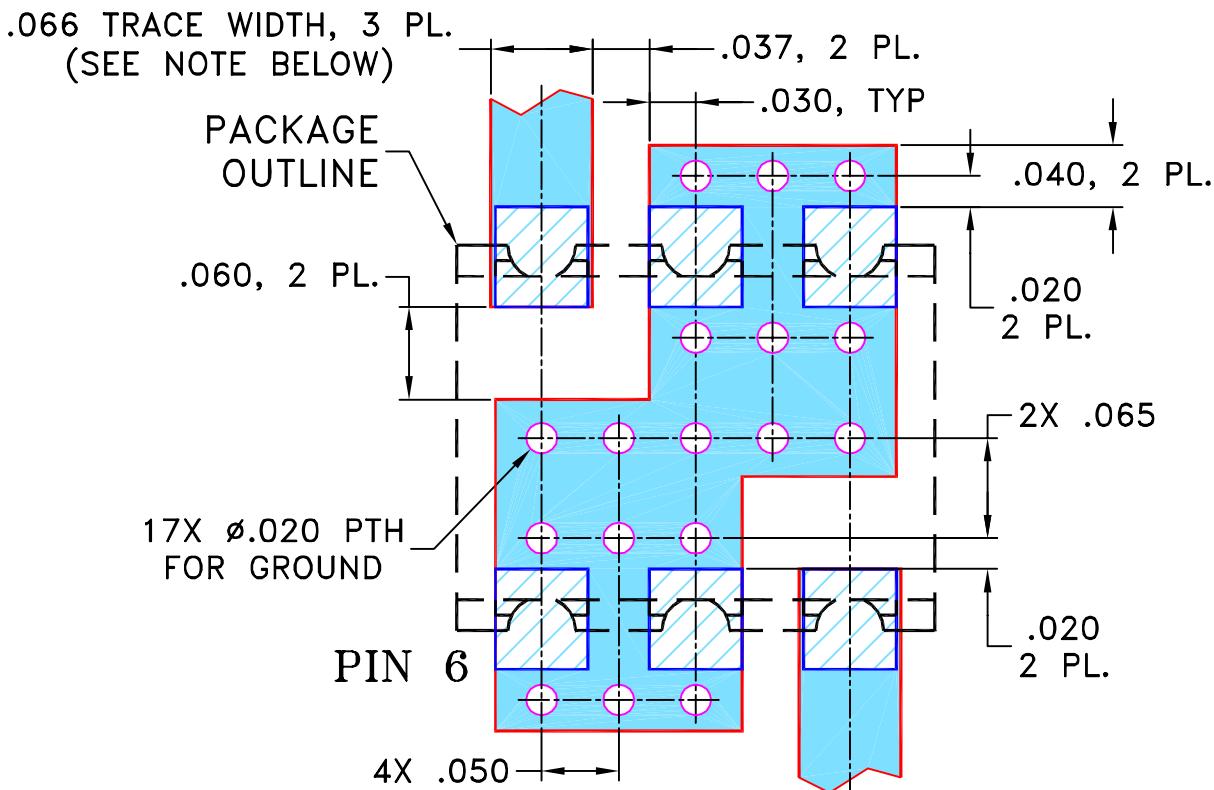

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS $.030" \pm .002"$; COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

AV

12/14/08

TOLERANCES ON:

CHECKED

IL

01/04/07

2 PL DECIMALS \pm

APPROVED

DJ

01/04/07

3 PL DECIMALS $\pm .005$ ANGLES \pm FRACTIONS \pm

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.
EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE
AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY
DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO.
THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95




Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235


PL, rv, TT1224, RMK-3-662+, TB-393

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-258	OR
FILE:	98PL258	SCALE: 8:1	SHEET: 1 OF 1

Evaluation Board and Circuit

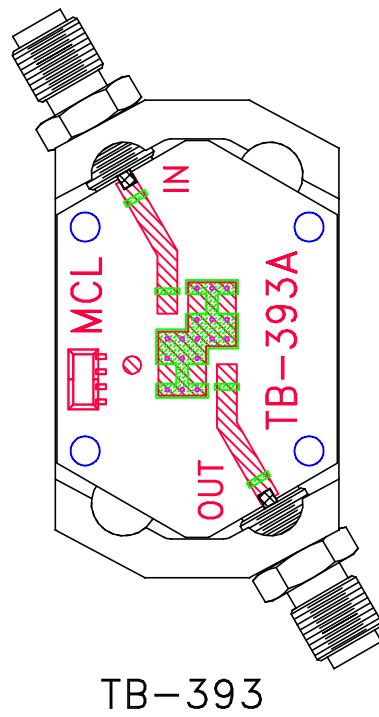

TB-393

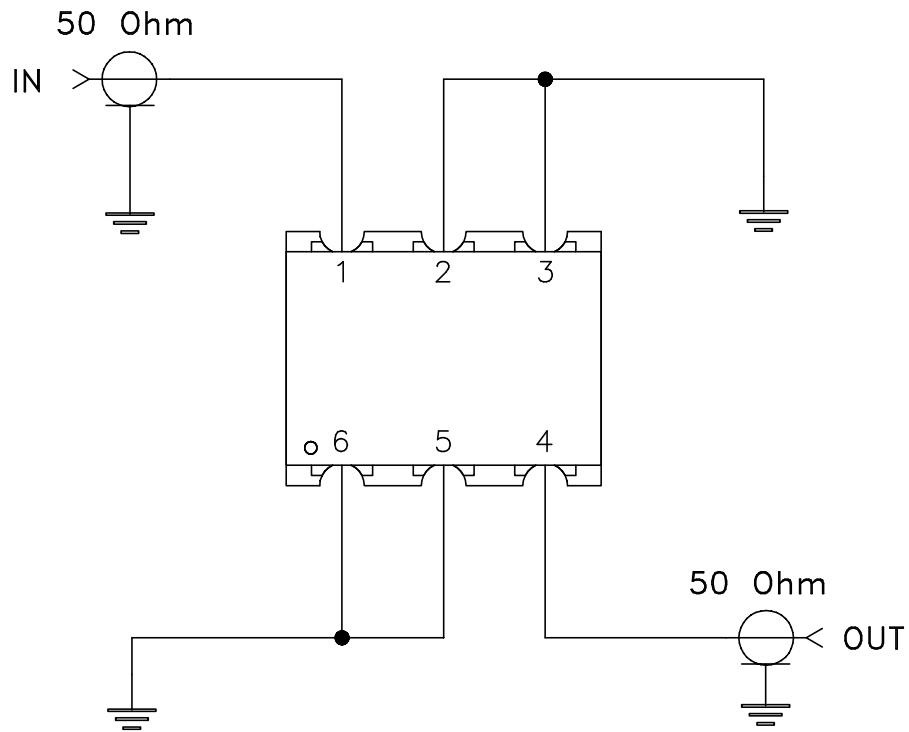

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 Mini-Circuits®



Environmental Specifications

ENV02T1

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + propylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215