



SURFACE MOUNT

X5 Frequency Multiplier

RMK-5-972+

50Ω 8100 to 9750 MHz

KEY FEATURES

- Wideband Output From: 8100 to 9750 MHz
- High Harmonic Suppression:
 - F4: 55 dBc Typ.
 - F6: 52 dBc Typ.
- Input Power: +7 to +11 dBm




Generic photo used for illustration purposes only

APPLICATIONS

- Synthesizers
- Local Oscillators
- Satellite Up and Down Converters

FUNCTIONAL DIAGRAM

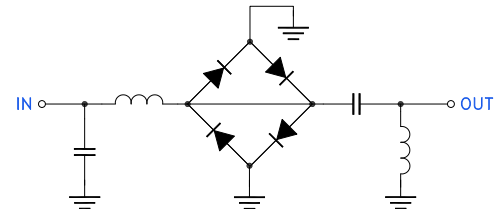

PRODUCT OVERVIEW

Mini-Circuits' RMK-5-972+ frequency multiplier provides a multiplication factor of 5, converting input frequencies from 1620 to 1950 MHz to output frequencies from 8100 to 9750 MHz, supporting applications such as synthesizers, local oscillators, satellite up and down converters and more. The unit provides an input power range from +7 to +11 dBm, 28.5 dB conversion loss, and good harmonic suppression. The multiplier comes housed in a miniature, surface-mount package (0.25 x 0.31 x 0.16") ideal for dense circuit board layouts.

ELECTRICAL SPECIFICATIONS¹ AT +25°C

Parameter	Input Frequency (MHz)	Min.	Typ.	Max.	Unit	
Multiplication Factor			5			
Frequency Range, Input (F1)		1620	-	1950	MHz	
Frequency Range, Output (F5)		8100	-	9750	MHz	
Input Power		+7	-	+11	dBm	
Conversion Loss	1620 - 1950	-	28.5	34	dB	
Harmonic Output ²	F1	1620 - 1950	-12	-0.2	-	-dBc
	F2	1620 - 1950	38	60	-	
	F3	1620 - 1950	-15	-5.5	-	
	F4	1620 - 1950	38	55	-	
	F6	1620 - 1950	30	52	-	
	F7	1620 - 1950	-5	8	-	

1. Measured on Mini-Circuits Characterization Test Board TB-RMK-5-972+.

2. Harmonics of input frequency below the power level of F5.

ABSOLUTE MAXIMUM RATINGS³








Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C
Input RF Power	+13 dBm

3. Permanent damage may occur if any of these limits are exceeded.





TYPICAL PERFORMANCE GRAPHS

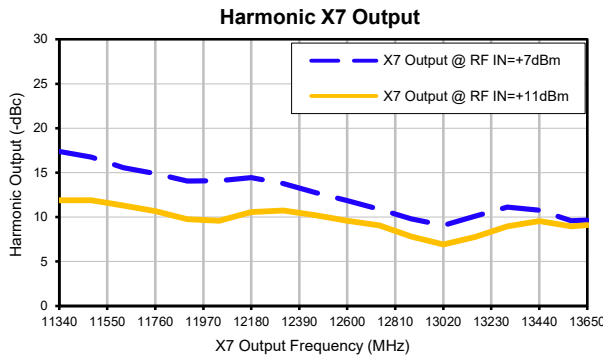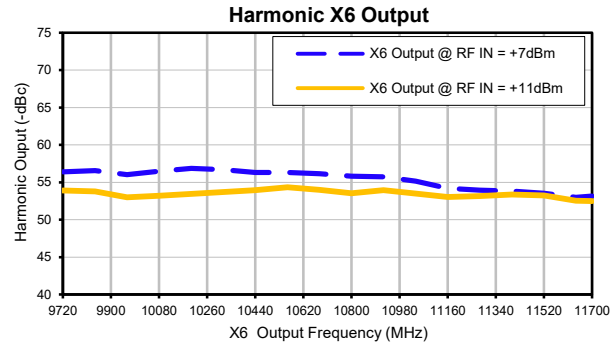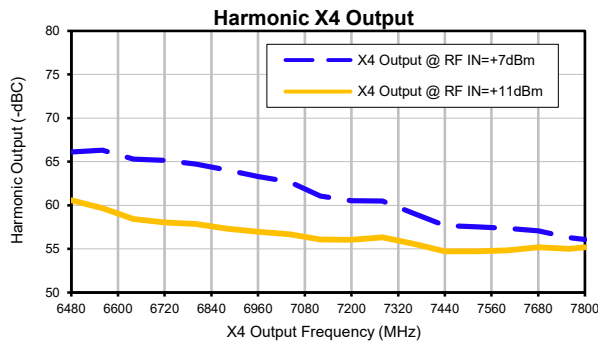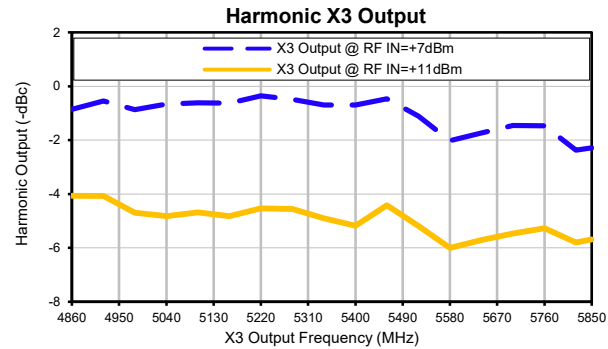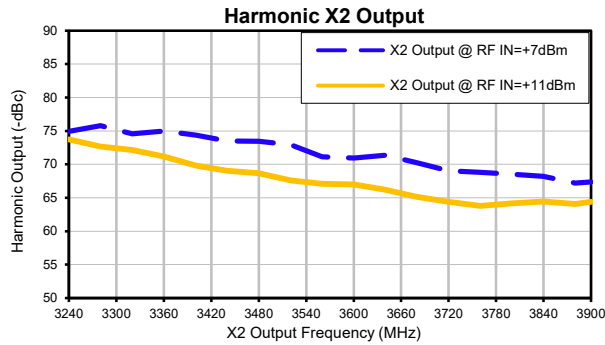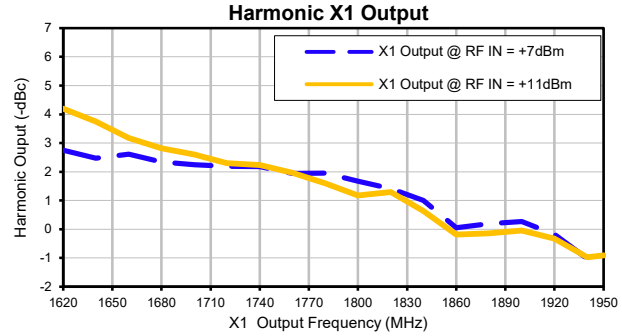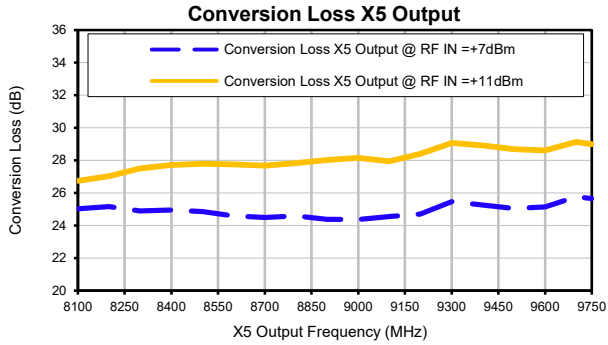



FUNCTIONAL DIAGRAM


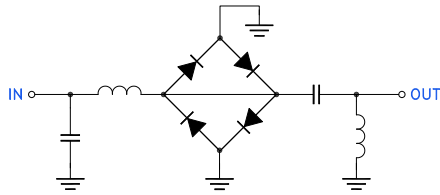


Figure 1. RMK-5-972+ Functional Diagram

PAD DESCRIPTION

Function	Pad Number	Description
RF-IN	1	Connects to RF Input Port
RF-OUT	4	Connects to RF Output Port
GROUND	2, 3, 5, 6	Connects to Ground on PCB, (See drawing PL-258)


SUGGESTED PCB LAYOUT (PL-258)

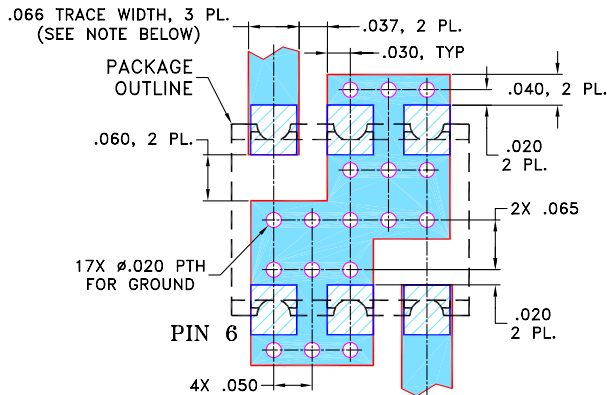


- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Figure 2. Suggested PCB Layout PL-258

CASE STYLE DRAWING

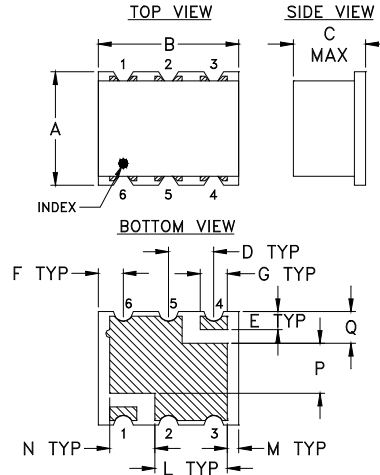

PCB Land Pattern



Suggested Layout, Tolerance to be within .002

OUTLINE DIMENSIONS (Inch/mm)

A	B	C	D	E	F	G	H
.25	.31	.16	.100	.040	.055	.060	.065
6.35	7.87	4.06	2.54	1.02	1.40	1.52	1.65
J	K	L	M	N	P	Q	wt.
.300	.060	.160	.025	.100	.110	.070	grams
7.62	1.52	4.06	0.64	2.54	2.79	1.78	0.16

*PRODUCT MARKING: RMK-5-972+

*Marking may contain other features or characters for internal lot control



SURFACE MOUNT

X5 Frequency Multiplier

RMK-5-972+

 Mini-Circuits

50Ω 8100 to 9750 MHz

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASH BOARD.

[CLICK HERE](#)

Performance Data & Graphs	Data Graphs
Case Style	TT1224 Lead Finish: Gold over Nickel Plate
RoHS Status	Compliant
Tape and Reel	TR-F2
Suggested Layout for PCB Design	PL-258
Evaluation Board	TB-RMK-5-972+
	Gerber File
Environmental Rating	ENV02T1

Typical Performance Data








FREQUENCY (MHz)							CONVERSION LOSS (dB)	RF IN = +7 dBm						
X1 OUTPUT	X2 OUTPUT	X3 OUTPUT	X4 OUTPUT	X5 OUTPUT	X6 OUTPUT	X7 OUTPUT		HARMONIC OUTPUT* (-dBc)						
1620	3240	4860	6480	8100	9720	11340	25.03	2.75	74.95	0.85	66.12	56.38	17.38	
1640	3280	4920	6560	8200	9840	11480	25.16	2.47	75.79	0.54	66.32	56.56	16.74	
1660	3320	4980	6640	8300	9960	11620	24.90	2.61	74.55	0.86	65.29	56.02	15.56	
1680	3360	5040	6720	8400	10080	11760	24.94	2.34	75.01	0.66	65.15	56.48	14.90	
1700	3400	5100	6800	8500	10200	11900	24.85	2.25	74.37	0.62	64.73	56.86	14.06	
1720	3440	5160	6880	8600	10320	12040	24.59	2.19	73.51	0.62	64.05	56.70	14.09	
1740	3480	5220	6960	8700	10440	12180	24.50	2.18	73.46	0.36	63.31	56.30	14.43	
1760	3520	5280	7040	8800	10560	12320	24.59	1.94	72.93	0.48	62.71	56.31	13.76	
1780	3560	5340	7120	8900	10680	12460	24.38	1.96	71.15	0.70	61.08	56.15	12.75	
1800	3600	5400	7200	9000	10800	12600	24.37	1.67	70.95	0.70	60.52	55.80	11.87	
1820	3640	5460	7280	9100	10920	12740	24.54	1.42	71.38	0.46	60.50	55.74	10.86	
1840	3680	5520	7360	9200	11040	12880	24.70	1.01	70.24	1.11	59.05	55.16	9.80	
1860	3720	5580	7440	9300	11160	13020	25.46	0.05	69.02	2.02	57.69	54.21	9.07	
1880	3760	5640	7520	9400	11280	13160	25.26	0.19	68.81	1.73	57.53	53.95	10.12	
1900	3800	5700	7600	9500	11400	13300	25.04	0.27	68.55	1.46	57.38	53.82	11.12	
1920	3840	5760	7680	9600	11520	13440	25.13	0.18	68.23	1.47	57.08	53.52	10.79	
1940	3880	5820	7760	9700	11640	13580	25.77	1.03	67.20	2.37	56.29	52.99	9.58	
1950	3900	5850	7800	9750	11700	13650	25.65	0.98	67.35	2.28	56.08	53.16	9.67	

* Harmonic Output below power level of X5 Output.


FREQUENCY (MHz)							CONVERSION LOSS (dB)	RF IN = +11 dBm						
X1 OUTPUT	X2 OUTPUT	X3 OUTPUT	X4 OUTPUT	X5 OUTPUT	X6 OUTPUT	X7 OUTPUT		HARMONIC OUTPUT* (-dBc)						
1620	3240	4860	6480	8100	9720	11340	26.74	4.20	73.74	4.07	60.58	53.91	11.88	
1640	3280	4920	6560	8200	9840	11480	27.04	3.75	72.68	4.07	59.66	53.78	11.89	
1660	3320	4980	6640	8300	9960	11620	27.51	3.17	72.15	4.69	58.44	53.00	11.30	
1680	3360	5040	6720	8400	10080	11760	27.71	2.82	71.16	4.83	58.03	53.21	10.67	
1700	3400	5100	6800	8500	10200	11900	27.79	2.60	69.83	4.68	57.84	53.46	9.75	
1720	3440	5160	6880	8600	10320	12040	27.76	2.30	69.05	4.82	57.32	53.72	9.60	
1740	3480	5220	6960	8700	10440	12180	27.68	2.23	68.67	4.54	56.98	53.94	10.56	
1760	3520	5280	7040	8800	10560	12320	27.82	1.97	67.63	4.56	56.70	54.34	10.75	
1780	3560	5340	7120	8900	10680	12460	28.02	1.60	67.08	4.91	56.07	53.99	10.21	
1800	3600	5400	7200	9000	10800	12600	28.15	1.18	67.00	5.17	56.03	53.54	9.59	
1820	3640	5460	7280	9100	10920	12740	27.94	1.30	66.19	4.41	56.31	53.95	9.06	
1840	3680	5520	7360	9200	11040	12880	28.39	0.64	65.14	5.19	55.59	53.49	7.82	
1860	3720	5580	7440	9300	11160	13020	29.07	0.18	64.38	6.00	54.74	53.01	6.92	
1880	3760	5640	7520	9400	11280	13160	28.91	0.14	63.79	5.71	54.73	53.15	7.76	
1900	3800	5700	7600	9500	11400	13300	28.68	0.05	64.18	5.46	54.84	53.37	8.97	
1920	3840	5760	7680	9600	11520	13440	28.62	0.33	64.44	5.26	55.18	53.25	9.55	
1940	3880	5820	7760	9700	11640	13580	29.13	0.98	64.08	5.80	55.03	52.53	8.98	
1950	3900	5850	7800	9750	11700	13650	28.99	0.91	64.40	5.69	55.19	52.49	9.10	

* Harmonic Output below power level of X5 Output.


Typical Performance Curves

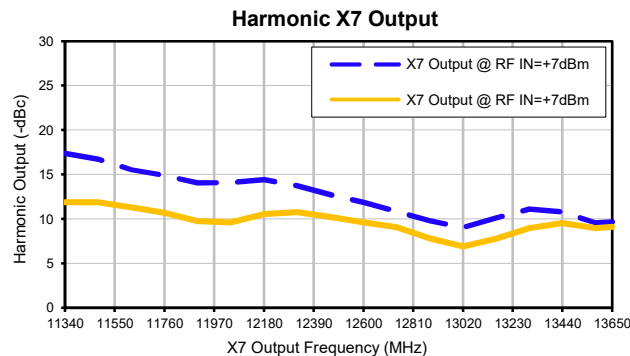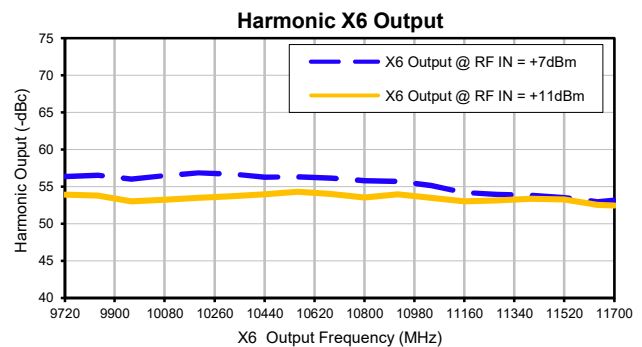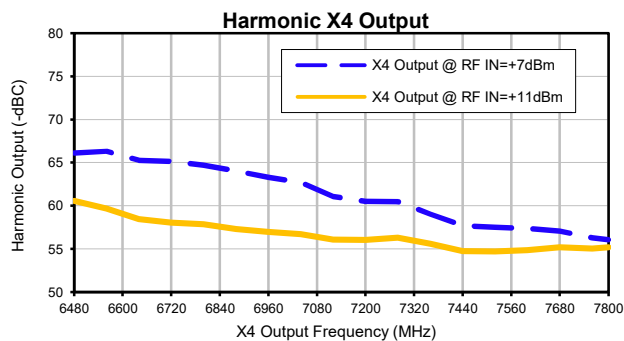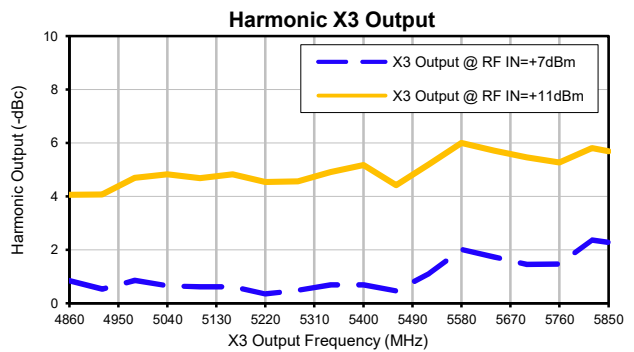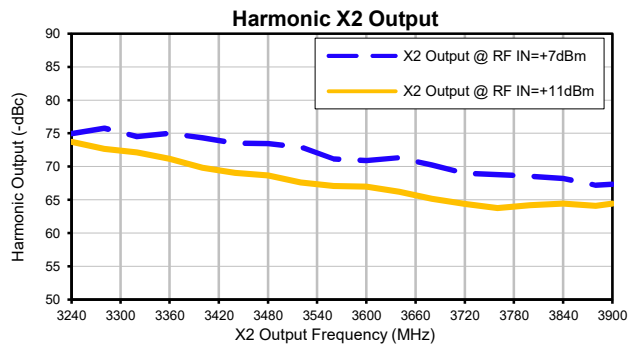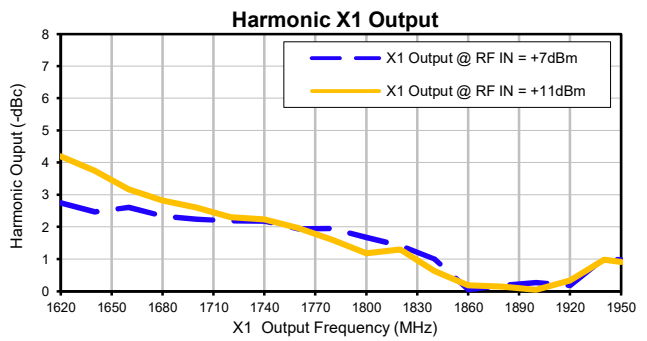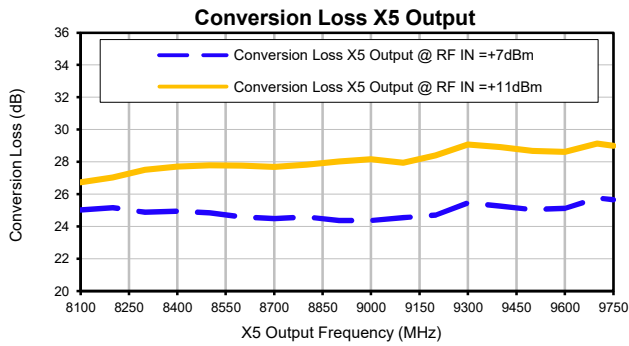

Outline Dimensions

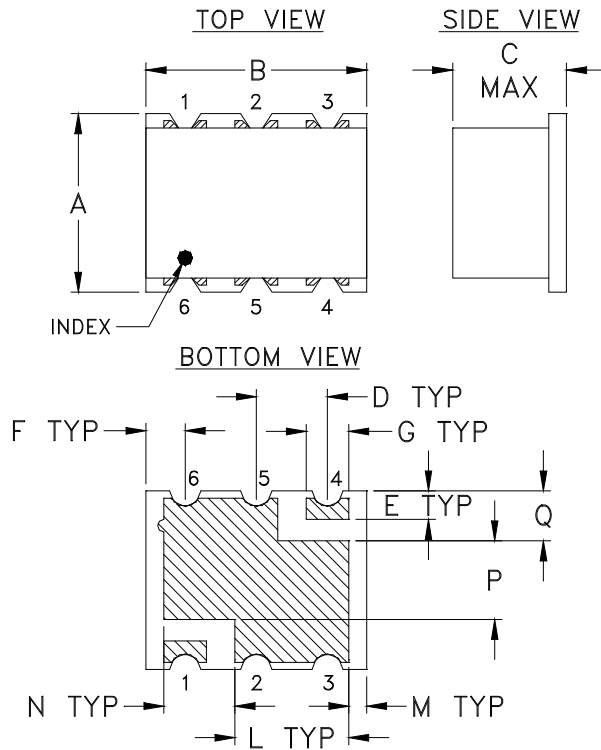

PCB Land Pattern



Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L
TT1224	.25 (6.35)	.31 (7.87)	.16 (4.06)	.100 (2.54)	.040 (1.02)	.055 (1.40)	.060 (1.52)	.065 (1.65)	.300 (7.62)	.060 (1.52)	.160 (4.06)

CASE #	M	N	P	Q	WT. GRAM
TT1224	.025 (.64)	.100 (2.54)	.110 (2.79)	.070 (1.78)	.16

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

1. Case material: Plastic.
2. Termination: 2-10 μ inch (.05-.25 microns) Gold over 100-300 μ inch (2.54-7.62 microns) Nickel plate




P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F2

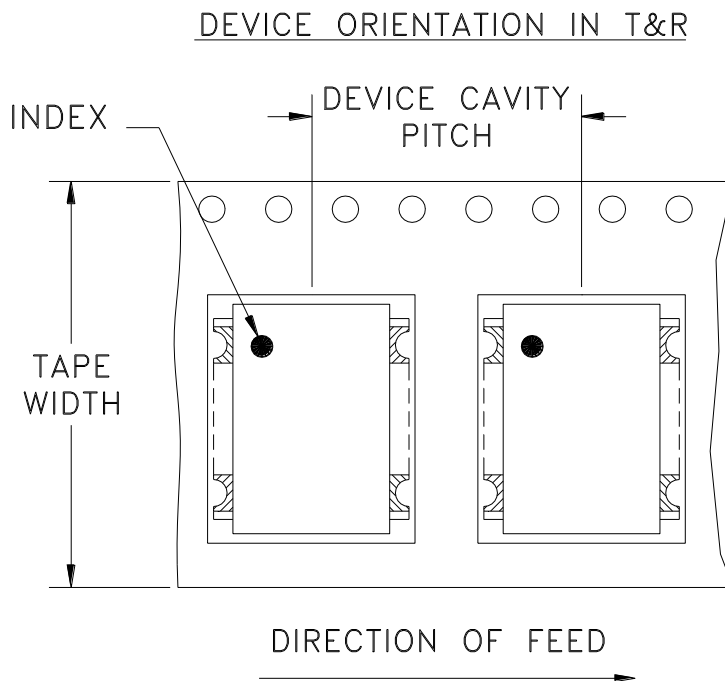

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel See note
16	12	7	10
			20
			50
			100
			200
		13	500

Note: Please consult individual model data sheet to determine device per reel availability

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION




REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M108897	NEW RELEASE	01/04/07	AV	DJ

SUGGESTED MOUNTING CONFIGURATION
FOR TT1224 CASE STYLE "rv" PIN CONNECTION

.066 TRACE WIDTH, 3 PL.
(SEE NOTE BELOW)

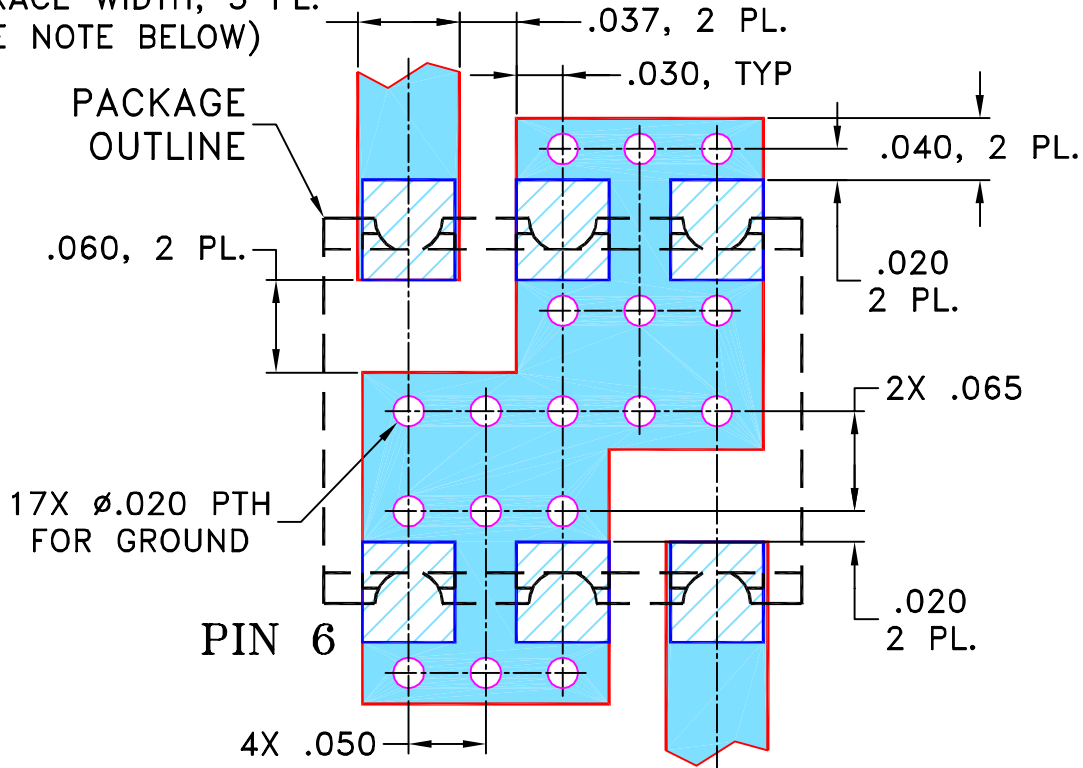

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

AV

12/14/06

TOLERANCES ON:

CHECKED

IL

01/04/07

2 PL DECIMALS ± .005


APPROVED

DJ

01/04/07

ANGLES ±

FRACTIONS ±



THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, rv, TT1224, RMK-3-662+, TB-393

SIZE
A

CODE IDENT
15542

DRAWING NO:
98-PL-258



REV:
OR

FILE: 98PL258

SCALE: 8:1

SHEET: 1 OF 1


Evaluation Board and Circuit

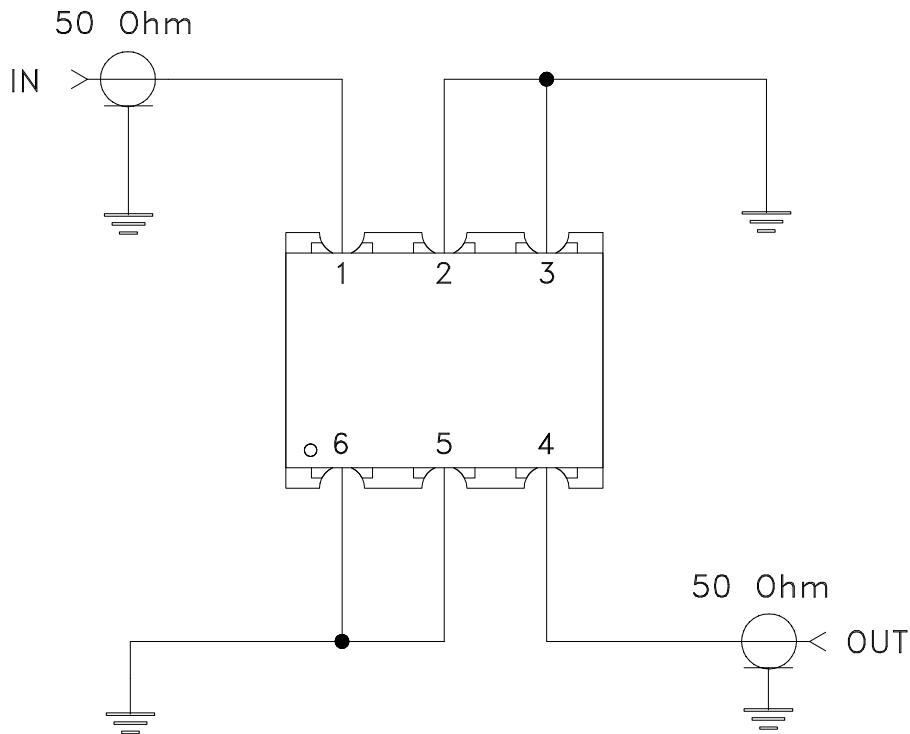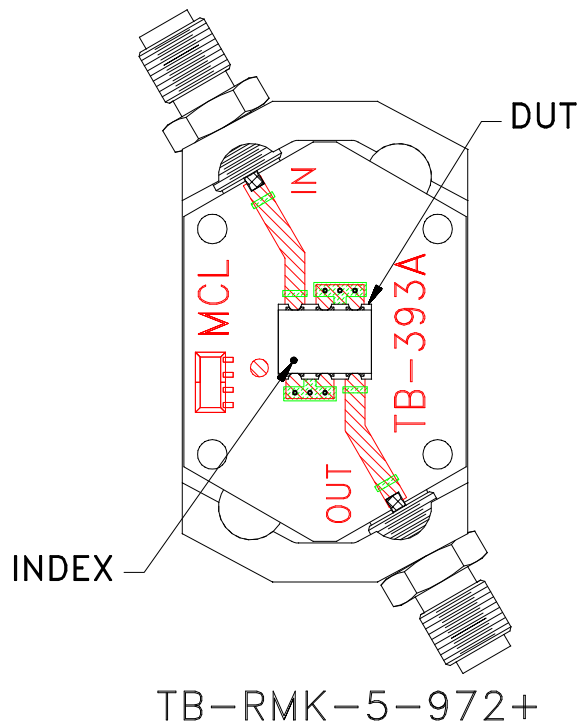

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent, Dielectric Constant=3.5, Thickness=.030 inch.

 Mini-Circuits®

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215