NON-CATALOG

Surface Mount

Frequency Mixer

RMS-25MHW+

Level 13 (LO Power +13 dBm) 5 to 2500 MHz

CASE STYLE: TT240
PRICE: Consult Sales Dept.

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA

Pin Configuration

LO	1
RF	4
IF	5
GROUND	2,3,6

EVALUATION BOARD P/N: TB-03

Features

- low conversion loss, 7.0 dB typ.
- good L-R & L-I isolation, 32 dB typ.
- wide IF bandwidth, 5-2200 MHz

Applications

- cellular
- UHF-TV
- PCN
- GSM

Outline Drawing

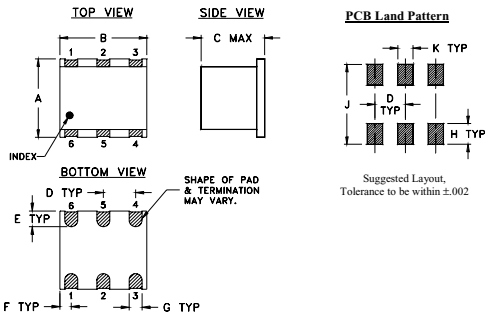

Outline Dimensions (inch / mm)

A	B	C	D	E	F
.250	.31	.20	.100	.050	.055
6.35	7.87	5.08	2.54	1.27	1.40

G	H	J	K	wt
.040	.070	.270	.050	grams
1.02	1.78	6.86	1.27	0.50

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3@ center band Typ. (dBm)
		Mid-Band m			Total Range	L		M		U		L		M		U		
LO/RF f_L-f_U	IF	$\bar{x}$	σ	Max.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	
5-2500	5-2200	7.0	0.1	8.5	9.8	54	28	32	23	32	20	34	23	32	25	28	17	18

1dB Compr.: +9 dBm typ.

L = low range [f_L to 10 f_L]
M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]
m= mid band [2f_L to f_U/2]

Typical Performance Data

Frequency RF MHz	Frequency LO MHz	Conversion Loss (dB) LO +13dBm	Isolation L-R (dB) LO +13dBm	Isolation L-I (dB) LO +13dBm	VSWR LO port (:1) LO +13dBm	VSWR RF port (:1) LO +13dBm
5.00	35.00	6.75	41.77	32.87	2.31	1.26
7.00	37.00	6.64	43.90	34.54	2.28	1.07
9.00	39.00	6.57	45.70	35.70	2.29	1.06
15.00	45.00	6.50	49.51	37.55	2.27	1.06
55.00	85.00	6.58	56.94	37.73	2.26	1.04
95.00	125.00	6.68	52.10	37.07	2.25	1.08
100.00	130.00	6.67	47.09	36.14	2.15	1.16
330.00	360.00	6.98	38.07	36.21	2.04	1.24
560.00	590.00	6.92	33.58	34.52	1.90	1.33
790.00	820.00	6.86	32.21	32.04	1.83	1.47
1020.00	1050.00	6.98	33.29	31.85	1.68	1.63
1250.00	1280.00	7.21	34.33	30.26	1.58	1.77
1480.00	1510.00	7.22	38.26	32.39	1.42	1.77
1710.00	1740.00	7.28	39.36	33.11	1.30	1.65
1940.00	1970.00	7.27	35.60	29.25	1.31	1.62
2170.00	2200.00	7.28	32.25	28.84	1.44	1.68
2400.00	2430.00	7.46	28.58	28.58	1.61	1.73
2450.00	2480.00	7.53	28.06	28.42	1.63	1.69
2475.00	2505.00	7.57	27.70	28.35	1.66	1.61
2500.00	2530.00	7.65	27.47	28.19	1.61	1.60

RMS-25MHW+
CONVERSION LOSS

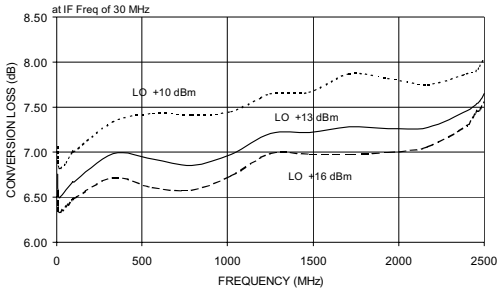

RMS-25MHW+
ISOLATION L-R

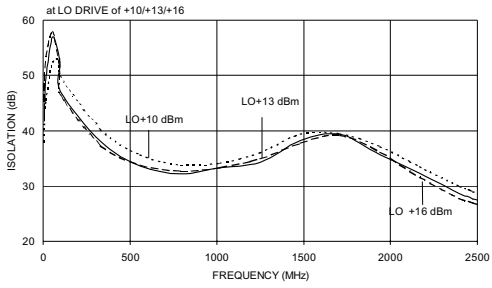

RMS-25MHW+
VSWR

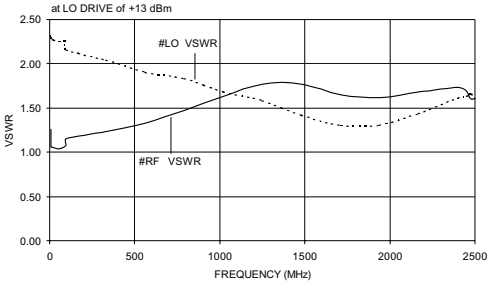

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. **2.** Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. **3.** The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M122594
EE-8396A
RMS-25MHW+
RC/TD/CP/AM
100325

Frequency Mixer RMS-25MHW+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB) @LO (dBm)		
		+10	+13	+16
10.1	40.1	6.91	6.63	6.48
90.1	120.1	6.94	6.68	6.57
170.1	200.1	7.04	6.78	6.64
250.1	280.1	7.22	6.92	6.74
330.1	360.1	7.26	6.93	6.72
410.1	440.1	7.26	6.92	6.71
490.1	520.1	7.35	6.95	6.73
590.1	620.1	7.43	6.98	6.73
670.1	700.1	7.46	7.01	6.77
770.1	800.1	7.39	6.95	6.72
850.1	880.1	7.28	6.87	6.66
950.1	980.1	7.26	6.90	6.71
1030.1	1060.1	7.30	6.95	6.77
1130.1	1160.1	7.44	7.08	6.89
1210.1	1240.1	7.50	7.14	6.95
1310.1	1340.1	7.54	7.15	6.95
1390.1	1420.1	7.54	7.13	6.92
1490.1	1520.1	7.56	7.11	6.90
1570.1	1600.1	7.61	7.13	6.91
1670.1	1700.1	7.62	7.12	6.90
1750.1	1780.1	7.64	7.12	6.88
1850.1	1880.1	7.60	7.04	6.82
1930.1	1960.1	7.60	7.05	6.81
2030.1	2060.1	7.53	6.99	6.75
2110.1	2140.1	7.57	7.09	6.86
2210.1	2240.1	7.49	7.05	6.87
2290.1	2320.1	7.59	7.16	6.98
2390.1	2420.1	7.66	7.27	7.10
2470.1	2500.1	7.72	7.37	7.20
2570.1	2600.1	7.85	7.53	7.38
2650.1	2680.1	7.99	7.70	7.56
2750.1	2780.1	8.23	7.95	7.84
2830.1	2860.1	8.40	8.14	8.06
2930.1	2960.1	8.67	8.45	8.37
3010.1	3040.1	8.94	8.70	8.64
3110.1	3140.1	9.37	9.11	9.03
3190.1	3220.1	9.67	9.41	9.32
3290.1	3320.1	10.09	9.85	9.76
3370.1	3400.1	10.43	10.17	10.05
3470.1	3500.1	10.96	10.64	10.51

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm) @LO (dBm)		
		+10	+13	+16
10.1	40.1	29.15	32.69	31.75
90.1	120.1	32.53	32.66	30.20
170.1	200.1	27.17	24.35	23.52
250.1	280.1	21.59	21.03	21.82
330.1	360.1	20.22	20.49	22.92
410.1	440.1	19.37	20.73	24.23
490.1	520.1	19.06	21.89	26.18
590.1	620.1	18.38	22.45	26.46
670.1	700.1	18.47	22.13	23.72
770.1	800.1	20.02	22.47	22.52
850.1	880.1	20.23	20.64	20.93
950.1	980.1	19.25	19.47	20.02
1030.1	1060.1	19.98	20.49	21.03
1130.1	1160.1	18.70	19.77	20.83
1210.1	1240.1	18.47	20.50	21.57
1310.1	1340.1	18.00	19.49	20.58
1390.1	1420.1	16.95	18.12	19.19
1490.1	1520.1	16.27	17.60	18.81
1570.1	1600.1	15.50	16.74	17.88
1670.1	1700.1	15.39	16.44	17.17
1750.1	1780.1	15.08	16.03	16.63
1850.1	1880.1	14.77	15.71	16.01
1930.1	1960.1	14.31	15.27	15.62
2030.1	2060.1	13.93	14.78	15.09
2110.1	2140.1	13.72	14.59	15.00
2210.1	2240.1	13.44	14.37	14.84
2290.1	2320.1	13.54	14.38	14.91
2390.1	2420.1	13.51	14.33	14.84
2470.1	2500.1	13.40	14.40	15.03
2570.1	2600.1	13.49	14.56	15.34
2650.1	2680.1	13.60	14.79	15.56
2750.1	2780.1	13.88	15.22	16.28
2830.1	2860.1	14.04	15.44	16.81
2930.1	2960.1	14.38	15.67	17.49
3010.1	3040.1	14.55	16.02	18.01
3110.1	3140.1	14.97	16.81	19.77
3190.1	3220.1	15.68	17.74	21.17
3290.1	3320.1	16.51	18.86	22.35
3370.1	3400.1	17.27	19.61	22.44
3470.1	3500.1	18.49	21.06	23.22

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+9dBm (dB) @LO (dBm)		
		+10	+13	+16
10.1	40.1	1.57	1.05	0.85
90.1	120.1	1.60	1.17	0.84
170.1	200.1	1.62	1.19	0.88
250.1	280.1	1.52	1.11	0.82
330.1	360.1	1.55	1.16	0.89
410.1	440.1	1.59	1.22	0.94
490.1	520.1	1.64	1.30	1.01
590.1	620.1	1.70	1.38	1.09
670.1	700.1	1.72	1.40	1.11
770.1	800.1	1.83	1.50	1.19
850.1	880.1	1.97	1.63	1.32
950.1	980.1	1.99	1.63	1.33
1030.1	1060.1	2.00	1.64	1.36
1130.1	1160.1	1.96	1.59	1.31
1210.1	1240.1	1.96	1.58	1.30
1310.1	1340.1	2.03	1.64	1.36
1390.1	1420.1	2.03	1.64	1.36
1490.1	1520.1	2.02	1.65	1.39
1570.1	1600.1	2.01	1.66	1.42
1670.1	1700.1	1.98	1.66	1.39
1750.1	1780.1	1.92	1.63	1.39
1850.1	1880.1	1.92	1.66	1.40
1930.1	1960.1	1.89	1.61	1.38
2030.1	2060.1	1.87	1.58	1.32
2110.1	2140.1	1.78	1.47	1.23
2210.1	2240.1	1.82	1.52	1.27
2290.1	2320.1	1.79	1.44	1.20
2390.1	2420.1	1.74	1.38	1.14
2470.1	2500.1	1.68	1.33	1.08
2570.1	2600.1	1.60	1.32	1.08
2650.1	2680.1	1.68	1.26	1.00
2750.1	2780.1	1.57	1.13	0.88
2830.1	2860.1	1.45	1.00	0.80
2930.1	2960.1	1.27	0.89	0.67
3010.1	3040.1	1.26	0.86	0.68
3110.1	3140.1	1.06	0.74	0.59
3190.1	3220.1	0.94	0.65	0.56
3290.1	3320.1	0.82	0.59	0.48
3370.1	3400.1	0.79	0.55	0.44
3470.1	3500.1	0.68	0.47	0.38

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1250.1MHz (dB) @LO (dBm) +13
1240.0	10.1	7.00
1210.0	40.1	7.05
1180.0	70.1	7.12
1150.0	100.1	7.15
1120.0	130.1	7.15
1090.0	160.1	7.21
1060.0	190.1	7.28
1030.0	220.1	7.22
1000.0	250.1	7.25
970.0	280.1	7.34
940.0	310.1	7.29
910.0	340.1	7.29
880.0	370.1	7.31
850.0	400.1	7.31
820.0	430.1	7.30
790.0	460.1	7.23
760.0	490.1	7.23
730.0	520.1	7.23
700.0	550.1	7.17
670.0	580.1	7.16
640.0	610.1	7.18
610.0	640.1	7.17
580.0	670.1	7.15
550.0	700.1	7.12
520.0	730.1	7.18
490.0	760.1	7.14
460.0	790.1	7.08
430.0	820.1	7.12
390.0	860.1	7.01
360.0	890.1	7.04
320.0	930.1	7.10
290.0	960.1	7.11
250.0	1000.1	7.16
220.0	1030.1	7.17
180.0	1070.1	7.27
150.0	1100.1	7.22
110.0	1140.1	7.26
80.0	1170.1	7.24
40.0	1210.1	7.22
10.0	1240.1	7.05

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB) @LO (dBm) +13
10.0	20.1	6.57
110.0	120.1	6.68
210.0	220.1	6.70
310.0	320.1	6.68
410.0	420.1	6.77
510.0	520.1	6.65
610.0	620.1	6.79
710.0	720.1	6.92
810.0	820.1	6.79
910.0	920.1	6.70
1010.0	1020.1	6.89
1110.0	1120.1	7.08
1210.0	1220.1	7.20
1310.0	1320.1	7.28
1410.0	1420.1	7.40
1510.0	1520.1	7.46
1590.0	1600.1	7.40
1690.0	1700.1	7.38
1770.0	1780.1	7.27
1870.0	1880.1	7.36
1950.0	1960.1	7.30
2050.0	2060.1	7.43
2130.0	2140.1	7.60
2230.0	2240.1	7.68
2310.0	2320.1	7.68
2410.0	2420.1	7.90
2490.0	2500.1	8.03
2590.0	2600.1	8.12
2670.0	2680.1	8.20
2770.0	2780.1	8.36
2850.0	2860.1	8.46
2950.0	2960.1	8.65
3030.0	3040.1	8.81
3130.0	3140.1	8.87
3210.0	3220.1	8.99
3310.0	3320.1	9.28
3390.0	3400.1	9.51
3490.0	3500.1	9.71
3570.0	3580.1	9.91
3670.0	3680.1	10.10

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2500.1001MHz (dB) @LO (dBm) +13
2490.0	10.1	8.60
2429.5	70.6	8.52
2369.0	131.1	8.41
2308.5	191.6	8.34
2248.0	252.1	8.29
2187.6	312.5	8.20
2127.1	373.0	8.21
2066.6	433.5	8.14
2006.1	494.0	8.06
1945.6	554.5	8.05
1885.1	615.0	7.94
1824.6	675.5	7.96
1764.1	736.0	7.90
1703.7	796.4	7.86
1643.2	856.9	7.83
1582.7	917.4	7.74
1522.2	977.9	7.70
1461.7	1038.4	7.57
1401.2	1098.9	7.55
1340.7	1159.4	7.44
1280.2	1219.9	7.43
1219.8	1280.3	7.30
1159.3	1340.8	7.32
1098.8	1401.3	7.31
1038.3	1461.8	7.29
977.8	1522.3	7.28
917.3	1582.8	7.25
856.8	1643.3	7.34
776.2	1723.9	7.28
715.7	1784.4	7.37
635.0	1865.1	7.30
574.6	1925.5	7.35
493.9	2006.2	7.29
433.4	2066.7	7.29
352.8	2147.3	7.22
292.3	2207.8	7.23
211.6	2288.5	7.23
151.1	2349.0	7.23
70.5	2429.6	7.28
10.0	2490.1	7.25

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB) @LO (dBm)			LO-IF ISOLATION (dB) @LO (dBm)		
	+10	+13	+16	+10	+13	+16
40.1	48.89	50.31	50.63	33.04	36.23	38.85
120.1	46.12	44.67	43.89	32.82	35.55	37.41
200.1	41.71	40.48	39.85	32.59	34.96	36.03
280.1	38.75	37.69	37.13	32.97	34.72	34.85
360.1	36.59	35.75	35.38	33.54	34.29	33.60
440.1	34.91	34.28	34.04	33.99	33.74	32.57
520.1	33.61	33.27	33.16	34.53	33.04	31.49
620.1	32.26	32.16	32.26	34.77	32.23	30.43
700.1	31.37	31.60	31.85	34.96	31.67	29.65
800.1	30.82	31.14	31.52	34.70	30.90	28.83
880.1	30.93	31.45	31.91	34.54	30.45	28.31
980.1	31.01	31.49	31.94	33.65	29.54	27.49
1060.1	31.45	31.96	32.39	32.51	28.76	26.74
1160.1	32.00	32.69	33.22	31.91	28.28	26.30
1240.1	32.41	33.22	33.92	31.84	28.30	26.39
1340.1	33.47	34.24	34.93	31.98	28.51	26.50
1420.1	34.16	35.04	35.42	32.34	29.16	26.91
1520.1	35.30	36.43	36.68	31.51	29.41	27.29
1600.1	36.06	37.32	37.36	30.57	29.25	27.44
1700.1	37.06	37.83	37.70	29.37	29.10	27.85
1780.1	38.45	38.54	37.50	28.48	28.85	28.10
1880.1	38.92	39.33	37.78	27.48	28.61	28.59
1960.1	39.20	39.30	37.76	27.01	28.60	29.11
2060.1	38.79	38.67	36.94	26.75	29.01	30.44
2140.1	37.90	37.66	36.13	26.54	29.27	31.67
2240.1	36.01	35.27	34.14	26.71	30.11	33.97
2320.1	34.19	33.18	32.09	26.92	30.61	35.31
2420.1	32.13	30.88	29.71	27.22	30.85	35.23
2500.1	30.72	29.41	28.02	27.44	30.70	33.73
2600.1	29.48	28.09	26.72	28.11	30.75	32.32
2680.1	28.18	27.10	25.90	28.68	30.68	31.34
2780.1	26.71	25.75	25.12	29.48	30.50	30.47
2860.1	25.72	24.85	24.51	30.12	30.41	30.05
2960.1	24.41	24.11	23.64	30.21	30.09	29.11
3040.1	24.03	23.82	23.86	30.40	29.77	28.97
3140.1	23.35	23.28	23.72	30.26	29.52	28.94
3220.1	23.13	23.29	23.93	29.95	29.30	28.89
3320.1	22.82	23.47	24.18	29.11	28.72	28.15
3400.1	23.00	23.86	24.66	28.65	28.18	27.61
3500.1	23.28	24.17	25.15	28.04	27.66	27.41

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB) @LO (dBm)		
		+10	+13	+16
10.1	40.1	21.89	21.54	21.52
90.1	120.1	22.24	22.09	21.94
170.1	200.1	22.51	22.40	22.27
250.1	280.1	22.80	22.79	22.91
330.1	360.1	23.19	23.25	23.51
410.1	440.1	24.07	24.22	24.39
490.1	520.1	24.86	24.97	25.13
590.1	620.1	26.18	26.35	26.45
670.1	700.1	27.51	27.59	27.86
770.1	800.1	29.84	29.55	29.42
850.1	880.1	32.19	31.53	31.26
950.1	980.1	34.52	33.15	32.41
1030.1	1060.1	36.02	34.47	33.60
1130.1	1160.1	39.30	38.15	37.45
1210.1	1240.1	43.56	45.89	46.96
1310.1	1340.1	37.01	38.88	40.20
1390.1	1420.1	32.66	33.45	34.07
1490.1	1520.1	29.34	29.74	30.12
1570.1	1600.1	28.23	28.62	28.97
1670.1	1700.1	27.35	27.99	28.28
1750.1	1780.1	26.65	27.55	27.99
1850.1	1880.1	26.16	27.27	27.91
1930.1	1960.1	26.37	27.49	28.30
2030.1	2060.1	27.04	28.20	29.05
2110.1	2140.1	27.36	28.19	28.81
2210.1	2240.1	26.96	27.37	27.65
2290.1	2320.1	26.24	26.30	26.43
2390.1	2420.1	24.96	24.65	24.64
2470.1	2500.1	23.75	23.30	23.17
2570.1	2600.1	22.46	21.75	21.56
2650.1	2680.1	21.22	20.61	20.36
2750.1	2780.1	20.26	19.58	19.21
2830.1	2860.1	19.54	19.03	18.60
2930.1	2960.1	18.68	18.36	18.00
3010.1	3040.1	18.26	18.02	17.81
3110.1	3140.1	17.89	17.77	17.62
3190.1	3220.1	17.87	17.81	17.66
3290.1	3320.1	18.00	18.07	17.97
3370.1	3400.1	18.13	18.32	18.36
3470.1	3500.1	18.25	18.53	18.73

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1) @LO (dBm)		
		+10	+13	+16
10.1	40.1	1.42	1.42	1.66
90.1	120.1	1.04	1.11	1.18
170.1	200.1	1.03	1.06	1.12
250.1	280.1	1.05	1.03	1.09
330.1	360.1	1.08	1.00	1.06
410.1	440.1	1.10	1.02	1.04
490.1	520.1	1.15	1.07	1.03
590.1	620.1	1.24	1.14	1.09
670.1	700.1	1.30	1.20	1.14
770.1	800.1	1.37	1.27	1.21
850.1	880.1	1.45	1.35	1.29
950.1	980.1	1.52	1.42	1.35
1030.1	1060.1	1.60	1.49	1.42
1130.1	1160.1	1.69	1.58	1.51
1210.1	1240.1	1.75	1.64	1.57
1310.1	1340.1	1.82	1.71	1.64
1390.1	1420.1	1.85	1.73	1.66
1490.1	1520.1	1.91	1.78	1.70
1570.1	1600.1	1.92	1.79	1.71
1670.1	1700.1	1.92	1.78	1.70
1750.1	1780.1	1.91	1.77	1.68
1850.1	1880.1	1.87	1.72	1.63
1930.1	1960.1	1.84	1.70	1.60
2030.1	2060.1	1.78	1.63	1.54
2110.1	2140.1	1.74	1.59	1.50
2210.1	2240.1	1.64	1.49	1.41
2290.1	2320.1	1.56	1.42	1.33
2390.1	2420.1	1.45	1.32	1.24
2470.1	2500.1	1.36	1.25	1.17
2570.1	2600.1	1.26	1.16	1.09
2650.1	2680.1	1.18	1.09	1.06
2750.1	2780.1	1.11	1.08	1.12
2830.1	2860.1	1.12	1.18	1.24
2930.1	2960.1	1.22	1.30	1.39
3010.1	3040.1	1.34	1.44	1.53
3110.1	3140.1	1.48	1.61	1.72
3190.1	3220.1	1.60	1.74	1.86
3290.1	3320.1	1.78	1.93	2.06
3370.1	3400.1	1.89	2.05	2.19
3470.1	3500.1	2.11	2.27	2.40

LO (MHz)	LO VSWR (:1) @LO (dBm)		
	+10	+13	+16
110.0	1.65	2.38	3.31
190.0	1.60	2.26	3.10
270.0	1.59	2.22	3.01
350.0	1.61	2.22	2.98
430.0	1.63	2.21	2.95
510.0	1.64	2.19	2.90
590.0	1.64	2.15	2.82
670.0	1.61	2.09	2.73
750.0	1.59	2.03	2.65
830.0	1.59	1.99	2.57
910.0	1.62	1.95	2.49
990.0	1.66	1.93	2.42
1070.0	1.71	1.90	2.33
1150.0	1.73	1.84	2.22
1230.0	1.77	1.78	2.10
1330.0	1.81	1.71	1.96
1410.0	1.88	1.67	1.86
1510.0	1.90	1.61	1.74
1590.0	1.90	1.56	1.64
1690.0	1.87	1.47	1.51
1770.0	1.83	1.39	1.41
1870.0	1.80	1.30	1.30
1950.0	1.75	1.23	1.23
2050.0	1.71	1.17	1.18
2130.0	1.66	1.14	1.19
2230.0	1.62	1.15	1.25
2310.0	1.61	1.19	1.31
2410.0	1.57	1.24	1.39
2490.0	1.57	1.29	1.45
2590.0	1.53	1.35	1.53
2670.0	1.49	1.39	1.59
2770.0	1.46	1.46	1.69
2850.0	1.44	1.53	1.79
2950.0	1.46	1.64	1.92
3030.0	1.50	1.72	2.02
3130.0	1.54	1.82	2.13
3210.0	1.61	1.91	2.22
3310.0	1.70	2.03	2.34
3390.0	1.80	2.14	2.46
3490.0	1.89	2.24	2.56

IF (OUT) (MHz)	IF VSWR @LO=2500.1001MHz (:1) @LO (dBm)		
	+10	+13	+16
10.1	1.12	1.10	1.15
70.1	1.10	1.01	1.08
130.1	1.12	1.04	1.09
190.1	1.11	1.07	1.13
250.1	1.16	1.08	1.09
310.1	1.16	1.10	1.12
370.1	1.15	1.08	1.10
430.1	1.21	1.12	1.10
490.1	1.21	1.12	1.11
550.1	1.20	1.09	1.06
610.1	1.23	1.13	1.09
670.1	1.24	1.12	1.08
730.1	1.26	1.13	1.05
790.1	1.25	1.12	1.05
850.1	1.26	1.12	1.03
910.1	1.31	1.17	1.07
970.1	1.30	1.16	1.06
1030.1	1.30	1.16	1.08
1090.1	1.33	1.19	1.10
1150.1	1.37	1.23	1.15
1210.1	1.37	1.24	1.17
1270.1	1.38	1.25	1.19
1330.1	1.40	1.28	1.22
1390.1	1.43	1.31	1.25
1450.1	1.43	1.33	1.29
1510.1	1.42	1.32	1.28
1590.1	1.46	1.37	1.34
1650.1	1.46	1.39	1.36
1730.1	1.51	1.44	1.42
1790.1	1.50	1.43	1.41
1870.1	1.55	1.50	1.49
1930.1	1.55	1.51	1.51
2010.1	1.60	1.57	1.56
2070.1	1.62	1.59	1.59
2150.1	1.66	1.64	1.64
2210.1	1.72	1.71	1.71
2290.1	1.77	1.76	1.76
2350.1	1.81	1.82	1.83
2430.1	1.87	1.87	1.89
2490.1	1.99	2.00	2.01

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Harmonics Tables

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	2	12	13	25	17	35	27	34	22	44
1	-	40	+0	33	15	37	20	35	25	43	45	35
2	69	62	57	60	53	61	51	59	50	62	52	55
3	>90	72	56	68	58	69	60	65	74	63	64	>77
4	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
5	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
6	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
7	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
8	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
9	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
10	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

Test conditions:
RF IN: 1250.1 MHz; -6.00 dBm.
LO IN: 1280.1 MHz; +13.00 dBm
IF OUT: 30 MHz; -13.41 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	12	23	25	36	30	53	40	58	41	53
1	-	33	+0	32	14	38	22	39	27	50	47	47
2	49	40	48	45	42	54	40	53	42	57	53	53
3	87	44	37	44	42	51	61	54	47	49	49	60
4	>90	51	50	54	57	59	57	59	57	69	59	75
5	>90	55	59	73	51	64	50	58	57	57	62	55
6	>90	70	68	74	71	74	79	69	77	74	70	72
7	>90	78	75	80	70	68	76	68	76	73	75	79
8	>90	>87	>87	>87	86	>87	78	>87	77	>87	78	85
9	>90	>87	>87	>87	82	86	81	77	84	77	84	74
10	>90	>87	>87	>87	>87	>87	>87	85	>87	83	>87	82
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:
RF IN: 1250.1 MHz; 4.00 dBm.
LO IN: 1280.1 MHz; +13.00 dBm
IF OUT: 30 MHz; -3.46 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Curves

Conversion Loss @ IF=30MHz

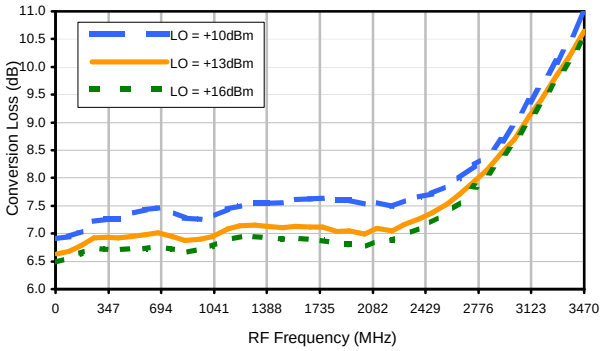

Conversion Loss vs. IF @ RF=1250.1MHz

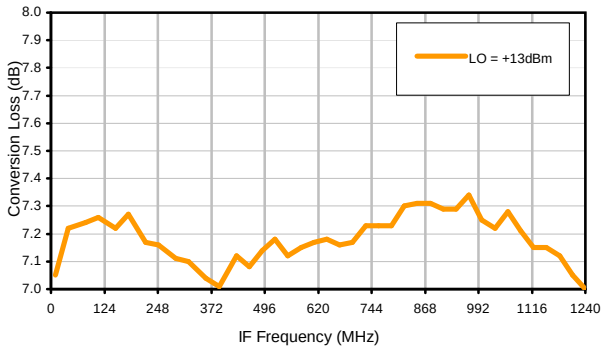

Conversion Loss vs. IF @ RF=10.1MHz

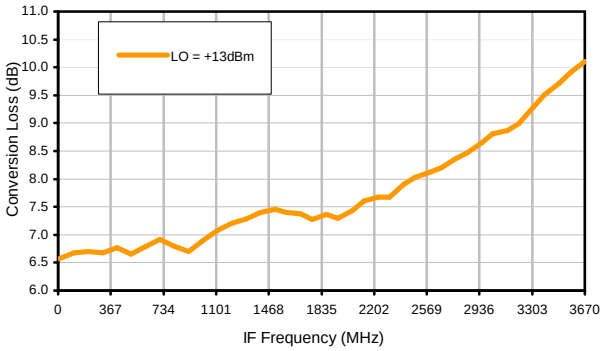

Conversion Loss vs. IF @ RF=2500.1001MHz

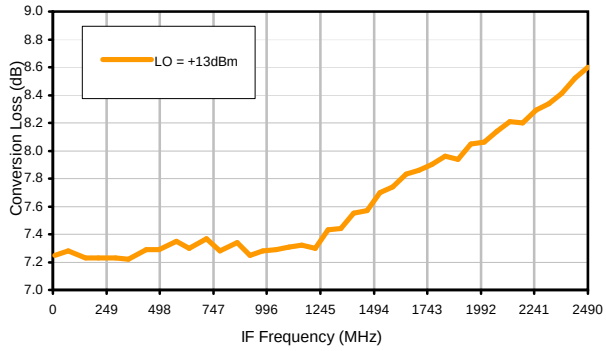

IP3 Input

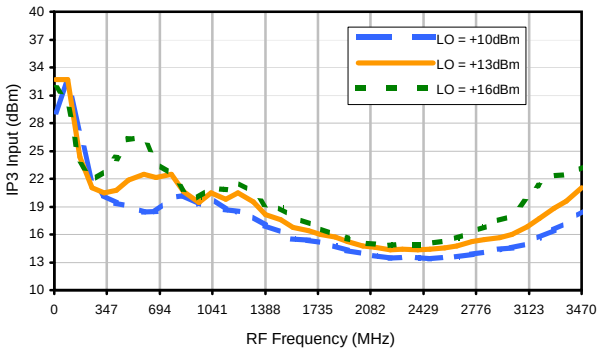

Compression @ RF IN=+9dBm

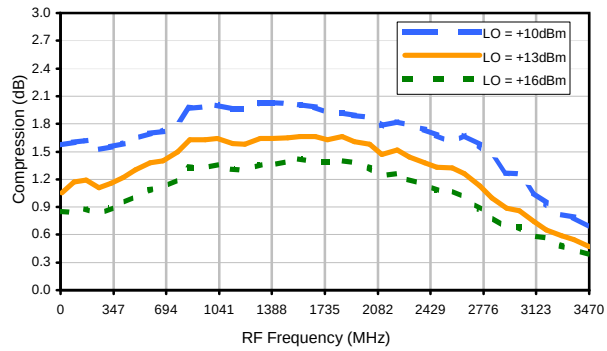

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Curves

LO-RF Isolation

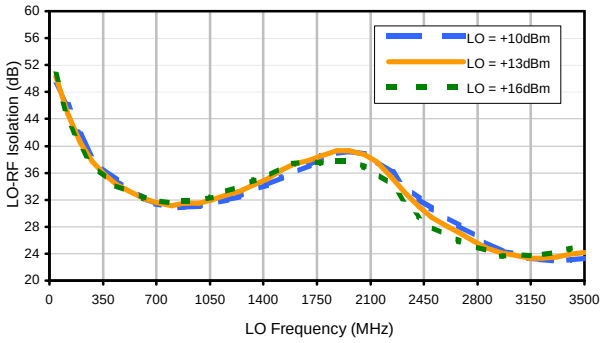

LO-IF Isolation

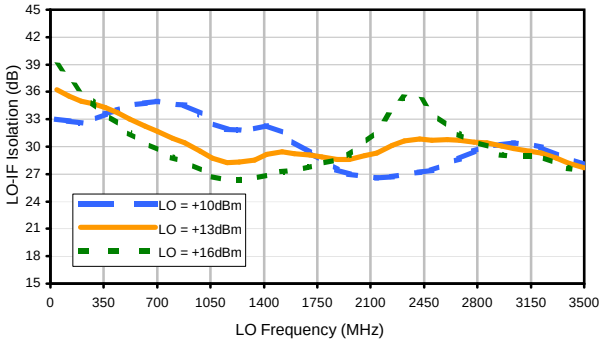

RF-IF Isolation

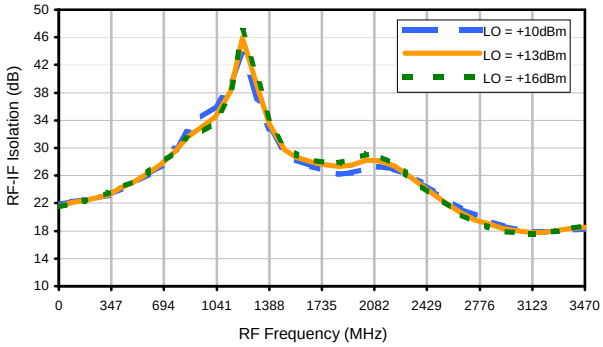

RF VSWR

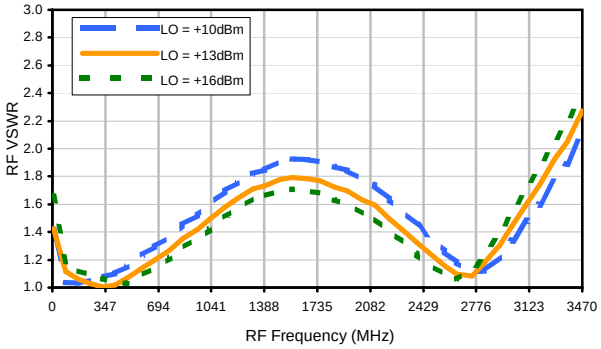

LO VSWR

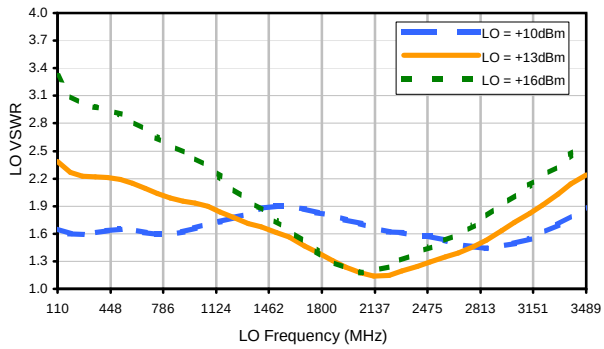

IF VSWR

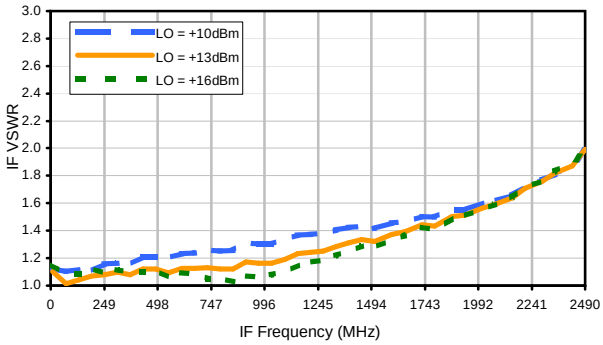

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Harmonics Tables

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	2	12	13	25	17	35	27	34	22	44
1	-	40	+0	33	15	37	20	35	25	43	45	35
2	69	62	57	60	53	61	51	59	50	62	52	55
3	>90	72	56	68	58	69	60	65	74	63	64	>77
4	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
5	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
6	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
7	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
8	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
9	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
10	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

Test conditions:
RF IN: 1250.1 MHz; -6.00 dBm.
LO IN: 1280.1 MHz; +13.00 dBm
IF OUT: 30 MHz; -13.41 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	12	23	25	36	30	53	40	58	41	53
1	-	33	+0	32	14	38	22	39	27	50	47	47
2	49	40	48	45	42	54	40	53	42	57	53	53
3	87	44	37	44	42	51	61	54	47	49	49	60
4	>90	51	50	54	57	59	57	59	57	69	59	75
5	>90	55	59	73	51	64	50	58	57	57	62	55
6	>90	70	68	74	71	74	79	69	77	74	70	72
7	>90	78	75	80	70	68	76	68	76	73	75	79
8	>90	>87	>87	>87	86	>87	78	>87	77	>87	78	85
9	>90	>87	>87	>87	82	86	81	77	84	77	84	74
10	>90	>87	>87	>87	>87	>87	>87	85	>87	83	>87	82
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:
RF IN: 1250.1 MHz; 4.00 dBm.
LO IN: 1280.1 MHz; +13.00 dBm
IF OUT: 30 MHz; -3.46 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Case Style TT

TT240

Outline Dimensions

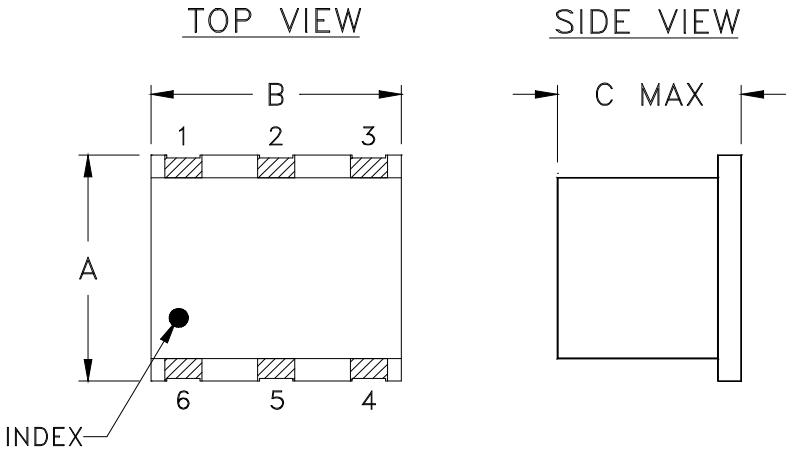

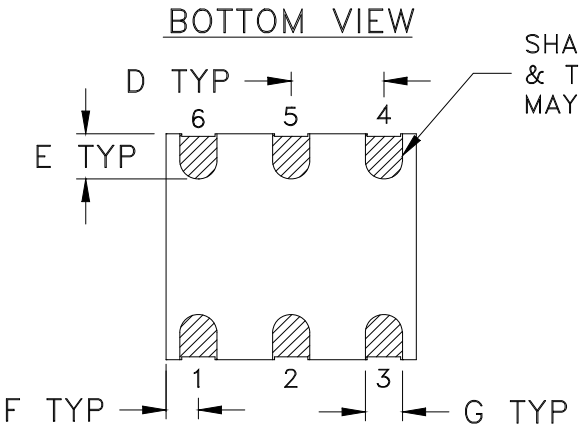

PCB Land Pattern

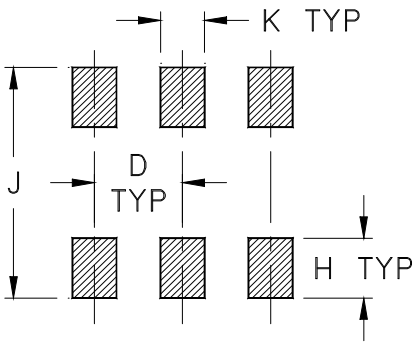

Suggested Layout,
Tolerance to be within ±.002

CASE #	A	B	C	D	E	F	G	H	J	K	WT. GRAM
TT240	.250 (6.35)	.31 (7.87)	.20 (5.08)	.100 (2.54)	.050 (1.27)	.055 (1.40)	.040 (1.02)	.070 (1.78)	.270 (6.86)	.050 (1.27)	.50

Dimensions are in inches (mm). Tolerances: 2Pl. ± .01; 3 Pl. ± .005

Notes:

1. Case material: Ceramic.
2. Termination finish:
   For RoHS Case Styles: 2-10µ inch (.05-.25 microns) Gold plate over 100-300 µ inch (2.54-7.62 microns) Nickel plate. All models, (+) suffix.
   For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

This document and its contents are the property of Mini-Circuits.

Tape & Reel Packaging TR-F2

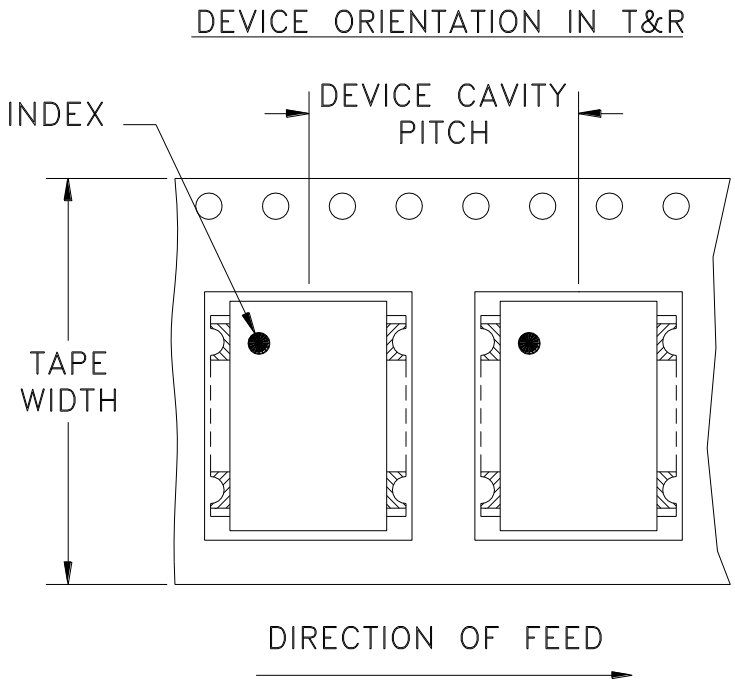

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel See note
16	12	7	10
			20
			50
			100
			200
		13	500

Note: Please consult individual model data sheet to determine device per reel availability

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits.

THIRD ANGLE PROJECTION



REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M101143	ADDED "gk" PIN CONNECTION, TT100 CASE STYLE & NOTE 2	10/10/05	MMG	DJ
B	M102713	ADDED "...WITH SMOBC"	01/17/06	MMG	IL
C	M108637	REMOVED "PIN 1" , ADDED INDEX ON UNIT	12/01/06	MYG	FL

SUGGESTED MOUNTING CONFIGURATION FOR BH292, CD541/542/636/637, TT100/240 CASE STYLES, "gk", "ht", "hu", "nd", "w" PIN CONNECTIONS

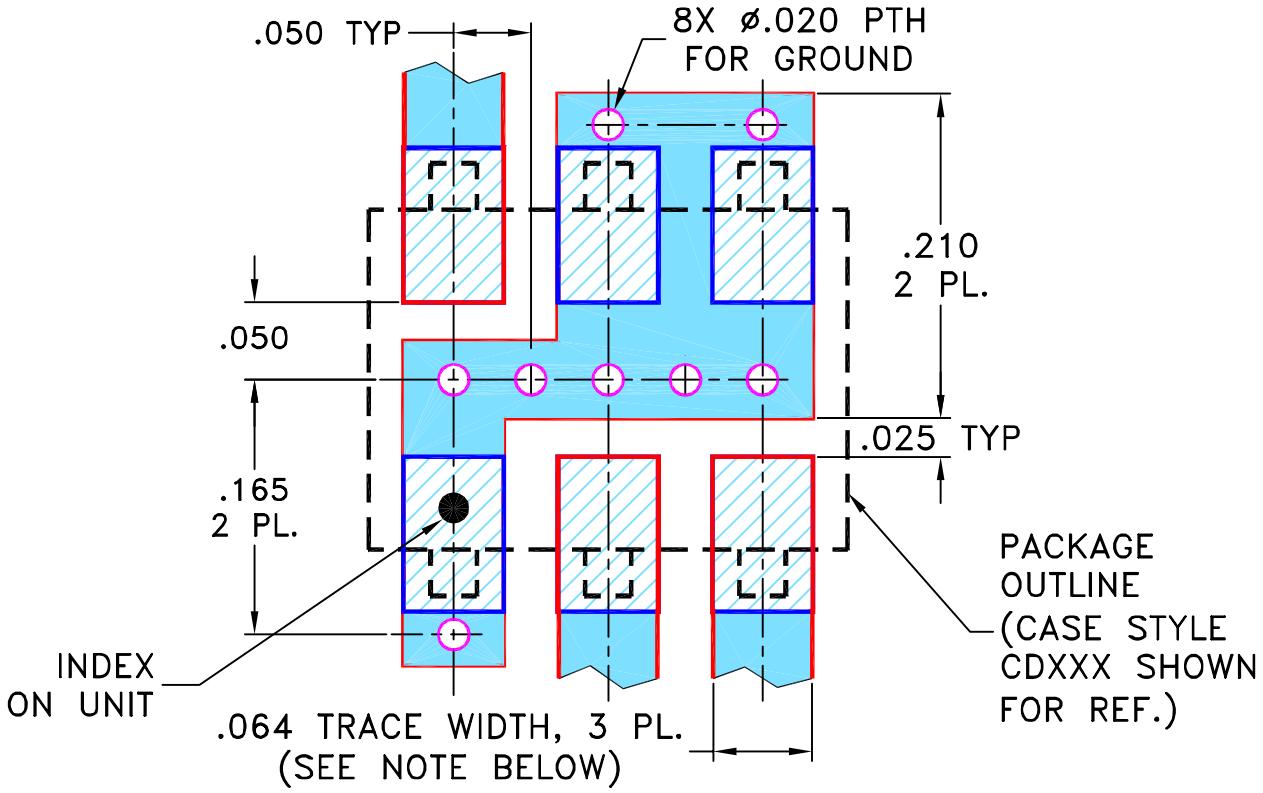

NOTES:
1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	MMG	07/17/02
TOLERANCES ON:	CHECKED	WL	08/02/02
2 PL DECIMALS ±	APPROVED	DJ	08/05/02
3 PL DECIMALS ± .005			
ANGLES ±			
FRACTIONS ±			

Mini-Circuits®
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235

PL, gk/ht/hu/nd/w, BH292, CD541/542/636/637, TT100/240, TB-03

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-052	C

FILE:	SCALE:	SHEET:
98PL052	8:1	1 OF 1

THIRD ANGLE PROJECTION



REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
E	**M119737**	**UPDATED PCB**	**10.08**	**MF**	**AD**
F	M127659	UPDATED CARR	06.10	SW	SG
G	M127846	UPDATED SCHEMATIC DIAGRAM	06.10	SW	SG
H	M131840	UPDATED DWG	05.11	MF	AD

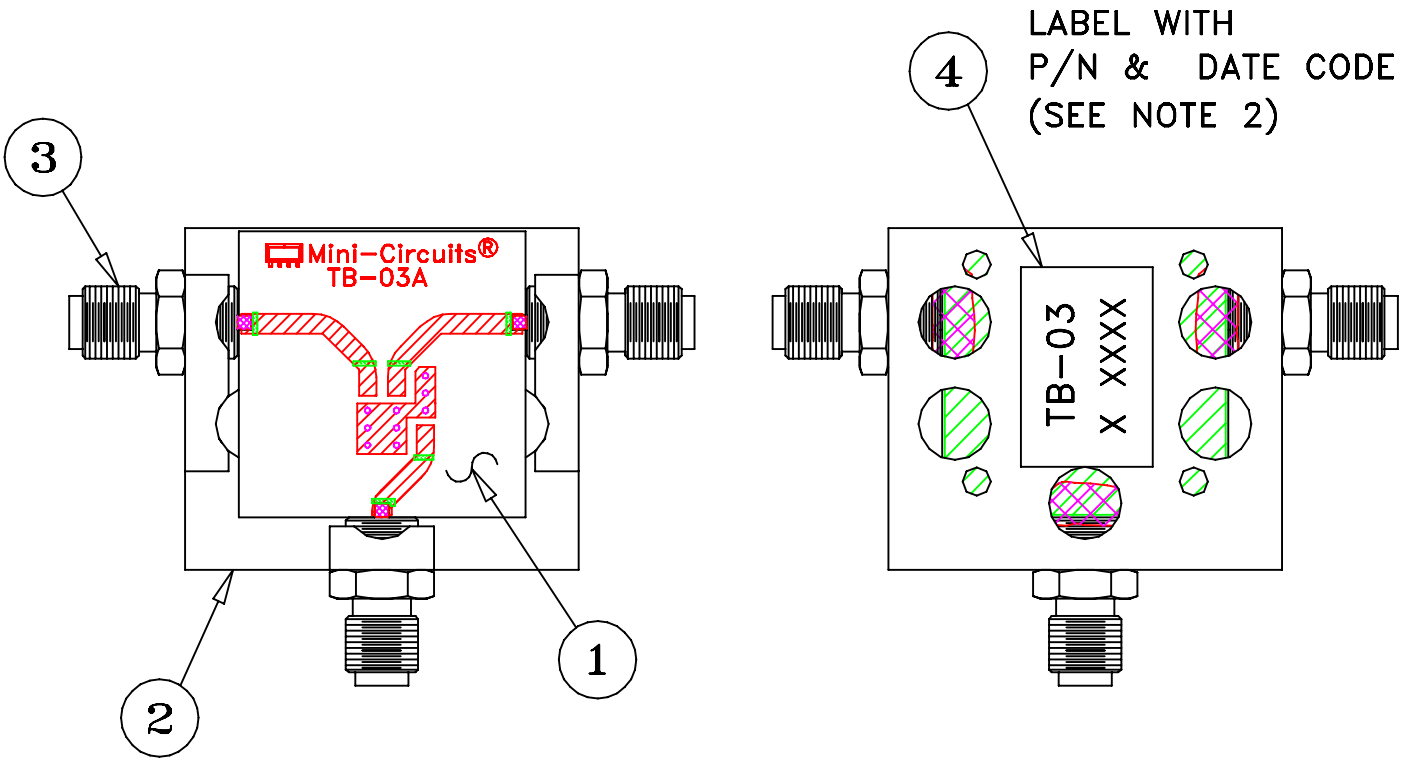

NOTES:

1. REFER TO -09 PAGE FOR ITEM DESCRIPTIONS. DESIGNATION NUMBERS ON -20 PAGE CORRESPOND TO THE NUMBERS ON -09 PAGE.
2. FOR TEXT HEIGHT & STYLE ON THE LABEL REFER TO: D3-G209.

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	S.WOLYNSKI	06.29.99
TOLERANCES ON:	CHECKED	SG	07.06.99
2 PL DECIMALS ±	APPROVED	MG	07.10.99
3 PL DECIMALS ±			
ANGLES ±			
FRACTIONS ±			

Mini-Circuits®
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235

TB,ADE,CD542/636,06MX01,50

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	TB-03-20	H

FILE:	SCALE:	SHEET:
WTB-03	1.5:1	1 OF 2

Evaluation Board and Circuit

For Pin Connections and DUT Orientation Refer to Data Sheet of the DUT

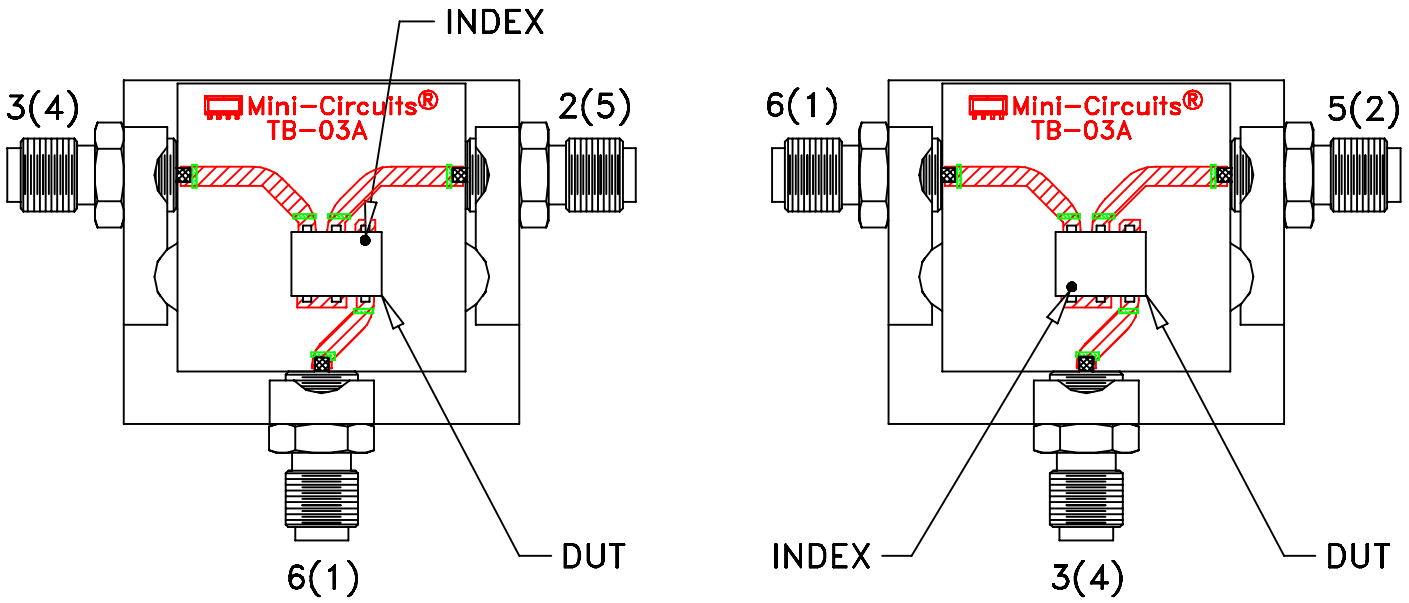

TB-03

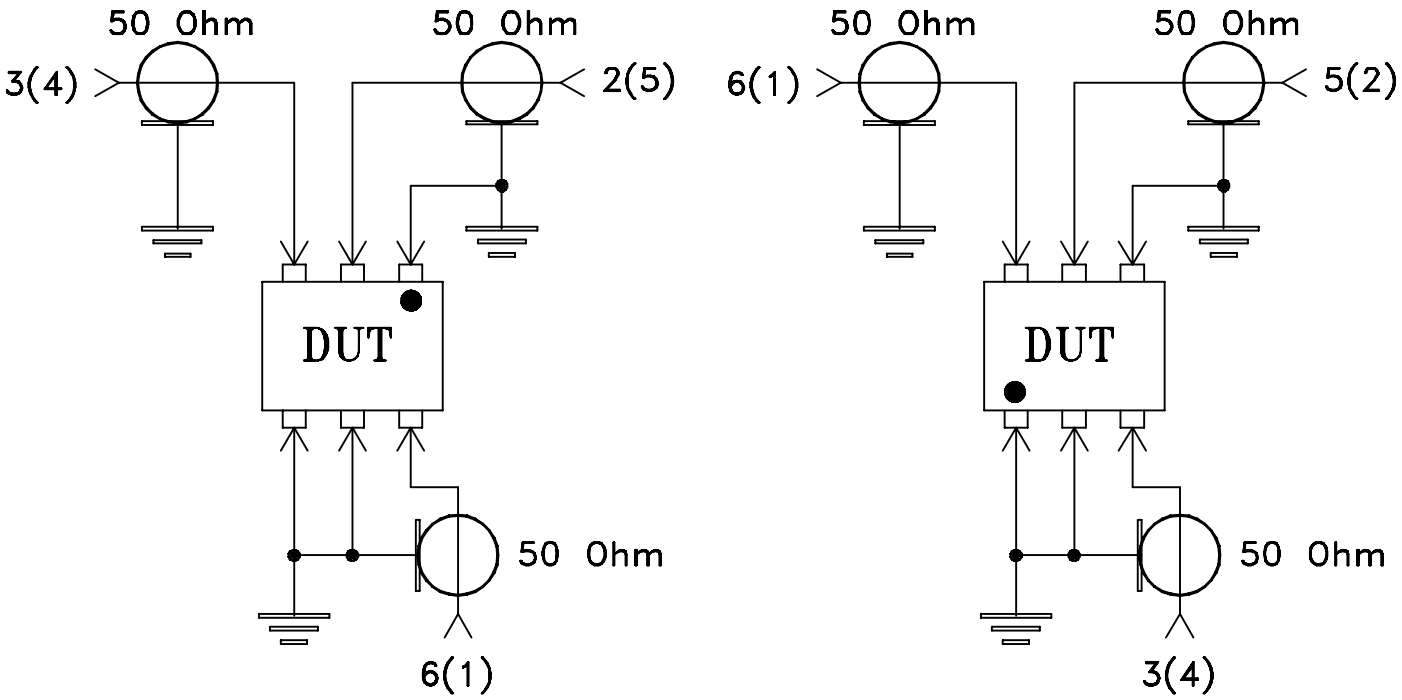

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: Rogers RO4350 or equivalent, Dielectric Constant=3.5, Thickness=.030 inch.

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.

Mini-Circuits

Environmental Specifications ENV02T1

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215

This document and its contents are the property of Mini-Circuits.