

Surface Mount

Frequency Mixer

Level 13 (LO Power +13 dBm) 5 to 2500 MHz

RMS-25MHW+


CASE STYLE: TT240

PRICE: Consult Sales Dept.

Maximum Ratings

Operating Temperature -40°C to 85°C

Storage Temperature -55°C to 100°C

RF Power 200mW

IF Current 40mA

Pin Configuration

LO 1


RF 4

IF 5

GROUND 2,3,6

EVALUATION BOARD P/N: TB-03

Outline Drawing

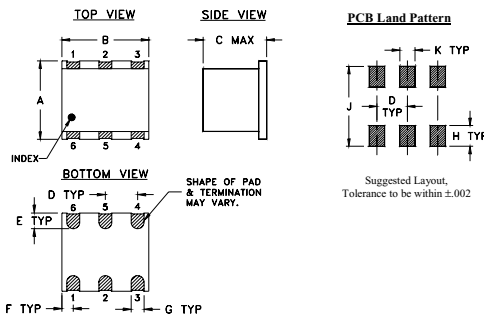

Outline Dimensions (inch mm)

A	B	C	D	E	F
.250	.31	.20	.100	.050	.055
6.35	7.87	5.08	2.54	1.27	1.40
G	H	J	K	wt	
.040	.070	.270	.050	grams	
1.02	1.78	6.86	1.27	0.50	

Features

- low conversion loss, 7.0 dB typ.
- good L-R & L-I isolation, 32 dB typ.
- wide IF bandwidth, 5-2200 MHz

Applications

- cellular
- UHF-TV
- PCN
- GSM

Electrical Specifications




FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3@ center band Typ. (dBm)
LO/RF f _i - f _u	IF	Mid-Band			Total Range Max.	L Typ.	M Min.	U Typ.	Min.	L Typ.	M Min.	U Typ.	Min.					
		$\bar{x}$	σ	Max.														
5-2500	5-2200	7.0	0.1	8.5	9.8	54	28	32	23	32	20	34	23	32	25	28	17	18

1dB Compr.: +9 dBm typ.

L = low range [f_L to $10 f_L$]M = mid range [$10 f_L$ to $f_U/2$]U = upper range [$f_U/2$ to f_U]m = mid band [$2f_L$ to $f_U/2$]

Typical Performance Data

Frequency		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR LO port (:1)	VSWR RF port (:1)
RF MHz	LO MHz	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm
5.00	35.00	6.75	41.77	32.87	2.31	1.26
7.00	37.00	6.64	43.90	34.54	2.28	1.07
9.00	39.00	6.57	45.70	35.70	2.29	1.06
15.00	45.00	6.50	49.51	37.55	2.27	1.06
55.00	85.00	6.58	56.94	37.73	2.26	1.04
95.00	125.00	6.68	52.10	37.07	2.25	1.08
100.00	130.00	6.67	47.09	36.14	2.15	1.16
330.00	360.00	6.98	38.07	36.21	2.04	1.24
560.00	590.00	6.92	33.58	34.52	1.90	1.33
790.00	820.00	6.86	32.21	32.04	1.83	1.47
1020.00	1050.00	6.98	33.29	31.85	1.68	1.63
1250.00	1280.00	7.21	34.33	30.26	1.58	1.77
1480.00	1510.00	7.22	38.26	32.39	1.42	1.77
1710.00	1740.00	7.28	39.36	33.11	1.30	1.65
1940.00	1970.00	7.27	35.60	29.25	1.31	1.62
2170.00	2200.00	7.28	32.25	28.84	1.44	1.68
2400.00	2430.00	7.46	28.58	28.58	1.61	1.73
2450.00	2480.00	7.53	28.06	28.42	1.63	1.69
2475.00	2505.00	7.57	27.70	28.35	1.66	1.61
2500.00	2530.00	7.65	27.47	28.19	1.61	1.60

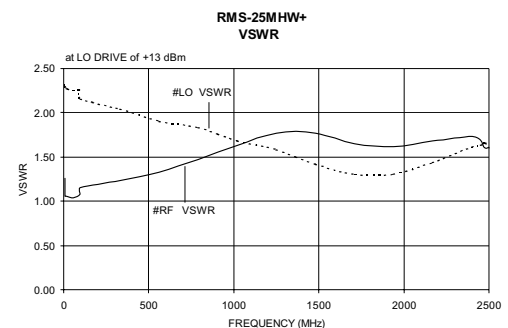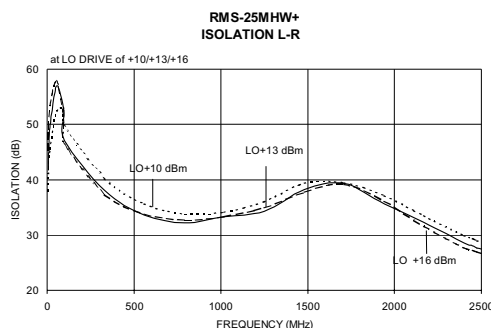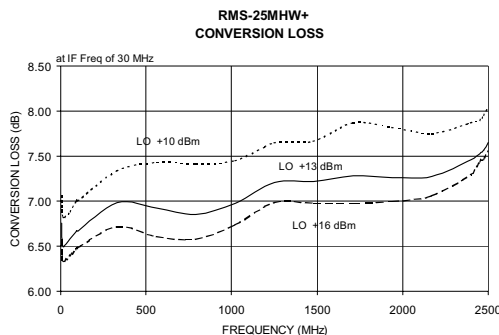
Mini-Circuits®
 ISO 9001 ISO 14001 AS 9100 CERTIFIED

 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

I/IRF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

 For detailed performance specs
 & shopping online see web site

 REV. A
 M122594
 EE-8396A
 RMS-25MHW+
 RC/TD/CP/AM
 100325

Frequency Mixer

RMS-25MHW+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+10	+13	+16
10.1	40.1	6.91	6.63	6.48
90.1	120.1	6.94	6.68	6.57
170.1	200.1	7.04	6.78	6.64
250.1	280.1	7.22	6.92	6.74
330.1	360.1	7.26	6.93	6.72
410.1	440.1	7.26	6.92	6.71
490.1	520.1	7.35	6.95	6.73
590.1	620.1	7.43	6.98	6.73
670.1	700.1	7.46	7.01	6.77
770.1	800.1	7.39	6.95	6.72
850.1	880.1	7.28	6.87	6.66
950.1	980.1	7.26	6.90	6.71
1030.1	1060.1	7.30	6.95	6.77
1130.1	1160.1	7.44	7.08	6.89
1210.1	1240.1	7.50	7.14	6.95
1310.1	1340.1	7.54	7.15	6.95
1390.1	1420.1	7.54	7.13	6.92
1490.1	1520.1	7.56	7.11	6.90
1570.1	1600.1	7.61	7.13	6.91
1670.1	1700.1	7.62	7.12	6.90
1750.1	1780.1	7.64	7.12	6.88
1850.1	1880.1	7.60	7.04	6.82
1930.1	1960.1	7.60	7.05	6.81
2030.1	2060.1	7.53	6.99	6.75
2110.1	2140.1	7.57	7.09	6.86
2210.1	2240.1	7.49	7.05	6.87
2290.1	2320.1	7.59	7.16	6.98
2390.1	2420.1	7.66	7.27	7.10
2470.1	2500.1	7.72	7.37	7.20
2570.1	2600.1	7.85	7.53	7.38
2650.1	2680.1	7.99	7.70	7.56
2750.1	2780.1	8.23	7.95	7.84
2830.1	2860.1	8.40	8.14	8.06
2930.1	2960.1	8.67	8.45	8.37
3010.1	3040.1	8.94	8.70	8.64
3110.1	3140.1	9.37	9.11	9.03
3190.1	3220.1	9.67	9.41	9.32
3290.1	3320.1	10.09	9.85	9.76
3370.1	3400.1	10.43	10.17	10.05
3470.1	3500.1	10.96	10.64	10.51

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+10	+13	+16
10.1	40.1	29.15	32.69	31.75
90.1	120.1	32.53	32.66	30.20
170.1	200.1	27.17	24.35	23.52
250.1	280.1	21.59	21.03	21.82
330.1	360.1	20.22	20.49	22.92
410.1	440.1	19.37	20.73	24.23
490.1	520.1	19.06	21.89	26.18
590.1	620.1	18.38	22.45	26.46
670.1	700.1	18.47	22.13	23.72
770.1	800.1	20.02	22.47	22.52
850.1	880.1	20.23	20.64	20.93
950.1	980.1	19.25	19.47	20.02
1030.1	1060.1	19.98	20.49	21.03
1130.1	1160.1	18.70	19.77	20.83
1210.1	1240.1	18.47	20.50	21.57
1310.1	1340.1	18.00	19.49	20.58
1390.1	1420.1	16.95	18.12	19.19
1490.1	1520.1	16.27	17.60	18.81
1570.1	1600.1	15.50	16.74	17.88
1670.1	1700.1	15.39	16.44	17.17
1750.1	1780.1	15.08	16.03	16.63
1850.1	1880.1	14.77	15.71	16.01
1930.1	1960.1	14.31	15.27	15.62
2030.1	2060.1	13.93	14.78	15.09
2110.1	2140.1	13.72	14.59	15.00
2210.1	2240.1	13.44	14.37	14.84
2290.1	2320.1	13.54	14.38	14.91
2390.1	2420.1	13.51	14.33	14.84
2470.1	2500.1	13.40	14.40	15.03
2570.1	2600.1	13.49	14.56	15.34
2650.1	2680.1	13.60	14.79	15.56
2750.1	2780.1	13.88	15.22	16.28
2830.1	2860.1	14.04	15.44	16.81
2930.1	2960.1	14.38	15.67	17.49
3010.1	3040.1	14.55	16.02	18.01
3110.1	3140.1	14.97	16.81	19.77
3190.1	3220.1	15.68	17.74	21.17
3290.1	3320.1	16.51	18.86	22.35
3370.1	3400.1	17.27	19.61	22.44
3470.1	3500.1	18.49	21.06	23.22

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+9dBm (dB)		
		@LO (dBm)		
		+10	+13	+16
10.1	40.1	1.57	1.05	0.85
90.1	120.1	1.60	1.17	0.84
170.1	200.1	1.62	1.19	0.88
250.1	280.1	1.52	1.11	0.82
330.1	360.1	1.55	1.16	0.89
410.1	440.1	1.59	1.22	0.94
490.1	520.1	1.64	1.30	1.01
590.1	620.1	1.70	1.38	1.09
670.1	700.1	1.72	1.40	1.11
770.1	800.1	1.83	1.50	1.19
850.1	880.1	1.97	1.63	1.32
950.1	980.1	1.99	1.63	1.33
1030.1	1060.1	2.00	1.64	1.36
1130.1	1160.1	1.96	1.59	1.31
1210.1	1240.1	1.96	1.58	1.30
1310.1	1340.1	2.03	1.64	1.36
1390.1	1420.1	2.03	1.64	1.36
1490.1	1520.1	2.02	1.65	1.39
1570.1	1600.1	2.01	1.66	1.42
1670.1	1700.1	1.98	1.66	1.39
1750.1	1780.1	1.92	1.63	1.39
1850.1	1880.1	1.92	1.66	1.40
1930.1	1960.1	1.89	1.61	1.38
2030.1	2060.1	1.87	1.58	1.32
2110.1	2140.1	1.78	1.47	1.23
2210.1	2240.1	1.82	1.52	1.27
2290.1	2320.1	1.79	1.44	1.20
2390.1	2420.1	1.74	1.38	1.14
2470.1	2500.1	1.68	1.33	1.08
2570.1	2600.1	1.60	1.32	1.08
2650.1	2680.1	1.68	1.26	1.00
2750.1	2780.1	1.57	1.13	0.88
2830.1	2860.1	1.45	1.00	0.80
2930.1	2960.1	1.27	0.89	0.67
3010.1	3040.1	1.26	0.86	0.68
3110.1	3140.1	1.06	0.74	0.59
3190.1	3220.1	0.94	0.65	0.56
3290.1	3320.1	0.82	0.59	0.48
3370.1	3400.1	0.79	0.55	0.44
3470.1	3500.1	0.68	0.47	0.38

Frequency Mixer

RMS-25MHW+

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1250.1MHz (dB)
		@LO (dBm)
		+13
1240.0	10.1	7.00
1210.0	40.1	7.05
1180.0	70.1	7.12
1150.0	100.1	7.15
1120.0	130.1	7.15
1090.0	160.1	7.21
1060.0	190.1	7.28
1030.0	220.1	7.22
1000.0	250.1	7.25
970.0	280.1	7.34
940.0	310.1	7.29
910.0	340.1	7.29
880.0	370.1	7.31
850.0	400.1	7.31
820.0	430.1	7.30
790.0	460.1	7.23
760.0	490.1	7.23
730.0	520.1	7.23
700.0	550.1	7.17
670.0	580.1	7.16
640.0	610.1	7.18
610.0	640.1	7.17
580.0	670.1	7.15
550.0	700.1	7.12
520.0	730.1	7.18
490.0	760.1	7.14
460.0	790.1	7.08
430.0	820.1	7.12
390.0	860.1	7.01
360.0	890.1	7.04
320.0	930.1	7.10
290.0	960.1	7.11
250.0	1000.1	7.16
220.0	1030.1	7.17
180.0	1070.1	7.27
150.0	1100.1	7.22
110.0	1140.1	7.26
80.0	1170.1	7.24
40.0	1210.1	7.22
10.0	1240.1	7.05

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)
		@LO (dBm)
		+13
10.0	20.1	6.57
110.0	120.1	6.68
210.0	220.1	6.70
310.0	320.1	6.68
410.0	420.1	6.77
510.0	520.1	6.65
610.0	620.1	6.79
710.0	720.1	6.92
810.0	820.1	6.79
910.0	920.1	6.70
1010.0	1020.1	6.89
1110.0	1120.1	7.08
1210.0	1220.1	7.20
1310.0	1320.1	7.28
1410.0	1420.1	7.40
1510.0	1520.1	7.46
1590.0	1600.1	7.40
1690.0	1700.1	7.38
1770.0	1780.1	7.27
1870.0	1880.1	7.36
1950.0	1960.1	7.30
2050.0	2060.1	7.43
2130.0	2140.1	7.60
2230.0	2240.1	7.68
2310.0	2320.1	7.68
2410.0	2420.1	7.90
2490.0	2500.1	8.03
2590.0	2600.1	8.12
2670.0	2680.1	8.20
2770.0	2780.1	8.36
2850.0	2860.1	8.46
2950.0	2960.1	8.65
3030.0	3040.1	8.81
3130.0	3140.1	8.87
3210.0	3220.1	8.99
3310.0	3320.1	9.28
3390.0	3400.1	9.51
3490.0	3500.1	9.71
3570.0	3580.1	9.91
3670.0	3680.1	10.10

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2500.1001MHz (dB)
		@LO (dBm)
		+13
2490.0	10.1	8.60
2429.5	70.6	8.52
2369.0	131.1	8.41
2308.5	191.6	8.34
2248.0	252.1	8.29
2187.6	312.5	8.20
2127.1	373.0	8.21
2066.6	433.5	8.14
2006.1	494.0	8.06
1945.6	554.5	8.05
1885.1	615.0	7.94
1824.6	675.5	7.96
1764.1	736.0	7.90
1703.7	796.4	7.86
1643.2	856.9	7.83
1582.7	917.4	7.74
1522.2	977.9	7.70
1461.7	1038.4	7.57
1401.2	1098.9	7.55
1340.7	1159.4	7.44
1280.2	1219.9	7.43
1219.8	1280.3	7.30
1159.3	1340.8	7.32
1098.8	1401.3	7.31
1038.3	1461.8	7.29
977.8	1522.3	7.28
917.3	1582.8	7.25
856.8	1643.3	7.34
776.2	1723.9	7.28
715.7	1784.4	7.37
635.0	1865.1	7.30
574.6	1925.5	7.35
493.9	2006.2	7.29
433.4	2066.7	7.29
352.8	2147.3	7.22
292.3	2207.8	7.23
211.6	2288.5	7.23
151.1	2349.0	7.23
70.5	2429.6	7.28
10.0	2490.1	7.25

REV. X2

RMS-25MHW+

101028

Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

RMS-25MHW+

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+10	+13	+16	+10	+13	+16
40.1	48.89	50.31	50.63	33.04	36.23	38.85
120.1	46.12	44.67	43.89	32.82	35.55	37.41
200.1	41.71	40.48	39.85	32.59	34.96	36.03
280.1	38.75	37.69	37.13	32.97	34.72	34.85
360.1	36.59	35.75	35.38	33.54	34.29	33.60
440.1	34.91	34.28	34.04	33.99	33.74	32.57
520.1	33.61	33.27	33.16	34.53	33.04	31.49
620.1	32.26	32.16	32.26	34.77	32.23	30.43
700.1	31.37	31.60	31.85	34.96	31.67	29.65
800.1	30.82	31.14	31.52	34.70	30.90	28.83
880.1	30.93	31.45	31.91	34.54	30.45	28.31
980.1	31.01	31.49	31.94	33.65	29.54	27.49
1060.1	31.45	31.96	32.39	32.51	28.76	26.74
1160.1	32.00	32.69	33.22	31.91	28.28	26.30
1240.1	32.41	33.22	33.92	31.84	28.30	26.39
1340.1	33.47	34.24	34.93	31.98	28.51	26.50
1420.1	34.16	35.04	35.42	32.34	29.16	26.91
1520.1	35.30	36.43	36.68	31.51	29.41	27.29
1600.1	36.06	37.32	37.36	30.57	29.25	27.44
1700.1	37.06	37.83	37.70	29.37	29.10	27.85
1780.1	38.45	38.54	37.50	28.48	28.85	28.10
1880.1	38.92	39.33	37.78	27.48	28.61	28.59
1960.1	39.20	39.30	37.76	27.01	28.60	29.11
2060.1	38.79	38.67	36.94	26.75	29.01	30.44
2140.1	37.90	37.66	36.13	26.54	29.27	31.67
2240.1	36.01	35.27	34.14	26.71	30.11	33.97
2320.1	34.19	33.18	32.09	26.92	30.61	35.31
2420.1	32.13	30.88	29.71	27.22	30.85	35.23
2500.1	30.72	29.41	28.02	27.44	30.70	33.73
2600.1	29.48	28.09	26.72	28.11	30.75	32.32
2680.1	28.18	27.10	25.90	28.68	30.68	31.34
2780.1	26.71	25.75	25.12	29.48	30.50	30.47
2860.1	25.72	24.85	24.51	30.12	30.41	30.05
2960.1	24.41	24.11	23.64	30.21	30.09	29.11
3040.1	24.03	23.82	23.86	30.40	29.77	28.97
3140.1	23.35	23.28	23.72	30.26	29.52	28.94
3220.1	23.13	23.29	23.93	29.95	29.30	28.89
3320.1	22.82	23.47	24.18	29.11	28.72	28.15
3400.1	23.00	23.86	24.66	28.65	28.18	27.61
3500.1	23.28	24.17	25.15	28.04	27.66	27.41

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+10	+13	+16
10.1	40.1	21.89	21.54	21.52
90.1	120.1	22.24	22.09	21.94
170.1	200.1	22.51	22.40	22.27
250.1	280.1	22.80	22.79	22.91
330.1	360.1	23.19	23.25	23.51
410.1	440.1	24.07	24.22	24.39
490.1	520.1	24.86	24.97	25.13
590.1	620.1	26.18	26.35	26.45
670.1	700.1	27.51	27.59	27.86
770.1	800.1	29.84	29.55	29.42
850.1	880.1	32.19	31.53	31.26
950.1	980.1	34.52	33.15	32.41
1030.1	1060.1	36.02	34.47	33.60
1130.1	1160.1	39.30	38.15	37.45
1210.1	1240.1	43.56	45.89	46.96
1310.1	1340.1	37.01	38.88	40.20
1390.1	1420.1	32.66	33.45	34.07
1490.1	1520.1	29.34	29.74	30.12
1570.1	1600.1	28.23	28.62	28.97
1670.1	1700.1	27.35	27.99	28.28
1750.1	1780.1	26.65	27.55	27.99
1850.1	1880.1	26.16	27.27	27.91
1930.1	1960.1	26.37	27.49	28.30
2030.1	2060.1	27.04	28.20	29.05
2110.1	2140.1	27.36	28.19	28.81
2210.1	2240.1	26.96	27.37	27.65
2290.1	2320.1	26.24	26.30	26.43
2390.1	2420.1	24.96	24.65	24.64
2470.1	2500.1	23.75	23.30	23.17
2570.1	2600.1	22.46	21.75	21.56
2650.1	2680.1	21.22	20.61	20.36
2750.1	2780.1	20.26	19.58	19.21
2830.1	2860.1	19.54	19.03	18.60
2930.1	2960.1	18.68	18.36	18.00
3010.1	3040.1	18.26	18.02	17.81
3110.1	3140.1	17.89	17.77	17.62
3190.1	3220.1	17.87	17.81	17.66
3290.1	3320.1	18.00	18.07	17.97
3370.1	3400.1	18.13	18.32	18.36
3470.1	3500.1	18.25	18.53	18.73

Frequency Mixer

RMS-25MHW+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=2500.1001MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+10	+13	+16		+10	+13	+16		+10	+13	+16
10.1	40.1	1.42	1.42	1.66	110.0	1.65	2.38	3.31	10.1	1.12	1.10	1.15
90.1	120.1	1.04	1.11	1.18	190.0	1.60	2.26	3.10	70.1	1.10	1.01	1.08
170.1	200.1	1.03	1.06	1.12	270.0	1.59	2.22	3.01	130.1	1.12	1.04	1.09
250.1	280.1	1.05	1.03	1.09	350.0	1.61	2.22	2.98	190.1	1.11	1.07	1.13
330.1	360.1	1.08	1.00	1.06	430.0	1.63	2.21	2.95	250.1	1.16	1.08	1.09
410.1	440.1	1.10	1.02	1.04	510.0	1.64	2.19	2.90	310.1	1.16	1.10	1.12
490.1	520.1	1.15	1.07	1.03	590.0	1.64	2.15	2.82	370.1	1.15	1.08	1.10
590.1	620.1	1.24	1.14	1.09	670.0	1.61	2.09	2.73	430.1	1.21	1.12	1.10
670.1	700.1	1.30	1.20	1.14	750.0	1.59	2.03	2.65	490.1	1.21	1.12	1.11
770.1	800.1	1.37	1.27	1.21	830.0	1.59	1.99	2.57	550.1	1.20	1.09	1.06
850.1	880.1	1.45	1.35	1.29	910.0	1.62	1.95	2.49	610.1	1.23	1.13	1.09
950.1	980.1	1.52	1.42	1.35	990.0	1.66	1.93	2.42	670.1	1.24	1.12	1.08
1030.1	1060.1	1.60	1.49	1.42	1070.0	1.71	1.90	2.33	730.1	1.26	1.13	1.05
1130.1	1160.1	1.69	1.58	1.51	1150.0	1.73	1.84	2.22	790.1	1.25	1.12	1.05
1210.1	1240.1	1.75	1.64	1.57	1230.0	1.77	1.78	2.10	850.1	1.26	1.12	1.03
1310.1	1340.1	1.82	1.71	1.64	1330.0	1.81	1.71	1.96	910.1	1.31	1.17	1.07
1390.1	1420.1	1.85	1.73	1.66	1410.0	1.88	1.67	1.86	970.1	1.30	1.16	1.06
1490.1	1520.1	1.91	1.78	1.70	1510.0	1.90	1.61	1.74	1030.1	1.30	1.16	1.08
1570.1	1600.1	1.92	1.79	1.71	1590.0	1.90	1.56	1.64	1090.1	1.33	1.19	1.10
1670.1	1700.1	1.92	1.78	1.70	1690.0	1.87	1.47	1.51	1150.1	1.37	1.23	1.15
1750.1	1780.1	1.91	1.77	1.68	1770.0	1.83	1.39	1.41	1210.1	1.37	1.24	1.17
1850.1	1880.1	1.87	1.72	1.63	1870.0	1.80	1.30	1.30	1270.1	1.38	1.25	1.19
1930.1	1960.1	1.84	1.70	1.60	1950.0	1.75	1.23	1.23	1330.1	1.40	1.28	1.22
2030.1	2060.1	1.78	1.63	1.54	2050.0	1.71	1.17	1.18	1390.1	1.43	1.31	1.25
2110.1	2140.1	1.74	1.59	1.50	2130.0	1.66	1.14	1.19	1450.1	1.43	1.33	1.29
2210.1	2240.1	1.64	1.49	1.41	2230.0	1.62	1.15	1.25	1510.1	1.42	1.32	1.28
2290.1	2320.1	1.56	1.42	1.33	2310.0	1.61	1.19	1.31	1590.1	1.46	1.37	1.34
2390.1	2420.1	1.45	1.32	1.24	2410.0	1.57	1.24	1.39	1650.1	1.46	1.39	1.36
2470.1	2500.1	1.36	1.25	1.17	2490.0	1.57	1.29	1.45	1730.1	1.51	1.44	1.42
2570.1	2600.1	1.26	1.16	1.09	2590.0	1.53	1.35	1.53	1790.1	1.50	1.43	1.41
2650.1	2680.1	1.18	1.09	1.06	2670.0	1.49	1.39	1.59	1870.1	1.55	1.50	1.49
2750.1	2780.1	1.11	1.08	1.12	2770.0	1.46	1.46	1.69	1930.1	1.55	1.51	1.51
2830.1	2860.1	1.12	1.18	1.24	2850.0	1.44	1.53	1.79	2010.1	1.60	1.57	1.56
2930.1	2960.1	1.22	1.30	1.39	2950.0	1.46	1.64	1.92	2070.1	1.62	1.59	1.59
3010.1	3040.1	1.34	1.44	1.53	3030.0	1.50	1.72	2.02	2150.1	1.66	1.64	1.64
3110.1	3140.1	1.48	1.61	1.72	3130.0	1.54	1.82	2.13	2210.1	1.72	1.71	1.71
3190.1	3220.1	1.60	1.74	1.86	3210.0	1.61	1.91	2.22	2290.1	1.77	1.76	1.76
3290.1	3320.1	1.78	1.93	2.06	3310.0	1.70	2.03	2.34	2350.1	1.81	1.82	1.83
3370.1	3400.1	1.89	2.05	2.19	3390.0	1.80	2.14	2.46	2430.1	1.87	1.87	1.89
3470.1	3500.1	2.11	2.27	2.40	3490.0	1.89	2.24	2.56	2490.1	1.99	2.00	2.01

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	2	12	13	25	17	35	27	34	22	44
1	-	40	+0	33	15	37	20	35	25	43	45	35
2	69	62	57	60	53	61	51	59	50	62	52	55
3	>90	72	56	68	58	69	60	65	74	63	64	>77
4	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
5	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
6	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
7	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
8	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
9	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
10	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
RF CAL		0	1	2	3	4	5	6	7	8	9	10

Test conditions:

RF IN: 1250.1 MHz; -6.00 dBm.

LO IN: 1280.1 MHz; +13.00 dBm

IF OUT: 30 MHz; -13.41 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	12	23	25	36	30	53	40	58	41	53
1	-	33	+0	32	14	38	22	39	27	50	47	47
2	49	40	48	45	42	54	40	53	42	57	53	53
3	87	44	37	44	42	51	61	54	47	49	49	60
4	>90	51	50	54	57	59	57	59	57	69	59	75
5	>90	55	59	73	51	64	50	58	57	57	62	55
6	>90	70	68	74	71	74	79	69	77	74	70	72
7	>90	78	75	80	70	68	76	68	76	73	75	79
8	>90	>87	>87	>87	86	>87	78	>87	77	>87	78	85
9	>90	>87	>87	>87	82	86	81	77	84	77	84	74
10	>90	>87	>87	>87	>87	>87	>87	85	>87	83	>87	82
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 1250.1 MHz; 4.00 dBm.

LO IN: 1280.1 MHz; +13.00 dBm

IF OUT: 30 MHz; -3.46 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.


3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Frequency Mixer


RMS-25MHW+

Typical Performance Curves


Conversion Loss @ IF=30MHz

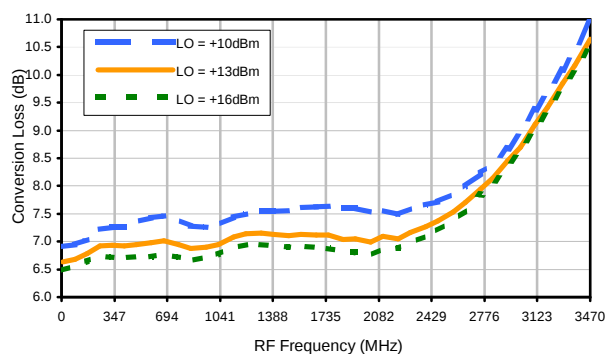


Conversion Loss vs. IF @ RF=1250.1MHz

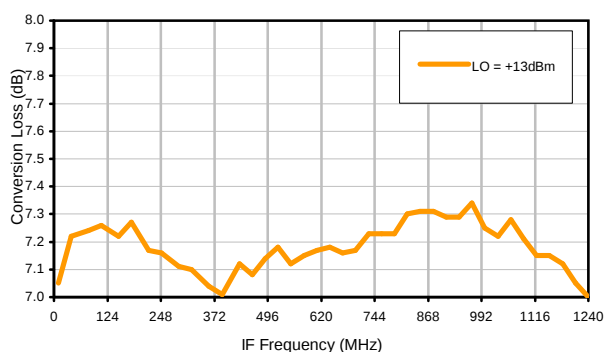


Conversion Loss vs. IF @ RF=10.1MHz

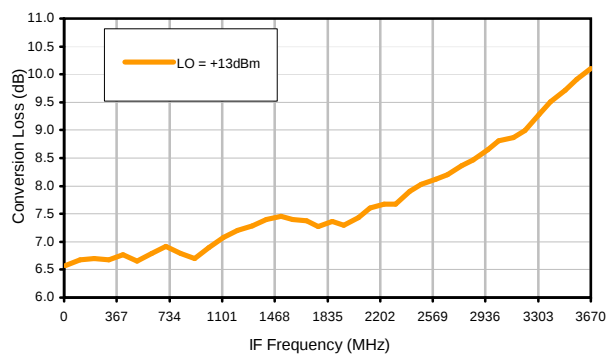


Conversion Loss vs. IF @ RF=2500.1001MHz

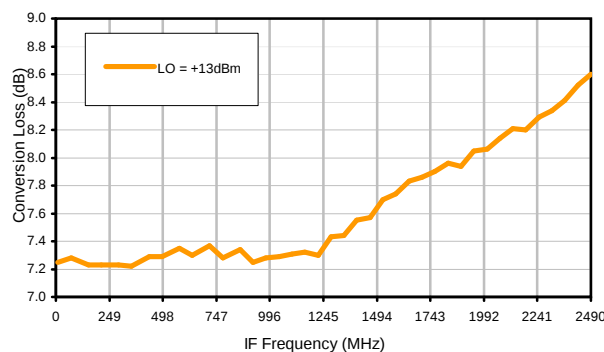

IP3 Input

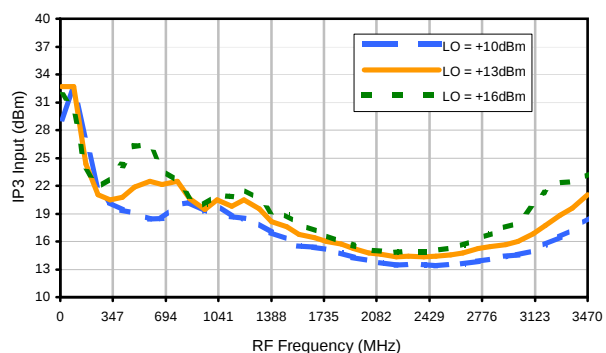


Compression @ RF IN=+9dBm

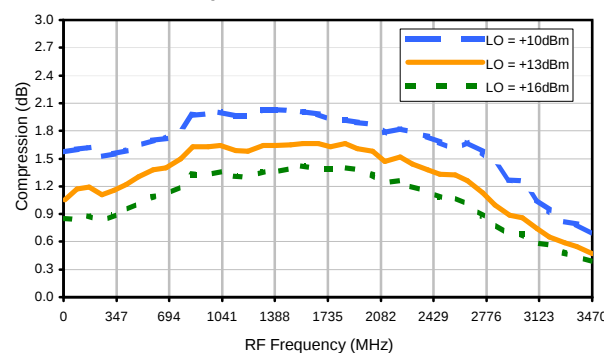


Typical Performance Curves


LO-RF Isolation

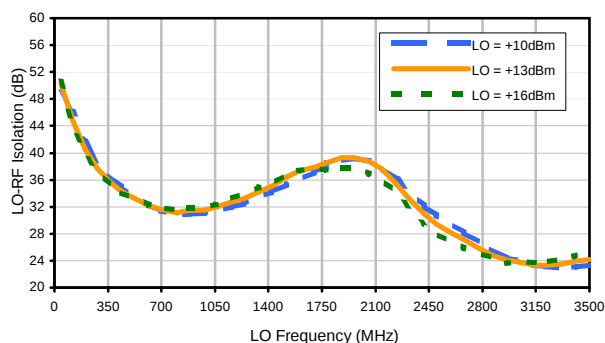


LO-IF Isolation

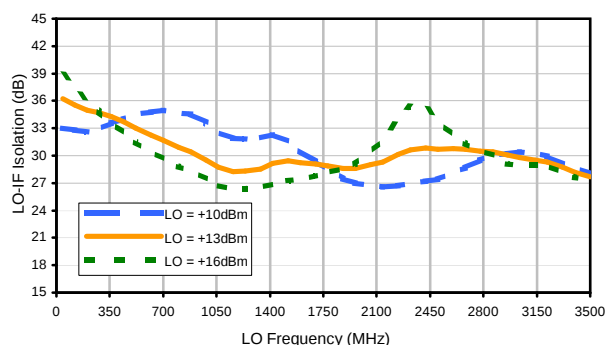


RF-IF Isolation

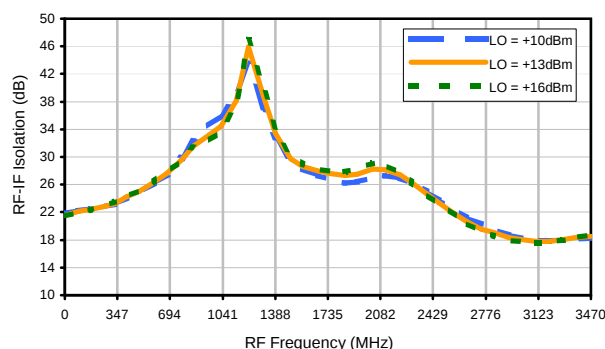


RF VSWR

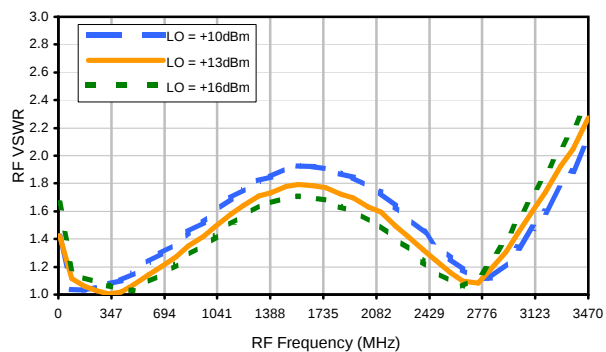

LO VSWR

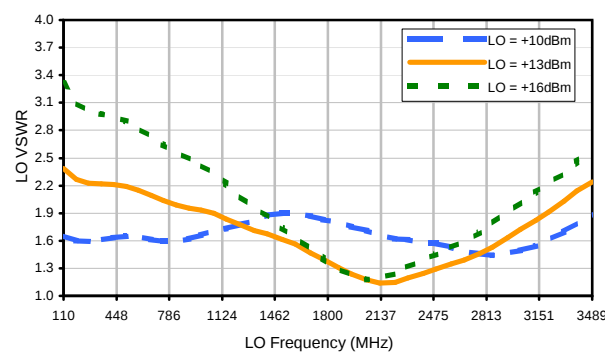

IF VSWR

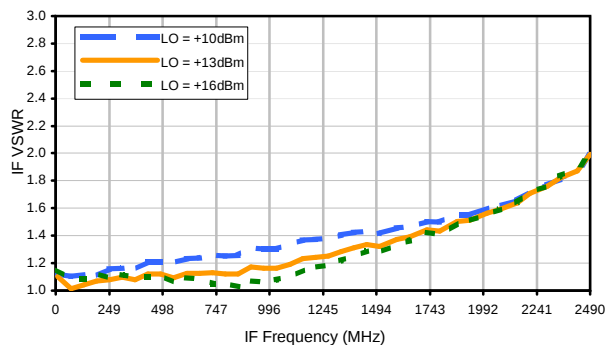

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	2	12	13	25	17	35	27	34	22	44
1	-	40	+0	33	15	37	20	35	25	43	45	35
2	69	62	57	60	53	61	51	59	50	62	52	55
3	>90	72	56	68	58	69	60	65	74	63	64	>77
4	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
5	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
6	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
7	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
8	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
9	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
10	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

Test conditions:

RF IN: 1250.1 MHz; -6.00 dBm.

LO IN: 1280.1 MHz; +13.00 dBm

IF OUT: 30 MHz; -13.41 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	12	23	25	36	30	53	40	58	41	53
1	-	33	+0	32	14	38	22	39	27	50	47	47
2	49	40	48	45	42	54	40	53	42	57	53	53
3	87	44	37	44	42	51	61	54	47	49	49	60
4	>90	51	50	54	57	59	57	59	57	69	59	75
5	>90	55	59	73	51	64	50	58	57	57	62	55
6	>90	70	68	74	71	74	79	69	77	74	70	72
7	>90	78	75	80	70	68	76	68	76	73	75	79
8	>90	>87	>87	>87	86	>87	78	>87	77	>87	78	85
9	>90	>87	>87	>87	82	86	81	77	84	77	84	74
10	>90	>87	>87	>87	>87	>87	>87	85	>87	83	>87	82
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 1250.1 MHz; 4.00 dBm.

LO IN: 1280.1 MHz; +13.00 dBm


IF OUT: 30 MHz; -3.46 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.


2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Outline Dimensions

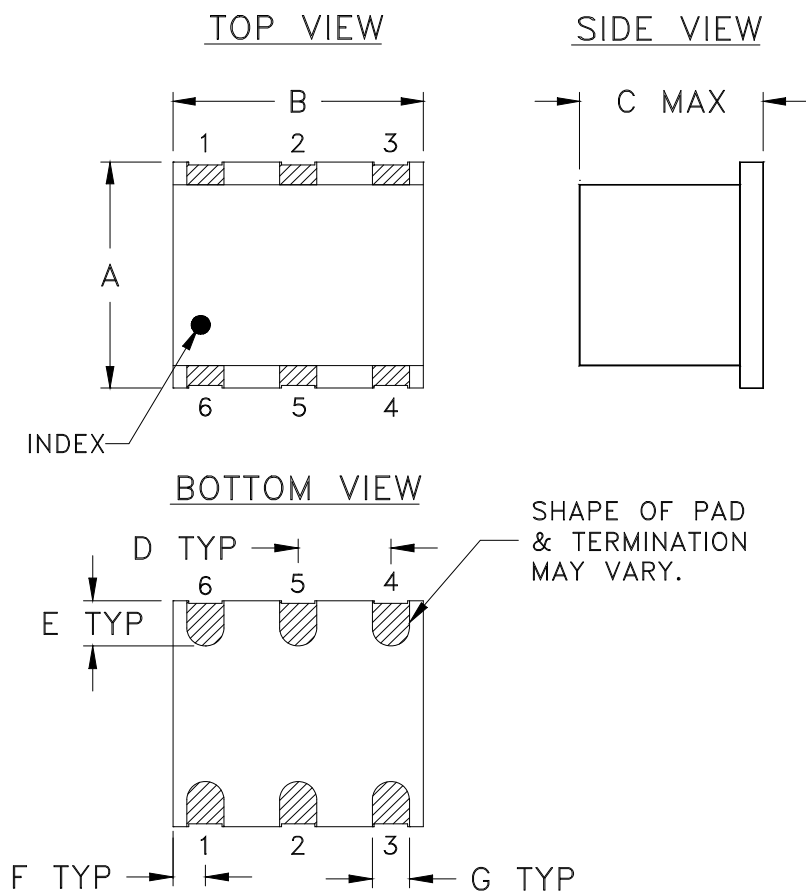

PCB Land Pattern

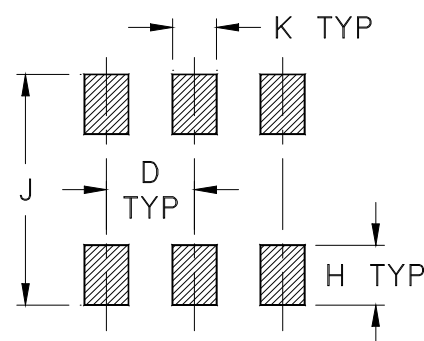

CASE #	A	B	C	D	E	F	G	H	J	K	WT. GRAM
TT240	.250 (6.35)	.31 (7.87)	.20 (5.08)	.100 (2.54)	.050 (1.27)	.055 (1.40)	.040 (1.02)	.070 (1.78)	.270 (6.86)	.050 (1.27)	.50

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Ceramic.
- Termination finish:
 - For RoHS Case Styles: 2-10 μ inch (.05-.25 microns) Gold plate over 100-300 μ inch (2.54-7.62 microns) Nickel plate. All models, (+) suffix.
 - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.




P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F2

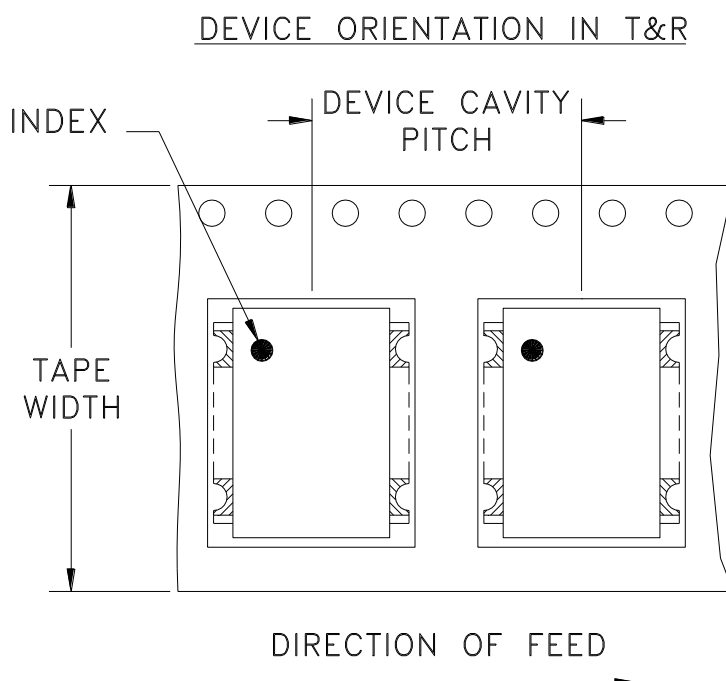

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel See note
16	12	7	10
			20
			50
			100
			200
		13	500

Note: Please consult individual model data sheet to determine device per reel availability

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M101143	ADDED "gk" PIN CONNECTION, TT100 CASE STYLE & NOTE 2	10/10/05	MMG	DJ
B	M102713	ADDED "...WITH SMOBC"	01/17/06	MMG	IL
C	M108637	REMOVED "PIN 1", ADDED INDEX ON UNIT	12/01/06	MYG	FL


SUGGESTED MOUNTING CONFIGURATION
FOR BH292, CD541/542/636/637, TT100/240 CASE
STYLES, "gk", "ht", "hu", "nd", "w" PIN CONNECTIONS

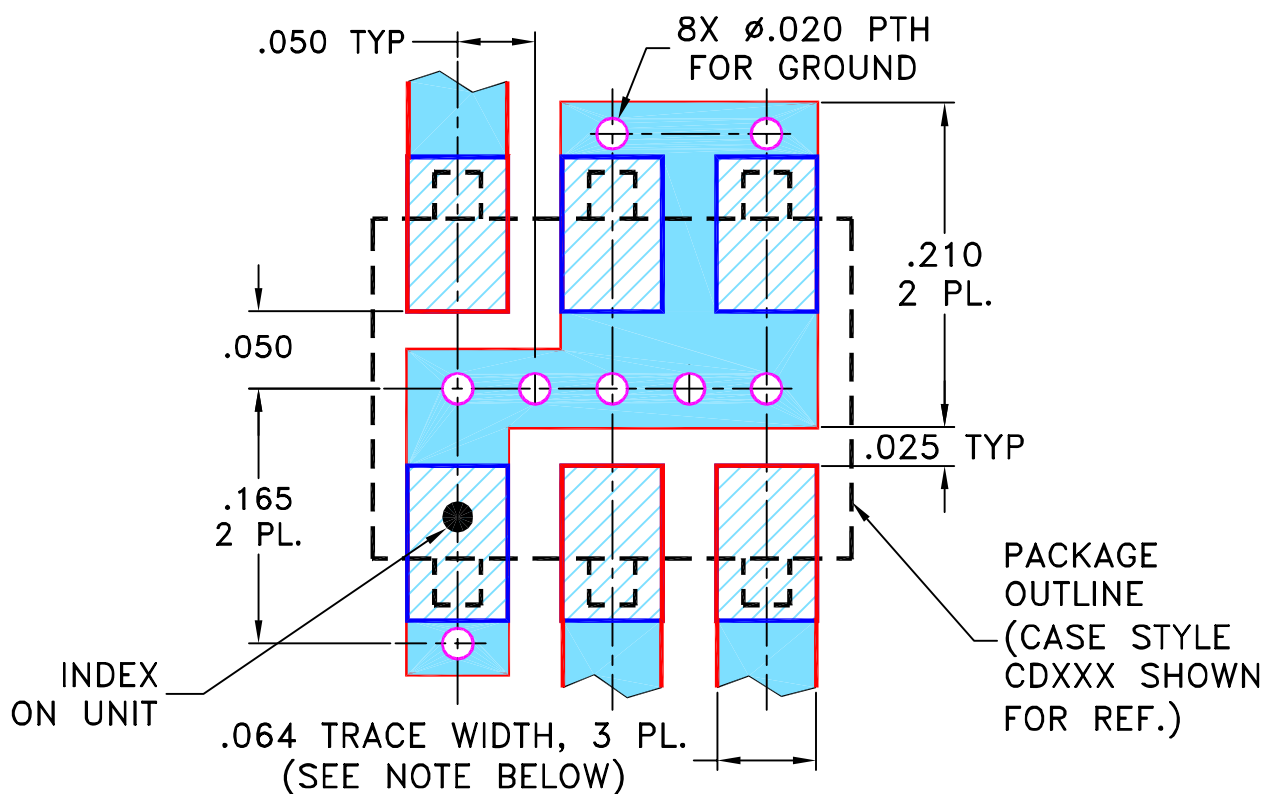

- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE.
 FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
 (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS $\pm$ 3 PL DECIMALS $\pm$.005ANGLES $\pm$ FRACTIONS $\pm$

DRAWN

MMG

07/17/02

CHECKED

WL

08/02/02

APPROVED

DJ

08/05/02



Mini-Circuits®

13 Neptune Avenue
 Brooklyn NY 11235

PL, gk/ht/hu/nd/w, BH292,
 CD541/542/636/637, TT100/240, TB-03

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-052

REV:

C

FILE:

98PL052

SCALE:

8:1

SHEET:


1 OF 1

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.


ASHEETA1.DWG REV:A DATE:01/12/95

THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
E	M119737	UPDATED PCB	10.08	MF	AD
F	M127659	UPDATED CARR	06.10	SW	SG
G	M127846	UPDATED SCHEMATIC DIAGRAM	06.10	SW	SG
H	M131840	UPDATED DWG	05.11	MF	AD

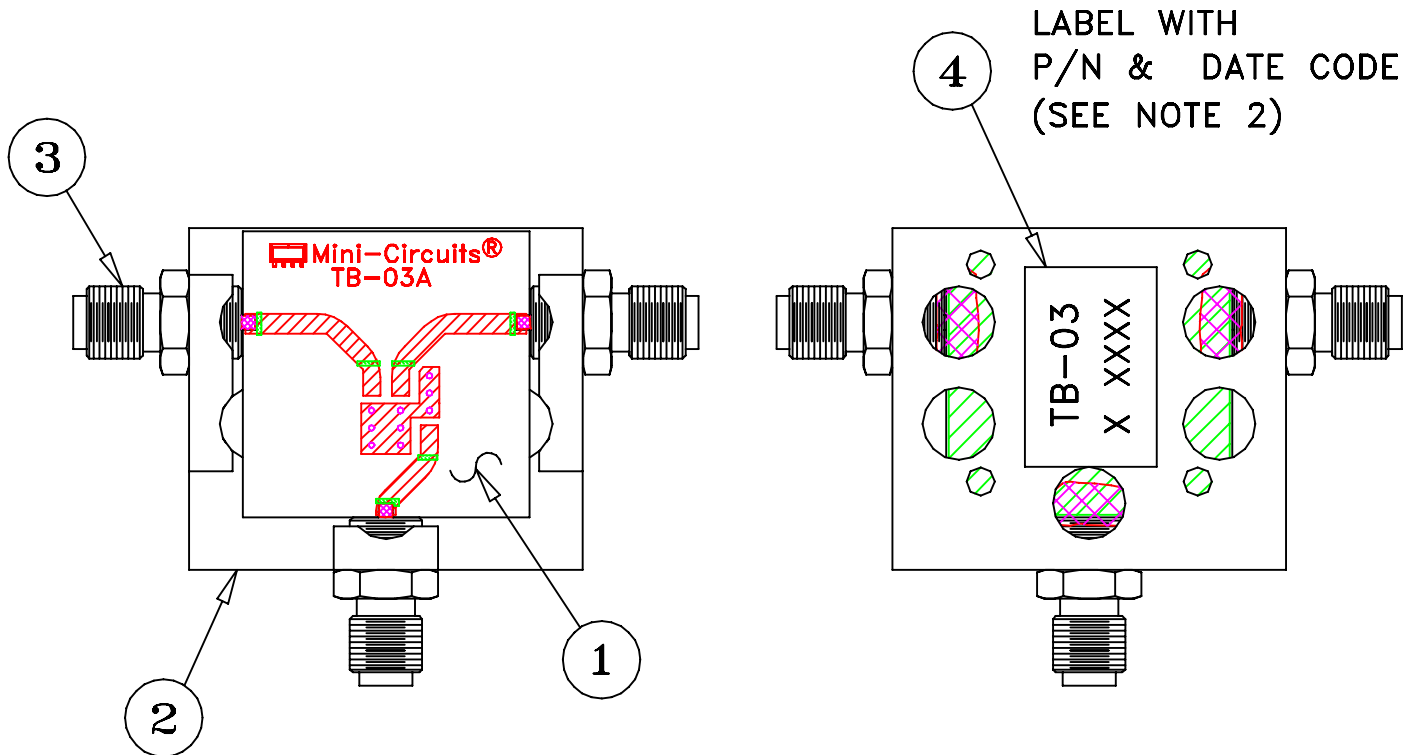**NOTES:**

1. REFER TO -09 PAGE FOR ITEM DESCRIPTIONS.
DESIGNATION NUMBERS ON -20 PAGE CORRESPOND TO THE NUMBERS ON -09 PAGE.
2. FOR TEXT HEIGHT & STYLE ON THE LABEL REFER TO: D3-G209.

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

S.WOLYNSKI

08.29.99

TOLERANCES ON:

CHECKED

SG

07.06.99

2 PL DECIMALS ±

APPROVED

MG

07.10.99

3 PL DECIMALS ±

ANGLES ±

FRACTIONS ±

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95


Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

TB,ADE,CD542/636,06MX01,50

SIZE

A

CODE IDENT

15542

DRAWING NO:

TB-03-20

REV:

H

FILE:

WTB-03

SCALE:


1.5:1

SHEET:


1 OF 2

Evaluation Board and Circuit

For Pin Connections and DUT Orientation Refer to
Data Sheet of the DUT

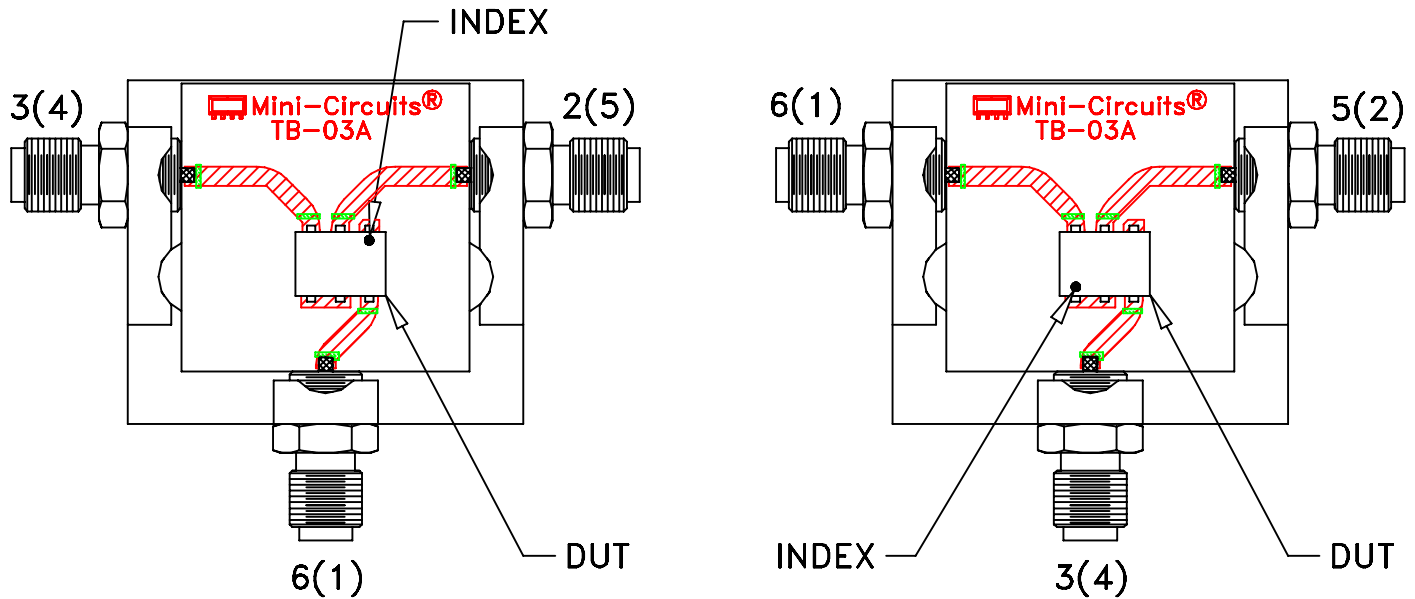

TB-03

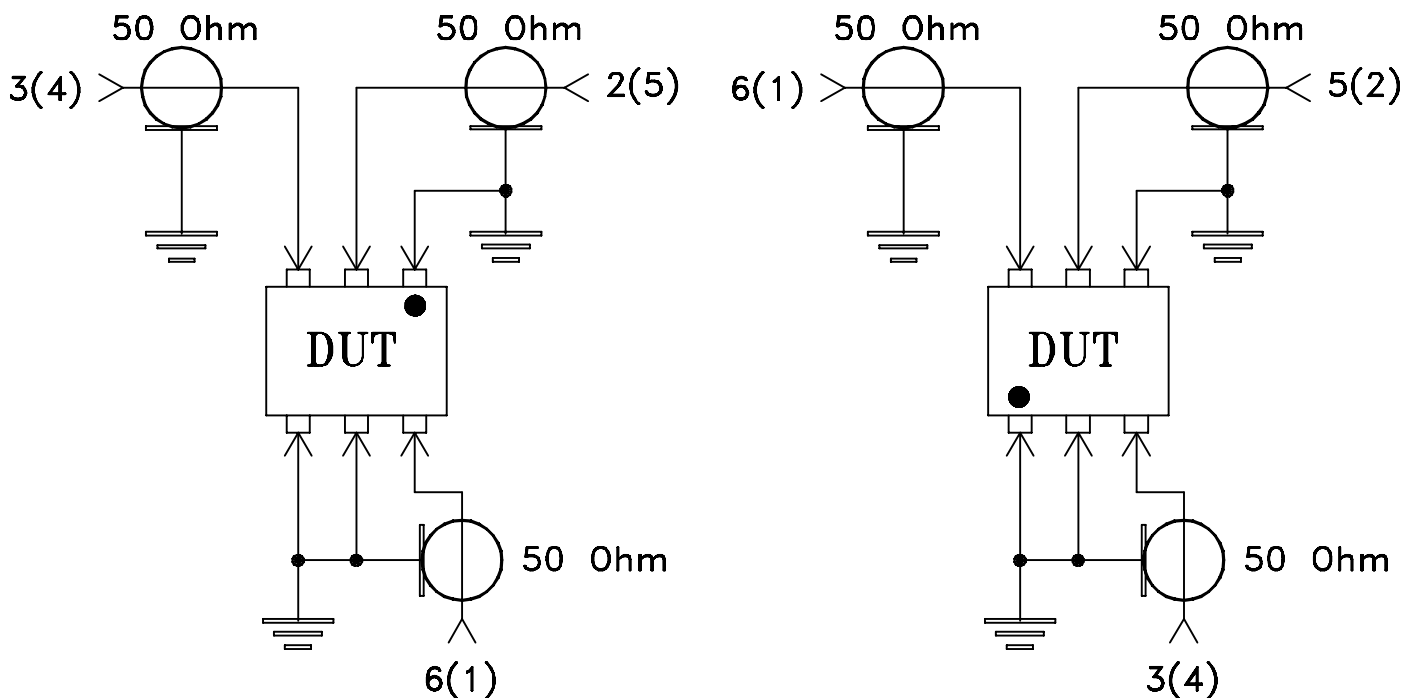

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215