

# Non-Catalog Model

## Frequency Mixer

## RMS-2UMH

Level 13 (LO Power +13 dBm)

### Important Note

This is a non-catalog model and can be manufactured on specific request. Pricing and delivery information can be supplied upon request.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : TT100

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (fL to fU)	10		1000	MHz
	RF (fL to fU)	10		1000	MHz
	IF	20		500	MHz
Conversion Loss	mid band		7.0	8.5	dB
	Total Range			9.5	dB
LO-RF Isolation	Low Range	40	52		dB
	Mid Range	30	43		dB
	Upper Range	25	33		dB
LO-IF Isolation	Low Range	30	53		dB
	Mid Range	25	44		dB
	Upper Range	22	39		dB
1 dB Comp. Input Power			+9		dBm

Notes: Low Range = [fL to 10fL]  
mid band = [2fL to fU/2]

Mid Range = [10fL to fU/2]

Upper Range = [fU/2 to fU]


Phase detection, positive polarity.

Units are non-hermetic.

MAXIMUM RATINGS	
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA

PIN CONNECTIONS	
LO	1
RF	4
IF	5
GROUND	2, 3, 6

### Electrical Schematics

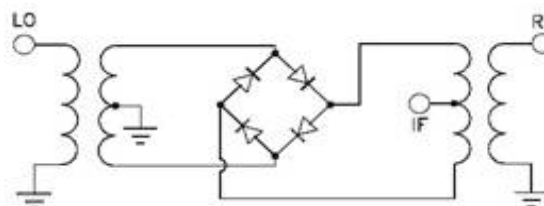

# Frequency Mixer

# RMS-2UMH

## Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+9dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
		+10	+13	+16			+10	+13	+16			+10	+13	+16
10.1	40.1	6.46	6.11	5.95	10.1	40.1	22.28	23.85	24.00	10.1	40.1	1.18	0.87	0.71
50.4	80.4	6.63	6.30	6.14	50.4	80.4	18.71	17.81	16.20	50.4	80.4	0.99	0.73	0.55
90.7	120.7	6.69	6.39	6.22	90.7	120.7	15.84	14.40	14.07	90.7	120.7	0.97	0.73	0.58
131.0	161.0	6.84	6.55	6.35	131.0	161.0	13.08	12.78	13.70	131.0	161.0	0.99	0.74	0.59
171.3	201.3	7.14	6.75	6.50	171.3	201.3	11.66	12.11	13.65	171.3	201.3	0.96	0.76	0.62
211.5	241.5	7.37	6.90	6.58	211.5	241.5	10.91	12.06	14.25	211.5	241.5	1.12	0.87	0.77
251.8	281.8	7.64	7.11	6.70	251.8	281.8	10.60	12.32	14.88	251.8	281.8	1.10	0.93	0.84
292.1	322.1	7.92	7.29	6.81	292.1	322.1	10.39	12.54	15.23	292.1	322.1	1.05	0.93	0.92
332.4	362.4	8.18	7.46	6.94	332.4	362.4	10.56	12.90	15.76	332.4	362.4	1.07	1.02	0.99
372.7	402.7	8.45	7.51	6.94	372.7	402.7	10.85	13.95	17.16	372.7	402.7	1.01	1.13	1.16
413.0	443.0	8.67	7.64	6.95	413.0	443.0	10.96	14.22	17.41	413.0	443.0	1.02	1.15	1.19
453.3	483.3	8.95	7.85	7.14	453.3	483.3	11.23	14.42	17.41	453.3	483.3	0.98	1.17	1.22
493.6	523.6	8.97	7.81	7.16	493.6	523.6	11.80	15.32	17.64	493.6	523.6	1.00	1.23	1.21
533.9	563.9	9.16	7.93	7.20	533.9	563.9	11.36	15.09	18.19	533.9	563.9	0.86	1.23	1.24
574.2	604.2	9.33	7.95	7.25	574.2	604.2	11.17	15.08	17.60	574.2	604.2	0.78	1.15	1.18
614.4	644.4	9.25	7.96	7.26	614.4	644.4	11.45	15.11	17.63	614.4	644.4	0.83	1.12	1.14
654.7	684.7	9.33	8.11	7.44	654.7	684.7	11.82	15.04	17.49	654.7	684.7	0.81	1.01	0.96
695.0	725.0	9.37	8.30	7.67	695.0	725.0	12.33	14.75	16.89	695.0	725.0	0.88	0.92	0.90
735.3	765.3	9.38	8.48	7.91	735.3	765.3	13.16	14.69	16.99	735.3	765.3	0.81	0.72	0.69
775.6	805.6	9.29	8.56	8.09	775.6	805.6	13.99	15.01	16.66	775.6	805.6	0.80	0.62	0.55
815.9	845.9	9.29	8.60	8.22	815.9	845.9	14.82	15.94	16.58	815.9	845.9	0.73	0.54	0.41
856.2	886.2	9.29	8.68	8.35	856.2	886.2	15.58	16.89	17.59	856.2	886.2	0.61	0.40	0.32
896.5	926.5	9.27	8.76	8.45	896.5	926.5	16.60	17.16	18.46	896.5	926.5	0.47	0.24	0.19
916.6	946.6	9.28	8.83	8.53	916.6	946.6	17.32	17.24	18.84	916.6	946.6	0.38	0.18	0.14
956.9	986.9	9.24	8.86	8.61	956.9	986.9	17.56	18.33	18.29	956.9	986.9	0.30	0.09	0.06
977.1	1007.1	9.28	8.89	8.68	977.1	1007.1	17.69	19.61	18.43	977.1	1007.1	0.25	0.08	0.03
1017.3	1047.3	9.34	8.86	8.72	1017.3	1047.3	17.16	22.47	19.42	1017.3	1047.3	0.24	0.08	0.03
1037.5	1067.5	9.40	8.88	8.75	1037.5	1067.5	17.11	22.16	20.53	1037.5	1067.5	0.23	0.07	0.05
1077.8	1107.8	9.51	8.99	8.79	1077.8	1107.8	18.22	19.90	23.99	1077.8	1107.8	0.25	0.04	0.04
1097.9	1127.9	9.58	8.99	8.84	1097.9	1127.9	18.19	20.19	23.73	1097.9	1127.9	0.21	0.05	0.04
1138.2	1168.2	9.79	9.07	8.89	1138.2	1168.2	19.62	19.91	24.19	1138.2	1168.2	0.15	0.03	0.07
1158.4	1188.4	9.91	9.11	8.93	1158.4	1188.4	20.46	19.28	22.46	1158.4	1188.4	0.12	0.02	0.05
1198.7	1228.7	10.24	9.25	9.01	1198.7	1228.7	20.00	19.96	22.06	1198.7	1228.7	0.03	0.03	0.05
1218.8	1248.8	10.33	9.27	9.05	1218.8	1248.8	19.59	21.09	22.90	1218.8	1248.8	0.04	0.05	0.04
1259.1	1289.1	10.63	9.40	9.14	1259.1	1289.1	19.31	24.69	22.41	1259.1	1289.1	-0.03	0.08	0.02
1279.2	1309.2	10.80	9.48	9.19	1279.2	1309.2	19.06	27.73	23.50	1279.2	1309.2	-0.03	0.06	0.03
1319.5	1349.5	11.10	9.72	9.31	1319.5	1349.5	19.29	28.92	24.97	1319.5	1349.5	-0.08	0.03	0.04
1339.7	1369.7	11.29	9.88	9.39	1339.7	1369.7	18.68	25.19	25.61	1339.7	1369.7	-0.10	0.02	0.05
1380.0	1410.0	11.77	10.19	9.57	1380.0	1410.0	18.00	21.33	26.98	1380.0	1410.0	-0.13	-0.02	0.05
1400.1	1430.1	12.04	10.29	9.69	1400.1	1430.1	17.54	21.11	31.55	1400.1	1430.1	-0.18	-0.04	0.06



# Frequency Mixer

# RMS-2UMH

## Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=500.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1000.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+13			+13			+13
480.0	20.1	6.76	20.0	30.1	6.21	500.0	500.1	9.39
468.2	31.9	6.80	32.3	42.4	6.10	487.7	512.4	9.31
456.4	43.7	6.83	44.6	54.7	6.12	475.4	524.7	9.39
444.6	55.5	6.87	56.9	67.0	6.07	463.1	537.0	9.41
432.8	67.3	6.99	69.2	79.3	6.09	450.8	549.3	9.43
421.0	79.1	7.06	81.5	91.6	6.12	438.5	561.6	9.48
409.2	90.9	7.15	93.8	103.9	6.07	426.2	573.9	9.47
397.4	102.7	7.22	106.2	116.3	6.06	413.8	586.3	9.48
385.6	114.5	7.25	118.5	128.6	6.05	401.5	598.6	9.44
373.8	126.3	7.28	130.8	140.9	6.02	389.2	610.9	9.43
362.1	138.0	7.37	143.1	153.2	6.08	376.9	623.2	9.43
350.3	149.8	7.41	155.4	165.5	6.07	364.6	635.5	9.42
338.5	161.6	7.47	167.7	177.8	6.06	352.3	647.8	9.41
326.7	173.4	7.51	180.0	190.1	6.08	340.0	660.1	9.39
314.9	185.2	7.52	192.3	202.4	6.05	327.7	672.4	9.31
303.1	197.0	7.55	204.6	214.7	6.07	315.4	684.7	9.30
291.3	208.8	7.53	216.9	227.0	6.08	303.1	697.0	9.25
279.5	220.6	7.53	229.2	239.3	6.05	290.8	709.3	9.18
267.7	232.4	7.55	241.5	251.6	6.08	278.5	721.6	9.18
255.9	244.2	7.53	253.8	263.9	6.12	266.2	733.9	9.11
244.1	256.0	7.45	266.2	276.3	6.12	253.8	746.3	9.07
232.3	267.8	7.56	278.5	288.6	6.15	241.5	758.6	9.04
220.5	279.6	7.57	290.8	300.9	6.14	229.2	770.9	8.98
208.7	291.4	7.61	303.1	313.2	6.13	216.9	783.2	8.97
196.9	303.2	7.65	315.4	325.5	6.17	204.6	795.5	8.94
185.1	315.0	7.58	327.7	337.8	6.16	192.3	807.8	8.90
173.3	326.8	7.61	340.0	350.1	6.16	180.0	820.1	8.90
161.5	338.6	7.66	352.3	362.4	6.18	167.7	832.4	8.88
149.7	350.4	7.63	364.6	374.7	6.16	155.4	844.7	8.87
137.9	362.2	7.67	376.9	387.0	6.21	143.1	857.0	8.88
126.2	373.9	7.66	389.2	399.3	6.22	130.8	869.3	8.84
114.4	385.7	7.62	401.5	411.6	6.21	118.5	881.6	8.83
102.6	397.5	7.66	413.8	423.9	6.25	106.2	893.9	8.84
90.8	409.3	7.65	426.2	436.3	6.25	93.8	906.3	8.82
79.0	421.1	7.59	438.5	448.6	6.29	81.5	918.6	8.84
67.2	432.9	7.68	450.8	460.9	6.35	69.2	930.9	8.86
55.4	444.7	7.72	463.1	473.2	6.36	56.9	943.2	8.86
43.6	456.5	7.80	475.4	485.5	6.41	44.6	955.5	8.92
31.8	468.3	7.91	487.7	497.8	6.43	32.3	967.8	8.97
20.0	480.1	8.03	500.0	510.1	6.44	20.0	980.1	9.11

# Frequency Mixer

# RMS-2UMH

## Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+10	+13	+16	+10	+13	+16
10.1	65.89	66.36	66.53	56.03	56.99	59.16
50.4	54.59	55.20	55.81	52.59	52.37	52.01
90.7	50.27	50.98	51.32	51.39	50.01	49.04
131.0	47.58	48.21	48.54	50.15	48.28	46.49
171.3	45.62	46.20	46.81	49.49	46.39	44.57
211.5	44.11	44.82	45.65	47.94	44.67	42.88
251.8	42.85	43.83	44.77	46.18	43.22	41.59
292.1	42.07	43.04	44.06	44.52	41.79	40.30
332.4	41.19	42.49	43.68	43.25	40.83	39.35
372.7	40.54	41.63	42.81	41.70	39.88	38.60
413.0	40.15	41.01	41.75	40.85	38.87	37.76
453.3	39.76	41.06	41.55	40.31	38.56	37.26
493.6	39.02	40.50	41.24	39.62	38.06	36.96
533.9	37.80	38.66	39.45	39.22	37.97	36.83
574.2	37.11	37.34	37.84	39.32	38.21	37.18
614.4	36.35	36.13	36.49	39.15	37.77	37.10
654.7	35.76	35.34	35.48	39.45	37.76	37.23
695.0	35.28	34.75	34.74	40.11	38.26	37.49
735.3	35.38	34.48	34.32	42.84	39.80	38.30
775.6	36.15	34.91	34.39	50.06	42.28	39.27
815.9	36.55	35.11	34.35	49.09	42.77	39.28
856.2	36.71	35.51	34.43	42.36	40.62	38.18
896.5	36.02	35.08	34.13	38.23	37.43	35.75
916.6	35.46	34.68	33.98	36.95	36.31	34.86
956.9	34.36	33.68	33.24	34.48	34.26	32.96
977.1	34.05	33.33	32.95	33.62	33.49	32.21
1017.3	33.40	32.69	32.26	31.68	31.87	30.73
1037.5	33.40	32.58	32.22	31.11	31.17	30.20
1077.8	33.40	32.03	31.66	29.52	29.50	28.61
1097.9	33.45	31.88	31.41	28.86	28.82	28.03
1138.2	33.50	31.71	30.97	27.46	27.42	26.70
1158.4	33.61	31.51	30.73	26.77	26.60	25.94
1198.7	34.13	31.53	30.46	25.43	25.16	24.54
1218.8	34.37	31.51	30.38	24.80	24.48	23.93
1259.1	34.89	31.82	30.29	23.47	23.09	22.48
1279.2	34.89	31.81	30.15	22.82	22.46	21.84
1319.5	35.00	32.15	30.10	21.50	21.25	20.49
1339.7	34.56	31.88	30.01	20.86	20.54	19.84
1380.0	32.70	31.06	29.42	19.68	19.37	18.64
1400.1	31.48	30.45	28.87	19.13	18.90	18.15

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+10	+13	+16
10.1	40.1	14.90	15.46	15.94
50.4	80.4	19.57	19.90	20.13
90.7	120.7	20.31	20.55	20.66
131.0	161.0	20.72	20.88	21.10
171.3	201.3	20.97	21.25	21.50
211.5	241.5	21.43	21.78	22.13
251.8	281.8	21.96	22.36	22.80
292.1	322.1	22.65	23.20	23.64
332.4	362.4	23.46	24.24	24.90
372.7	402.7	24.86	25.67	26.50
413.0	443.0	26.89	27.90	28.44
453.3	483.3	29.35	31.66	32.51
493.6	523.6	32.43	36.46	38.92
533.9	563.9	35.41	36.43	37.39
574.2	604.2	39.08	35.84	35.11
614.4	644.4	36.14	34.75	33.67
654.7	684.7	32.45	33.16	33.11
695.0	725.0	29.57	31.13	31.66
735.3	765.3	27.12	28.23	28.81
775.6	805.6	25.04	25.44	25.99
815.9	845.9	23.56	23.59	23.83
856.2	886.2	22.54	22.43	22.38
896.5	926.5	21.91	21.61	21.43
916.6	946.6	21.65	21.27	21.10
956.9	986.9	21.24	20.70	20.38
977.1	1007.1	20.91	20.36	20.02
1017.3	1047.3	20.11	19.57	19.24
1037.5	1067.5	19.66	19.14	18.87
1077.8	1107.8	18.74	18.29	18.02
1097.9	1127.9	18.38	17.94	17.71
1138.2	1168.2	17.79	17.33	17.14
1158.4	1188.4	17.61	17.13	16.91
1198.7	1228.7	17.16	16.70	16.50
1218.8	1248.8	16.90	16.47	16.25
1259.1	1289.1	16.44	16.11	15.89
1279.2	1309.2	16.15	15.90	15.71
1319.5	1349.5	15.49	15.37	15.27
1339.7	1369.7	15.12	15.12	15.01
1380.0	1410.0	14.36	14.49	14.46
1400.1	1430.1	14.06	14.21	14.23

# Frequency Mixer

# RMS-2UMH

## Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)		
		@LO (dBm)		
		+10	+13	+16
10.1	40.1	1.38	1.35	1.36
50.4	80.4	1.18	1.08	1.08
90.7	120.7	1.21	1.09	1.05
131.0	161.0	1.24	1.14	1.08
171.3	201.3	1.31	1.21	1.15
211.5	241.5	1.39	1.29	1.23
251.8	281.8	1.51	1.40	1.34
292.1	322.1	1.65	1.53	1.46
332.4	362.4	1.81	1.68	1.60
372.7	402.7	1.99	1.83	1.74
413.0	443.0	2.19	2.01	1.90
453.3	483.3	2.42	2.22	2.09
493.6	523.6	2.61	2.39	2.26
533.9	563.9	2.86	2.58	2.43
574.2	604.2	3.09	2.77	2.58
614.4	644.4	3.25	2.92	2.73
654.7	684.7	3.40	3.09	2.89
695.0	725.0	3.52	3.24	3.06
735.3	765.3	3.58	3.37	3.21
775.6	805.6	3.60	3.46	3.33
815.9	845.9	3.62	3.51	3.42
856.2	886.2	3.65	3.56	3.49
896.5	926.5	3.63	3.58	3.53
916.6	946.6	3.62	3.58	3.54
956.9	986.9	3.56	3.54	3.51
977.1	1007.1	3.54	3.52	3.49
1017.3	1047.3	3.49	3.45	3.44
1037.5	1067.5	3.47	3.41	3.39
1077.8	1107.8	3.42	3.34	3.31
1097.9	1127.9	3.40	3.31	3.29
1138.2	1168.2	3.38	3.25	3.22
1158.4	1188.4	3.39	3.24	3.19
1198.7	1228.7	3.41	3.20	3.14
1218.8	1248.8	3.42	3.19	3.12
1259.1	1289.1	3.43	3.16	3.07
1279.2	1309.2	3.43	3.15	3.04
1319.5	1349.5	3.42	3.13	3.00
1339.7	1369.7	3.40	3.12	2.97
1380.0	1410.0	3.37	3.09	2.92
1400.1	1430.1	3.37	3.07	2.92

LO (MHz)	LO VSWR (:1)		
	@LO (dBm)		
	+10	+13	+16
10.1	1.38	1.97	2.74
50.4	1.36	2.13	3.13
90.7	1.34	2.03	2.94
131.0	1.37	2.07	3.00
171.3	1.42	2.07	2.95
211.5	1.46	2.07	2.94
251.8	1.53	2.12	2.97
292.1	1.57	2.10	2.89
332.4	1.63	2.14	2.93
372.7	1.69	2.13	2.86
413.0	1.72	2.13	2.84
453.3	1.81	2.17	2.83
493.6	1.84	2.15	2.78
533.9	1.85	2.16	2.77
574.2	1.88	2.13	2.69
614.4	1.87	2.09	2.65
654.7	1.91	2.07	2.59
695.0	1.94	2.05	2.54
735.3	2.01	2.06	2.52
775.6	2.11	2.07	2.47
815.9	2.20	2.10	2.46
856.2	2.33	2.13	2.42
896.5	2.42	2.15	2.39
916.6	2.49	2.18	2.40
956.9	2.62	2.21	2.37
977.1	2.67	2.21	2.35
1017.3	2.78	2.24	2.33
1037.5	2.87	2.26	2.33
1077.8	2.96	2.25	2.25
1097.9	2.99	2.25	2.22
1138.2	3.13	2.30	2.20
1158.4	3.17	2.30	2.17
1198.7	3.17	2.29	2.10
1218.8	3.21	2.31	2.10
1259.1	3.26	2.34	2.06
1279.2	3.23	2.32	2.02
1319.5	3.25	2.32	1.98
1339.7	3.27	2.33	1.97
1380.0	3.24	2.30	1.91
1400.1	3.25	2.29	1.89

IF (OUT) (MHz)	IF VSWR @LO=1000.1MHz (:1)		
	@LO (dBm)		
	+10	+13	+16
20.1	1.47	1.35	1.35
32.1	1.42	1.36	1.32
44.1	1.35	1.31	1.30
56.1	1.27	1.22	1.25
68.1	1.20	1.15	1.21
80.1	1.16	1.08	1.15
92.1	1.19	1.09	1.12
104.1	1.22	1.11	1.11
116.1	1.24	1.12	1.12
128.1	1.24	1.14	1.15
140.1	1.23	1.14	1.18
152.1	1.20	1.13	1.18
164.1	1.17	1.10	1.17
176.1	1.16	1.09	1.17
188.1	1.16	1.09	1.16
200.1	1.18	1.09	1.15
212.1	1.20	1.11	1.17
224.1	1.20	1.13	1.19
236.1	1.20	1.15	1.22
248.1	1.18	1.16	1.25
260.1	1.16	1.16	1.26
272.1	1.15	1.16	1.27
284.1	1.15	1.16	1.27
296.1	1.15	1.16	1.27
308.1	1.15	1.18	1.29
320.1	1.16	1.19	1.31
332.1	1.17	1.21	1.34
344.1	1.17	1.23	1.36
356.1	1.16	1.25	1.39
368.1	1.16	1.27	1.40
380.1	1.17	1.28	1.43
392.1	1.17	1.29	1.44
404.1	1.19	1.31	1.46
416.1	1.20	1.34	1.49
428.1	1.21	1.36	1.52
440.1	1.23	1.39	1.55
452.1	1.24	1.41	1.58
464.1	1.25	1.43	1.60
488.1	1.28	1.48	1.65
500.1	1.30	1.51	1.69

## Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	11	21	8	32	12	37	32	52	39	57
1	-	27	+0	31	20	44	40	33	31	42	34	49
2	>100	58	47	57	52	64	55	55	47	59	55	60
3	>100	68	49	57	46	55	53	76	63	58	76	62
4	>100	>86	84	76	68	74	69	78	84	71	67	75
5	>100	>86	>86	>86	78	80	75	78	79	>86	>86	84
6	>100	>86	>86	>86	>86	>86	>86	>86	86	>86	>86	>86
7	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
8	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
9	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
10	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 500.1 MHz; -6.00 dBm.  
 LO IN: 530.01 MHz; +13.00 dBm  
 IF OUT: 29.91 MHz; -14.09 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	20	32	20	46	28	51	53	70	55	72
1	-	29	+0	29	19	47	56	40	41	57	46	83
2	85	51	41	54	45	66	45	54	51	68	59	74
3	>100	51	31	43	31	44	41	75	48	53	52	64
4	>100	74	66	61	58	64	64	65	65	60	56	73
5	>100	55	67	61	63	55	52	48	56	68	72	56
6	>100	72	64	80	76	69	65	61	63	69	83	61
7	>100	73	64	67	82	75	54	53	51	56	62	79
8	>100	89	86	77	79	93	74	65	66	64	73	74
9	>100	94	75	87	68	71	88	69	62	70	66	64
10	>100	>96	91	94	90	80	79	>96	84	77	84	69
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 500.1 MHz; 4.00 dBm.  
 LO IN: 530.01 MHz; +13.00 dBm  
 IF OUT: 29.91 MHz; -3.7 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.  
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.  
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2  
 RMS-2UMH  
 100818  
 Page 5 of 5




IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant  
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see [minicircuits.com](http://minicircuits.com)

## Typical Performance Curves


Conversion Loss @ IF=30MHz

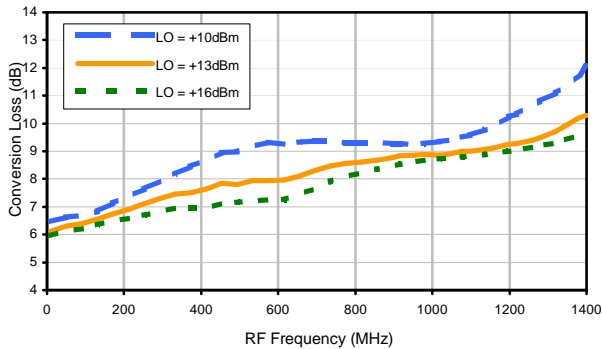


Conversion Loss vs. IF @ RF=500.1MHz

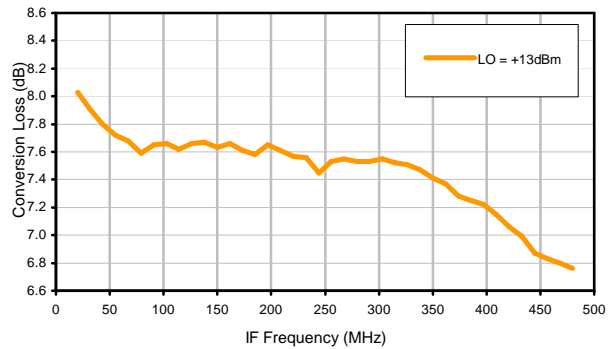


Conversion Loss vs. IF @ RF=10.1MHz

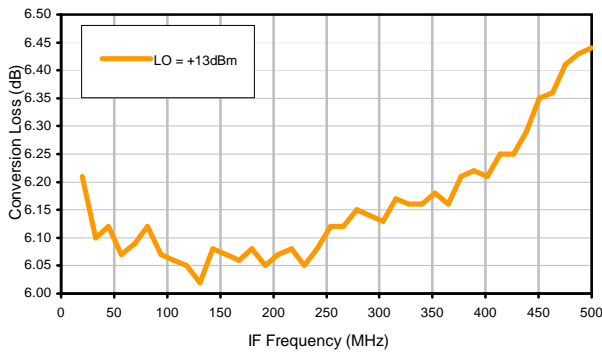


Conversion Loss vs. IF @ RF=1000.1MHz

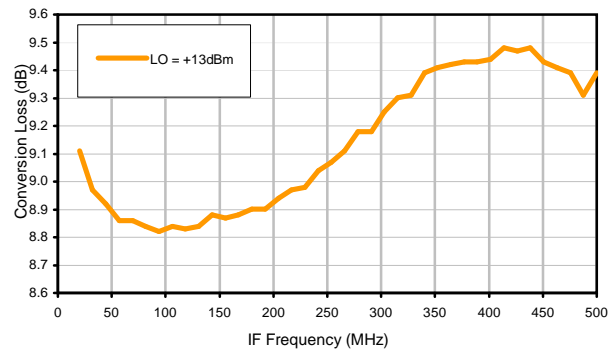

IP3 Input

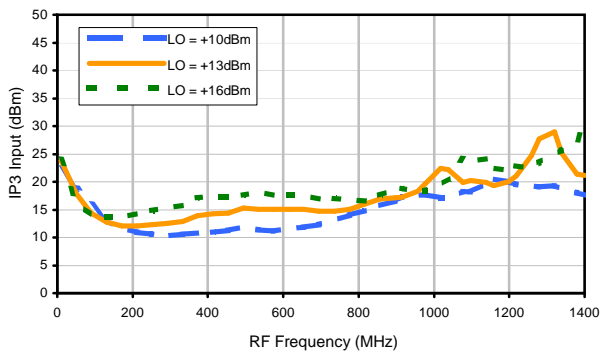


Compression @ RF IN=+9dBm

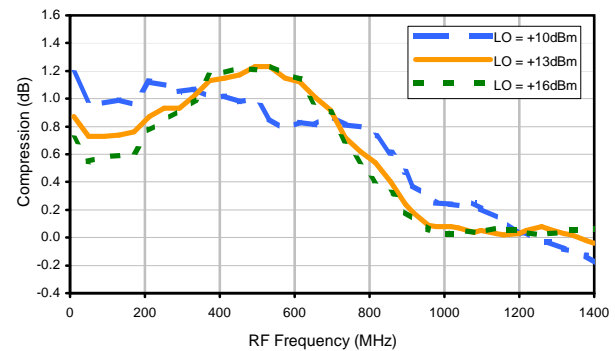


## Typical Performance Curves


LO-RF Isolation

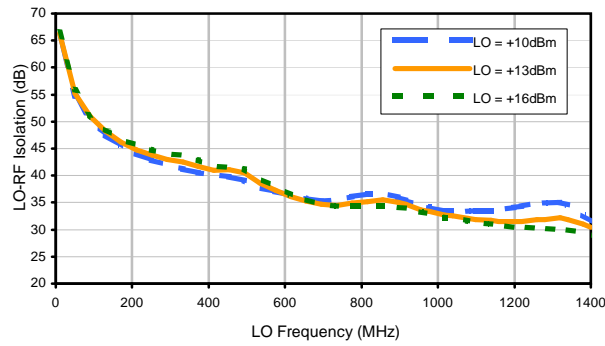


LO-IF Isolation

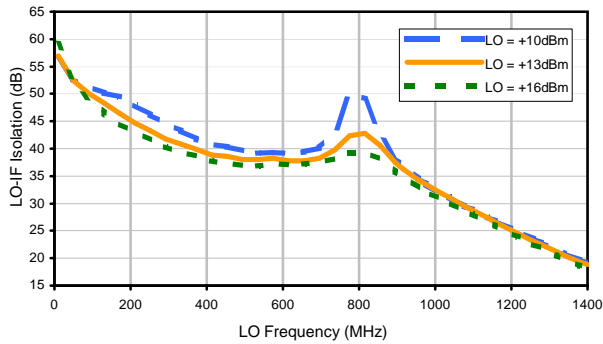


RF-IF Isolation

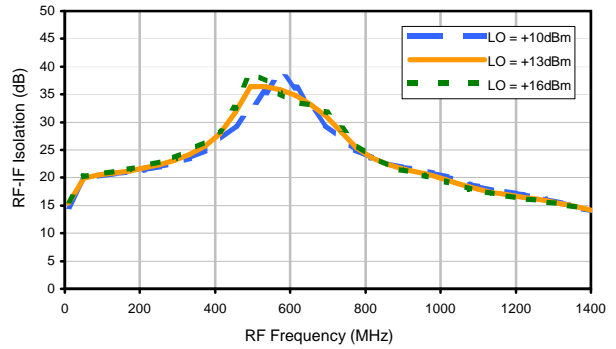


RF VSWR

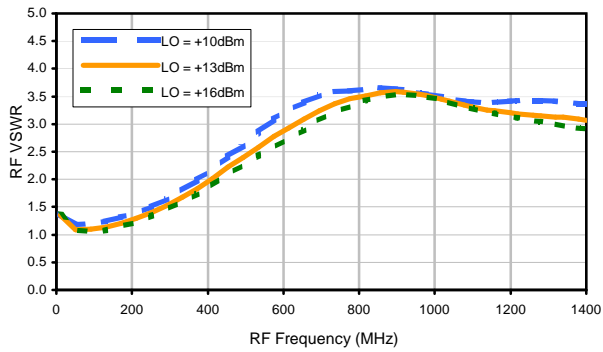

LO VSWR

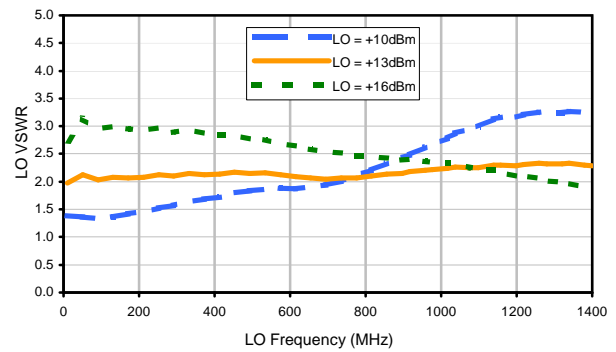

IF VSWR

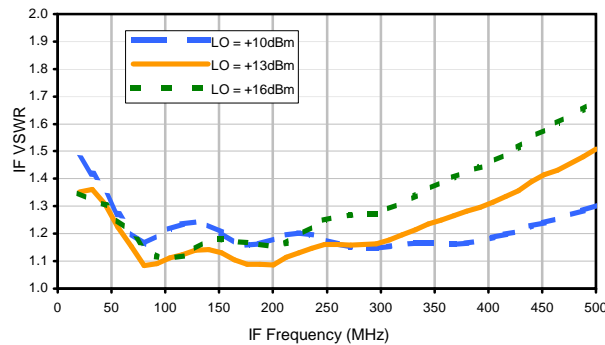

## Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	11	21	8	32	12	37	32	52	39	57
1	-	27	+0	31	20	44	40	33	31	42	34	49
2	>100	58	47	57	52	64	55	55	47	59	55	60
3	>100	68	49	57	46	55	53	76	63	58	76	62
4	>100	>86	84	76	68	74	69	78	84	71	67	75
5	>100	>86	>86	>86	78	80	75	78	79	>86	>86	84
6	>100	>86	>86	>86	>86	>86	>86	>86	86	>86	>86	>86
7	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
8	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
9	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
10	>100	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86	>86
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 500.1 MHz; -6.00 dBm.  
 LO IN: 530.01 MHz; +13.00 dBm  
 IF OUT: 29.91 MHz; -14.09 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	20	32	20	46	28	51	53	70	55	72
1	-	29	+0	29	19	47	56	40	41	57	46	83
2	85	51	41	54	45	66	45	54	51	68	59	74
3	>100	51	31	43	31	44	41	75	48	53	52	64
4	>100	74	66	61	58	64	64	65	65	60	56	73
5	>100	55	67	61	63	55	52	48	56	68	72	56
6	>100	72	64	80	76	69	65	61	63	69	83	61
7	>100	73	64	67	82	75	54	53	51	56	62	79
8	>100	89	86	77	79	93	74	65	66	64	73	74
9	>100	94	75	87	68	71	88	69	62	70	66	64
10	>100	>96	91	94	90	80	79	>96	84	77	84	69
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 500.1 MHz; 4.00 dBm.  
 LO IN: 530.01 MHz; +13.00 dBm  
 IF OUT: 29.91 MHz; -3.7 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.  
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.  
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2  
 RMS-2UMH  
 100818  
 Page 3 of 3




IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant  
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see [minicircuits.com](http://minicircuits.com)

### Outline Dimensions

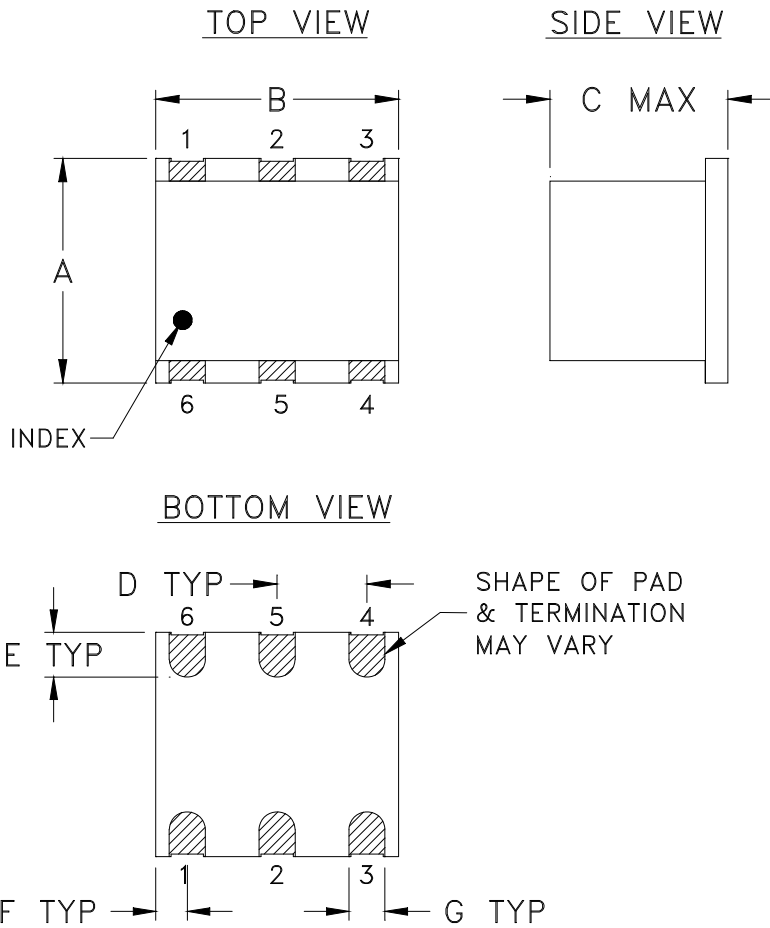

### PCB Land Pattern

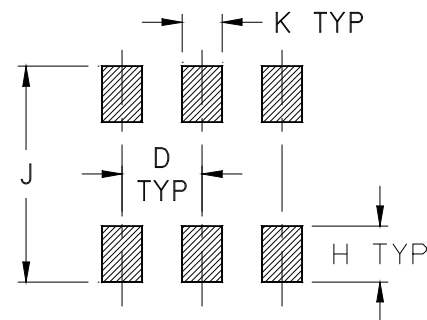

Suggested Layout,  
Tolerance to be within  $\pm .002$


CASE #	A	B	C	D	E	F	G	H	J	K	WT. GRAM
TT100	.250 (6.35)	.31 (7.87)	.20 (5.08)	.100 (2.54)	.050 (1.27)	.055 (1.40)	.040 (1.02)	.070 (1.78)	.270 (6.86)	.050 (1.27)	.50

Dimensions are in inches (mm). Tolerances: 2Pl.  $\pm .03$ ; 3 Pl.  $\pm .005$

#### Notes:

1. Case material: Ceramic.
2. Terminations: Palladium Platinum Silver.

# Tape & Reel Packaging TR-F2

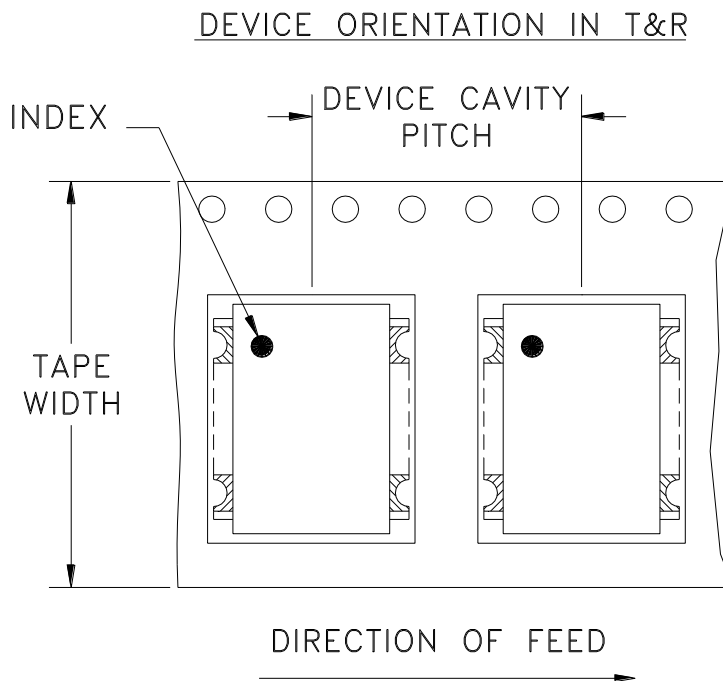

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel See note
16	12	7	10
			20
			50
			100
		200	
		13	500

Note: Please consult individual model data sheet to determine device per reel availability

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M101143	ADDED "gk" PIN CONNECTION, TT100 CASE STYLE & NOTE 2	10/10/05	MMG	DJ
B	M102713	ADDED "...WITH SMOBC"	01/17/06	MMG	IL
C	M108637	REMOVED "PIN 1", ADDED INDEX ON UNIT	12/01/06	MYG	FL

SUGGESTED MOUNTING CONFIGURATION  
FOR BH292, CD541/542/636/637, TT100/240 CASE  
STYLES, "gk", "ht", "hu", "nd", "w" PIN CONNECTIONS



- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES	MMG	07/17/02
TOLERANCES ON:	WL	08/02/02
2 PL DECIMALS ±	DJ	08/05/02
3 PL DECIMALS ± .005		
ANGLES ±		
FRACTIONS ±		

**Mini-Circuits®** 13 Neptune Avenue  
 Brooklyn NY 11235

PL, gk/ht/hu/nd/w, BH292,  
 CD541/542/636/637, TT100/240, TB-03

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-052	REV: C
FILE: 98PL052	SCALE: 8:1	SHEET: 1 OF 1	

Mini-Circuits®  
 THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
E	M119737	UPDATED PCB	10.08	MF	AD
F	M127659	UPDATED CARR	06.10	SW	SG
G	M127846	UPDATED SCHEMATIC DIAGRAM	06.10	SW	SG
H	M131840	UPDATED DWG	05.11	MF	AD



**NOTES:**

1. REFER TO -09 PAGE FOR ITEM DESCRIPTIONS.  
DESIGNATION NUMBERS ON -20 PAGE CORRESPOND TO THE NUMBERS ON -09 PAGE.
2. FOR TEXT HEIGHT & STYLE ON THE LABEL REFER TO: D3-G209.

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS ± 3 PL DECIMALS ± ANGLES ± FRACTIONS ±	DRAWN	S.WOLYNSKI 06.29.99
	CHECKED	SG 07.06.99
	APPROVED	MG 07.10.99

 **Mini-Circuits®** 13 Neptune Avenue  
Brooklyn NY 11235

TB,ADE,CD542/636,06MX01,50

 Mini-Circuits®  
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

SIZE A	CODE IDENT 15542	DRAWING NO: TB-03-20	REV: H
FILE: WTB-03	SCALE: 1.5:1	SHEET: 1 OF 2	

# Evaluation Board and Circuit

For Pin Connections and DUT Orientation Refer to  
Data Sheet of the DUT



TB-03



Schematic Diagram

## Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,  
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**