

Non-Catalog Model

Frequency Mixer

Level 10 (LO Power +10 dBm)

SBL-1LH

Important Note

This is a non-catalog model and can be manufactured on specific request.
Pricing and delivery information can be supplied upon request.

Please click "Back", and then click "Contact Us" for Applications support.



CASE STYLE : A06

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (fL to fU)	2		500	MHz
	RF (fL to fU)	2		500	MHz
	IF	0		500	MHz
Conversion Loss	mid band		5.8	7.0	dB
	Total Range			8.0	dB
LO-RF Isolation	Low Range	45	75		dB
	Mid Range	35	68		dB
	Upper Range	25	56		dB
LO-IF Isolation	Low Range	35	61		dB
	Mid Range	25	45		dB
	Upper Range	20	36		dB
1 dB Comp. Input Power			+5		dBm

Notes: Low Range = [fL to 10fL]
mid band = [2fL to fU/2]

Mid Range = [10fL to fU/2]

Upper Range = [fU/2 to fU]


Non-hermetic

MAXIMUM RATINGS	
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

PIN CONNECTIONS	
LO	8
RF	1
IF	3, 4 ^
GROUND	2, 5, 6, 7

^ - pins must be connected together externally

Electrical Schematics

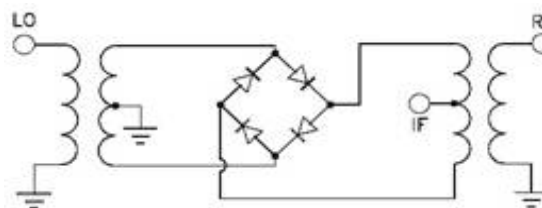

Frequency Mixer

SBL-1LH

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+5dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
+7	+10	+13	+7	+10	+13	+7	+10	+13						
2.0	32.0	7.08	6.68	6.47	10.1	40.1	18.62	20.30	21.08	10.1	40.1	1.59	1.18	0.84
4.0	34.0	6.44	5.99	5.80	29.9	59.9	21.35	21.16	22.26	29.9	59.9	1.41	1.11	0.78
5.0	35.0	6.33	5.91	5.68	49.7	79.7	21.10	20.87	21.47	49.7	79.7	1.46	1.11	0.78
10.0	40.0	6.07	5.67	5.46	69.4	99.4	20.69	19.51	23.23	69.4	99.4	1.44	0.98	0.76
29.9	59.9	5.66	5.37	5.22	89.2	119.2	18.94	20.72	26.62	89.2	119.2	1.38	0.96	0.69
49.7	79.7	5.60	5.41	5.26	109.0	139.0	18.97	21.99	21.75	109.0	139.0	1.26	0.88	0.61
69.4	99.4	5.58	5.40	5.26	128.8	158.8	19.22	30.69	18.81	128.8	158.8	1.26	0.90	0.66
89.2	119.2	5.57	5.39	5.28	148.5	178.5	18.30	24.81	18.12	148.5	178.5	1.29	0.87	0.63
109.0	139.0	5.58	5.40	5.28	168.3	198.3	16.74	26.35	19.46	168.3	198.3	1.15	0.81	0.58
128.8	158.8	5.56	5.40	5.31	188.1	218.1	18.65	22.51	17.62	188.1	218.1	1.14	0.81	0.60
148.5	178.5	5.57	5.41	5.30	207.9	237.9	17.14	14.23	13.84	207.9	237.9	1.09	0.79	0.60
188.1	218.1	5.57	5.44	5.32	227.7	257.7	14.39	12.09	11.45	227.7	257.7	1.03	0.79	0.61
207.9	237.9	5.59	5.44	5.33	247.4	277.4	14.76	13.05	13.06	247.4	277.4	1.01	0.72	0.56
227.7	257.7	5.67	5.49	5.41	267.2	297.2	22.85	17.39	18.19	267.2	297.2	0.99	0.74	0.54
247.4	277.4	5.77	5.59	5.44	287.0	317.0	20.61	21.42	21.19	287.0	317.0	1.03	0.78	0.58
267.2	297.2	5.86	5.63	5.43	306.8	336.8	25.28	17.19	16.84	306.8	336.8	1.15	0.85	0.66
287.0	317.0	5.94	5.72	5.52	326.5	356.5	16.50	14.50	13.96	326.5	356.5	1.35	1.03	0.81
306.8	336.8	5.98	5.83	5.67	346.3	376.3	14.22	13.03	13.02	346.3	376.3	1.53	1.14	0.89
326.5	356.5	6.03	5.87	5.76	366.1	396.1	12.86	11.88	12.86	366.1	396.1	1.68	1.24	0.92
346.3	376.3	6.03	5.94	5.81	385.9	415.9	11.91	12.24	13.85	385.9	415.9	1.91	1.34	0.99
366.1	396.1	6.13	5.99	5.89	405.7	435.7	12.93	13.19	14.14	405.7	435.7	2.14	1.46	1.12
385.9	415.9	6.21	6.07	6.01	425.4	455.4	10.58	12.67	14.27	425.4	455.4	2.41	1.74	1.31
445.2	475.2	6.86	6.56	6.35	445.2	475.2	8.63	12.02	14.38	445.2	475.2	2.44	1.89	1.42
465.0	495.0	7.10	6.75	6.38	465.0	495.0	5.66	8.49	12.66	465.0	495.0	2.60	2.07	1.66
484.8	514.8	7.34	7.01	6.49	484.8	514.8	4.30	6.06	10.04	484.8	514.8	2.63	2.15	1.81
504.5	534.5	7.60	7.30	6.82	504.5	534.5	3.40	4.27	6.78	504.5	534.5	2.70	2.24	1.92
524.3	554.3	7.80	7.52	7.09	524.3	554.3	2.92	3.46	4.98	524.3	554.3	2.59	2.18	1.84
544.1	574.1	7.93	7.63	7.20	544.1	574.1	2.89	3.29	4.33	544.1	574.1	2.53	2.10	1.80
583.7	613.7	8.35	7.88	7.32	583.7	613.7	3.60	4.30	5.57	583.7	613.7	2.12	1.84	1.59
603.4	633.4	8.49	7.85	7.25	603.4	633.4	4.48	5.68	7.24	603.4	633.4	2.04	1.83	1.63
643.0	673.0	8.52	7.72	7.11	643.0	673.0	7.53	10.21	13.30	643.0	673.0	1.91	1.79	1.58
662.8	692.8	8.35	7.55	7.06	662.8	692.8	9.40	12.32	15.99	662.8	692.8	2.00	1.84	1.59
702.3	732.3	8.13	7.53	7.16	702.3	732.3	12.68	14.72	18.40	702.3	732.3	2.15	1.83	1.53
722.1	752.1	8.09	7.61	7.34	722.1	752.1	12.02	14.08	17.07	722.1	752.1	2.11	1.72	1.39
761.7	791.7	8.28	8.00	7.81	761.7	791.7	12.42	14.50	17.15	761.7	791.7	1.92	1.45	1.11
781.4	811.4	8.55	8.26	8.09	781.4	811.4	12.11	14.17	16.29	781.4	811.4	1.82	1.32	1.00
821.0	851.0	8.98	8.69	8.50	821.0	851.0	11.19	12.92	15.31	821.0	851.0	1.76	1.34	1.04
840.8	870.8	9.19	8.90	8.73	840.8	870.8	11.01	12.20	14.12	840.8	870.8	1.75	1.32	1.04
880.3	910.3	9.72	9.43	9.26	880.3	910.3	10.81	11.62	12.85	880.3	910.3	1.77	1.32	1.06
900.1	930.1	10.06	9.80	9.66	900.1	930.1	11.12	12.16	13.51	900.1	930.1	1.70	1.24	1.01

REV. X2

SBL-1LH

100818

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

SBL-1LH

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=250.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=500.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+10			+10			+10
240.0	10.1	5.79	10.0	20.1	5.24	490.0	10.1	7.45
234.1	16.0	5.74	22.3	32.4	5.14	477.7	22.4	7.29
228.2	21.9	5.64	34.6	44.7	5.14	465.4	34.7	7.19
222.3	27.8	5.60	46.9	57.0	5.13	453.1	47.0	7.12
216.4	33.7	5.56	59.2	69.3	5.16	440.8	59.3	7.13
210.5	39.6	5.52	71.5	81.6	5.18	428.5	71.6	7.00
204.6	45.5	5.51	83.8	93.9	5.20	416.2	83.9	6.92
198.7	51.4	5.46	96.2	106.3	5.20	403.8	96.3	6.85
192.8	57.3	5.41	108.5	118.6	5.21	391.5	108.6	6.79
186.9	63.2	5.38	120.8	130.9	5.22	379.2	120.9	6.83
181.0	69.1	5.42	133.1	143.2	5.24	366.9	133.2	6.86
175.1	75.0	5.43	145.4	155.5	5.31	354.6	145.5	6.76
169.2	80.9	5.40	157.7	167.8	5.34	342.3	157.8	6.74
163.3	86.8	5.39	170.0	180.1	5.33	330.0	170.1	6.70
157.4	92.7	5.38	182.3	192.4	5.38	317.7	182.4	6.71
151.5	98.6	5.38	194.6	204.7	5.40	305.4	194.7	6.76
145.6	104.5	5.41	206.9	217.0	5.41	293.1	207.0	6.74
139.7	110.4	5.41	219.2	229.3	5.47	280.8	219.3	6.76
133.8	116.3	5.38	231.5	241.6	5.47	268.5	231.6	6.78
127.9	122.2	5.35	243.8	253.9	5.47	256.2	243.9	6.78
122.1	128.0	5.38	256.2	266.3	5.51	243.8	256.3	6.91
116.2	133.9	5.40	268.5	278.6	5.44	231.5	268.6	6.91
110.3	139.8	5.41	280.8	290.9	5.45	219.2	280.9	6.88
104.4	145.7	5.40	293.1	303.2	5.56	206.9	293.2	6.90
98.5	151.6	5.40	305.4	315.5	5.71	194.6	305.5	6.84
92.6	157.5	5.42	317.7	327.8	5.98	182.3	317.8	6.79
86.7	163.4	5.43	330.0	340.1	6.12	170.0	330.1	6.77
80.8	169.3	5.46	342.3	352.4	6.24	157.7	342.4	6.73
74.9	175.2	5.46	354.6	364.7	6.40	145.4	354.7	6.76
69.0	181.1	5.43	366.9	377.0	6.39	133.1	367.0	6.78
63.1	187.0	5.41	379.2	389.3	6.35	120.8	379.3	6.74
57.2	192.9	5.41	391.5	401.6	6.21	108.5	391.6	6.74
51.3	198.8	5.41	403.8	413.9	6.05	96.2	403.9	6.72
45.4	204.7	5.44	416.2	426.3	6.04	83.8	416.3	6.65
39.5	210.6	5.46	428.5	438.6	5.98	71.5	428.6	6.62
33.6	216.5	5.47	440.8	450.9	5.97	59.2	440.9	6.57
27.7	222.4	5.49	453.1	463.2	5.93	46.9	453.2	6.53
21.8	228.3	5.51	465.4	475.5	5.87	34.6	465.5	6.57
15.9	234.2	5.53	477.7	487.8	5.90	22.3	477.8	6.64
10.0	240.1	5.66	490.0	500.1	5.92	10.0	490.1	6.85

REV. X2
SBL-1LH
100818
Page 2 of 5

Frequency Mixer

SBL-1LH

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+7	+10	+13	+7	+10	+13
2.0	54.70	56.27	57.70	58.13	61.48	64.77
4.0	53.93	55.49	56.87	58.13	61.08	63.47
5.0	53.83	55.45	56.81	58.22	60.78	62.56
10.0	53.50	55.36	56.81	57.55	59.10	60.35
29.9	66.49	67.58	67.91	54.91	56.49	55.61
49.7	62.40	63.45	64.36	53.70	55.29	55.08
69.4	59.37	60.72	62.07	52.94	53.67	54.47
89.2	57.15	58.64	59.89	51.86	52.74	54.06
109.0	55.88	57.32	58.31	50.54	52.32	53.60
128.8	54.78	56.55	57.78	49.67	51.52	53.07
148.5	53.47	54.93	56.00	48.48	50.64	52.60
188.1	51.65	53.06	54.33	47.25	49.40	51.39
207.9	50.72	52.07	53.11	46.68	48.85	50.73
227.7	50.40	51.85	53.07	45.98	48.40	50.09
247.4	49.81	51.20	52.28	45.63	47.94	49.63
267.2	49.57	51.01	52.17	45.14	47.00	48.38
287.0	49.23	50.79	52.17	45.46	47.39	48.36
306.8	48.18	49.94	51.70	45.38	47.35	47.73
326.5	47.71	49.24	50.72	44.18	45.33	45.79
346.3	47.34	49.15	50.88	42.80	43.64	44.04
366.1	46.27	48.03	49.73	41.22	41.54	41.70
385.9	45.54	47.68	50.09	42.26	41.48	40.68
425.4	46.32	49.06	51.13	40.44	38.17	37.04
445.2	47.23	50.87	53.36	42.41	38.57	36.75
465.0	46.71	49.47	51.28	44.04	39.67	37.10
484.8	47.14	51.35	54.48	44.05	39.89	36.76
504.5	47.92	52.12	54.38	44.26	40.47	36.42
524.3	47.43	52.28	61.35	41.97	39.94	36.45
544.1	47.56	52.51	57.91	39.46	38.25	36.06
583.7	49.02	52.35	49.90	37.82	36.75	35.18
603.4	49.85	55.37	52.82	36.69	35.75	34.15
643.0	51.64	49.57	44.45	35.21	34.13	31.09
662.8	52.92	45.07	40.25	34.03	32.49	28.72
702.3	51.41	41.53	37.85	31.47	28.44	25.69
722.1	47.66	40.05	37.06	30.02	27.35	25.07
781.4	41.99	37.12	34.23	26.08	24.72	22.99
821.0	37.58	34.66	32.14	23.79	23.15	21.72
840.8	34.92	32.94	30.78	22.81	22.49	21.15
880.3	31.88	30.94	29.21	21.30	21.25	20.16
900.1	30.45	29.82	28.31	20.59	20.70	19.74

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+7	+10	+13
10.1	40.1	45.67	47.49	44.62
29.9	59.9	38.95	38.70	39.22
49.7	79.7	34.93	35.32	35.39
69.4	99.4	32.54	32.58	33.08
89.2	119.2	31.12	31.25	31.19
109.0	139.0	29.90	30.07	30.29
128.8	158.8	28.95	29.34	29.51
148.5	178.5	28.56	28.68	28.93
168.3	198.3	28.73	28.93	29.05
188.1	218.1	28.65	29.35	30.03
207.9	237.9	27.60	28.38	29.25
227.7	257.7	27.07	27.56	27.69
247.4	277.4	26.35	26.57	26.86
267.2	297.2	26.00	26.20	26.35
287.0	317.0	26.32	26.37	26.86
306.8	336.8	25.44	25.74	26.13
326.5	356.5	24.63	24.87	25.08
346.3	376.3	23.07	23.20	23.41
366.1	396.1	21.53	21.70	21.77
385.9	415.9	20.40	20.50	20.58
405.7	435.7	19.17	19.18	19.18
425.4	455.4	18.58	18.58	18.53
445.2	475.2	17.98	17.80	17.74
465.0	495.0	17.57	17.47	17.29
484.8	514.8	17.33	17.22	17.15
504.5	534.5	16.98	16.94	16.82
524.3	554.3	17.09	16.95	16.97
544.1	574.1	17.00	16.89	16.87
583.7	613.7	17.57	17.56	17.50
603.4	633.4	17.72	17.67	17.58
643.0	673.0	17.12	16.69	16.21
662.8	692.8	16.46	15.94	15.43
702.3	732.3	14.82	14.32	13.92
722.1	752.1	14.11	13.65	13.28
761.7	791.7	12.83	12.43	12.07
781.4	811.4	12.21	11.83	11.52
821.0	851.0	11.07	10.65	10.33
840.8	870.8	10.54	10.11	9.79
880.3	910.3	9.53	9.15	8.86
900.1	930.1	9.10	8.70	8.43

REV. X2

SBL-1LH

100818

Page 3 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

SBL-1LH

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=500.1MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+7	+10	+13		+7	+10	+13		+7	+10	+13
2.0	32.0	1.61	1.65	1.69	2.0	1.63	2.08	2.67	2.0	1.61	1.45	1.32
4.5	34.5	1.32	1.36	1.40	4.5	1.48	1.99	2.60	4.5	1.62	1.45	1.32
10.1	40.1	1.21	1.14	1.12	10.1	1.56	2.23	3.12	10.0	2.66	2.14	1.71
29.9	59.9	1.21	1.10	1.06	29.9	1.66	2.42	3.38	22.6	2.65	2.14	1.75
49.7	79.7	1.17	1.08	1.03	49.7	1.63	2.36	3.26	35.1	2.54	2.10	1.73
69.4	99.4	1.13	1.06	1.04	69.4	1.56	2.21	3.01	47.7	2.51	2.09	1.77
89.2	119.2	1.12	1.05	1.04	89.2	1.55	2.18	2.97	60.3	2.52	2.13	1.81
109.0	139.0	1.08	1.04	1.07	109.0	1.60	2.28	3.10	72.8	2.57	2.16	1.84
128.8	158.8	1.08	1.07	1.09	128.8	1.64	2.35	3.20	85.4	2.60	2.18	1.85
148.5	178.5	1.08	1.08	1.12	148.5	1.63	2.32	3.12	97.9	2.63	2.18	1.85
168.3	198.3	1.08	1.11	1.15	168.3	1.62	2.26	3.04	110.5	2.69	2.23	1.88
188.1	218.1	1.10	1.16	1.22	188.1	1.64	2.30	3.07	123.1	2.73	2.28	1.94
207.9	237.9	1.14	1.19	1.25	207.9	1.70	2.39	3.20	135.6	2.76	2.33	2.00
227.7	257.7	1.16	1.20	1.24	227.7	1.76	2.46	3.27	148.2	2.76	2.35	2.04
247.4	277.4	1.17	1.22	1.26	247.4	1.76	2.44	3.23	160.8	2.74	2.34	2.05
267.2	297.2	1.18	1.25	1.31	267.2	1.77	2.43	3.20	173.3	2.75	2.36	2.06
287.0	317.0	1.19	1.28	1.35	287.0	1.82	2.48	3.27	185.9	2.84	2.42	2.10
306.8	336.8	1.25	1.33	1.40	306.8	1.89	2.59	3.39	198.5	2.93	2.48	2.15
326.5	356.5	1.32	1.40	1.46	326.5	1.95	2.66	3.47	211.0	2.95	2.52	2.20
346.3	376.3	1.41	1.50	1.57	346.3	1.96	2.66	3.45	223.6	2.92	2.49	2.20
366.1	396.1	1.50	1.60	1.68	366.1	1.98	2.67	3.45	236.2	2.88	2.48	2.20
385.9	415.9	1.58	1.69	1.74	385.9	2.03	2.73	3.53	248.7	2.89	2.50	2.23
405.7	435.7	1.62	1.71	1.75	405.7	2.10	2.80	3.62	261.3	2.95	2.56	2.28
425.4	455.4	1.58	1.68	1.70	425.4	2.15	2.84	3.65	273.8	3.02	2.62	2.32
445.2	475.2	1.54	1.63	1.65	445.2	2.20	2.87	3.65	286.4	3.02	2.63	2.33
465.0	495.0	1.50	1.56	1.56	465.0	2.28	2.94	3.71	299.0	3.00	2.60	2.31
484.8	514.8	1.46	1.50	1.49	484.8	2.38	3.07	3.85	311.5	3.00	2.58	2.29
504.5	534.5	1.44	1.46	1.44	504.5	2.47	3.19	3.98	324.1	3.06	2.63	2.34
524.3	554.3	1.39	1.40	1.38	524.3	2.52	3.25	4.04	336.7	3.09	2.69	2.41
544.1	574.1	1.33	1.33	1.31	544.1	2.54	3.27	4.06	349.2	3.09	2.69	2.42
583.7	613.7	1.18	1.13	1.07	583.7	2.67	3.41	4.23	361.8	3.05	2.66	2.39
603.4	633.4	1.19	1.12	1.08	603.4	2.73	3.48	4.30	374.4	3.05	2.65	2.36
643.0	673.0	1.37	1.36	1.37	643.0	2.76	3.48	4.28	386.9	3.06	2.65	2.36
662.8	692.8	1.48	1.49	1.51	662.8	2.80	3.51	4.30	399.5	3.13	2.68	2.38
702.3	732.3	1.70	1.73	1.76	702.3	2.88	3.58	4.38	412.1	3.19	2.73	2.43
722.1	752.1	1.81	1.85	1.89	722.1	2.88	3.58	4.37	424.6	3.12	2.69	2.41
761.7	791.7	2.08	2.11	2.14	761.7	2.97	3.65	4.44	437.2	3.07	2.63	2.36
781.4	811.4	2.20	2.23	2.25	781.4	3.08	3.75	4.53	449.7	3.09	2.64	2.35
821.0	851.0	2.38	2.38	2.38	821.0	3.28	3.89	4.62	462.3	3.13	2.68	2.40
840.8	870.8	2.44	2.44	2.42	840.8	3.40	3.97	4.68	474.9	3.13	2.69	2.40
880.3	910.3	2.54	2.52	2.49	880.3	3.69	4.18	4.83	487.4	3.14	2.68	2.39
900.1	930.1	2.61	2.57	2.54	900.1	3.84	4.29	4.89	500.0	2.65	2.43	2.35

REV. X2
SBL-1LH
100818
Page 4 of 5

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	32	34	25	42	34	47	61	61	57	77
1	-	24	+0	34	12	34	23	42	37	51	48	51
2	92	67	49	62	48	59	48	64	60	61	63	77
3	>100	50	35	49	41	54	34	49	43	50	52	57
4	>100	74	62	92	59	82	58	71	53	68	70	77
5	>100	69	63	72	50	71	48	74	49	61	62	66
6	>100	91	74	78	85	78	72	79	68	94	67	81
7	>100	83	73	77	65	74	61	84	60	76	55	68
8	>100	>94	91	>94	85	87	85	>94	79	92	75	83
9	>100	84	84	94	78	84	79	90	73	81	70	88
10	>100	>94	>94	>94	94	>94	>94	>94	91	>94	79	93
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 250.1 MHz; 0.00 dBm.

LO IN: 280.01 MHz; +10.00 dBm

IF OUT: 29.91 MHz; -5.7 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	22	23	14	31	23	34	43	48	40	53
1	-	23	+0	34	11	33	21	37	37	43	38	39
2	>100	70	54	67	53	64	49	63	60	68	68	73
3	>100	72	56	69	59	81	55	73	66	74	62	>84
4	>100	>84	>84	>84	>84	>84	>84	>84	78	>84	>84	>84
5	>100	>84	82	>84	80	>84	78	>84	77	>84	82	>84
6	>100	>84	>84	>84	>84	>84	>84	>84	>84	>84	>84	>84
7	>100	>84	>84	>84	>84	>84	>84	83	>84	>84	>84	>84
8	>100	>84	>84	>84	>84	>84	>84	>84	79	>84	>84	>84
9	>100	>84	>84	>84	>84	>84	>84	>84	>84	72	>84	>84
10	>100	>84	>84	>84	>84	>84	>84	>84	>84	>84	76	>84
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 250.1 MHz; -10.00 dBm.

LO IN: 280.01 MHz; +10.00 dBm

IF OUT: 29.91 MHz; -15.62 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2

SBL-1LH

100818

Page 5 of 5



Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Frequency Mixer


SBL-1LH

Typical Performance Curves


Conversion Loss @ IF=30MHz

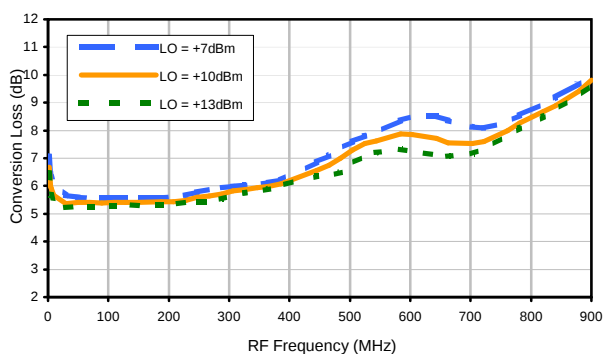


Conversion Loss vs. IF @ RF=250.1MHz

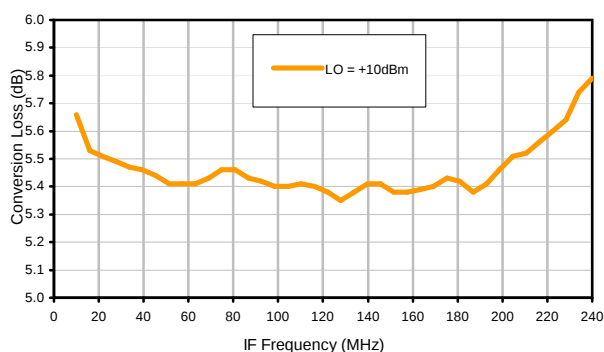


Conversion Loss vs. IF @ RF=10.1MHz

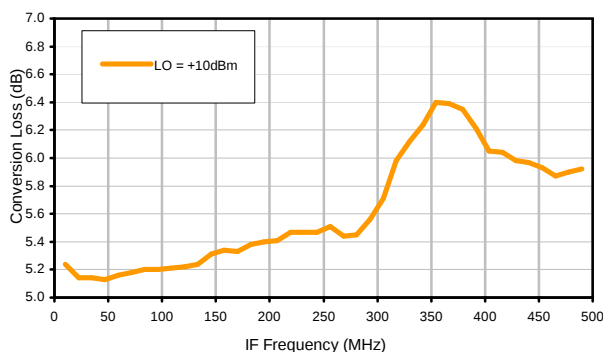


Conversion Loss vs. IF @ RF=500.1MHz

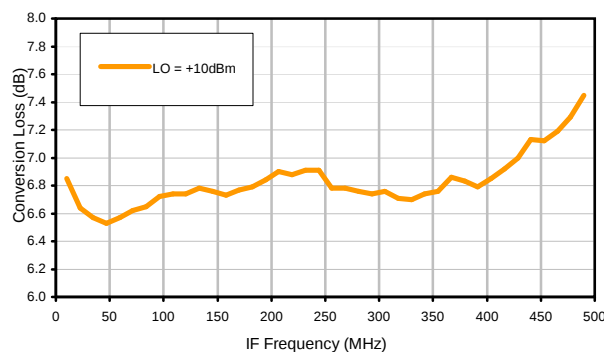

IP3 Input

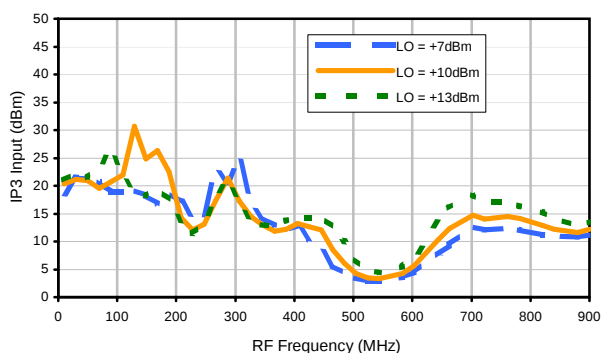

Compression @ RF IN=+5dBm

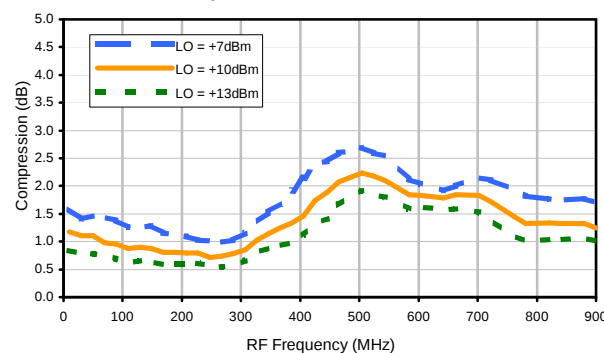

REV. X2

SBL-1LH

100818

Page 1 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Typical Performance Curves


LO-RF Isolation

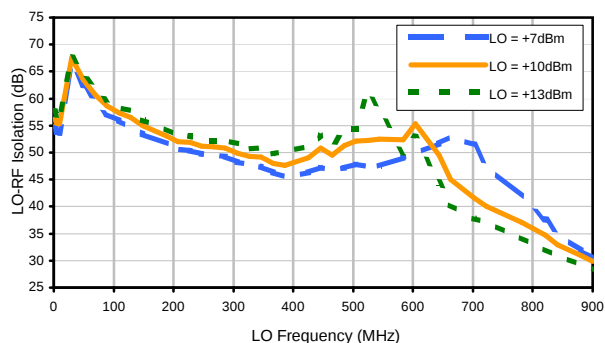


LO-IF Isolation

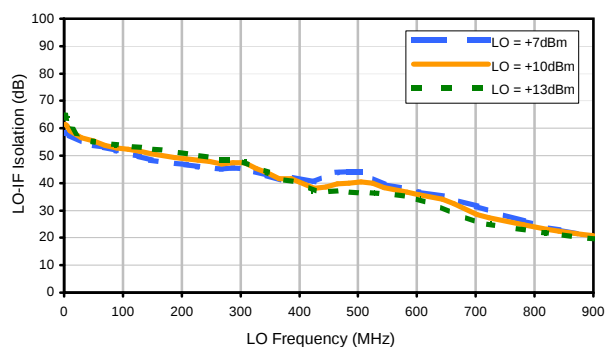


RF-IF Isolation

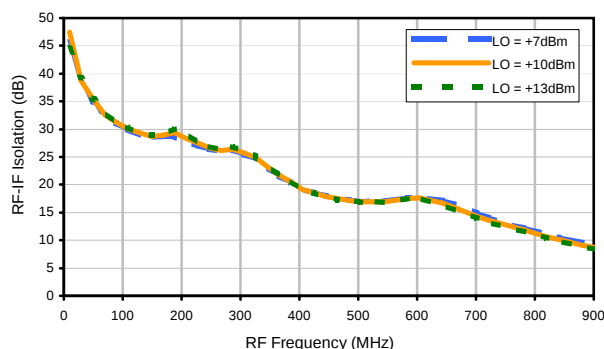


RF VSWR

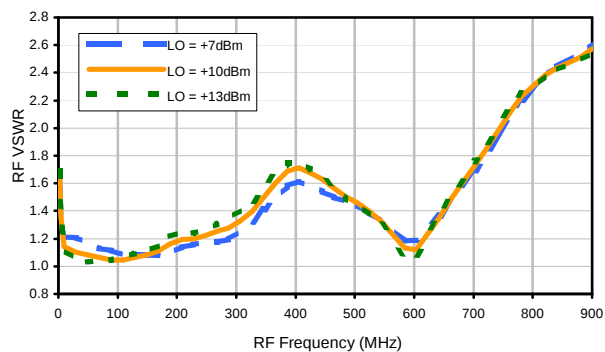

LO VSWR

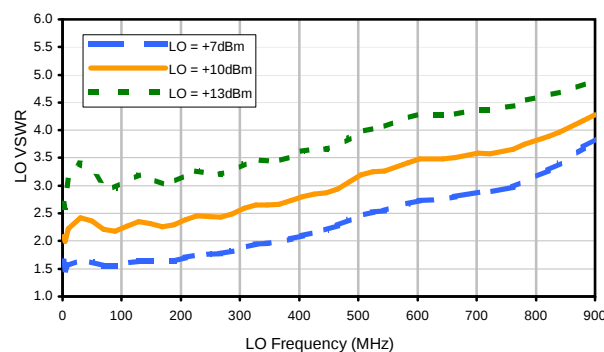

IF VSWR

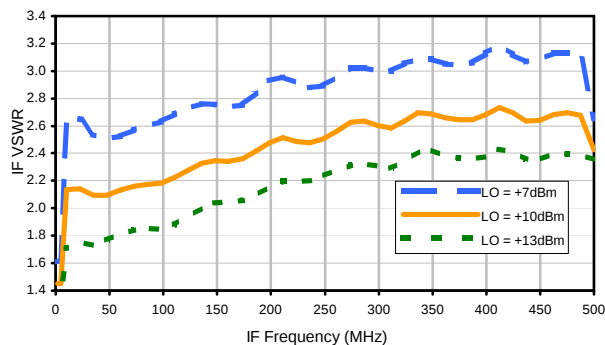

REV. X2

SBL-1LH

100818

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	32	34	25	42	34	47	61	61	57	77
1	-	24	+0	34	12	34	23	42	37	51	48	51
2	92	67	49	62	48	59	48	64	60	61	63	77
3	>100	50	35	49	41	54	34	49	43	50	52	57
4	>100	74	62	92	59	82	58	71	53	68	70	77
5	>100	69	63	72	50	71	48	74	49	61	62	66
6	>100	91	74	78	85	78	72	79	68	94	67	81
7	>100	83	73	77	65	74	61	84	60	76	55	68
8	>100	>94	91	>94	85	87	85	>94	79	92	75	83
9	>100	84	84	94	78	84	79	90	73	81	70	88
10	>100	>94	>94	>94	94	>94	>94	>94	91	>94	79	93
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 250.1 MHz; 0.00 dBm.

LO IN: 280.01 MHz; +10.00 dBm

IF OUT: 29.91 MHz; -5.7 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	22	23	14	31	23	34	43	48	40	53
1	-	23	+0	34	11	33	21	37	37	43	38	39
2	>100	70	54	67	53	64	49	63	60	68	68	73
3	>100	72	56	69	59	81	55	73	66	74	62	>84
4	>100	>84	>84	>84	>84	>84	>84	>84	78	>84	>84	>84
5	>100	>84	82	>84	80	>84	78	>84	77	>84	82	>84
6	>100	>84	>84	>84	>84	>84	>84	>84	>84	>84	>84	>84
7	>100	>84	>84	>84	>84	>84	>84	83	>84	>84	>84	>84
8	>100	>84	>84	>84	>84	>84	>84	>84	79	>84	>84	>84
9	>100	>84	>84	>84	>84	>84	>84	>84	>84	72	>84	>84
10	>100	>84	>84	>84	>84	>84	>84	>84	>84	>84	76	>84
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 250.1 MHz; -10.00 dBm.

LO IN: 280.01 MHz; +10.00 dBm

IF OUT: 29.91 MHz; -15.62 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2

SBL-1LH

100818

Page 3 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



A01
A04
A05
A06

Outline Dimensions

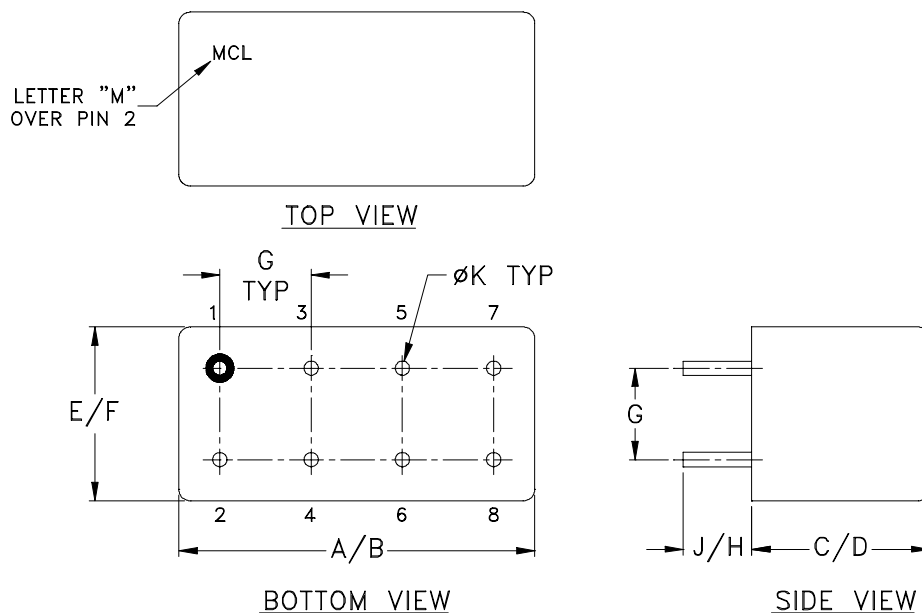

CASE#	A	B	C	D	E	F	G	H	J	K	WT, GRAM
A01	.770 (19.56)	.800 (20.32)	.385 (9.78)	.400 (10.16)	.370 (9.40)	.400 (10.16)	.200 (5.08)	.20 (5.08)	.14 (3.56)	.031 (.79)	5.2
A04			.200 (5.08)	.210 (5.33)							3.7
A05			.240 (6.10)	.250 (6.35)							3.7
A06			.285 (7.24)	.310 (7.87)							5.2

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Header material: C.R.S.
Pin material: #52 alloy.
Cover material: Cupro-Nickel.
- Pin finish: Electro Tin-Silver.
- Insulated spacer available. Request P/N B14-045-01.
- Tolerance on pin diameter $\pm .005$ inch.
- Glass meniscus 0.015 inch max.
- Blue bead indicates Pin 1. Pin numbers do not appear on unit, for reference only.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified