Plug-In

Frequency Mixer

SBL-1XLH+

Level 10 (LO Power +10 dBm) 10 to 1000 MHz



CASE STYLE: A06

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	8
RF	3,4^
IF	1
GROUND	2,5,6,7
CASE GROUND	2,5,6,7

^ pins must be connected together externally

Features

- excellent conversion loss, 6.0 dB typ.
- high L-R isolation, 40 dB typ. L-I isolation, 55 dB typ.
- rugged welded construction

Applications

- VHF/UHF
- defense & federal communications

Outline Drawing

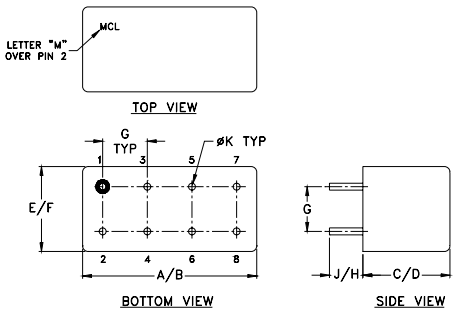

Outline Dimensions (inch / mm)

A	B	C	D	E	F
.770	.800	.285	.310	.370	.400
19.56	20.32	7.24	7.87	9.40	10.16

G	H	J	K		wt
.200	.20	.14	.031		grams
5.08	5.08	3.56	0.79		5.2

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
		Mid-Band m			Total Range	L		M		U		L		M		U	
LO/RF f_L-f_U	IF	$\overline{X}$	σ	Max.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.
10-1000	5-500	6.0	.12	7.5	8.5	50	40	40	25	30	20	70	45	55	40	45	30

1 dB COMP.: +5 dBm typ.

L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]
m= mid band [2f_L to f_U/2]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm
10.00	40.00	5.85	60.92	69.32	2.25	2.96
20.00	50.00	5.87	59.64	68.52	2.25	2.54
50.00	80.00	5.85	55.05	69.14	2.26	2.48
97.35	67.35	6.04	53.39	67.92	2.31	2.38
100.00	70.00	5.99	52.17	67.58	2.37	2.34
184.71	154.71	5.97	51.00	63.99	2.40	2.29
200.00	170.00	5.87	49.50	61.64	2.47	2.36
272.06	242.06	5.80	49.51	58.13	2.54	2.37
359.41	329.41	5.84	48.18	58.17	2.56	2.40
446.76	416.77	6.15	42.66	55.71	2.50	2.47
475.83	445.88	6.35	41.14	54.61	2.48	2.48
500.00	470.00	6.42	40.14	54.24	2.46	2.55
534.12	504.12	6.41	38.47	52.89	2.39	2.57
621.47	591.47	5.84	35.48	54.95	2.22	2.61
708.82	678.82	5.49	34.84	58.37	2.10	2.69
796.18	766.18	5.70	33.30	60.05	1.99	2.88
883.53	853.53	5.56	33.02	50.50	1.92	3.00
941.76	911.77	5.51	33.99	48.29	1.89	3.08
970.88	940.88	5.67	34.84	47.00	1.87	3.07
1000.00	970.00	5.70	35.36	45.65	1.87	3.06

Electrical Schematic

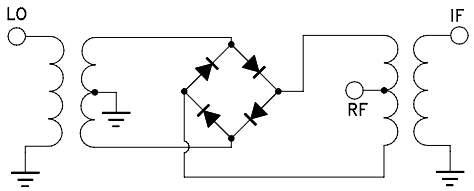

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Performance Charts

SBL-1XLH+

SBL-1XLH+
CONVERSION LOSS
at IF Freq of 30 MHz

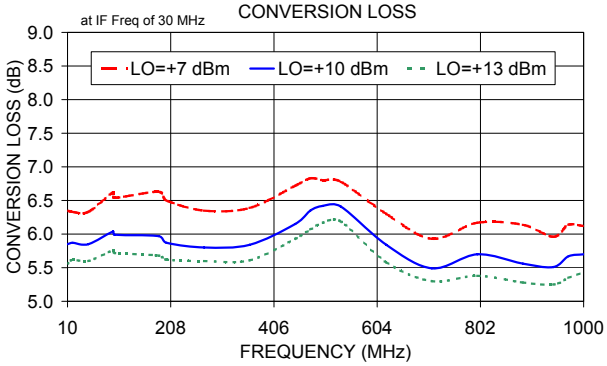

SBL-1XLH+
L-R ISOLATION

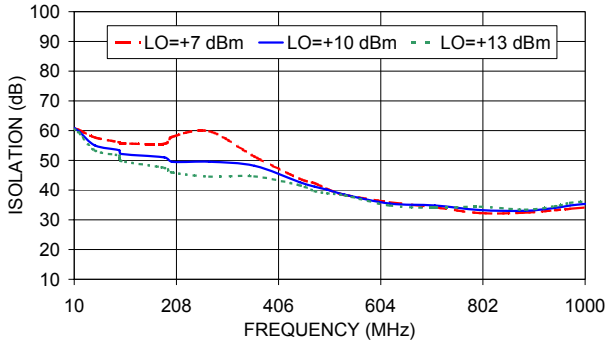

SBL-1XLH+
L-I ISOLATION

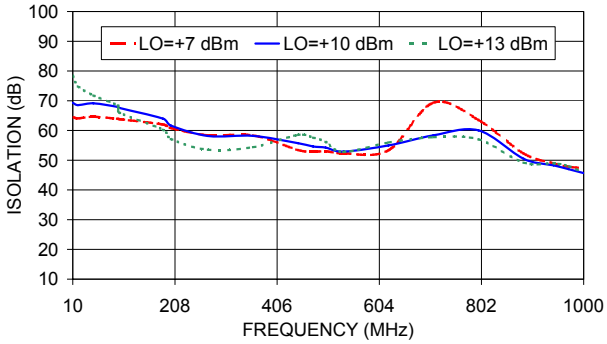

SBL-1XLH+
RF VSWR

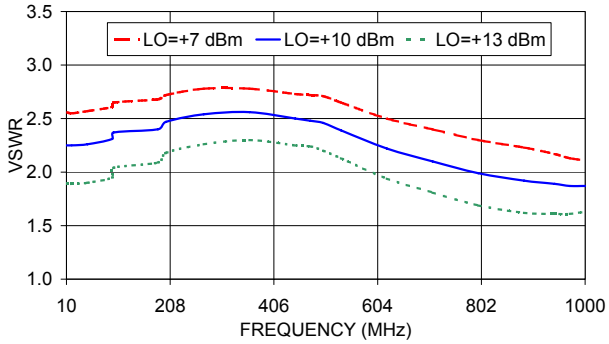

SBL-1XLH+
LO VSWR

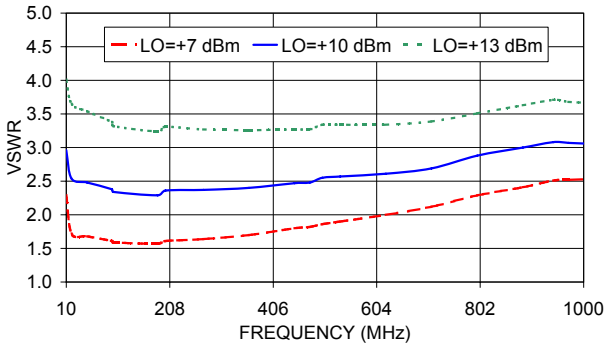

SBL-1XLH+
IF VSWR

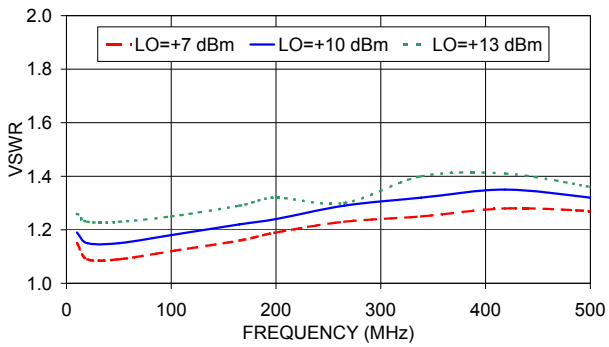

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Frequency Mixer SBL-1XLH+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB) @LO (dBm)		
		+7	+10	+13
10.1	40.1	6.27	5.71	5.65
50.4	80.4	6.39	5.97	5.74
90.6	120.6	6.36	5.92	5.73
130.9	160.9	6.35	5.96	5.76
171.1	201.1	6.50	6.08	5.84
211.4	241.4	6.46	6.02	5.79
251.6	281.6	6.64	6.16	5.94
291.9	321.9	6.59	6.14	5.93
332.1	362.1	6.68	6.17	5.96
372.4	402.4	6.85	6.29	6.01
412.6	442.6	6.93	6.41	6.13
452.9	482.9	7.17	6.67	6.43
493.1	523.1	7.27	6.84	6.63
533.4	563.4	7.30	6.93	6.73
573.6	603.6	7.04	6.74	6.58
613.9	643.9	6.82	6.56	6.44
654.2	684.2	6.62	6.37	6.26
694.4	724.4	6.49	6.18	6.09
734.7	764.7	6.51	6.12	5.96
774.9	804.9	6.41	5.97	5.83
815.2	845.2	6.60	6.03	5.78
855.4	885.4	6.80	6.09	5.82
895.7	925.7	6.89	6.18	5.88
935.9	965.9	6.87	6.24	5.93
976.2	1006.2	6.65	6.15	5.83
1016.4	1046.4	6.64	6.18	5.90
1056.7	1086.7	6.53	6.12	5.90
1096.9	1126.9	6.64	6.20	5.97
1137.2	1167.2	6.72	6.35	6.12
1177.4	1207.4	6.96	6.55	6.34
1217.7	1247.7	7.24	6.89	6.69
1257.9	1287.9	7.42	7.15	6.99
1298.2	1328.2	7.76	7.52	7.29
1338.5	1368.5	8.03	7.83	7.53
1378.7	1408.7	8.45	8.16	7.81
1419.0	1449.0	8.93	8.46	8.13
1459.2	1489.2	9.32	8.77	8.60
1499.5	1529.5	9.74	9.23	9.15
1539.7	1569.7	10.04	9.73	9.65
1600.1	1630.1	10.62	10.27	10.18

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm) @LO (dBm)		
		+7	+10	+13
10.1	40.1	22.67	21.19	20.29
50.4	80.4	15.99	16.12	16.25
90.6	120.6	15.14	15.30	17.15
130.9	160.9	13.89	16.13	23.87
171.1	201.1	12.93	17.24	20.19
211.4	241.4	14.43	21.09	17.77
251.6	281.6	16.42	16.97	15.62
291.9	321.9	19.14	15.99	15.56
332.1	362.1	17.90	15.87	15.74
372.4	402.4	13.67	13.97	14.95
412.6	442.6	11.63	11.71	13.27
452.9	482.9	10.64	11.52	12.99
493.1	523.1	10.01	10.79	12.39
533.4	563.4	10.02	10.85	12.46
573.6	603.6	10.36	10.69	12.76
613.9	643.9	12.99	11.70	12.49
654.2	684.2	13.46	13.53	12.90
694.4	724.4	14.63	15.38	15.33
734.7	764.7	12.91	15.73	16.56
774.9	804.9	11.61	15.68	15.53
815.2	845.2	12.29	17.15	14.83
855.4	885.4	11.31	15.38	18.44
895.7	925.7	9.94	12.63	15.09
935.9	965.9	8.79	9.97	11.77
976.2	1006.2	8.54	9.75	11.19
1016.4	1046.4	8.10	9.18	10.66
1056.7	1086.7	7.66	8.59	9.98
1096.9	1126.9	7.62	8.41	9.83
1137.2	1167.2	6.93	7.66	8.87
1177.4	1207.4	6.67	7.27	8.15
1217.7	1247.7	5.80	6.46	7.39
1257.9	1287.9	5.25	5.93	7.17
1298.2	1328.2	5.23	6.57	9.15
1338.5	1368.5	5.65	8.89	14.48
1378.7	1408.7	7.28	13.49	12.78
1419.0	1449.0	11.19	9.82	12.40
1459.2	1489.2	11.00	9.97	14.25
1499.5	1529.5	8.65	11.65	16.11
1539.7	1569.7	9.00	13.37	17.64
1600.1	1630.1	10.81	13.61	15.08

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+5dBm (dB) @LO (dBm)		
		+7	+10	+13
10.1	40.1	1.64	1.18	0.86
50.4	80.4	1.69	1.12	0.78
90.6	120.6	1.42	1.09	0.81
130.9	160.9	1.77	1.14	0.86
171.1	201.1	1.65	1.19	0.93
211.4	241.4	1.75	1.31	1.02
251.6	281.6	1.75	1.35	1.09
291.9	321.9	1.93	1.46	1.13
332.1	362.1	1.91	1.53	1.25
372.4	402.4	1.80	1.51	1.29
412.6	442.6	1.72	1.46	1.29
452.9	482.9	1.51	1.31	1.18
493.1	523.1	1.34	1.08	0.95
533.4	563.4	1.32	1.04	0.92
573.6	603.6	1.49	1.16	1.05
613.9	643.9	1.67	1.30	1.12
654.2	684.2	1.84	1.49	1.27
694.4	724.4	1.86	1.58	1.37
734.7	764.7	1.80	1.56	1.44
774.9	804.9	1.79	1.57	1.44
815.2	845.2	1.53	1.36	1.28
855.4	885.4	1.30	1.16	1.08
895.7	925.7	1.11	0.93	0.85
935.9	965.9	1.13	0.80	0.69
976.2	1006.2	1.33	0.87	0.68
1016.4	1046.4	1.46	0.86	0.61
1056.7	1086.7	1.62	0.96	0.65
1096.9	1126.9	1.55	0.96	0.67
1137.2	1167.2	1.57	0.94	0.65
1177.4	1207.4	1.59	0.97	0.67
1217.7	1247.7	1.43	0.88	0.63
1257.9	1287.9	1.54	0.97	0.69
1298.2	1328.2	1.46	0.94	0.71
1338.5	1368.5	1.43	0.91	0.77
1378.7	1408.7	1.37	0.89	0.76
1419.0	1449.0	1.13	0.84	0.62
1459.2	1489.2	1.10	0.83	0.50
1499.5	1529.5	1.00	0.65	0.37
1539.7	1569.7	0.83	0.46	0.29
1600.1	1630.1	0.65	0.34	0.21

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=500.1MHz (dB)
		@LO (dBm)
		+10
480.0	20.1	6.95
467.9	32.2	6.97
455.9	44.2	6.96
443.8	56.3	7.05
431.8	68.3	7.15
419.7	80.4	7.22
407.7	92.4	7.33
395.6	104.5	7.27
383.6	116.5	7.16
371.5	128.6	7.19
359.5	140.6	7.22
347.4	152.7	7.23
335.4	164.7	7.27
323.3	176.8	7.22
311.3	188.8	7.23
299.2	200.9	7.33
287.2	212.9	7.18
275.1	225.0	7.09
263.1	237.0	7.13
251.0	249.1	7.04
239.0	261.1	7.16
226.9	273.2	7.14
214.9	285.2	7.05
202.8	297.3	7.06
190.8	309.3	7.09
178.7	321.4	7.00
166.7	333.4	7.02
154.6	345.5	7.01
142.6	357.5	7.03
130.5	369.6	7.14
118.5	381.6	7.09
106.4	393.7	7.00
94.4	405.7	7.01
82.3	417.8	6.90
70.3	429.8	6.86
58.2	441.9	6.87
46.2	453.9	6.77
34.1	466.0	6.78
22.1	478.0	6.82
10.0	490.1	6.97

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)
		@LO (dBm)
		+10
10.0	20.1	5.67
22.6	32.7	5.64
35.1	45.2	5.69
47.7	57.8	5.78
60.3	70.4	5.74
72.8	82.9	5.81
85.4	95.5	5.85
97.9	108.0	5.79
110.5	120.6	5.81
123.1	133.2	5.73
135.6	145.7	5.71
148.2	158.3	5.76
160.8	170.9	5.75
173.3	183.4	5.74
185.9	196.0	5.75
198.5	208.6	5.66
211.0	221.1	5.68
223.6	233.7	5.68
236.2	246.3	5.64
248.7	258.8	5.69
261.3	271.4	5.68
273.8	283.9	5.64
286.4	296.5	5.68
299.0	309.1	5.67
311.5	321.6	5.64
324.1	334.2	5.67
336.7	346.8	5.65
349.2	359.3	5.68
361.8	371.9	5.72
374.4	384.5	5.70
386.9	397.0	5.76
399.5	409.6	5.80
412.1	422.2	5.81
424.6	434.7	5.86
437.2	447.3	5.86
449.7	459.8	5.85
462.3	472.4	5.92
474.9	485.0	5.92
487.4	497.5	5.94
500.0	510.1	5.97

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1000.1MHz (dB)
		@LO (dBm)
		+10
500.0	500.1	6.74
487.4	512.7	6.66
474.9	525.2	6.65
462.3	537.8	6.56
449.7	550.4	6.54
437.2	562.9	6.50
424.6	575.5	6.48
412.1	588.0	6.51
399.5	600.6	6.44
386.9	613.2	6.39
374.4	625.7	6.40
361.8	638.3	6.40
349.2	650.9	6.49
336.7	663.4	6.55
324.1	676.0	6.57
311.5	688.6	6.62
299.0	701.1	6.62
286.4	713.7	6.63
273.8	726.3	6.69
261.3	738.8	6.67
248.7	751.4	6.70
236.2	763.9	6.73
223.6	776.5	6.70
211.0	789.1	6.71
198.5	801.6	6.71
185.9	814.2	6.69
173.3	826.8	6.72
160.8	839.3	6.69
148.2	851.9	6.65
135.6	864.5	6.65
123.1	877.0	6.57
110.5	889.6	6.50
97.9	902.2	6.44
85.4	914.7	6.30
72.8	927.3	6.26
60.3	939.8	6.24
47.7	952.4	6.15
35.1	965.0	6.17
22.6	977.5	6.12
10.0	990.1	6.30

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB) @LO (dBm)			LO-IF ISOLATION (dB) @LO (dBm)		
	+7	+10	+13	+7	+10	+13
10.1	74.65	68.79	63.79	66.86	81.37	81.46
50.4	60.68	57.39	55.60	67.59	69.10	72.24
90.6	57.65	54.33	51.49	61.77	63.38	64.55
130.9	54.23	50.88	49.02	57.66	59.69	61.59
171.1	52.85	49.49	47.85	54.90	56.64	58.38
211.4	51.46	48.50	46.60	52.95	55.03	56.48
251.6	50.63	47.29	45.20	51.75	53.37	54.34
291.9	49.46	46.33	44.26	50.57	52.36	53.41
332.1	46.54	44.50	43.07	49.02	50.34	51.48
372.4	44.34	43.07	41.59	47.65	48.59	49.25
412.6	41.40	40.50	40.37	47.27	48.17	49.09
452.9	40.57	39.03	38.33	47.56	48.05	48.69
493.1	39.55	39.17	38.32	47.81	48.05	47.67
533.4	38.41	38.50	38.27	47.10	48.47	48.68
573.6	37.21	37.43	37.58	45.09	46.26	47.03
613.9	36.37	35.82	35.57	43.43	43.96	44.71
654.2	35.67	35.14	34.08	42.33	42.75	43.29
694.4	34.61	34.74	33.70	41.84	42.68	43.64
734.7	33.94	34.87	34.44	41.60	43.56	45.48
774.9	32.48	34.16	34.91	39.98	42.00	44.12
815.2	31.52	33.56	34.93	38.86	40.86	43.00
855.4	30.05	32.20	34.26	38.36	40.40	42.69
895.7	28.45	30.11	32.21	38.35	40.56	43.04
935.9	27.84	29.03	30.94	39.26	41.52	44.19
976.2	27.63	28.43	29.92	39.95	42.12	44.50
1016.4	27.88	28.62	29.86	40.72	42.64	44.44
1056.7	27.76	28.83	29.92	41.55	43.45	45.26
1096.9	27.98	29.24	30.12	41.77	43.37	45.19
1137.2	28.63	30.37	30.87	41.92	43.22	44.82
1177.4	28.99	31.36	31.94	41.17	42.17	43.54
1217.7	29.61	32.80	34.21	41.16	41.65	42.39
1257.9	29.34	33.08	36.02	42.05	42.54	43.00
1298.2	29.00	32.70	36.48	43.15	43.75	44.20
1338.5	28.83	32.89	37.12	43.89	44.71	45.08
1378.7	29.19	33.51	37.45	43.17	44.26	44.89
1419.0	29.85	34.46	38.08	43.46	44.41	45.18
1459.2	31.07	35.30	38.46	42.99	44.20	45.31
1499.5	31.90	35.48	38.34	43.34	44.54	45.73
1539.7	32.44	35.43	38.08	43.67	44.92	46.23
1600.1	32.23	34.73	37.09	43.92	45.19	46.32

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB) @LO (dBm)		
		+7	+10	+13
10.1	40.1	43.00	43.48	50.66
50.4	80.4	37.81	37.89	38.76
90.6	120.6	33.36	33.75	33.69
130.9	160.9	30.87	31.27	31.45
171.1	201.1	29.28	29.68	29.94
211.4	241.4	28.27	28.63	29.10
251.6	281.6	28.26	28.55	28.72
291.9	321.9	27.94	28.91	29.52
332.1	362.1	27.27	28.50	29.19
372.4	402.4	27.32	27.74	28.14
412.6	442.6	27.88	28.13	28.24
452.9	482.9	28.44	29.15	29.52
493.1	523.1	28.38	29.43	30.35
533.4	563.4	26.47	27.43	28.40
573.6	603.6	24.43	25.09	25.59
613.9	643.9	22.72	23.02	23.25
654.2	684.2	21.77	21.84	21.84
694.4	724.4	21.10	21.16	21.18
734.7	764.7	20.84	20.91	21.07
774.9	804.9	20.56	20.59	20.67
815.2	845.2	20.53	20.51	20.48
855.4	885.4	20.74	20.42	20.17
895.7	925.7	20.35	19.78	19.33
935.9	965.9	20.29	19.73	19.09
976.2	1006.2	20.25	19.81	19.32
1016.4	1046.4	19.85	19.60	19.25
1056.7	1086.7	19.16	19.06	18.83
1096.9	1126.9	18.44	18.45	18.34
1137.2	1167.2	17.77	17.77	17.69
1177.4	1207.4	16.89	16.88	16.79
1217.7	1247.7	15.97	15.87	15.68
1257.9	1287.9	15.19	15.00	14.73
1298.2	1328.2	14.56	14.23	13.83
1338.5	1368.5	13.94	13.50	13.06
1378.7	1408.7	13.32	12.76	12.31
1419.0	1449.0	12.61	12.02	11.65
1459.2	1489.2	12.05	11.45	11.18
1499.5	1529.5	11.46	11.01	10.81
1539.7	1569.7	11.05	10.70	10.60
1600.1	1630.1	10.57	10.36	10.19

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1) @LO (dBm)		
		+7	+10	+13
10.1	40.1	1.31	1.13	1.03
50.4	80.4	1.41	1.19	1.07
90.6	120.6	1.40	1.20	1.11
130.9	160.9	1.42	1.25	1.18
171.1	201.1	1.53	1.35	1.28
211.4	241.4	1.60	1.46	1.39
251.6	281.6	1.77	1.63	1.55
291.9	321.9	1.94	1.79	1.69
332.1	362.1	2.12	1.95	1.83
372.4	402.4	2.35	2.15	2.00
412.6	442.6	2.52	2.30	2.13
452.9	482.9	2.71	2.46	2.29
493.1	523.1	2.79	2.58	2.44
533.4	563.4	2.84	2.64	2.50
573.6	603.6	2.84	2.63	2.48
613.9	643.9	2.81	2.59	2.44
654.2	684.2	2.78	2.52	2.36
694.4	724.4	2.75	2.46	2.25
734.7	764.7	2.79	2.43	2.17
774.9	804.9	2.78	2.32	2.01
815.2	845.2	2.87	2.30	1.94
855.4	885.4	3.01	2.41	2.06
895.7	925.7	3.06	2.48	2.14
935.9	965.9	3.02	2.47	2.07
976.2	1006.2	2.85	2.38	1.97
1016.4	1046.4	2.73	2.30	1.93
1056.7	1086.7	2.63	2.22	1.90
1096.9	1126.9	2.58	2.18	1.88
1137.2	1167.2	2.57	2.21	1.94
1177.4	1207.4	2.64	2.33	2.09
1217.7	1247.7	2.70	2.43	2.24
1257.9	1287.9	2.72	2.51	2.37
1298.2	1328.2	2.71	2.56	2.51
1338.5	1368.5	2.73	2.68	2.77
1378.7	1408.7	2.85	2.95	3.17
1419.0	1449.0	3.06	3.33	3.62
1459.2	1489.2	3.36	3.73	4.01
1499.5	1529.5	3.72	4.10	4.34
1539.7	1569.7	4.04	4.37	4.56
1600.1	1630.1	4.25	4.47	4.59

LO (MHz)	LO VSWR (:1) @LO (dBm)		
	+7	+10	+13
10.1	1.71	2.47	3.20
50.4	1.80	2.62	3.66
90.6	1.69	2.39	3.28
130.9	1.76	2.55	3.54
171.1	1.71	2.43	3.33
211.4	1.74	2.48	3.41
251.6	1.75	2.50	3.43
291.9	1.74	2.46	3.34
332.1	1.81	2.56	3.48
372.4	1.79	2.50	3.37
412.6	1.86	2.58	3.47
452.9	1.87	2.58	3.43
493.1	1.90	2.60	3.44
533.4	1.96	2.67	3.50
573.6	1.96	2.64	3.43
613.9	2.04	2.74	3.54
654.2	2.06	2.73	3.52
694.4	2.11	2.78	3.56
734.7	2.17	2.82	3.58
774.9	2.20	2.81	3.54
815.2	2.26	2.86	3.58
855.4	2.31	2.88	3.57
895.7	2.39	2.96	3.65
935.9	2.46	3.05	3.73
976.2	2.51	3.10	3.77
1016.4	2.55	3.15	3.82
1056.7	2.60	3.19	3.86
1096.9	2.63	3.21	3.86
1137.2	2.68	3.23	3.88
1177.4	2.72	3.25	3.88
1217.7	2.75	3.24	3.86
1257.9	2.80	3.26	3.86
1298.2	2.80	3.22	3.79
1338.5	2.83	3.21	3.76
1378.7	2.84	3.18	3.73
1419.0	2.85	3.15	3.70
1459.2	2.89	3.21	3.79
1499.5	2.95	3.26	3.82
1539.7	3.09	3.40	3.94
1600.1	3.35	3.56	4.04

IF (OUT) (MHz)	IF VSWR @LO=1000.1MHz (:1) @LO (dBm)		
	+7	+10	+13
10.0	1.35	1.56	1.71
22.6	1.33	1.52	1.68
35.1	1.40	1.59	1.77
47.7	1.41	1.62	1.79
60.3	1.41	1.61	1.77
72.8	1.40	1.59	1.74
85.4	1.41	1.60	1.76
97.9	1.42	1.61	1.78
110.5	1.42	1.61	1.77
123.1	1.41	1.58	1.73
135.6	1.40	1.57	1.70
148.2	1.41	1.57	1.71
160.8	1.43	1.61	1.76
173.3	1.45	1.63	1.78
185.9	1.45	1.61	1.75
198.5	1.43	1.58	1.70
211.0	1.42	1.56	1.68
223.6	1.43	1.58	1.70
236.2	1.46	1.61	1.73
248.7	1.47	1.62	1.74
261.3	1.46	1.60	1.71
273.8	1.44	1.57	1.66
286.4	1.43	1.55	1.64
299.0	1.44	1.56	1.66
311.5	1.45	1.58	1.67
324.1	1.45	1.57	1.65
336.7	1.43	1.53	1.61
349.2	1.40	1.50	1.58
361.8	1.40	1.50	1.57
374.4	1.41	1.51	1.59
386.9	1.42	1.52	1.59
399.5	1.41	1.50	1.57
412.1	1.37	1.45	1.51
424.6	1.35	1.43	1.49
437.2	1.36	1.44	1.50
449.7	1.36	1.44	1.51
462.3	1.36	1.43	1.49
474.9	1.34	1.40	1.45
487.4	1.31	1.37	1.41
500.0	1.29	1.35	1.41

Harmonics Tables

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	29	30	42	46	40	42	33	58	50	64
1	-	23	+0	48	17	32	47	37	40	34	53	49
2	90	42	57	47	55	41	52	61	62	52	41	68
3	>100	48	32	53	36	53	34	44	62	51	64	49
4	>100	75	72	57	65	52	67	50	63	80	69	64
5	>100	70	79	67	50	58	48	61	47	60	73	61
6	>100	82	83	86	80	71	82	65	69	63	71	81
7	>100	68	78	81	78	80	64	72	61	68	61	71
8	>100	90	77	89	90	93	88	89	83	79	77	71
9	>100	84	90	82	90	92	>93	93	78	79	75	75
10	>100	>93	93	>93	89	>93	>93	>93	>93	88	90	85
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500.1 MHz; 0.00 dBm.
LO IN: 530.01 MHz; +10.00 dBm
IF OUT: 29.91 MHz; -6.95 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	20	25	33	34	30	29	17	41	45	54
1	-	23	+0	39	16	27	40	32	40	29	44	38
2	>100	45	60	47	69	42	55	70	58	60	50	58
3	>100	61	47	64	48	72	46	58	78	62	57	62
4	>100	>83	>83	68	81	69	79	69	80	>83	80	73
5	>100	>83	>83	>83	77	>83	80	>83	76	>83	>83	>83
6	>100	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
7	>100	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
8	>100	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
9	>100	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
10	>100	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500.1 MHz; -10.00 dBm.
LO IN: 530.01 MHz; +10.00 dBm
IF OUT: 29.91 MHz; -16.99 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Typical Performance Curves

Conversion Loss @ IF=30MHz

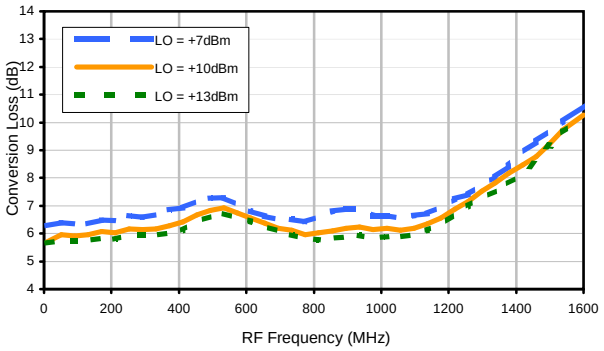

Conversion Loss vs. IF @ RF=500.1MHz

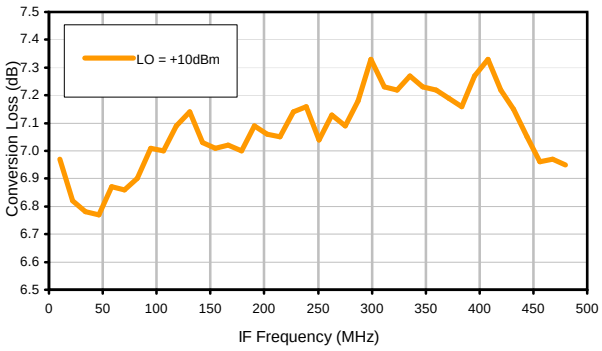

Conversion Loss vs. IF @ RF=10.1MHz

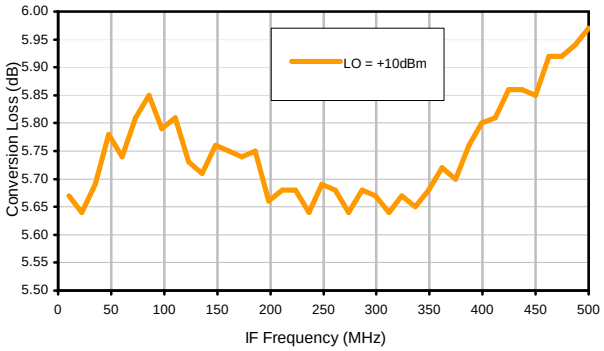

Conversion Loss vs. IF @ RF=1000.1MHz

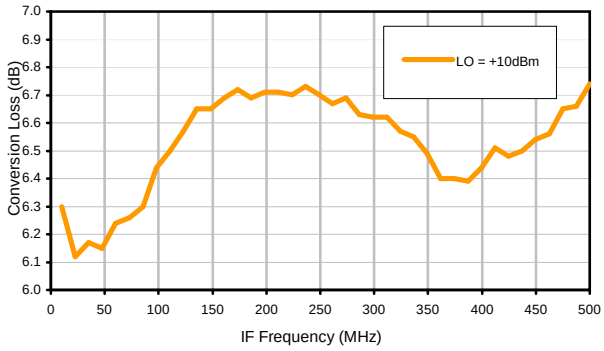

IP3 Input

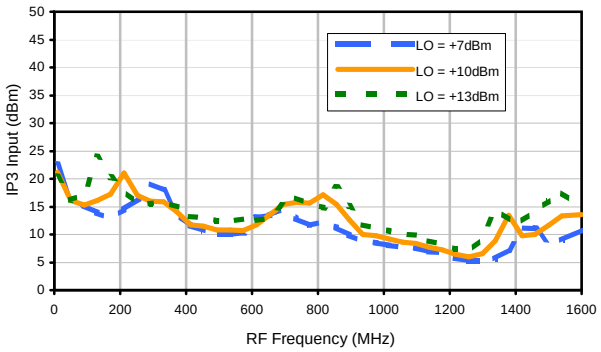

Compression @ RF IN=+5dBm

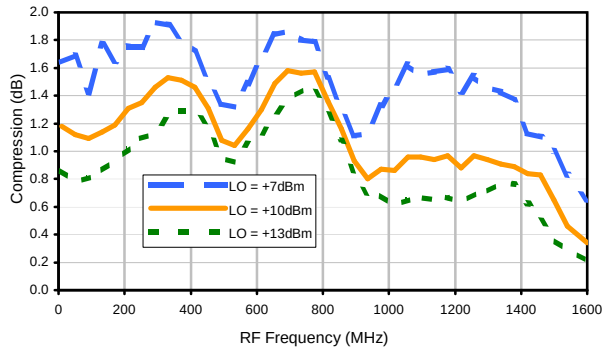

Typical Performance Curves

LO-RF Isolation

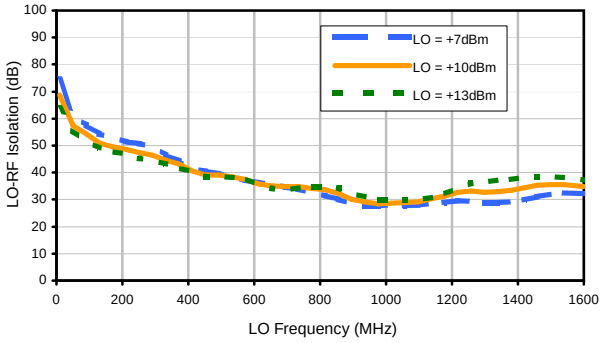

LO-IF Isolation

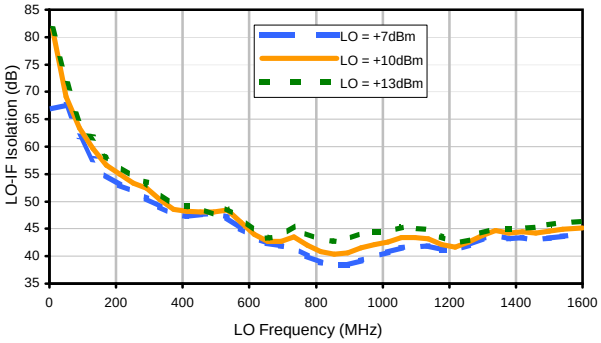

RF-IF Isolation

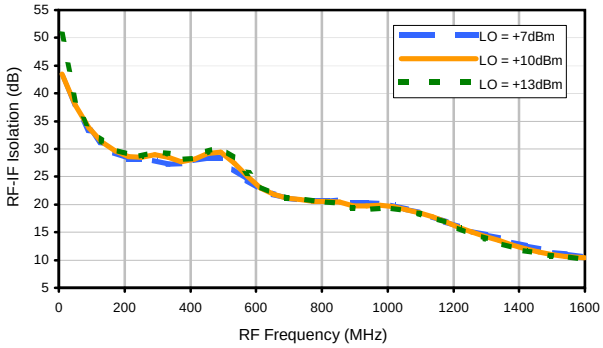

RF VSWR

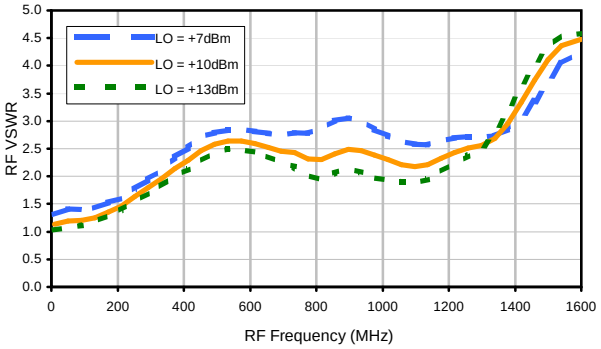

LO VSWR

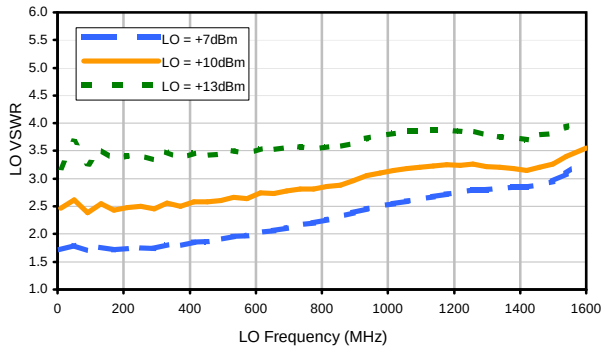

IF VSWR

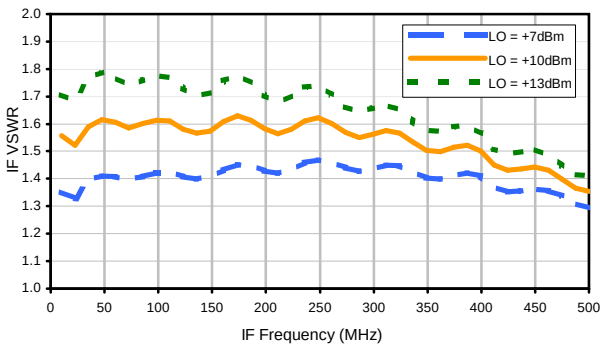

Harmonics Tables

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	29	30	42	46	40	42	33	58	50	64
1	-	23	+0	48	17	32	47	37	40	34	53	49
2	90	42	57	47	55	41	52	61	62	52	41	68
3	>100	48	32	53	36	53	34	44	62	51	64	49
4	>100	75	72	57	65	52	67	50	63	80	69	64
5	>100	70	79	67	50	58	48	61	47	60	73	61
6	>100	82	83	86	80	71	82	65	69	63	71	81
7	>100	68	78	81	78	80	64	72	61	68	61	71
8	>100	90	77	89	90	93	88	89	83	79	77	71
9	>100	84	90	82	90	92	>93	93	78	79	75	75
10	>100	>93	93	>93	89	>93	>93	>93	>93	88	90	85
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: **RF IN: 500.1 MHz; 0.00 dBm.**
LO IN: 530.01 MHz; +10.00 dBm
IF OUT: 29.91 MHz; -6.95 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	20	25	33	34	30	29	17	41	45	54
1	-	23	+0	39	16	27	40	32	40	29	44	38
2	>100	45	60	47	69	42	55	70	58	60	50	58
3	>100	61	47	64	48	72	46	58	78	62	57	62
4	>100	>83	>83	68	81	69	79	69	80	>83	80	73
5	>100	>83	>83	>83	77	>83	80	>83	76	>83	>83	>83
6	>100	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
7	>100	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
8	>100	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
9	>100	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
10	>100	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: **RF IN: 500.1 MHz; -10.00 dBm.**
LO IN: 530.01 MHz; +10.00 dBm
IF OUT: 29.91 MHz; -16.99 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Case Style A

A01
A04
A05
A06

Outline Dimensions

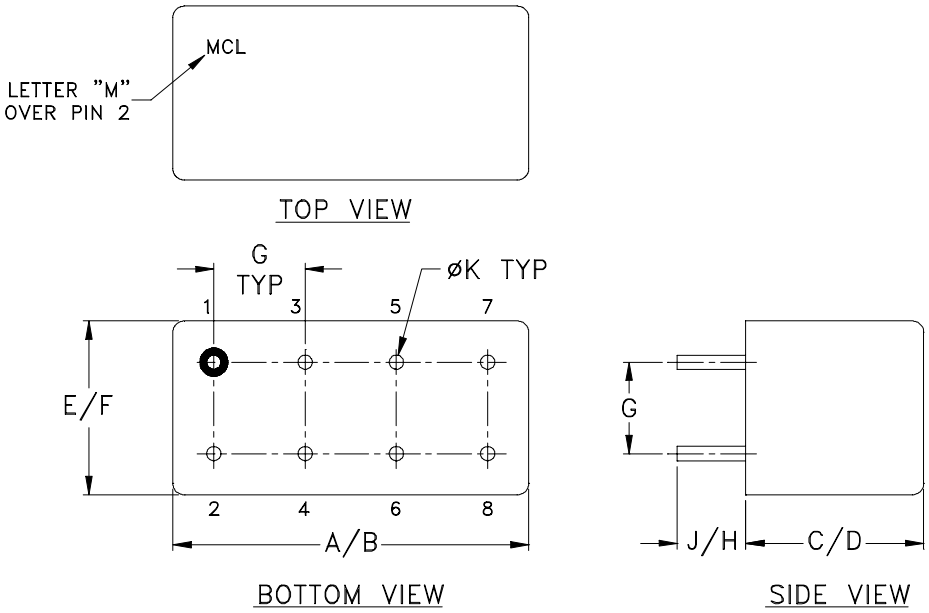

CASE#	A	B	C	D	E	F	G	H	J	K	WT, GRAM
A01	.770 (19.56)	.800 (20.32)	.385 (9.78)	.400 (10.16)	.370 (9.40)	.400 (10.16)	.200 (5.08)	.20 (5.08)	.14 (3.56)	.031 (.79)	5.2
A04			.200 (5.08)	.210 (5.33)							3.7
A05			.240 (6.10)	.250 (6.35)							3.7
A06			.285 (7.24)	.310 (7.87)							5.2

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .03; 3 Pl. ± .015

Notes:

1. Header material: C.R.S.
   Pin material: #52 alloy.
   Cover material: Cupro-Nickel.
2. Pin finish: Electro Tin-Silver.
3. Insulated spacer available. Request P/N B14-045-01.
4. Tolerance on pin diameter +/-.005 inch.
5. Glass meniscus 0.015 inch max.
6. Blue bead indicates Pin 1. Pin numbers do not appear on unit, for reference only.

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

Mini-Circuits

Environmental Specifications ENV30

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Moisture Resistance	10 cycles, 24 hours per cycle	MIL-STD-202, Method 106, Condition A, except 50°C and end point electrical test done within 12 hours
Solderability	10X Magnification	J-STD-002, 95% Coverage
Resistance to Solder Heat	260°C for 10 seconds	MIL-STD-202, Method 210, Condition B
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215
Terminal Strength	4 1/2 Pound Pull	MIL-STD-202, Method 211, Condition A

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D